


MFG-ExtruderRearRetainer · v0.8 MANUFACTURING DRAWING


TOP X-Y



FRONT X-Z



SIDE Y-Z

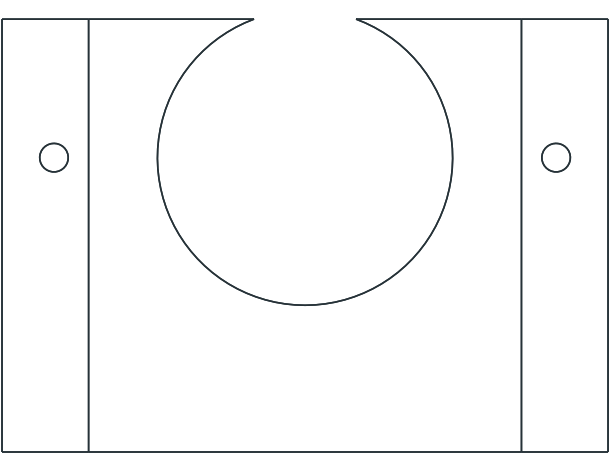

Drawing MFG-ExtruderRearRetainer | Part ExtruderRearRetainer — ExtruderRearRetainer | Qty 1

Rev final-design-fabrication-closure-v0.8 | Units mm | Scale NTS, dimensions govern | Third-angle projection | source commit 93ec6a9c0c2afa3ad72288a967f07b7c8d03c99e

Material: 4 mm S355J2 steel | Process/finish: laser/waterjet rough + face and tap finish

Overall: X 12.000 × Y 70.000 × Z 50.000 mm | general tolerance ISO 2768-m unless noted

Critical: web 4.00 ±0.05; rear ribs 8.00 ±0.05; 2×M4×0.7-6H full engagement ≥8.0; face flatness 0.03; parent yield ≥177.5 MPa at service temperature; cold endplay 0.12–0.28 mm

GD&T/datums: A=profile mounting plane; B=barrel axis; C=rear axial datum; verify datum marking on supplier inspection report

Inspection: CMM/caliper against STEP and drawing; deburr and visual crack/warp inspection; barrel-axis alignment; sliding travel and cold/hot clearance inspection

Edges: remove burrs; break unspecified sharp edges C0.3–0.5. No unapproved material/tolerance substitution.

Artifact check: PASS only; fabrication HOLD pending full v0.8 gates. Physical NOT_RUN; machining USER_APPROVAL_REQUIRED.