


MFG-EX-SCR-01 • v0.8 MANUFACTURING DRAWING

TOP X-Y



FRONT X-Z

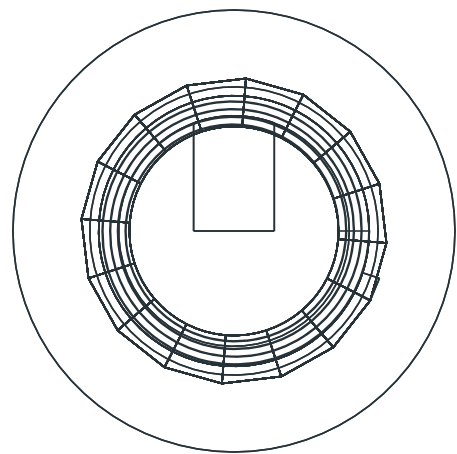

SIDE Y-Z



Drawing MFG-EX-SCR-01 | Part EX-SCR-01 — 16 mm x 16D single screw | Qty 1

Rev final-design-fabrication-closure-v0.8 | Units mm | Scale NTS, dimensions govern | Third-angle projection | source commit 93ec6a9c0c2afa3ad72288a967f07b7c8d03c99e

Material: SCM440 (KS D3867/JIS G4105 equivalent) QT + gas nitride | Process/finish: turn between centres, 4-axis flight mill, polish, nitride, finish grind

Overall: X 23.000 × Y 23.000 × Z 316.000 mm | general tolerance ISO 2768-m unless noted

Critical: total 316.00; active 256.00; OD 15.92 -0.02/0; RH pitch 16.00; land 1.60; Datum A axis from Ø12 h6 drive and Ø15 h6 x11 thrust-bearing seat; integral Ø23.00 +0.05/0 x9 shaft-washer abutment, face runout0.03 to A material/process; SCM440 QT 28–32 HRC; gas nitride 0.30–0.50 mm, surface 900–1100 HV; flight OD TIR ≤0.05/256; OD Ra≤0.8 µm

GD&T/datums: A=common journal/bore axis; B=drive/feed datum face; C=feed-port angular plane; verify datum marking on supplier inspection report

Inspection: CMM/caliper against STEP and drawing; deburr and visual crack/warp inspection; certified material/heat-treatment report; three-station bore/OD and TIR report

Edges: remove burrs; break unspecified sharp edges C0.3–0.5. No unapproved material/tolerance substitution.

Artifact check: PASS only; fabrication HOLD pending full v0.8 gates. Physical NOT_RUN; machining USER_APPROVAL_REQUIRED.