



MFG-SP-TG-01 · v0.8 MANUFACTURING DRAWING

END VIEW

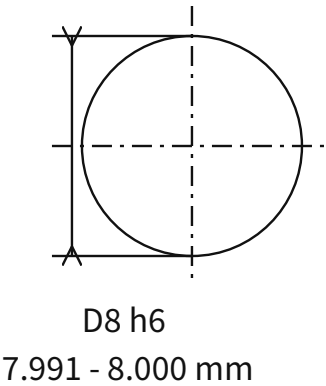

SIDE VIEW / SILHOUETTE

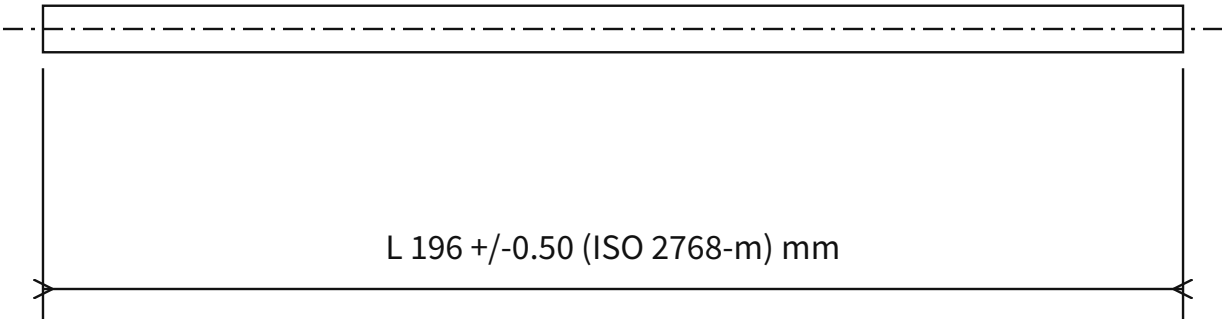

Drawing MFG-SP-TG-01 | Part SP-TG-01 — Traverse guide rod | Qty 2

Rev final-design-fabrication-closure-v0.8 | Units mm | Scale NTS, dimensions govern | Third-angle projection | source commit 93ec6a9c0c2afa3ad72288a967f07b7c8d03c99e

Material: 8 h6 ground steel shaft | Process/finish: cut/face/deburr; collar witness marks outside carriage stroke

Overall: X 8.000 × Y 8.000 × Z 196.000 mm | general tolerance ISO 2768-m unless noted

Critical: 8 h6 x196; nominal end margin2 beyond each8 mm collar; keep set-screw contact outside carriage path; actual collar torque and shaft retention test HOLD

GD&T/datums: A=common journal axis; B=drive-end shoulder/face; C=keyway or retaining feature plane; verify datum marking on supplier inspection report

Inspection: CMM/caliper against STEP and drawing; deburr and visual crack/warp inspection; micrometer bearing seats; dial-indicator TIR/runout between centres

Edges: remove burrs; break unspecified sharp edges C0.3–0.5. No unapproved material/tolerance substitution.

Artifact check: PASS only; fabrication HOLD pending full v0.8 gates. Physical NOT_RUN; machining USER_APPROVAL_REQUIRED.