


MFG-CUT-10 • v0.8 MANUFACTURING DRAWING

TOP X-Y



FRONT X-Z

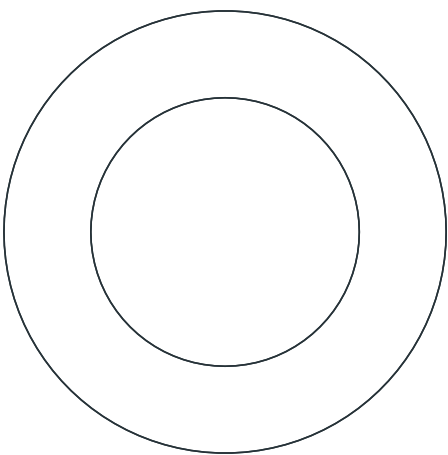

SIDE Y-Z



Drawing MFG-CUT-10 | Part CUT-10 — 61905 bearing seat ring | Qty 4

Rev final-design-fabrication-closure-v0.8 | Units mm | Scale NTS, dimensions govern | Third-angle projection | source commit 93ec6a9c0c2afa3ad72288a967f07b7c8d03c99e

Material: S45C normalized steel | Process/finish: turn and match-face

Overall: X 42.000 × Y 42.000 × Z 3.000 mm | general tolerance ISO 2768-m unless noted

Critical: OD42 g6; ID25.50 +0.10/0; width3.00 +/-0.02; faces parallel0.01; bears on outer ring only; engrave front-fixed/rear-floating and shaft ID; set rear outer-ring endplay using0.05/0.10/0.20 ground metal shims; complete-shaft axial float acceptance0.05-0.20 mm

GD&T/datums: A=frame mounting face; B=primary bearing axis; C=secondary bearing/fastener axis; verify datum marking on supplier inspection report

Inspection: CMM/caliper against STEP and drawing; deburr and visual crack/warp inspection; bore gauge; matched-pair centre distance and axis parallelism

Edges: remove burrs; break unspecified sharp edges C0.3–0.5. No unapproved material/tolerance substitution.

Artifact check: PASS only; fabrication HOLD pending full v0.8 gates. Physical NOT_RUN; machining USER_APPROVAL_REQUIRED.