

MFG-EX-DIE-05 · v0.8 MANUFACTURING DRAWING


TOP X-Y



FRONT X-Z



SIDE Y-Z

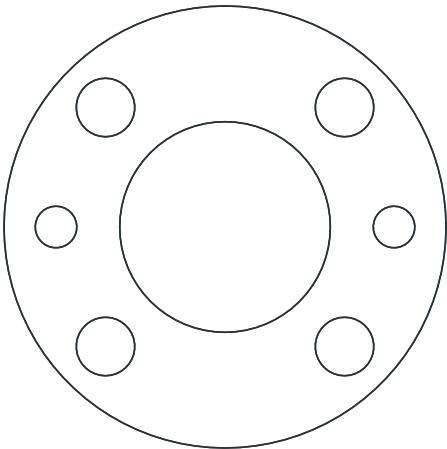

Drawing MFG-EX-DIE-05 | Part EX-DIE-05 — Annealed copper face gasket | Qty 2

Rev final-design-fabrication-closure-v0.8 | Units mm | Scale NTS, dimensions govern | Third-angle projection | source commit 93ec6a9c0c2afa3ad72288a967f07b7c8d03c99e

Material: C110 annealed copper t0.5 | Process/finish: waterjet/punch; anneal after cutting; bag clean

Overall: X 0.500 × Y 34.000 × Z 34.000 mm | general tolerance ISO 2768-m unless noted

Critical: OD34; ID16.20 +0.10/0; 4x Ø4.5 PCD26 at45 degree; 2x Ø3.20 dowel clearance at PCD26 angles0/180; t0.50 ±0.03; burr <=0.03; one spare required

GD&T/datums: A=barrel interface face; B=melt-channel axis; C=fastener-pattern centre plane; verify datum marking on supplier inspection report

Inspection: CMM/caliper against STEP and drawing; deburr and visual crack/warp inspection; pin-gauge channels/orifice; face flatness; shielded hydro/hot-polymer containment test

Edges: remove burrs; break unspecified sharp edges C0.3–0.5. No unapproved material/tolerance substitution.

Artifact check: PASS only; fabrication HOLD pending full v0.8 gates. Physical NOT_RUN; machining USER_APPROVAL_REQUIRED.