


MFG-FM-EB-01 · v0.8 MANUFACTURING DRAWING


TOP X-Y



FRONT X-Z

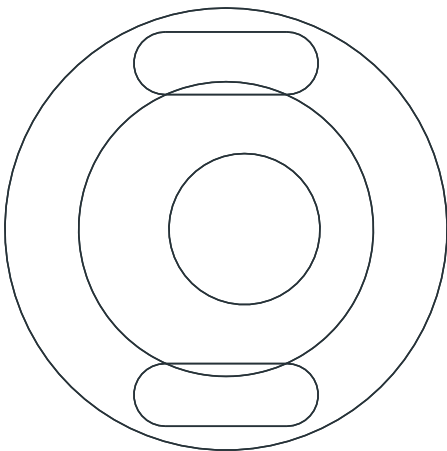

SIDE Y-Z



Drawing MFG-FM-EB-01 | Part FM-EB-01 — Puller eccentric pressure bushing | Qty 2

Rev final-design-fabrication-closure-v0.8 | Units mm | Scale NTS, dimensions govern | Third-angle projection | source commit 93ec6a9c0c2afa3ad72288a967f07b7c8d03c99e

Material: S45C normalized steel | Process/finish: turn eccentric bore + mill flange slots

Overall: X 24.000 × Y 13.000 × Z 24.000 mm | general tolerance ISO 2768-m unless noted

Critical: OD16 g6 x10; flange Ø24 x3; bore Ø8.20 +0.05/0 offset1.00 ±0.02; 2x3.4x10 flange slots at radius9; install paired bushes at equal index within0.5°; set full-rotation unloaded roller gap1.60-1.90 then clamp 2xM3 per bush

GD&T/datums: A=frame mounting face; B=primary bearing axis; C=secondary bearing/fastener axis; verify datum marking on supplier inspection report

Inspection: CMM/caliper against STEP and drawing; deburr and visual crack/warp inspection; bore gauge; matched-pair centre distance and axis parallelism

Edges: remove burrs; break unspecified sharp edges C0.3–0.5. No unapproved material/tolerance substitution.

Artifact check: PASS only; fabrication HOLD pending full v0.8 gates. Physical NOT_RUN; machining USER_APPROVAL_REQUIRED.