


MFG-SP-BP-01 · v0.8 MANUFACTURING DRAWING

TOP X-Y



FRONT X-Z

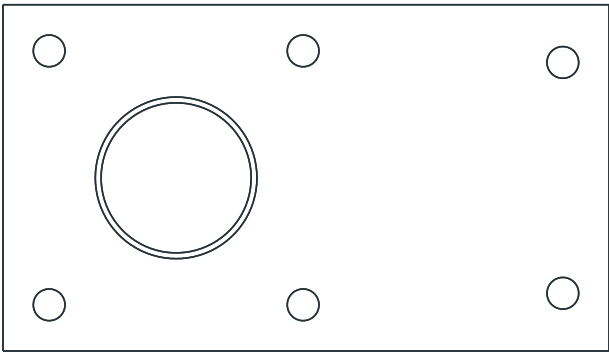

SIDE Y-Z



Drawing MFG-SP-BP-01 | Part SP-BP-01 — Spool 6001 bearing pocket plate | Qty 2

Rev final-design-fabrication-closure-v0.8 | Units mm | Scale NTS, dimensions govern | Third-angle projection | source commit 93ec6a9c0c2afa3ad72288a967f07b7c8d03c99e

Material: 10 mm 6061-T6 | Process/finish: waterjet rough + pocket bore finish

Overall: X 105.000 × Y 10.000 × Z 60.000 mm | general tolerance ISO 2768-m unless noted

Critical: 105 x10 x60; bearing centre X30/Z30; Ø28.000–28.021 H7 x8.05–8.10 pocket from marked inner face; Ø26 through relief leaves 1.95–2.00 shoulder; 4xØ5.5 retainer + 2xØ5.5 profile tab; matched axis position ±0.05

GD&T/datums: A=frame mounting face; B=primary bearing axis; C=secondary bearing/fastener axis; verify datum marking on supplier inspection report

Inspection: CMM/caliper against STEP and drawing; deburr and visual crack/warp inspection; bore gauge; matched-pair centre distance and axis parallelism

Edges: remove burrs; break unspecified sharp edges C0.3–0.5. No unapproved material/tolerance substitution.

Artifact check: PASS only; fabrication HOLD pending full v0.8 gates. Physical NOT_RUN; machining USER_APPROVAL_REQUIRED.