


MFG-SP-BR-01 · v0.8 MANUFACTURING DRAWING

TOP X-Y



FRONT X-Z

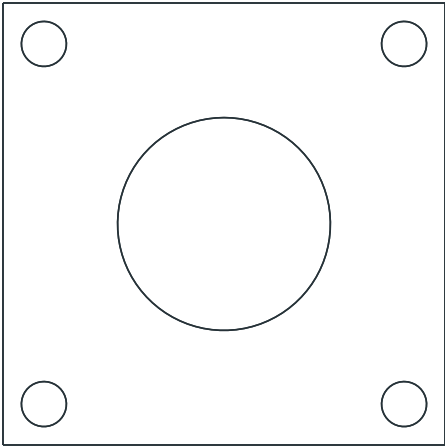

SIDE Y-Z



Drawing MFG-SP-BR-01 | Part SP-BR-01 — Spool 6001 outer-ring retainer | Qty 2

Rev final-design-fabrication-closure-v0.8 | Units mm | Scale NTS, dimensions govern | Third-angle projection | source commit 93ec6a9c0c2afa3ad72288a967f07b7c8d03c99e

Material: 2 mm 304 stainless sheet | Process/finish: laser cut + deburr

Overall: X 54.000 × Y 2.000 × Z 54.000 mm | general tolerance ISO 2768-m unless noted

Critical: 54 x2 x54; Ø26.0 +0.10/0 relief gives 0.95–1.00 radial outer-ring overlap; 4xØ5.5 at 44 mm square; flatness0.10; burr away from bearing; use 4x M5 with SP-BP-01

GD&T/datums: A=frame mounting face; B=primary bearing axis; C=secondary bearing/fastener axis; verify datum marking on supplier inspection report

Inspection: CMM/caliper against STEP and drawing; deburr and visual crack/warp inspection; bore gauge; matched-pair centre distance and axis parallelism

Edges: remove burrs; break unspecified sharp edges C0.3–0.5. No unapproved material/tolerance substitution.

Artifact check: PASS only; fabrication HOLD pending full v0.8 gates. Physical NOT_RUN; machining USER_APPROVAL_REQUIRED.