


MFG-SP-TR-01 · v0.8 MANUFACTURING DRAWING

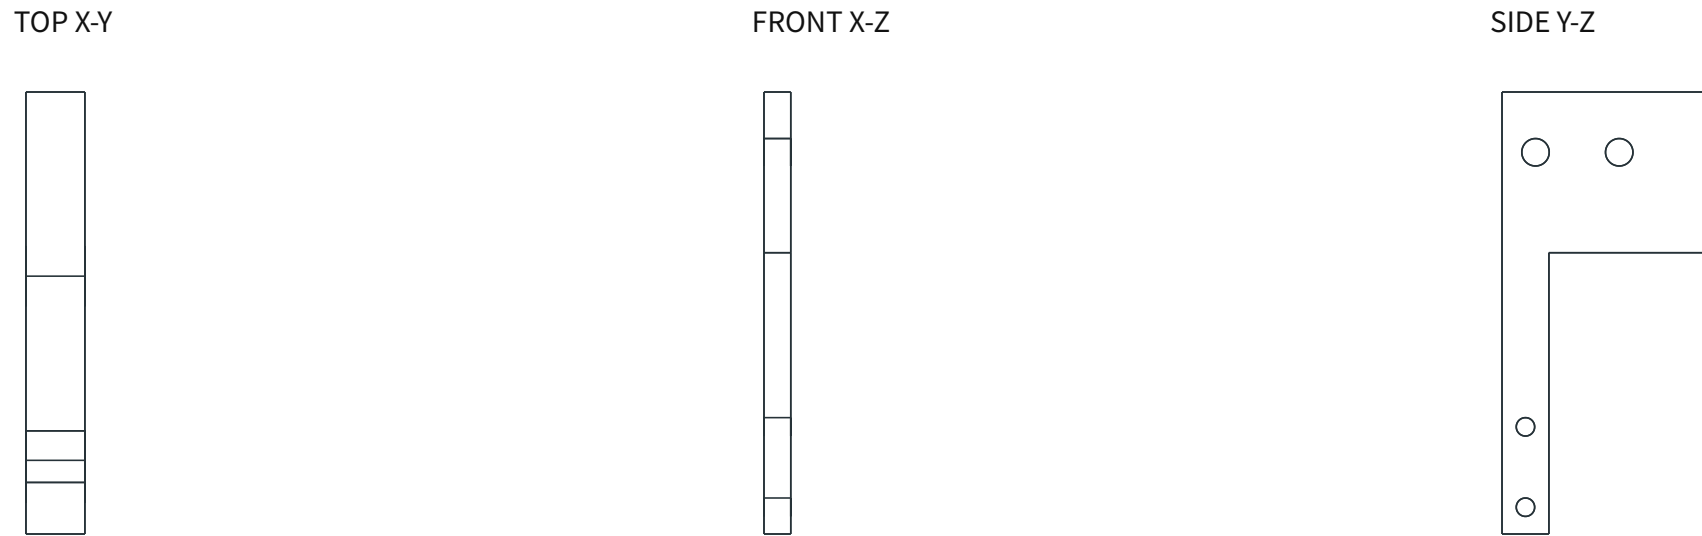

Drawing MFG-SP-TR-01 | Part SP-TR-01 — Y-axis traverse stepped support | Qty 2

Rev final-design-fabrication-closure-v0.8 | Units mm | Scale NTS, dimensions govern | Third-angle projection | source commit 93ec6a9c0c2afa3ad72288a967f07b7c8d03c99e

Material: 8 mm 6061-T6 | Process/finish: waterjet + ream

Overall: X 8.000 × Y 60.000 × Z 132.000 mm | general tolerance ISO 2768-m unless noted

Critical: 8x60x132; stem14x84; rod bores8.20-8.30 at local Y10/35 Z114; M5 holes5.5 at Y7 Z8/32; two SP-TG-01 rods8 h6 x196; four SP-SC-08 collars outside support plates; parallelism<=0.10 over support spacing; spindle-parallel Y axis; four M5x16 plus received washer/T-nut; received collar torque/anti-slip test and bracket/joint proof HOLD

GD&T/datums: A=frame mounting plane; B=primary edge; C=mounting-hole centreline; verify datum marking on supplier inspection report

Inspection: CMM/caliper against STEP and drawing; deburr and visual crack/warp inspection; fit-up, PE bond where metal, reach/access and interlock actuation inspection

Edges: remove burrs; break unspecified sharp edges C0.3–0.5. No unapproved material/tolerance substitution.

Artifact check: PASS only; fabrication HOLD pending full v0.8 gates. Physical NOT_RUN; machining USER_APPROVAL_REQUIRED.