


MFG-ExtruderFixedCollar · v0.8 MANUFACTURING DRAWING


TOP X-Y



FRONT X-Z



SIDE Y-Z

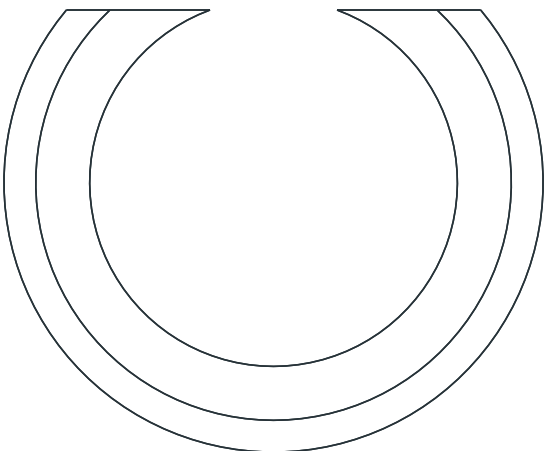

Drawing MFG-ExtruderFixedCollar | Part ExtruderFixedCollar — ExtruderFixedCollar | Qty 1

Rev final-design-fabrication-closure-v0.8 | Units mm | Scale NTS, dimensions govern | Third-angle projection | source commit 93ec6a9c0c2afa3ad72288a967f07b7c8d03c99e

Material: S45C steel | Process/finish: turn, split, black oxide with bore masked

Overall: X 12.000 × Y 50.000 × Z 41.000 mm | general tolerance ISO 2768-m unless noted

Critical: OD Ø50; L12.00 ±0.05; bore Ø34.25 +0.03/0; datum face runout 0.05 to bore axis; bore Ra≤1.6 µm; non-contact radial locator only; no blue-fit clamp on hot barrel

GD&T/datums: A=profile mounting plane; B=barrel axis; C=rear axial datum; verify datum marking on supplier inspection report

Inspection: CMM/caliper against STEP and drawing; deburr and visual crack/warp inspection; barrel-axis alignment; sliding travel and cold/hot clearance inspection

Edges: remove burrs; break unspecified sharp edges C0.3–0.5. No unapproved material/tolerance substitution.

Artifact check: PASS only; fabrication HOLD pending full v0.8 gates. Physical NOT_RUN; machining USER_APPROVAL_REQUIRED.