

MFG-ExtruderRearFixedDatum · v0.8 MANUFACTURING DRAWING


TOP X-Y



FRONT X-Z



SIDE Y-Z

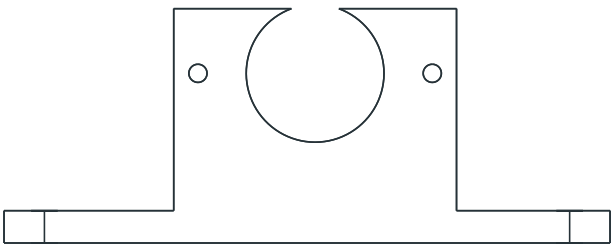

Drawing MFG-ExtruderRearFixedDatum | Part ExtruderRearFixedDatum — ExtruderRearFixedDatum | Qty 1

Rev final-design-fabrication-closure-v0.8 | Units mm | Scale NTS, dimensions govern | Third-angle projection | source commit 93ec6a9c0c2afa3ad72288a967f07b7c8d03c99e

Material: 8 mm S275 steel | Process/finish: laser/waterjet rough + bore/face finish

Overall: X 8.000 × Y 150.000 × Z 58.000 mm | general tolerance ISO 2768-m unless noted

Critical: barrel bore Ø34.25 +0.05/0; 2×Ø6.6 rail holes; datum face flatness 0.10; bore axis perpendicularity 0.10/54; hole position ±0.10

GD&T/datums: A=profile mounting plane; B=barrel axis; C=rear axial datum; verify datum marking on supplier inspection report

Inspection: CMM/caliper against STEP and drawing; deburr and visual crack/warp inspection; barrel-axis alignment; sliding travel and cold/hot clearance inspection

Edges: remove burrs; break unspecified sharp edges C0.3–0.5. No unapproved material/tolerance substitution.

Artifact check: PASS only; fabrication HOLD pending full v0.8 gates. Physical NOT_RUN; machining USER_APPROVAL_REQUIRED.