



MFG-TH-BH-02 · v0.8 MANUFACTURING DRAWING


TOP X-Y

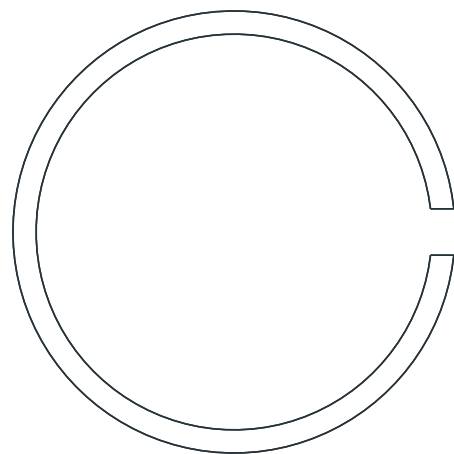

FRONT X-Z



SIDE Y-Z

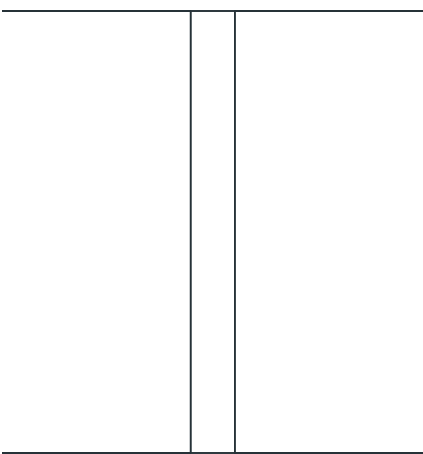

Drawing MFG-TH-BH-02 | Part TH-BH-02 — Custom barrel mica band heater Z1 | Qty 1

Rev final-design-fabrication-closure-v0.8 | Units mm | Scale NTS, dimensions govern | Third-angle projection | source commit 93ec6a9c0c2afa3ad72288a967f07b7c8d03c99e

Material: mica/NiCr/stainless sheath | Process/finish: custom heater RFQ

Overall: X 38.045 × Y 38.150 × Z 40.000 mm | general tolerance ISO 2768-m unless noted

Critical: 24 VDC 100 W each; free-state ID34.10–34.20; usable split-closure travel >=1.00; width40 ±0.5; radial build2 nominal; cold resistance 5.76 Ω ±10%; 300 mm fiberglass leads; PE-bonded sheath; PET service 300 C design; no stock Ø35 substitution; reduced-width 100 W design requires supplier watt-density and lead-layout review; thermal response NOT_RUN

GD&T/datums: A=profile mounting plane; B=barrel axis; C=rear axial datum; verify datum marking on supplier inspection report

Inspection: CMM/caliper against STEP and drawing; deburr and visual crack/warp inspection; barrel-axis alignment; sliding travel and cold/hot clearance inspection

Edges: remove burrs; break unspecified sharp edges C0.3–0.5. No unapproved material/tolerance substitution.

Artifact check: PASS only; fabrication HOLD pending full v0.8 gates. Physical NOT_RUN; machining USER_APPROVAL_REQUIRED.