



MFG-SP-AX-01 · v0.8 MANUFACTURING DRAWING

END VIEW

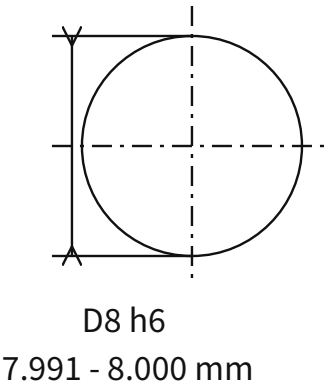

SIDE VIEW / SILHOUETTE

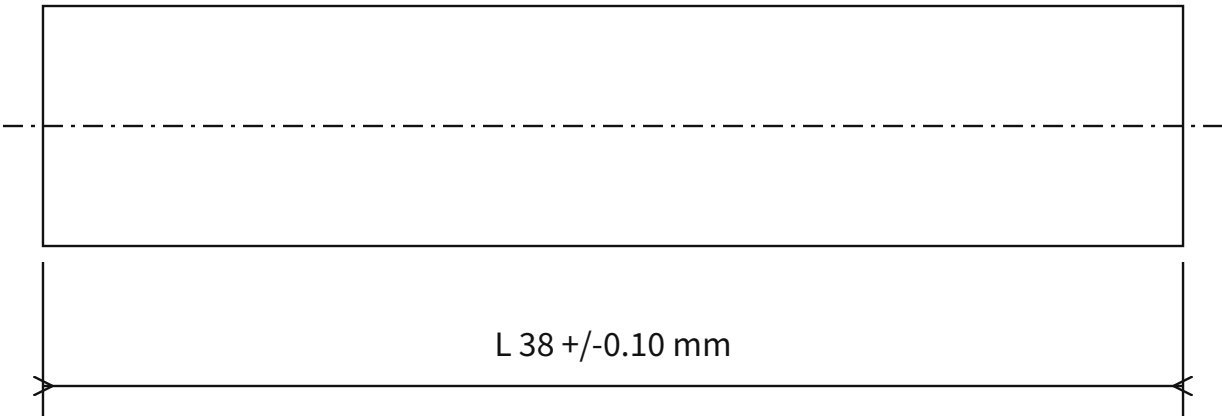

Drawing MFG-SP-AX-01 | Part SP-AX-01 — Dancer pivot axle | Qty 1
Rev final-design-fabrication-closure-v0.8 | Units mm | Scale NTS, dimensions govern | Third-angle projection | source commit
93ec6a9c0c2afa3ad72288a967f07b7c8d03c99e
Material: 8 h6 stainless ground shaft | Process/finish: cut + face + deburr
Overall: X 8.000 × Y 8.000 × Z 38.000 mm | general tolerance ISO 2768-m unless noted
Critical: Diameter 7.991-8.000; length 38 +/-0.10; ends C0.2; shaft straightness <=0.05; retain with two SP-SC-08 collars; endplay 0.10-0.30
after adjustment; collar torque and axial slip proof HOLD
GD&T/datums: A=common journal axis; B=drive-end shoulder/face; C=keyway or retaining feature plane; verify datum marking on supplier inspection
report
Inspection: CMM/caliper against STEP and drawing; deburr and visual crack/warp inspection; micrometer bearing seats; dial-indicator TIR/runout
between centres
Edges: remove burrs; break unspecified sharp edges C0.3–0.5. No unapproved material/tolerance substitution.
Artifact check: PASS only; fabrication HOLD pending full v0.8 gates. Physical NOT_RUN; machining USER_APPROVAL_REQUIRED.