


MFG-CUT-08 • v0.8 MANUFACTURING DRAWING

TOP X-Y



FRONT X-Z

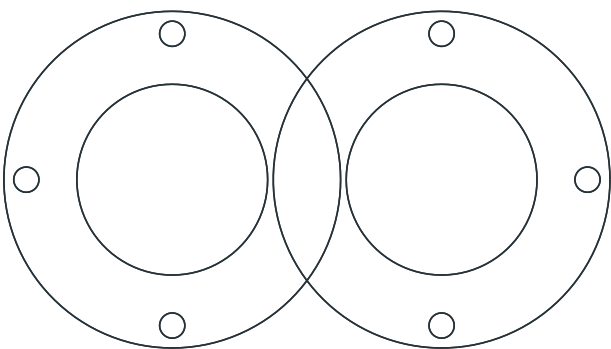

SIDE Y-Z



Drawing MFG-CUT-08 | Part CUT-08 — Dual 61905 bearing retainer | Qty 2

Rev final-design-fabrication-closure-v0.8 | Units mm | Scale NTS, dimensions govern | Third-angle projection | source commit
b287f07f7a55ba61e39c0a5cbe8e45515c9e53ec

Material: 2 mm steel | Process/finish: laser cut + deburr

Overall: X 108.000 × Y 60.000 × Z 2.000 mm | general tolerance ISO 2768-m unless noted

Critical: figure-eight OD lobes 60; two relief bores diameter 34; center distance 48.00 +/-0.05; six M4 clearance holes diameter 4.5 at drawing coordinates; CUT-03 matching holes are included and may be match-reamed after bearing-seat finish

GD&T/datums: A=frame mounting face; B=primary bearing axis; C=secondary bearing/fastener axis; verify datum marking on supplier inspection report

Inspection: CMM/caliper against STEP and drawing; deburr and visual crack/warp inspection; bore gauge; matched-pair centre distance and axis parallelism

Edges: remove burrs; break unspecified sharp edges C0.3–0.5. No unapproved material/tolerance substitution.

Artifact check: PASS only; fabrication HOLD pending full v0.8 gates. Physical NOT_RUN; machining USER_APPROVAL_REQUIRED.