



MFG-DRV-GD-01 · v0.8 MANUFACTURING DRAWING

TOP X-Y



FRONT X-Z

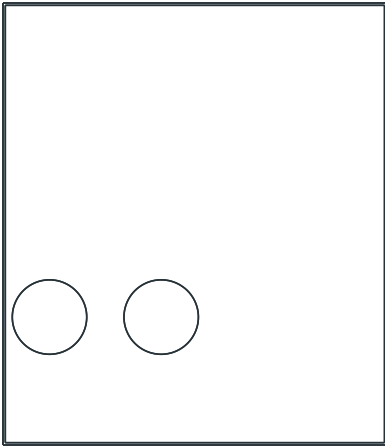

SIDE Y-Z



Drawing MFG-DRV-GD-01 | Part DRV-GD-01 — Interlocked drive guard | Qty 1

Rev final-design-fabrication-closure-v0.8 | Units mm | Scale NTS, dimensions govern | Third-angle projection | source commit
b287f07f7a55ba61e39c0a5cbe8e45515c9e53ec

Material: 1 mm galvanized steel | Process/finish: laser + brake + service-cover hardware

Overall: X 165.000 × Y 48.000 × Z 190.000 mm | general tolerance ISO 2768-m unless noted

Critical: 165 x48 x190; two Ø32 shaft clearances at X20/68,Z55; installed annular opening≤6; open service face; positive-opening interlock flag;
PE bond

GD&T/datums: A=frame mounting plane; B=primary edge; C=mounting-hole centreline; verify datum marking on supplier inspection report

Inspection: CMM/caliper against STEP and drawing; deburr and visual crack/warp inspection; fit-up, PE bond where metal, reach/access and
interlock actuation inspection

Edges: remove burrs; break unspecified sharp edges C0.3–0.5. No unapproved material/tolerance substitution.

Artifact check: PASS only; fabrication HOLD pending full v0.8 gates. Physical NOT_RUN; machining USER_APPROVAL_REQUIRED.