



MFG-EX-CPN-SCR · v0.8 MANUFACTURING DRAWING


TOP X-Y

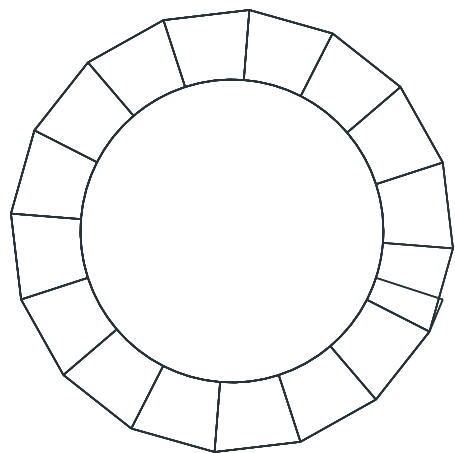

FRONT X-Z

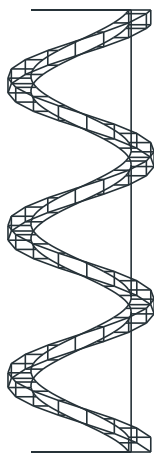

SIDE Y-Z

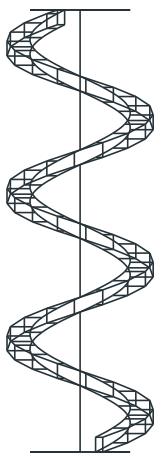

Drawing MFG-EX-CPN-SCR | Part EX-CPN-SCR — Three-pitch screw process coupon | Qty 1

Rev final-design-fabrication-closure-v0.8 | Units mm | Scale NTS, dimensions govern | Third-angle projection | source commit
b287f07f7a55ba61e39c0a5cbe8e45515c9e53ec

Material: same certified SCM440 heat as EX-SCR-01 | Process/finish: same flight mill/polish/nitride route as EX-SCR-01

Overall: X 15.871 × Y 15.871 × Z 48.000 mm | general tolerance ISO 2768-m unless noted

Critical: L48.00; three pitches; OD/root/land/finish/case same as feed zone; coupon RFQ only

GD&T/datums: A=common journal/bore axis; B=drive/feed datum face; C=feed-port angular plane; verify datum marking on supplier inspection report

Inspection: CMM/caliper against STEP and drawing; deburr and visual crack/warp inspection; certified material/heat-treatment report;
three-station bore/OD and TIR report

Edges: remove burrs; break unspecified sharp edges C0.3–0.5. No unapproved material/tolerance substitution.

Artifact check: PASS only; fabrication HOLD pending full v0.8 gates. Physical NOT_RUN; machining USER_APPROVAL_REQUIRED.