


# MFG-EX-DIE-04 · v0.8 MANUFACTURING DRAWING

TOP X-Y



FRONT X-Z

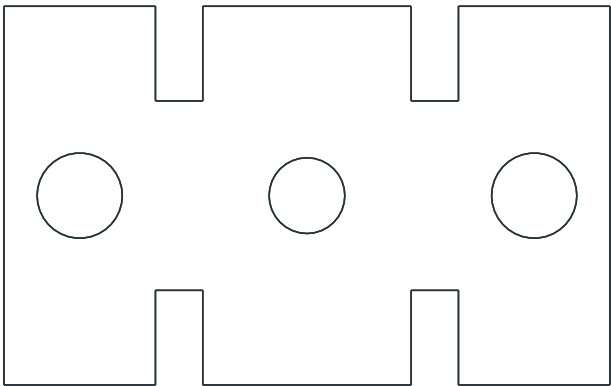

SIDE Y-Z



Drawing MFG-EX-DIE-04 | Part EX-DIE-04 — Sacrificial die relief retainer | Qty 1

Rev final-design-fabrication-closure-v0.8 | Units mm | Scale NTS, dimensions govern | Third-angle projection | source commit  
b287f07f7a55ba61e39c0a5cbe8e45515c9e53ec

Material: 304 stainless sheet t1.5 | Process/finish: laser/waterjet + deburr; no heat treatment

Overall: X 32.000 × Y 20.000 × Z 1.500 mm | general tolerance ISO 2768-m unless noted

Critical: 32 x20 x1.5; two 10 wide x2.5 long bending webs; 2x Ø4.5 at 24 centres; centre bypass Ø4; flatness 0.15; coupon-calibrate at operating temperature, analytical estimate is not release evidence

GD&T/datums: A=barrel interface face; B=melt-channel axis; C=fastener-pattern centre plane; verify datum marking on supplier inspection report

Inspection: CMM/caliper against STEP and drawing; deburr and visual crack/warp inspection; pin-gauge channels/orifice; face flatness; shielded hydro/hot-polymer containment test

Edges: remove burrs; break unspecified sharp edges C0.3–0.5. No unapproved material/tolerance substitution.

Artifact check: PASS only; fabrication HOLD pending full v0.8 gates. Physical NOT\_RUN; machining USER\_APPROVAL\_REQUIRED.