



MFG-FD-HOP-01 · v0.8 MANUFACTURING DRAWING


TOP X-Y

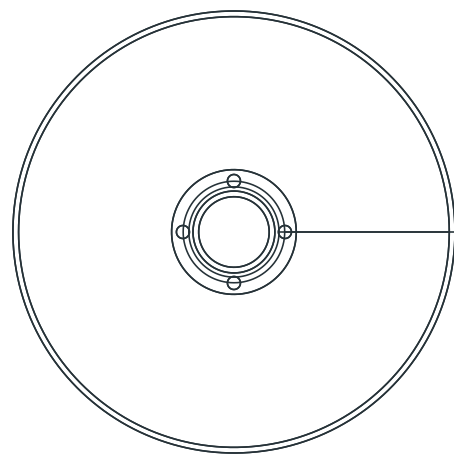

FRONT X-Z

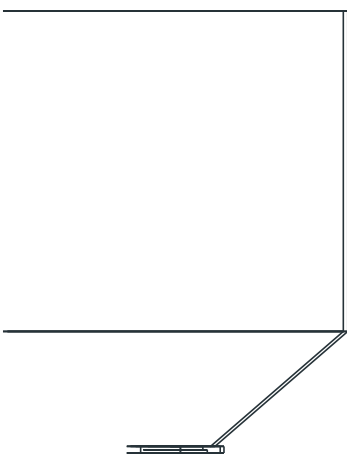

SIDE Y-Z

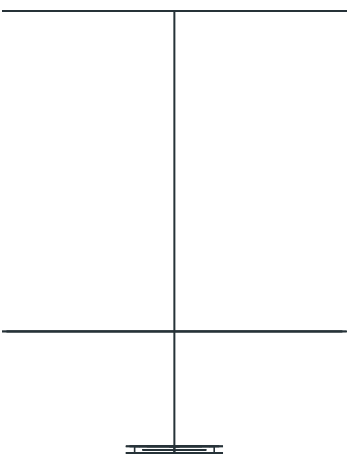

Drawing MFG-FD-HOP-01 | Part FD-HOP-01 — Sealed feed hopper | Qty 1

Rev final-design-fabrication-closure-v0.8 | Units mm | Scale NTS, dimensions govern | Third-angle projection | source commit
b287f07f7a55ba61e39c0a5cbe8e45515c9e53ec

Material: 2 mm 304 stainless | Process/finish: roll cone/cylinder + TIG flange + gasketed lid

Overall: X 156.000 × Y 156.000 × Z 200.000 mm | general tolerance ISO 2768-m unless noted

Critical: OD156 x straight145 + cone55; outlet ID24.90–25.00; lower flange OD44 x3, 4xØ4.60 +0.10/0 PCD36±0.05; register ID28.90 +0.03/0
x1.40±0.05; leak test

GD&T/datums: A=material-flow axis; B=mounting face; C=drive/sensor centre plane; verify datum marking on supplier inspection report

Inspection: CMM/caliper against STEP and drawing; deburr and visual crack/warp inspection; dry assembly rotation and cleanout/dead-pocket
inspection

Edges: remove burrs; break unspecified sharp edges C0.3–0.5. No unapproved material/tolerance substitution.

Artifact check: PASS only; fabrication HOLD pending full v0.8 gates. Physical NOT_RUN; machining USER_APPROVAL_REQUIRED.