



MFG-FM-RL-01 • v0.8 MANUFACTURING DRAWING


TOP X-Y

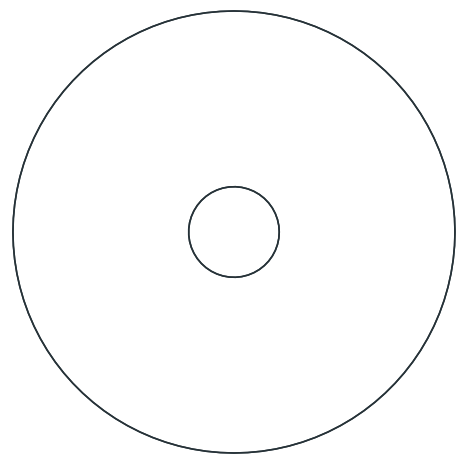

FRONT X-Z

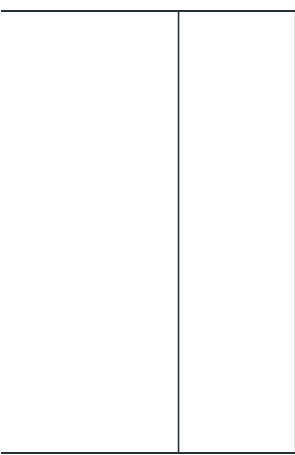

SIDE Y-Z

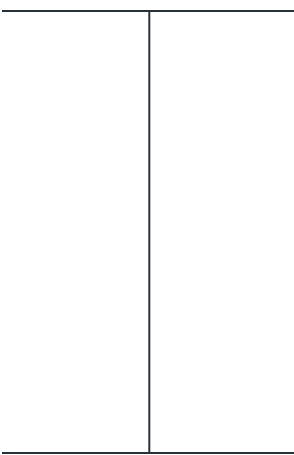

Drawing MFG-FM-RL-01 | Part FM-RL-01 — Puller roller | Qty 2

Rev final-design-fabrication-closure-v0.8 | Units mm | Scale NTS, dimensions govern | Third-angle projection | source commit b287f07f7a55ba61e39c0a5cbe8e45515c9e53ec

Material: 6061-T6 hub + replaceable Shore A 50–70 silicone sleeve | Process/finish: turn + bore

Overall: X 40.000 × Y 40.000 × Z 60.000 mm | general tolerance ISO 2768-m unless noted

Critical: finished OD40.00 ±0.025 x60; bore Ø8.2; TIR <=0.05; Shore A 50-70 sleeve; matched OD within 0.05

GD&T/datums: A=frame mounting plane; B=primary edge; C=mounting-hole centreline; verify datum marking on supplier inspection report

Inspection: CMM/caliper against STEP and drawing; deburr and visual crack/warp inspection; fit-up, PE bond where metal, reach/access and interlock actuation inspection

Edges: remove burrs; break unspecified sharp edges C0.3–0.5. No unapproved material/tolerance substitution.

Artifact check: PASS only; fabrication HOLD pending full v0.8 gates. Physical NOT_RUN; machining USER_APPROVAL_REQUIRED.