


MFG-SP-AX-01 · v0.8 MANUFACTURING DRAWING


TOP X-Y



FRONT X-Z

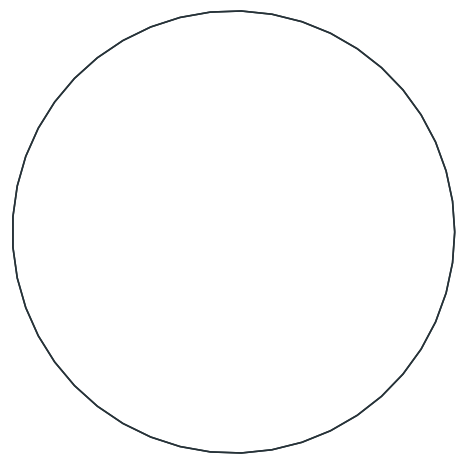

SIDE Y-Z



Drawing MFG-SP-AX-01 | Part SP-AX-01 — Dancer pivot/roller axles | Qty 2

Rev final-design-fabrication-closure-v0.8 | Units mm | Scale NTS, dimensions govern | Third-angle projection | source commit
b287f07f7a55ba61e39c0a5cbe8e45515c9e53ec

Material: Ø8 h6 stainless shaft | Process/finish: cut/face + collars

Overall: X 8.000 × Y 8.000 × Z 28.000 mm | general tolerance ISO 2768-m unless noted

Critical: Ø8 h6 =7.991-8.000 x28; metal collars; one pivot and one end roller axle

GD&T/datums: A=common journal axis; B=drive-end shoulder/face; C=keyway or retaining feature plane; verify datum marking on supplier inspection report

Inspection: CMM/caliper against STEP and drawing; deburr and visual crack/warp inspection; micrometer bearing seats; dial-indicator TIR/runout between centres

Edges: remove burrs; break unspecified sharp edges C0.3–0.5. No unapproved material/tolerance substitution.

Artifact check: PASS only; fabrication HOLD pending full v0.8 gates. Physical NOT_RUN; machining USER_APPROVAL_REQUIRED.