


# MFG-FM-PL-01 • v0.8 MANUFACTURING DRAWING

TOP X-Y



FRONT X-Z

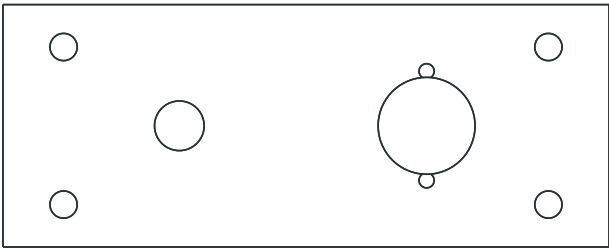

SIDE Y-Z



Drawing MFG-FM-PL-01 | Part FM-PL-01 — Puller side plate | Qty 2

Rev final-design-fabrication-closure-v0.8 | Units mm | Scale NTS, dimensions govern | Third-angle projection | source commit b287f07f7a55ba61e39c0a5cbe8e45515c9e53ec

Material: 10 mm 6061-T6 | Process/finish: waterjet + ream/tap

Overall: X 100.000 × Y 10.000 × Z 40.000 mm | general tolerance ISO 2768-m unless noted

Critical: 100 x10 x40; fixed axle Ø8.2 at X29.10/Z20; adjustable bush seat Ø16 H7 at X69.90/Z20; 2xM3-6H blind7 at X69.90/Z11/29 from marked outer face; installed axes X29.10/X70.90 give gap1.80 and nip X50.00 local; 4xØ4.5 guard mounts; matched pair axis position ±0.05

GD&T/datums: A=frame mounting face; B=primary bearing axis; C=secondary bearing/fastener axis; verify datum marking on supplier inspection report

Inspection: CMM/caliper against STEP and drawing; deburr and visual crack/warp inspection; bore gauge; matched-pair centre distance and axis parallelism

Edges: remove burrs; break unspecified sharp edges C0.3–0.5. No unapproved material/tolerance substitution.

Artifact check: PASS only; fabrication HOLD pending full v0.8 gates. Physical NOT\_RUN; machining USER\_APPROVAL\_REQUIRED.