



MFG-ExtruderRearRetainerSpacer318 · v0.8 MANUFACTURING DRAWING


TOP X-Y



FRONT X-Z



SIDE Y-Z

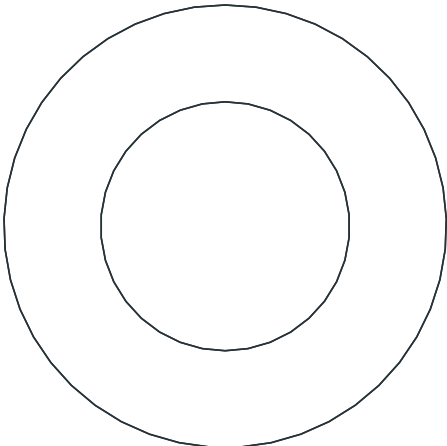

Drawing MFG-ExtruderRearRetainerSpacer318 | Part ExtruderRearRetainerSpacer318 — ExtruderRearRetainerSpacer318 | Qty 2
Rev final-design-fabrication-closure-v0.8 | Units mm | Scale NTS, dimensions govern | Third-angle projection | source commit
b287f07f7a55ba61e39c0a5cbe8e45515c9e53ec

Material: S275 steel | Process/finish: turn, face and deburr; matched pair

Overall: X 4.200 × Y 8.000 × Z 8.000 mm | general tolerance ISO 2768-m unless noted

Critical: OD Ø8.00 ±0.03; ID Ø4.50 +0.10/0; L4.20 ±0.02; face flatness 0.01; matched length spread ≤0.02

GD&T/datums: A=profile mounting plane; B=barrel axis; C=rear axial datum; verify datum marking on supplier inspection report

Inspection: CMM/caliper against STEP and drawing; deburr and visual crack/warp inspection; barrel-axis alignment; sliding travel and cold/hot clearance inspection

Edges: remove burrs; break unspecified sharp edges C0.3–0.5. No unapproved material/tolerance substitution.

Artifact check: PASS only; fabrication HOLD pending full v0.8 gates. Physical NOT_RUN; machining USER_APPROVAL_REQUIRED.