


MFG-CUT-02 • v0.8 MANUFACTURING DRAWING


TOP X-Y



FRONT X-Z

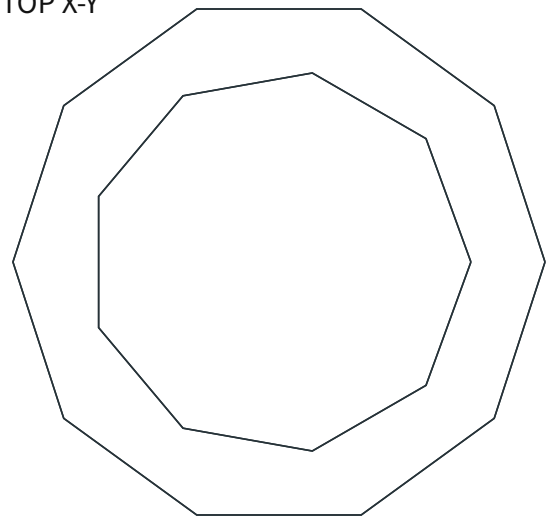

SIDE Y-Z

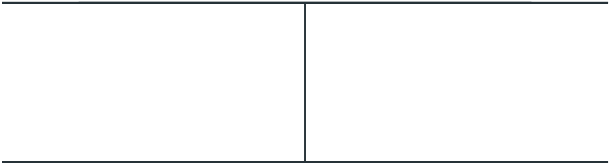

Drawing MFG-CUT-02 | Part CUT-02 — Cutter spacer | Qty 10

Rev final-design-fabrication-closure-v0.8 | Units mm | Scale NTS, dimensions govern | Third-angle projection | source commit df59fd138780f538a5fa62dad6e2770b49bf4d94

Material: S45C normalized steel | Process/finish: simple turning

Overall: X 28.000 × Y 28.000 × Z 7.000 mm | general tolerance ISO 2768-m unless noted

Critical: OD 28.0; bore 20.2 +0.10/0; length 7.00 +/-0.03; faces parallel within 0.03

GD&T/datums: A=shaft bore axis; B=ground stack face; C=keyway centre plane; verify datum marking on supplier inspection report

Inspection: CMM/caliper against STEP and drawing; deburr and visual crack/warp inspection; inspect flatness/parallelism and stack gap with metal shims

Edges: remove burrs; break unspecified sharp edges C0.3–0.5. No unapproved material/tolerance substitution.

Release: PASS — physical validation NOT_RUN; procurement and machining USER_APPROVAL_REQUIRED.