



# MFG-DRV-02 • v0.8 MANUFACTURING DRAWING


TOP X-Y

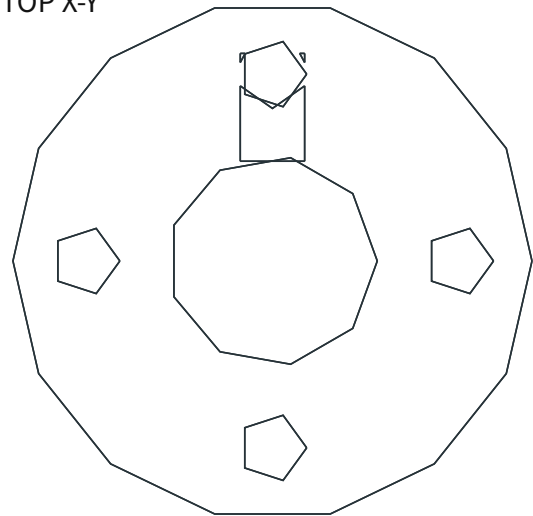

FRONT X-Z

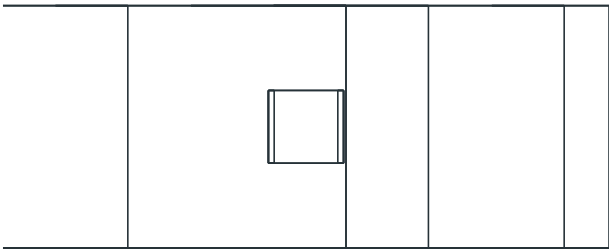

SIDE Y-Z

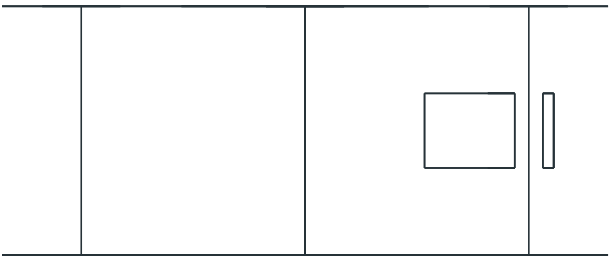

Drawing MFG-DRV-02 | Part DRV-02 — Bolt-on cutter sprocket hub | Qty 1

Rev final-design-fabrication-closure-v0.8 | Units mm | Scale NTS, dimensions govern | Third-angle projection | source commit df59fd138780f538a5fa62dad6e2770b49bf4d94

Material: S45C | Process/finish: turn + keyway + PCD drilling

Overall: X 50.000 × Y 50.000 × Z 20.000 mm | general tolerance ISO 2768-m unless noted

Critical: bore Ø20.2 +0.03/0 after received CUT-05 measurement; 6.2 keyway; 4xØ6.6 PCD36; sprocket register TIR <=0.10

GD&T/datums: A=shaft bore axis; B=stack face; C=key/dowel angular datum; verify datum marking on supplier inspection report

Inspection: CMM/caliper against STEP and drawing; deburr and visual crack/warp inspection; CMM centre distance; blue-check backlash/contact; verify keyed torque path

Edges: remove burrs; break unspecified sharp edges C0.3–0.5. No unapproved material/tolerance substitution.

Release: PASS — physical validation NOT\_RUN; procurement and machining USER\_APPROVAL\_REQUIRED.