



MFG-DRV-F01B • v0.8 MANUFACTURING DRAWING


TOP X-Y

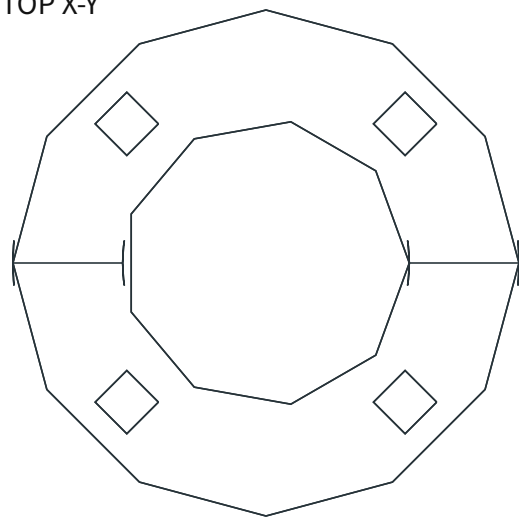

FRONT X-Z

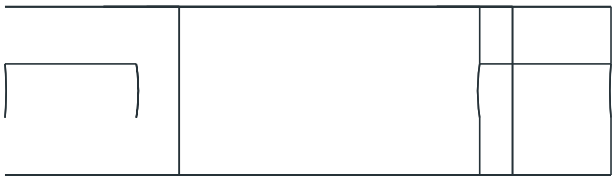

SIDE Y-Z

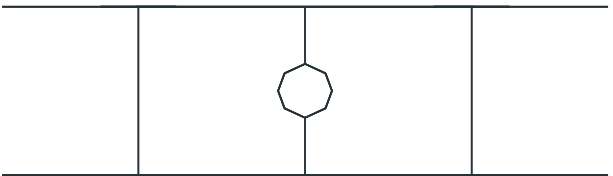

Drawing MFG-DRV-F01B | Part DRV-F01B — Motor-side fuse sprocket carrier | Qty 1

Rev final-design-fabrication-closure-v0.8 | Units mm | Scale NTS, dimensions govern | Third-angle projection | source commit
df59fd138780f538a5fa62dad6e2770b49bf4d94

Material: S45C | Process/finish: turn + PCD drill + radial drill

Overall: X 36.000 × Y 36.000 × Z 10.000 mm | general tolerance ISO 2768-m unless noted

Critical: OD36/ID20.4 x10; radial Ø3.2; 4xØ4.5 PCD28 to 12T sprocket; rotates free after pin fracture

GD&T/datums: A=shaft bore axis; B=stack face; C=key/dowel angular datum; verify datum marking on supplier inspection report

Inspection: CMM/caliper against STEP and drawing; deburr and visual crack/warp inspection; CMM centre distance; blue-check backlash/contact; verify keyed torque path

Edges: remove burrs; break unspecified sharp edges C0.3–0.5. No unapproved material/tolerance substitution.

Release: PASS — physical validation NOT_RUN; procurement and machining USER_APPROVAL_REQUIRED.