
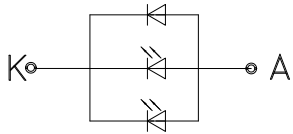


Item	Date	Remark
A	20200915	Original Drawing
		LCM



NO.	SYMBOL
1	LED-A
2	LED-K
3	IM2
4	IM1
5	IM0
6	VDD-2.8
7	DB7
8	DB6
9	DB5
10	DB4
11	DB3
12	DB2
13	DB1
14	DB0
15	RD
16	WR
17	RS
18	CS
19	TE
20	RESET
21	SDA
22	GND

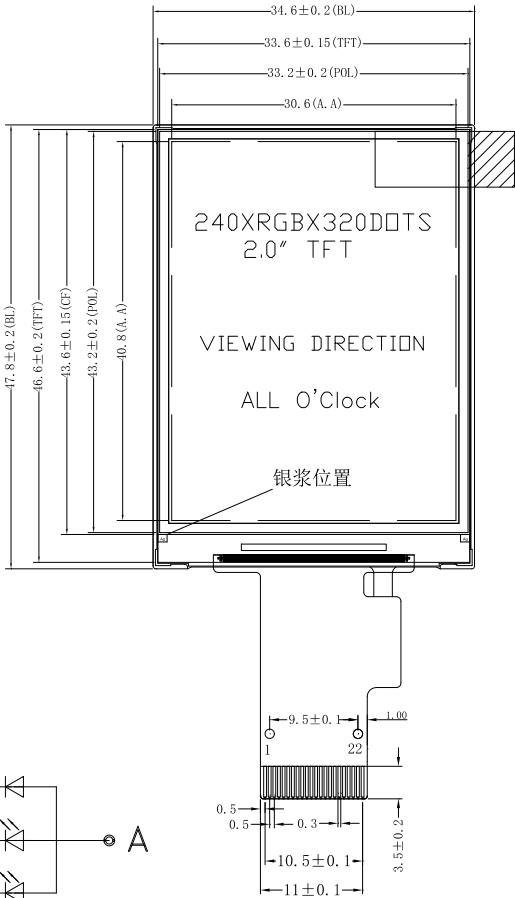

BL CIRCUIT DIAGRAM

NOTES:

1. DISPLAY TYPE: 2.0" TFT
2. VIEWING DIRECTION: All
3. POLARIZER MODE: TRANSMISSIVE/NORMALLY BLACK
4. DRIVER IC: ST7789
5. OPERATING TEMP.: -20°C~70°C
6. STORAGE TEMP.: -30°C~80°C
7. BACK LIGHT: 3 CHIP-WHITE LED; 60MA,3.0V
8. LCM Luminance: 400 CD/M2(TYP)
9. UNMARKED TOLERANCE: ±0.2
10. 建议机壳开窗可视区比 LCD A.A区单边大 0.3mm
11. 产品符合ROHS标准

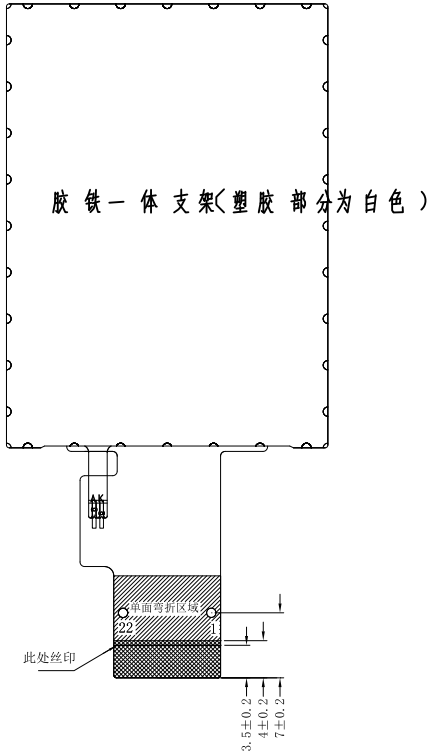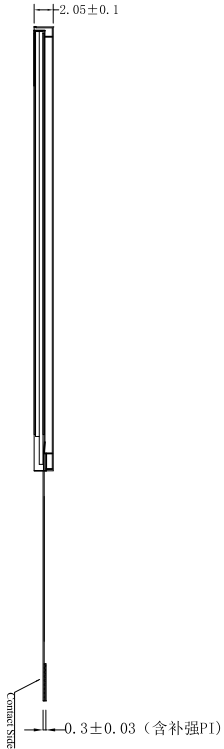

接口支持: 4SPI/8bit并口

Customer Approval Signature	Wisevision Optronics Co.,Ltd.							Drawing Number		Rev.	
								2.0" TFT		A	
	Unless Otherwise Specified		Title	N200-2432KHWIG07-C22				Material			
	Unit	mm						Soda Lime / Polyimide			
	General Roughness										
	Tolerance			Drawn	E.E.	Panel / E.	P.M.				
	Dimension	±0.3	By	Jesen					Scale	Sheet	Size
	Angle	±1	Date	20200915					1:1	1 of 1	A3

