

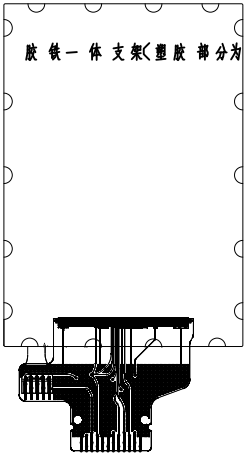


Item	Date	Remark
A	20200915	Original Drawing
		Low

NO.	SYMBOL
1	GND
2	K
3	A
4	VCC
5	GND
6	GND
7	RS
8	CS
9	SCL
10	SDA
11	RESET
12	GND

1	GND	
2	K	P39
3	A	P40
4	VCC	P02
5	GND	
6	GND	
7	RS	P10
8	CS	P09
9	SCL	P18
10	SDA	P16
11	RESET	P18
12	GND	

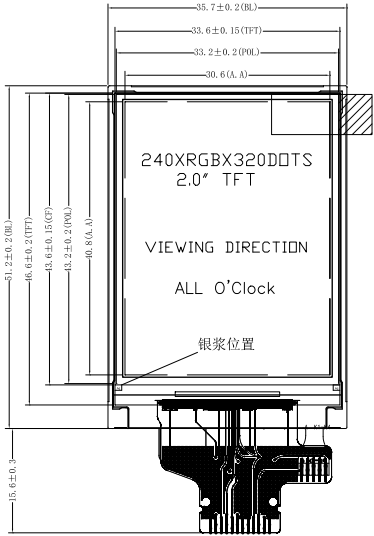

BL CIRCUIT DIAGRAM

- NOTES:
1. DISPLAY TYPE: 2.0" TFT
 2. VIEWING DIRECTION: All
 3. POLARIZER MODE: TRANSMISSIVE/NORMALLY BLACK
 4. DRIVER IC: ST7789
 5. OPERATING TEMP.: -20°C~70°C
 6. STORAGE TEMP.: -30°C~80°C
 7. BACK LIGHT: 4 CHIP-WHITE LED; 80MA,3.0V
 8. LCM Luminance: 400 CD/M2(TYP)
 9. UNMARKED TOLERANCE:±0.2
 10. 建议最小开槽宽度 LCD A/A区 最小为 0.3mm
 11. 产品符合ROHS标准

Customer Approval Signature	Wisevision technology Co.,Ltd.							Drawing Number	Rev.
								2.0" TFT	A
								Material	
								Soda Line / Polyimide	
	Unless Otherwise Specified		Title	N200-2432KHWIG20-H12					
	Unit	mm							
	General Roughness								
Tolerance		Drawn	E.E.	Panel / E.	P.M.				
Dimension	±0.3	By	Jesen				Scale	Sheet	Size
Angle	±1	Date	20200915				1:1	1 of 1	A3

