


TXL

Mounted X sprayer

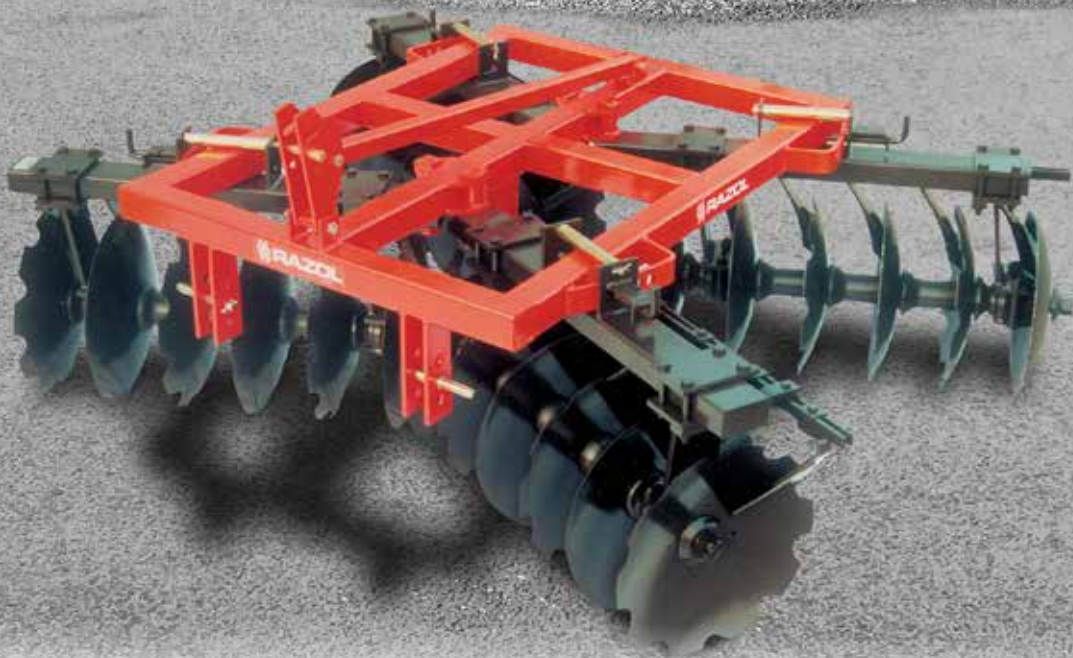

TXL

Mounted X sprayer

Strong points

The mounted tandem sprayer TXL has been specially designed for ploughing at spring, clods removing and stubble cultivation.

Adapted for light forest work, it perfectly suits poplar groves maintenance.

Robust and compact

Standard signalling

Discs angle manual adjustment

Versatile

+ HITCH

Mounted 3 points with clevises category n°2 and 3N to suit all types of tractors. 3° point height adjustable.

+ CHASSIS

Steel beam 100 x 100 x 6 mm.

+ ARRAYS

Steel beam 140 x 80 x 6 mm.

+ ANGLE ADJUSTMENT


Manual with sprindle to adjust the tool according to the user's needs.

+ MIDDLE TINE

Height adjustable.

+ SHAFT

Manganese-silica steel of 40 mm, bearings with double rows of tapered rollers, lubrication every 100 hours.



TXL 200 mm/610-5 mm				28 discs	32 discs
Working width				2,95 m	3,35 m
Power				80 to 110 cv	90 to 120 cv
Number of bearings				8	8
Weight				1 225 kg	1 345 kg

TXL 230 mm/610-5 mm	16 discs	20 discs	24 discs		28 discs
Working width	1,95 m	2,40 m	2,80 m		3,20 m
Power	60 to 80 cv	70 to 90 cv	80 to 110 cv		90 to 120 cv
Number of bearings	8	8	8		8
Weight	1 060 kg	1 180 kg	1 300 kg		1 420 kg

ROLLER ROL 9

● CHASSIS steel beam 100 x 100 x 8 mm		● 2 ELEMENT with tamping adjustment by slots				
ROL 9 FLAT IRONS	Working width	2,30 m	2,90 m	3,20 m	3,45 m	3,70 m
Ø400 mm, 8 flats	Weight	285 kg	310 kg	340 kg	355 kg	400 kg

Options available:

- Discs thickness 6 mm
- Square bearing 40 mm protection shell
- Square bearing 40 mm reinforced protection shell
- Middle disc with screw adjustment instead of the tine
- Automatic hitch n°2
- Ploughing discs Ø450 mm

DISC, TINE AND BEARING



Disc Ø610


- Mounted of square shaft 40 mm
- Thickness available: 5 or 6 mm



Square bearing of 40 mm

- Cast iron lids and bearing housings
- Steel sheath
- Tapered roller bearings

**Middle tine
50 x 18 mm**



**Triangle share
200 mm**



Standard protection



Reinforced protection

ROLLER ROL 9



+ FLAT IRONS

Ø400 mm, 9 flats
Flanged ball bearing Ø30 mm

- Dry and hilly land
- Silt and sand
- Aggressive flat irons
- Weight: 80 kg/m

ACCESSORIES



+ PLOUGHING DISC Ø450

To avoid any trace of the last disc after the roller passage and to get most perfect surface.

+ MIDDLE DISC INSTEAD OF THE TINE

To work on the middle part and without blocking when encountering plants.



Devices **with INDEPENDENT DISCS**

SKYRON fixed independent disc harrow
SKYRON folding independent disc harrow
SKYRON self-supporting independent disc harrow



Devices **with DISCS X**

ORBYS self-supporting X combining sprayer
ZÉNITH RGH self-supporting X combining sprayer
ZÉNITH RZH self-supporting X combining sprayer
ZÉNITH RJH self-supporting X combining sprayer
PHÉNIXTGX self-supporting X sprayer
PHÉNIXTBX self-supporting X sprayer



Devices **with DISCS V**

CWH - CWHR super heavy self-supporting V Cover Crop
SYNCHRONIC CIN self-supporting V Cover Crop
CLH - CVH heavy self-supporting V Cover Crop
CIH - CJH self-supporting V Cover Crop



Devices **with SUPPORTED DISCS**

VITICROP mounted X sprayer
VINIDISC mounted disc harrow
TXL mounted X sprayer
TRW heavy-duty mounted reversible sprayer
CCW - CCU mounted reversible sprayer



Devices **for ROLLING**

ROLLPACK self-supporting cast iron roller
TORO - RVH self-supporting cast iron roller
RVH EVO self-supporting steel smooth roller



Devices **with TINES**

KILIS - KILIS R combined cultivator with flexible tines
TÉOS - TÉOS R stubble cultivator with curved tines 3 rows



Devices **for LOOSENING**

ARASOL AVLE supported subsoiler
ARASOL AVS - AVR supported subsoiler
ARAPLOW ACV supported decompactor
ARAPLOW ACM - ACMH supported decompactor
ARAMULCH ADM - ADMH supported decompactor
DVV supported subsoiler for vineyard and orchards



Devices **for SPRING**

BLI - BMI - BSI folding and fixed mounted cultivator