
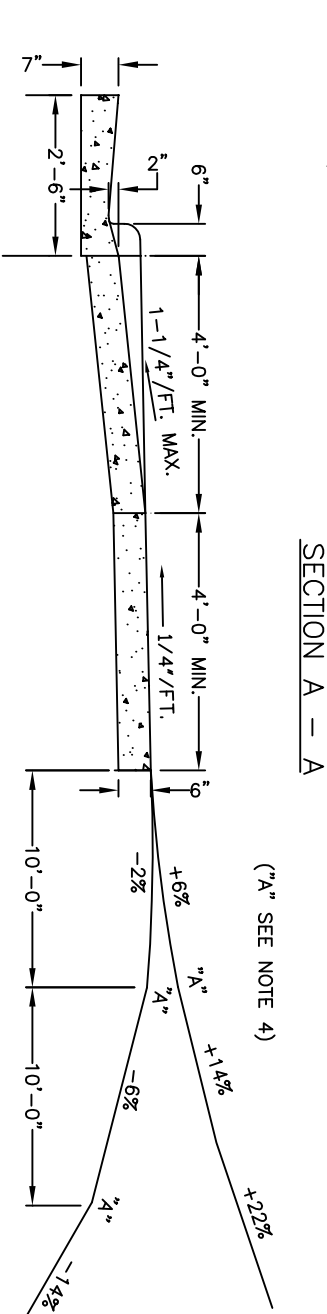
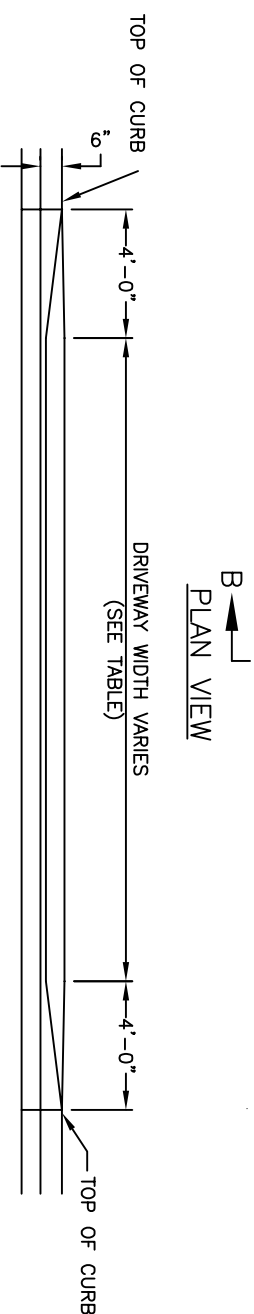


NOTES:

1. ALL CONCRETE TO BE 3600 P.S.I.
2. ALL CURB OR GUTTER AND SIDEWALK ARE TO BE REMOVED TO THE NEAREST JOINT BEYOND NEW CONSTRUCTION OR CUT WITH A SAW AND REMOVED. SAW CUT OR JOINT TO BE PERPENDICULAR TO EDGE OF EXISTING PAVEMENT. SEE STD. NO. 10.17 FOR JOINT DETAIL.
3. ALL DRIVEWAYS MUST MEET THE CURRENT TOWN DRIVEWAY REGULATIONS AND NCDOT REQUIREMENTS FOR SPACING, SIGHT DISTANCE AND OFFSETS FROM PROPERTY LINES AND INTERSECTIONS.
4. "A" BREAKOVER SHALL BE 8% OR LESS (A = ALGEBRAIC DIFFERENCE).
5. PRIOR APPROVAL IS REQUIRED ON GRADES EXCEEDING WHAT ARE SHOWN.

DRIVEWAY CLASSIFICATION		
TYPE DRIVEWAY	MINIMUM	MAXIMUM
TYPE I - RESIDENTIAL	15'	30'

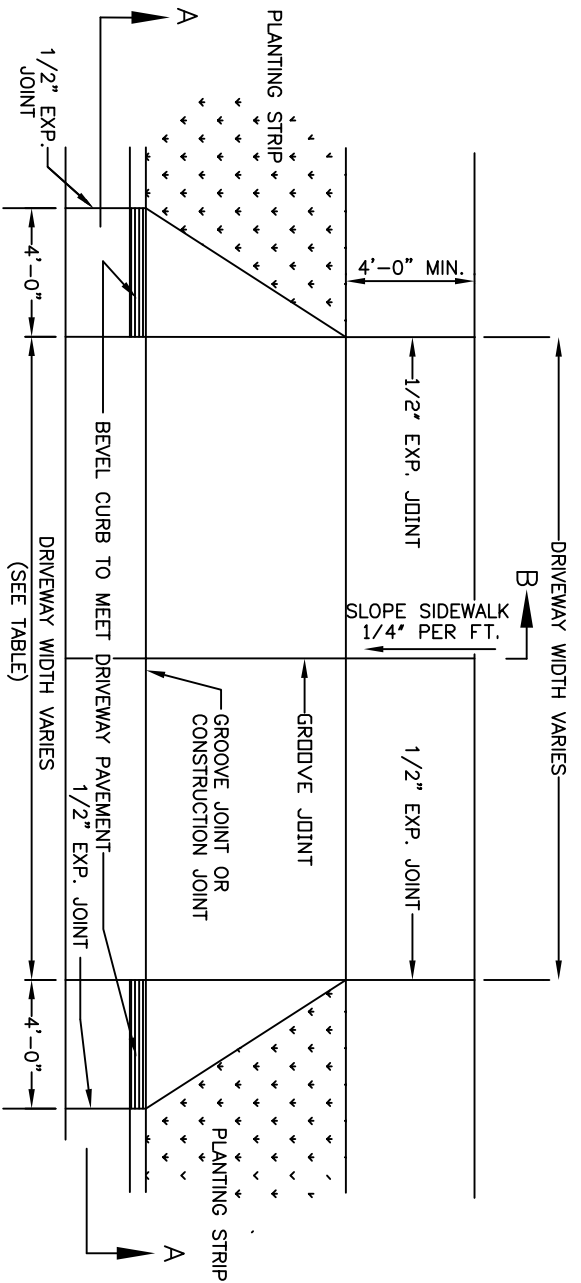

APPROVED DATE: 02/2007

NOT TO SCALE

**MECKLENBURG COUNTY
LAND DEVELOPMENT
STANDARDS**



**RESIDENTIAL DROP CURB TYPE I
DRIVEWAY WITH PLANTING STRIP
(2'-6" CURB AND GUTTER)**

STD. NO.	REV.
10.25A	