# Submitted in part fulfilment for the degree of MSc in Software Engineering.

# Model-driven software migration between microcontrollers

Sophie Wood

Version 0.1, 2018-May-16

Supervisor: Simos Gerasimou

Number of words = o, as counted by wc -w. This includes the body of the report, and Appendices TODO, but not TODO.

#### **Abstract**

TODO

Acknowledgements

TODO

# **Contents**

1	Intro	oduction	10
	1.1	Background and Motivation	10
	1.2	Project Goals	12
	1.3	Project Scope	12
	1.4	Report Structure	12
2	Lite	rature Review	13
	2.1	Existing Work	13
		2.1.1 Obsolescence	13
	2.2	Model Driven Engineering	13
		2.2.1 Domain-Specific Modelling Languages (DSMLs) .	14
		2.2.2 Model Transformations	14
		2.2.3 The Epsilon Framework	15
	2.3	Microcontroller Background	16
		2.3.1 Parallax Propeller Activity Board	16
		2.3.2 Arduino Uno	17
	2.4	Tools	18
3	Meti	hodology	19
4	Req	uirements	20
5	Des	ign and Implementation	21
6	Eval	luation	22
7	Con	clusion	23

# **List of Figures**

2.1	Features of the Parallax Propeller Activity Board [20]	16
2.2	Features of the Arduino Uno [21]	17

# **List of Tables**

## 1 Introduction

### 1.1 Background and Motivation

Bartels et al. define obsolescence as "materials, parts, devices, software, services and processes that become non-procurable from their original manufacturer or supplier" [1]. Both software and hardware can be subject to obsolescence problems.

Issues with hardware obsolescence have been driven by the growth of the electronics industry. This has reduced the life cycle of electronic parts as competitors release products with better functionality and features. Existing products are no longer commercially viable and therefore go out of production [1]. This is a particular issue in the defence/aerospace sectors as the typical life cycle of a system is 20-30 years or longer [2]. As such, parts will become unavailable before the system is completed. Singh et al. found that these systems "often encounter obsolescence problems before they are fielded and always during their support life" [3].

Obsolescence is also a concern in the software industry. Businesses must continuously update their products in order to stay ahead. Bill Gates has said:

"The only big companies that succeed will be those that obsolete their own products before someone else does." [1]

There are three main causes of software obsolescence [4]:

- (1) **Logistical**: digital media obsolescence, formatting, or degradation limits or terminates access to software
- **(2) Functional:** hardware, requirements, or other software changes to the system obsolete the functionality of the software
- **(3) Technological:** the sales and/or support for commercial off the shelf (COTS) software terminates

A particular issue is that hardware obsolescence can drive software obsolescence and vice versa. Software obsolescence can also be caused by lack of skills. For example, there may be a limited number of people that are competent in the language the system is written in. If these people leave the company, the system can no longer be maintained [5].

Again avionics/military and other "safety-critical" systems particularly struggle with software obsolescence issues as even small changes may have to go through extensive and costly qualification/certification processes [3]. For example, the US Navy estimates that obsolescence problems can cost up to \$750 million annually [6]. Sandborn and Myers also found that sustainment costs (which include costs related to obsolescence) dominate the system costs in the case of development of an F-16 military aircraft [7].

Strategies for obsolescence mitigation/management have generally focused on hardware obsolescence problems. This is despite software obsolescence costs often equalling or exceeding that of hardware. Proactive measures to mitigate obsolescence (e.g. improving code portability or using open-source software) often require either a large amount of resources or resources that are unavailable. Reactive strategies for tackling obsolescence include software license downgrades (i.e. customers can adapt legacy versions of the software by purchasing a licence for the latest version and applying that to the older product); purchasing the source code and third party support (i.e. a third party will take over maintenance of the legacy software). If these strategies are insufficient, the legacy system may have to be redeveloped or rehosted [4]. However, many such software modernisation projects are abandoned or not completed within the planned timescale/budget [8].

Model-driven software modernisation (MDSM) is a set of strategies that use model-driven engineering (MDE) to address the above issues by (partially) automating the process of modernisation. These approaches have already proved feasible by Kowalczyk and Kwiecińska who demonstrated the modernisation of a project written in Java 1.4 and the Hibernate 2.x framework, which uses XML mappings, into Java 1.5 and Hibernate 3.x which uses Java Persistence API (JPA) annotations [8]. Additionally, a model-driven approach is employed in industry by the Sodifrance company who have migrated a large-scale banking system (at a size of around one million lines of code) to J2EE [9].

The Defence Science and Technology Laboratory (DSTL) at the Ministry of Defence (MoD) have identified several instances of software obsolescence they would like to tackle. A problem of particular interest is "the

#### 1 Introduction

migration of an entire software system from a legacy hardware platform to a modern more powerful platform" [10]. This report will explore how MDSM processes can be used to partially automate the migration of code between microprocessors. A case study implementing the migration of code between a Parallax Propeller Activity Board and an Arduino Uno will be used to demonstrate the approach developed.

### 1.2 Project Goals

**TODO** 

### 1.3 Project Scope

**TODO** 

### 1.4 Report Structure

**TODO** 

### 2 Literature Review

TODO: write introduction to the literature review chapter

#### 2.1 Existing Work

#### 2.1.1 Obsolescence

The paper by Rojo et al. from 2010 summarises the existing literature for tackling obsolescence [2]. Although they identified many strategies for handling the obsolescence of electronic components, very few methods were relevant for dealing with software obsolescence. However, they conclude that sectors such as the defence industry would benefit from managing this problem.

They did identify two tools "se-Fly Fisher" and "R2T2" (Rapid Response Technology Trade) that could be useful for managing software obsolescence. These tools are used for design refresh planning. Design refresh planning deals with obsolescence in a proactive manner by planning the best times for performing a redesign of the system during the sustainment stage of its lifecycle.

Se-Fly Fisher uses the technology curves of each part of the system to: forecast how often a system baseline should change; identify replacement resources and estimate the benefit of each system baseline change [2]. Similarly, R2T2 can: forecast system obsolescence; allow for comparisons to alternative solutions; produce a life cycle obsolescence plan for the elements that require refreshment and plan when element replacements should occur [11].

### 2.2 Model Driven Engineering

Model Driven Engineering (MDE) was developed in order to address complexity within the problem space of computing. In the past, approaches for enabling programmers to develop code more easily have focused

on simplifying the solution space. This was achieved by providing abstractions such as higher-level programming languages or providing operating systems to manage the difficulty of programming hardware directly. However, these solutions are unable to express domain concepts effectively, unlike MDE techniques [12]. Furthermore, it has been found that MDE can also be utilised in automating the software development process [13].

The rest of this section introduces the terminology and main components of MDE.

#### 2.2.1 Domain-Specific Modelling Languages (DSMLs)

Meta-meta-modelling mechanisms such as the Object Management Group's (OMG) Meta Object Facility (MOF) can be used to create modelling languages for a given problem domain [14]. The key components of the OMG's approach to DSMLs are [15]:

**Models:** A model is a simplification of a system built with an intended goal in mind. Models should be easier to use than the original system. This is achieved by abstracting out details of the system that are unnecessary for the target model's intended purpose.

**Meta-models:** A meta-model is the explicit specification of an abstraction (i.e. model).

**Meta-meta-models:** A meta-meta-model is used to define meta-models. In particular, the OMG define the MOF (Meta Object Facility) which is a self-defined meta-meta-model.

#### 2.2.2 Model Transformations

There are three main categories of model transformation:

**Model-to-model (M2M):** M2M transformations are used to translate source models to target models. The source and target models can be instances of the same or different meta-models [16].

**Model-to-Text (M2T):** These can be considered a special case of M2M transformations. It is often the case that M2T transformations are used for code generation. The most common approach to M2T transformation is a template-based approach. A template contains mixtures of static text and dynamic sections that can be used to access information from the source model [16].

**Text-to-Model (T2M):** T2M transformations can be used to transform code to a model (conforming to a language meta-model). Model discoverer tools such as MoDisco [17] are the easiest way to perform T2M transformations on code [8].

#### 2.2.3 The Epsilon Framework

Epsilon is a family of programming languages for model management tasks. It provides (among others) the following languages of interest [18]:

**Epsilon Object Language (EOL):** EOL is the common basis for the languages provided by Epsilon. It can be used for querying and modifying models.

**Epsilon Validation Language (EVL):** EVL is used for model validation.

**Epsilon Transformation Language (ETL):** ETL is used for M2M transformations.

**Epsilon Generation Language (EGL):** EGL is used for M2T transformations.

Epsilon also enables the use of ANT tasks to create workflows of different tasks (e.g. a validation followed by a transformation followed by code generation) [18].

Epsilon has been chosen as the framework for this project over others for the following reasons:

- It is well documented with many tutorials as well as "The Epsilon Book" being freely available. Additionally, there is an active forum for any questions not answered by these sources [19].
- It is well integrated with Eclipse (for example, syntax/error highlighting is provided in the editor and there are graphical tools for running/debugging programs) and has been an official project since 2006 [19].
- Epsilon provides a connectivity layer (EMC). This layer allows EOL programs to access models of different modelling technologies including Eclipse Modelling Framework (EMF) models and XML documents [19].
- I am already familiar with how to use the framework.

### 2.3 Microcontroller Background

The project involves migration of code from a Parallax Propeller Activity Board to an Arduino Uno. However, since some features of the boards are different, this must be taken into account when migrating code. For example, the Propeller Activity Board uses an 8-core microcontroller whereas the Arduino Uno only has a single core. This must be taken into account during the code migration process. The following section discusses the important features and differences between the two boards.

#### 2.3.1 Parallax Propeller Activity Board

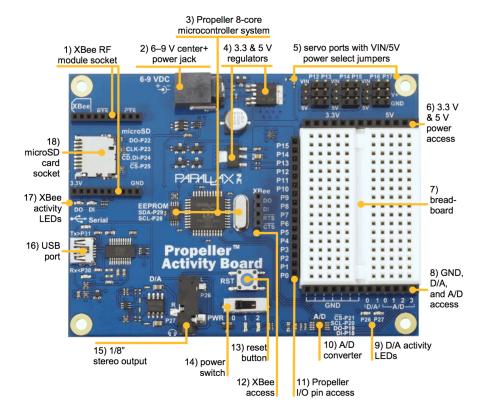


Figure 2.1: Features of the Parallax Propeller Activity Board [20].

The key features of the Parallax Propeller Activity Board are [20]:

- Built-in 8-core Propeller P8X32A microcontroller
- 64KB EEPROM
- XBee wireless module socket
- 16 digital I/O pins
- 4 Analog-to-Digital pins
- 2 Digital-to-Analog pins

#### 2.3.2 Arduino Uno

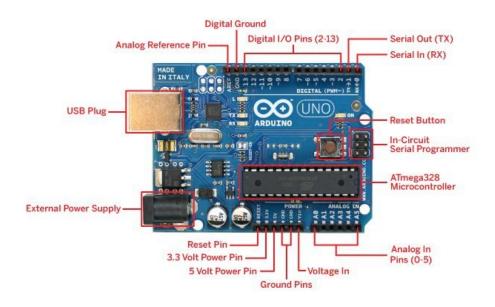


Figure 2.2: Features of the Arduino Uno [21].

The key features of the Arduino Uno are [22]:

- Built-in single-core ATmega328 microcontroller
- 32KB flash memory
- 2KB SRAM

### 2 Literature Review

- 1KB EEPROM
- 14 digital I/O pins (6 provide PWM output)
- 6 analog input pins

### 2.4 Tools

# 3 Methodology

# 4 Requirements

# **5 Design and Implementation**

# 6 Evaluation

# 7 Conclusion

# **Bibliography**

- [1] B. Bartels, U. Ermel, P. Sandborn and M. G. Pecht, *Strategies to the prediction, mitigation and management of product obsolescence*. John Wiley & Sons, 2012, vol. 87.
- [2] F. J. R. Rojo, R. Roy and E. Shehab, 'Obsolescence management for long-life contracts: State of the art and future trends', *The international journal of advanced manufacturing technology*, vol. 49, no. 9-12, pp. 1235–1250, 2010.
- [3] P. Singh and P. Sandborn, 'Obsolescence driven design refresh planning for sustainment-dominated systems', *The engineering economist*, vol. 51, no. 2, pp. 115–139, 2006.
- [4] P. Sandborn, 'Software obsolescence-complicating the part and technology obsolescence management problem', *Ieee transactions on components and packaging technologies*, vol. 30, no. 4, pp. 886–888, 2007.
- [5] S. Rajagopal, J. Erkoyuncu and R. Roy, 'Software obsolescence in defence', *Procedia cirp*, vol. 22, pp. 76–80, 2014.
- [6] C. Adams, 'Getting a handle on cots obsolescence', *Avionics magazine*, vol. 1, 2005.
- [7] P. Sandborn and J. Myers, 'Designing engineering systems for sustainability', in *Handbook of performability engineering*, Springer, 2008, pp. 81–103.
- [8] K. Kowalczyk and A. Kwiecinska, *Model-driven software modernization*, 2009.
- [9] F. Fleurey, E. Breton, B. Baudry, A. Nicolas and J.-M. Jézéquel, 'Model-driven engineering for software migration in a large industrial context', in *International conference on model driven engineering languages and systems*, Springer, 2007, pp. 482–497.

- [10] S. Gerasimou, D. Kolovos, R. Paige and M. Standish, 'Technical obsolescence management strategies for safety-related software for airborne systems', in *Federation of international conferences on software technologies: Applications and foundations*, Springer, 2017, pp. 385–393.
- [11] T. Herald, D. Verma, C. Lubert and R. Cloutier, 'An obsolescence management framework for system baseline evolution—perspectives through the system life cycle', *Systems engineering*, vol. 12, no. 1, pp. 1–20, 2009.
- [12] D. C. Schmidt, 'Model-driven engineering', *Computer-ieee computer society-*, vol. 39, no. 2, p. 25, 2006.
- [13] J. Bézivin, 'In search of a basic principle for model driven engineering', *Novatica journal, special issue*, vol. 5, no. 2, pp. 21–24, 2004.
- [14] G. Mussbacher, D. Amyot, R. Breu, J.-M. Bruel, B. H. Cheng, P. Collet, B. Combemale, R. B. France, R. Heldal, J. Hill *et al.*, 'The relevance of model-driven engineering thirty years from now', in *International conference on model driven engineering languages and systems*, Springer, 2014, pp. 183–200.
- [15] J. Bézivin and O. Gerbé, 'Towards a precise definition of the omg/mda framework', in *Automated software engineering*, 2001.(ase 2001). proceedings. 16th annual international conference on, IEEE, 2001, pp. 273–280.
- [16] K. Czarnecki and S. Helsen, 'Classification of model transformation approaches', in *Proceedings of the 2nd oopsla workshop on generative techniques in the context of the model driven architecture*, USA, vol. 45, 2003, pp. 1–17.
- [17] H. Bruneliere, J. Cabot, G. Dupé and F. Madiot, 'Modisco: A model driven reverse engineering framework', *Information and software technology*, vol. 56, no. 8, pp. 1012–1032, 2014.
- [18] D. Kolovos, L. Rose, R. Paige and A. Garcia-Dominguez, 'The epsilon book', *Structure*, vol. 178, pp. 1–10, 2010.
- [19] [Online]. Available: https://www.eclipse.org/epsilon/.
- [20] [Online]. Available: https://www.parallax.com/sites/default/files/downloads/32910-Propeller-Activity-Board-Guide-v1.1.pdf.
- [21] [Online]. Available: https://0x00sec.org/t/the-hackers-lab-arduino/1708.
- [22] [Online]. Available: https://www.farnell.com/datasheets/1682209.pdf.