

XE75GA



更节能环保






更高效回报



更可靠耐用



更舒适安全

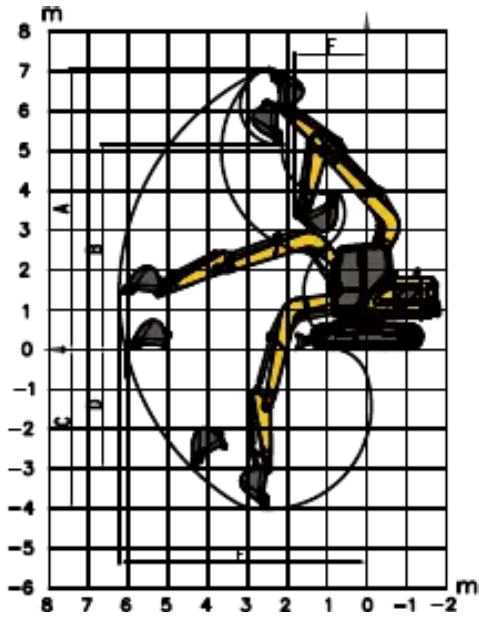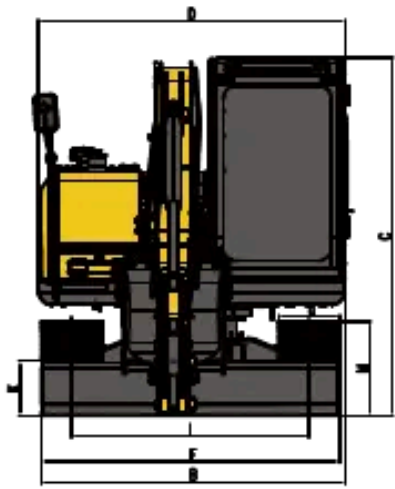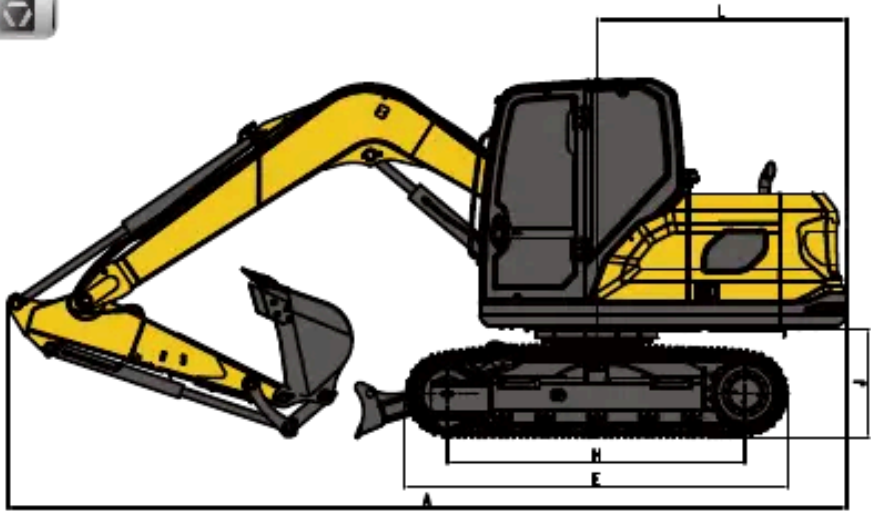

Working device

|          |                      |           |
|----------|----------------------|-----------|
| Standard | Boom length/mm       | 3720      |
|          | Bucket rod length/mm | 1622      |
| Optional | Boom length/mm       | /         |
|          | Bucket rod length/mm | /         |
|          | Bucket capacity/m3   | 0.18~0.35 |

Model

|                     |      |
|---------------------|------|
| Operating weight/kg | 7700 |
| Bucket capacity/m3  | 0.33 |

Engine

|                                 |                       |
|---------------------------------|-----------------------|
| Model number                    | D1105-K               |
| Direct injection                | √                     |
| 4-stroke                        | √                     |
| Water cooling                   | √                     |
| Turbocharged                    | √                     |
| Air-to-air intercooling         | /                     |
| Number of cylinders             | 4                     |
| Rated output power/speed kW/rpm | 18.5/2000 kW/rpm      |
| Maximum torque/speed N·m/rpm    | 206.9N·m/1100-1500rpm |
| Displacement L                  | 2.615 L               |

Oil capacity

|                           |     |
|---------------------------|-----|
| Fuel tank capacity L      | 170 |
| Hydraulic tank capacity L | 76  |
| Engine oil capacity L     | 10  |

Dimension

unit mm

|                               |      |
|-------------------------------|------|
| A Total length                | 6185 |
| B Total width                 | 2265 |
| C Total height                | 2645 |
| D Turntable width             | 2260 |
| E Track length                | 2825 |
| F Total chassis width         | 2250 |
| G Standard track shoe width   | 450  |
| H.Track wheelbase             | 2195 |
| I Gauge                       | 1800 |
| J Center of gravity clearance | 813  |
| K Minimum ground clearance    | 385  |
| L Minimum rear turning radius | 1840 |
| M Track height                | 696  |

Scope of work

unit mm

|                                                 |      |
|-------------------------------------------------|------|
| A Maximum digging height                        | 7085 |
| B Maximum unloading height                      | 5160 |
| C Maximum digging depth                         | 4020 |
| DMaximum vertical excavation depth              | 2960 |
| E Maximum digging radius                        | 6260 |
| F Minimum turning radius                        | 1818 |
| Maximum ground clearance when bulldozer lifting | 440  |
| Maximum depth when dozer sinking                | 445  |

Main performance

|                               |         |
|-------------------------------|---------|
| Travel speed (high/low) km/h  | 4.3/2.5 |
| Rotation speed r/min          | 11      |
| Climbing ability°             | 35      |
| Ground specific pressure/kPa  | 33.5    |
| Bucket digging force/kN       | 57      |
| Stick digging force/KN        | 38      |
| Maximum traction/kN           | 68.3    |
| Lift arm deflection (left) °  | /       |
| Lift arm deflection (right) ° | /       |

Hydraulic system

|                                    |              |
|------------------------------------|--------------|
| Main pump                          | Plunger pump |
| Rated flow rate of main pump L/min | 160          |
| Main safety valve pressure/MPa     | 28           |
| Walking system pressure/MPa        | 28           |
| Rotary system pressure/MPa         | 20.6         |
| Pilot system pressure/MPa          | 3.5          |