

BRIZALL



P R O D U C T

CATALOG

WWW.brizall.com

WELCOME TO BRIZALL

In **2009**, **Brizall Grounding Private Limited** began its manufacturing journey in Vapi, Gujarat, India, with a focused commitment to delivering reliable, high-performance grounding and lightning protection solutions.

Over the years, we have built strong manufacturing capabilities through continuous innovation, advanced technology, engineering expertise, and strict quality control. Our commitment to precision and consistency is reflected in every stage of our manufacturing process.

With a strong foundation in India and an expanding international presence, Brizall Grounding continues to develop and manufacture solutions that meet the evolving requirements of customers across domestic and global markets.

We believe in building long-term partnerships through quality, reliability, innovation, and dependable performance.

FROM INDIA — TO THE WORLD



WWW.brizall.com

EARTHING & GROUNDING	1
COPPER BONDED THREADED EARTH RODS	2
COUPLING FOR THREADED EARTH ROD	3
DRIVING HEAD FOR THREADED EARTH ROD	3
COPPER BONDED UNTHREADED EARTH RODS	4
COUPLING FOR UNTHREADED EARTH ROD	5
WATER PIPE GROUND CLAMP	5
MECHANICALLY COPPER CLADDED EARTHING RODS	6
SOLID COPPER EARTH RODS	7
DRIVING SPIKE FOR SOLID COPPER & STAINLESS STEEL EARTH ROD	8
DRIVING HEAD FOR SOLID COPPER & STAINLESS STEEL EARTH ROD	8
COUPLING DOWELS	8
STAINLESS STEEL EARTH RODS	9
GALVANIZED STEEL EARTH RODS	9
COPPER BONDED EARTH ROD WITH TERMINAL WELDED	10
COPPER BONDED CHEMICAL EARTHING ELECTROD	10
COPPER BONDED EARTH PLATE	11
SOLID COPPER EARTH PLATE	11
EARTH ROD TO TAPE CLAMPS (TYPE A)	12
EARTH ROD TO CABLE CLAMPS (TYPE G)	12
U BOLT CLAMPS	13
SPLIT CONNECTOR CLAMPS	14
COPPER 'C' CLAMPS	14
SPLIT BOLT CONNECTORS	15
FLEXIBLE BRAID BOND	15
TOWER EARTH CLAMP - CIRCULAR CONDUCTOR	16
TOWER EARTH CLAMP - FLAT TAPE	16
POLYMER EARTH PITS	17
CONCRETE EARTH PITS	17
EARTHING BACKFILL COMPOUND	17
EARTH BARS AND DISCONNECTING LINKS	18, 19
EARTH BONDING POINTS	20
EARTH BAR INSULATORS	20
EARTH BOSS	20

LIGHTING PROTECTION SYSTEM	21
AIR TERMINAL ROD	22
MULTI POINT	22
AIR TERMINAL ROD (BLUNT HEAD)	23
AIR ROD SADDLE	23
AIR ROD RIDGE SADDLE	24
AIR ROD FIXING SIDE BRACKET SET	24
METALLIC DC TAPE CLIP	25
TAPE CLIP	25
OBLONG JUNCTION CLAMP	26
PLATE TYPE TEST CLAMP	26
SCREW DOWN TEST CLAMP	26
FLAT TAPE TO CIRCULAR CONDUCTOR CLAMP	27
SQUARE JUNCTION CLAMP (FLAT TAPES)	27
BI METALLIC CONNECTORS	28
BACK PLATE HOLDFAST	28
T JUNCTION CLAMP (CIRCULAR)	28
ONE HOLE CABLE CLIP	29
CABLE SADDLE	29
SQUARE JUNCTION CLAMP (CIRCULAR)	30
PARALLEL JUNCTION CLAMP (CIRCULAR)	30
AIR ROD CONDUCTOR SADDLE	31
BARE COPPER TAPE / TINNED BARE COPPER TAPE	31
BARE ALUMINIUM TAPE	32
COPPER BONDED BUS BAR	32

CABLE GLANDS	33
BW TYPE CABLE GLANDS	34
BW TYPE CABLE GLANDS	35
CW TYPE CABLE GLANDS	36
A1/A2 TYPE CABLE GLANDS	37
E1W TYPE CABLE GLANDS	38
CABLE TERMINALS	39
COPPER CABLE LUG	40, 41, 42
STANDARD BARREL CONNECTOR (FERRULE)	43
COPPER CABLE LUGS - 4 HOLE	44
COPPER LAY-IN LUGS	44
BI-METALLIC CABLE TERMINAL (COPPER – ALUMINIUM)	45
BI-METALLIC CABLE CONNECTOR (COPPER – ALUMINIUM)	46
COPPER MACHANICAL OFFSET TONGUE TERMINAL LUGS	47
ALUMINIUM MECHANICAL LUGS (PB TYPE)	48
ALUMINIUM MECHANICAL LUGS (TA TYPE)	49
ALUMINIUM MECHANICAL LUGS (AU TYPE)	50

EARTHING & GROUNDING

An effective earthing and grounding system is an essential part of electrical safety. It provides a safe and controlled path for fault and lightning currents to flow into the earth, helping protect people, equipment, and electrical installations from electrical hazards.

For a reliable grounding system, it is important to achieve low earth resistance by selecting suitable, high-quality grounding conductors and electrodes with adequate current-carrying capacity.

The design and performance of the system depend on factors such as soil resistivity, soil composition, moisture content, temperature, and the presence of salts or other chemicals.

Proper site assessment is an important part of grounding-system design. Existing metallic structures such as tanks, pipelines, cable trays, structural steel, and rails may need to be bonded to the grounding network to maintain equipotential bonding and reduce the risk of dangerous potential differences and side flashing.

Each lightning-protection down conductor should be connected to an appropriate earth electrode. Earth inspection pits should be provided where required to allow convenient inspection, testing, and maintenance of the grounding connection and earth resistance.

Where a single earth electrode cannot achieve the required resistance, multiple electrodes can be installed as part of the grounding system. Electrode spacing, length, diameter, soil conditions, and installation depth should be considered during design. Depending on site conditions, grounding rods, copper-bonded electrodes, earth plates, or earth mats may be selected.

Regular inspection and testing are essential to maintain long-term grounding performance. Exposure to moisture, chemicals, and environmental conditions can cause corrosion or deterioration of grounding components over time. A properly designed, installed, tested, and maintained grounding system provides dependable electrical safety and long-term performance.

EARTHING & GROUNDING

COPPER BONDED THREADED EARTH RODS

Brizall Copper Bonded Threaded earth rods have a low carbon steel core ideal for deep driving and a molecularly bonded copper covering of 99.9% pure copper to give lasting resistance to corrosion.


Standard copper coating thickness is 254 microns or (10 mil) or (0.25 mm).

we follows as per UL and IEC 62156 standard.

The threads are formed by a roll threading to ensure strength and maintain the molecular bonded copper along the full length of the threads.

Customized copper coating thickness & rod diameter are also available.

THREAD SIZE	SHANK DIA IN MM	LENGTH IN MM	PART NUMBER
1/2"	12.7	1200	CBERT-124
	12.7	1500	CBERT-125
	12.7	1800	CBERT-126
	12.7	2400	CBERT-128
	12.7	2440	CBERT-128 *
	12.7	3000	CBERT-1210
	12.7	3050	CBERT-1210 *
5/8"	14.2	1200	CBERT-144
	14.2	1500	CBERT-145
	14.2	1800	CBERT-146
	14.2	2400	CBERT-148
	14.2	2400	CBERT-148 *
	14.2	3000	CBERT-1410
	14.2	3050	CBERT-1410*
	16	1200	CBERT-164
	16	1500	CBERT-165
	16	1800	CBERT-166
	16	2400	CBERT-168
	16	3000	CBERT-1610
3/4"	17.2	1200	CBERT-174
	17.2	1500	CBERT-175
	17.2	1800	CBERT-176
	17.2	2400	CBERT-178
	17.2	2440	CBERT-178 *
	17.2	3000	CBERT-1710
	17.2	3050	CBERT-1710 *
1"	25	3000	CBERT-2510

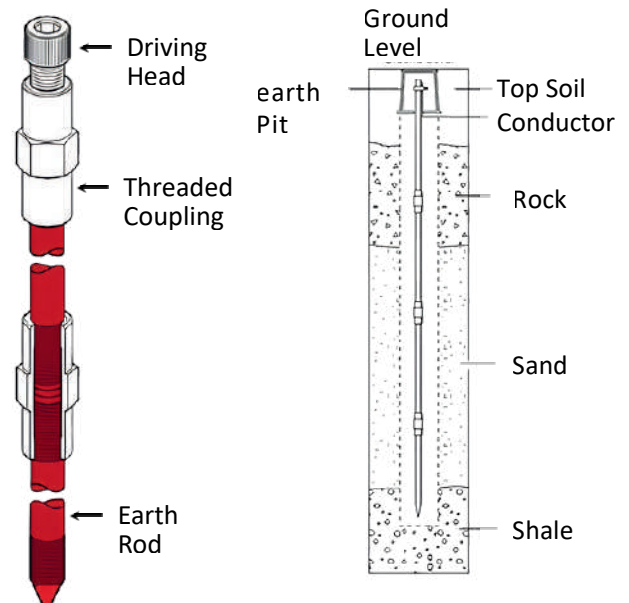

Material:- 99.9% Pure electrolytic copper molecularly bonded on steel core

EARTHING & GROUNDING

COUPLING FOR THREADED EARTH ROD


Threaded Couplings are used for join length of threaded copper bonded earth rods together deep driving and ensure continual contact between the rod, during and after driving.

The coupling has high copper content ensuring excellent acid and corrosion resistance and also protects the rod threads while using the driving stud.

The center hex design is outside for grip and keeping the coupling tight when driving into the ground.

THREAD SIZE	LENGTH IN MM	PART NUMBER
1/2"	60	ERCPT 12
5/8"	70	ERCPT 58
3/4"	80	ERCPT 34

Material:- Brass/Gunmetal

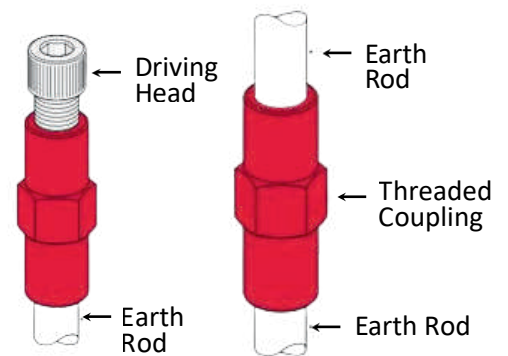

DRIVING HEAD FOR THREADED EARTH ROD


Reusable driving heads are suitable for driving earth rods by hand or with a power hammer.

Driving head screws into the coupling to allow deep driving of the earth rods and protect the threads.

The center hex design is outside for grip and keeping the coupling tight when driving into the ground.

THREAD SIZE	LENGTH IN MM	PART NUMBER
1/2"	50	ERCPT 12
5/8"	50	ERCPT 58
3/4"	60	ERCPT 34

Material:- Steel



EARTHING & GROUNDING

COPPER BONDED UNTHREADED EARTH RODS


Brizall earth rods have a low carbon steel core ideal for deep driving and a molecularly bonded copper covering of 99.9% pure copper to give lasting resistance to corrosion.

Standard copper coating thickness is 254 microns or (10 mil) (0.25 mm). we follows as per UL and IEC 62156 standard.

Customized copper coating thickness & rod diameter are also available.



SHANK DIA IN MM	LENGTH IN MM	PART NUMBER
12.7	1200	CBER-124
12.7	1500	CBER-125
12.7	1800	CBER-126
12.7	2400	CBER-128
12.7	2440	CBER-128 *
12.7	3000	CBER-1210
12.7	3050	CBER-1210 *
14.2	1200	CBER-144
14.2	1500	CBER-145
14.2	1800	CBER-146
14.2	2400	CBER-148
14.2	2440	CBER-148 *
14.2	3000	CBER-1410
14.2	3050	CBER-1410*
16	1200	CBER-164
16	1500	CBER-165
16	1800	CBER-166
16	2400	CBER-168
16	3000	CBER-1610
17.2	1200	CBER-174
17.2	1500	CBER-175
17.2	1800	CBER-176
17.2	2400	CBER-178
17.2	2440	CBER-178 *
17.2	3000	CBER-1710
17.2	3050	CBER-1710 *
25	3000	CBER-2510 *

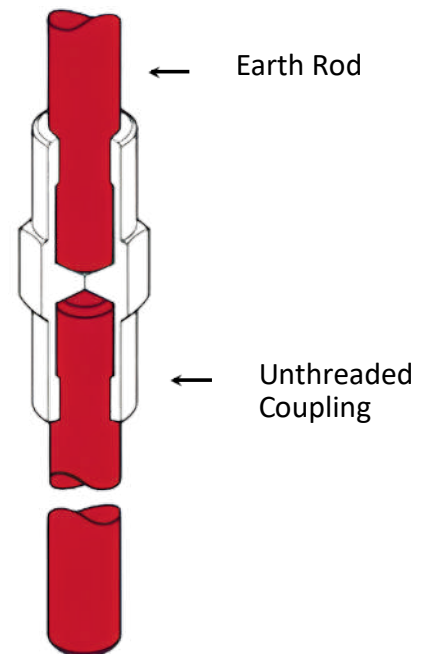

Material:- 99.9% Pure electrolytic copper molecularly bonded on steel core

EARTHING & GROUNDING

COUPLING FOR UNTHREADED EARTH ROD


Couplings joined of unthreaded copper bonded earth rods together & deep driving and ensure continual contact between the rod, during and after driving.

The coupling has high copper content ensuring excellent acid and corrosion resistance and also protects the rod threads while using the driving stud.

The center hex design is outside for grip and keeping the coupling tight when driving into the ground.

THREAD SIZE	LENGTH IN MM	PART NUMBER
1/2"	60	ERCPT 12
5/8"	70	ERCPT 58
3/4"	80	ERCPT 34

Material:- Brass/Gunmetal

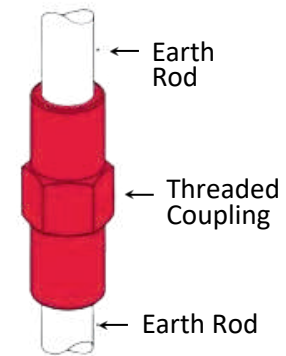


WATER PIPE GROUND CLAMP

Brizall Water Pipe Ground Clamp provides a secure and reliable connection between grounding conductors and metallic water pipes or grounding electrodes.

Designed for residential, commercial, and industrial grounding applications, it offers excellent mechanical strength, corrosion resistance, and long-lasting electrical performance.

Its robust construction ensures a secure connection and dependable grounding path, supporting electrical safety and reliable grounding system performance.

WATER PIPE SIZE	CONDUCTOR SIZE MAX	WIRE RANGE MIN	PART NUMBER
1/2"- 1"	# 2 Str	# 10 Sol	WGC01
1/4"- 2"	# 2 Str	# 10 Sol	WGC02

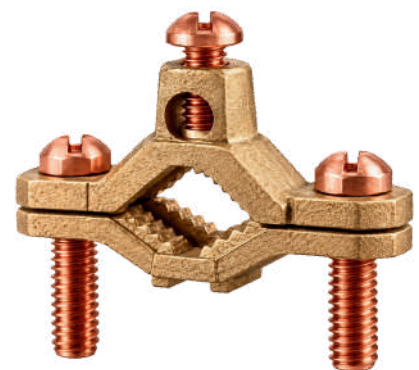


EARTHING & GROUNDING

MECHANICALLY COPPER CLADDED EARTHING RODS

Mechanically copper Cladded grounding rods are made when an electrolytic grade copper tube of 0.25 mm (250 microns) wall thickness is fitted by pressure & heat over a high tensile, low carbon steel rod to form a metallurgical bond.

THREAD SIZE	SHANK DIA IN MM	LENGTH IN MM	PART NUMBER
1/2" OR UNTHREADED	12.7	1200	CCER 124
	12.7	1500	CCER 125
	12.7	1800	CCER 126
	12.7	2400	CCER 128
5/8" OR UNTHREADED	14.2	1200	CCER 144
	14.2	1500	CCER 145
	14.2	1800	CCER 146
	14.2	2400	CCER 148
	14.2	3000	CCER 1410
5/8" OR UNTHREADED	16	1200	CCER 164
	16	1500	CCER 165
	16	1800	CCER 166
	16	2400	CCER 168
	16	3000	CCER 1610
3/4" OR UNTHREADED	17.2	1200	CCER 174
	17.2	1500	CCER 175
	17.2	1800	CCER 176
	17.2	2400	CCER 178
	17.2	3000	CCER 1710

Material:- Electrolytic grade copper Metallurgical bond on steel core

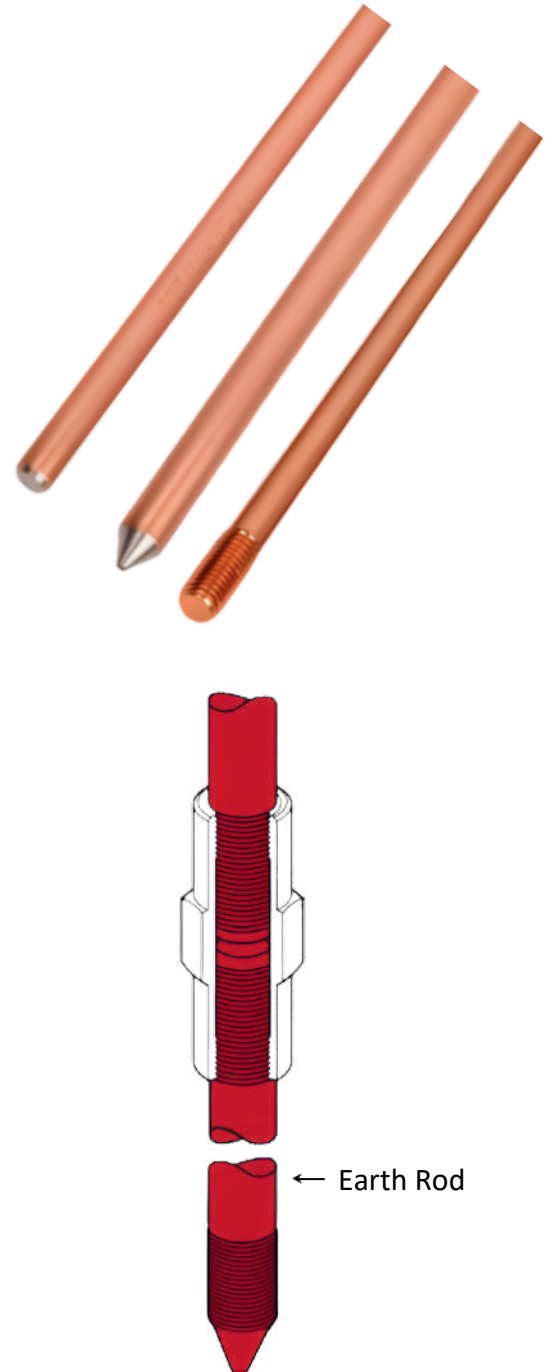

EARTHING & GROUNDING

SOLID COPPER EARTH RODS


These rods are used where soil condition are extremely high corrosion resistance and exceptionally long life is required.

Rod can be both internally and externally threaded to allow extension and achieve required low resistance.

Customize Size & Threading are also available

THREAD SIZE	SHANK DIA IN MM	LENGTH IN MM	PART NUMBER
M 10	15	1200	SCER 154
M 10	16	1500	SCER 165
	16	1800	SCER 166
	16	2400	SCER 168
	16	3000	SCER 163
M 10	20	1200	SCER 204
	20	1500	SCER 205
	20	1800	SCER 206
	20	2400	SCER 208
	20	3000	SCER 2010
M 12	25	1200	SCER 254
	25	1500	SCER 255
	25	1800	SCER 256
	25	2400	SCER 258
	25	3000	SCER 2510

Material:- 99.99% pure copper

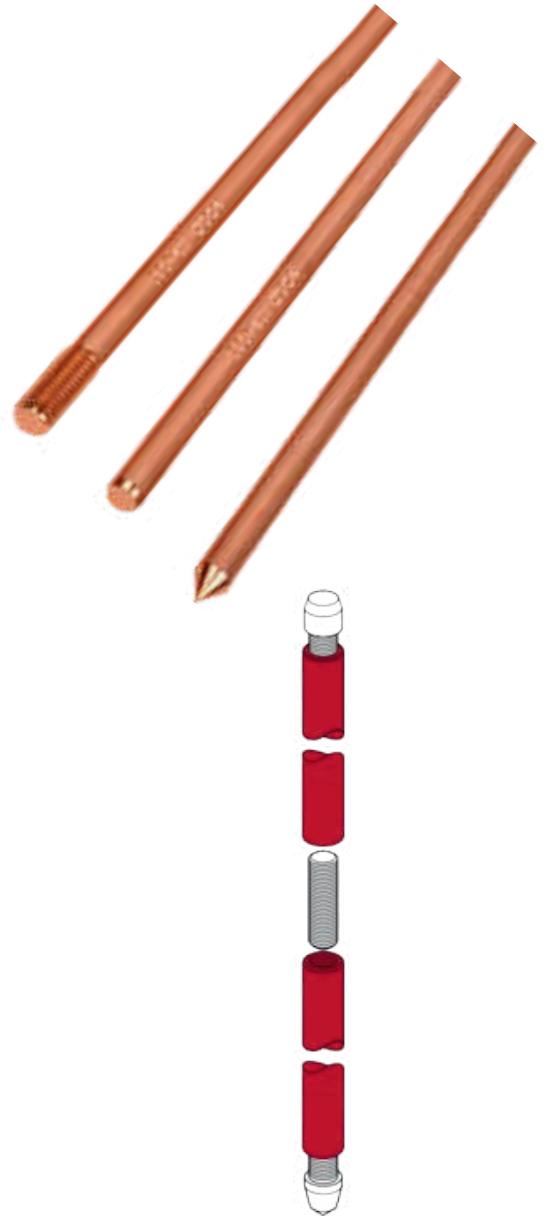

EARTHING & GROUNDING


DRIVING SPIKE FOR SOLID COPPER & STAINLESS STEEL EARTH ROD

The steel Spike enables the rod to be driven easily and stops the copper rod becoming damaged.

Driving studs are made from hardened steel & zinc plated to avoid atmospheric corrosion.

ROD DIA IN MM	THREAD SIZE	THREAD LENGTH MM	PART NUMBER
15 & 16	M 10	20	DS 16
20	M 10	20	DS 20
25	M 20	20	DS 25

Material:- Steel / SS 316

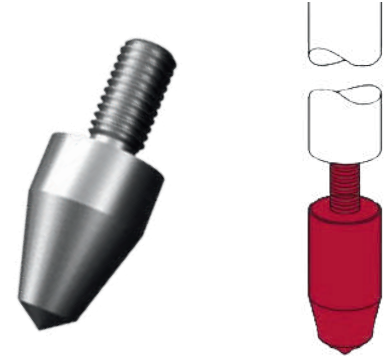


DRIVING HEAD FOR SOLID COPPER & STAINLESS STEEL EARTH ROD

The driving head protects the thread and the top of the rod from damage when driving.

Driving studs are made from hardened steel & zinc plated to avoid atmospheric corrosion.

ROD DIA IN MM	THREAD SIZE	THREAD LENGTH MM	PART NUMBER
15 & 16	M 10	20	DS 16
20	M 10	20	DS 20
25	M 12	20	DS 25


Material:- Steel / SS 316

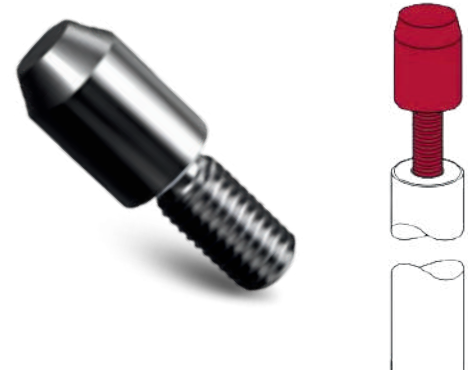

COUPLING DOWELS

ROD DIA IN MM	THREAD SIZE	THREAD LENGTH MM	PART NUMBER
15, 16 & 20	M 10	40	CD 10
25	M 20	40	CD 12

Material:- Copper / SS 316/ Brass

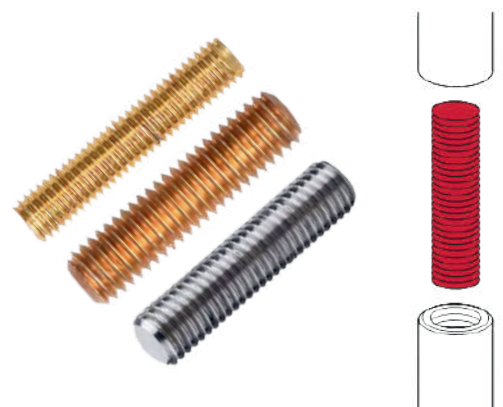

EARTHING & GROUNDING

STAINLESS STEEL EARTH RODS

Stainless steel earth rods are used where problems may be caused by galvanic corrosion due to dissimilar metals such as a copper earth rod and buried metals being in close proximity.

Rods can be both internal & Externally threaded to allow extension and achieve require of new resistance. Customize size & threading are also available

THREAD SIZE	SHANK DIA IN MM	THREAD LENGTH MM	PART NUMBER
M 10	16	1200	SSER 164

Material:- Stainless Steel Grade 316



GALVANIZED STEEL EARTH RODS

Galvanized Steel Earth Rods are used when the LPS system is designed for remote places where periodic inspection may not be possible.

Rods are hot dip galvanized with a coating of zinc not less than 90 microns.

Rods can be both internal & Externally threaded to allow extension and achieve required low resistance.

SHANK DIA IN MM	LENGTH IN MM	PART NUMBER
12.7 (1/2")	1520	GER 125
12.7 (1/2")	1830	GER 126
12.7 (1/2")	2440	GER 128
16.0 (5/8")	1520	GER 165
16.0 (5/8")	1830	GER 166
16.0 (5/8")	2440	GER 168
16.0 (5/8")	3050	GER 1610
19.0 (3/4")	2440	GER 198
19.0 (3/4")	3050	GER 1910
25.4 (1")	3050	GER 2510

Material:- Hot Dip Galvanizing on steel core



EARTHING & GROUNDING

COPPER BONDED EARTH ROD WITH TERMINAL WELDED


The copper bonded earth rod made from low carbon steel and terminal welded at one end and other end pointed with Copper coating 254 micron on steel core.

These copper bonded earth rods design welded terminal type does not require a separate clamp for connection.

Terminal size 150 mm x 50 mm x 5 mm Thk bus bar with 12.5 mm Dia of 4 hole.

ROD DIA IN MM	LENGTH IN MM	PART NUMBER
14	1500	BRTW 1415
14	2000	BRTW 1420
14	3000	BRTW 1430
17	1500	BRTW 1715
17	2000	BRTW 1720
17	3000	BRTW 1730
25	1500	BRTW 2515
25	2000	BRTW 2520
25	3000	BRTW 2530

Material:- Copper bonded on steel core.

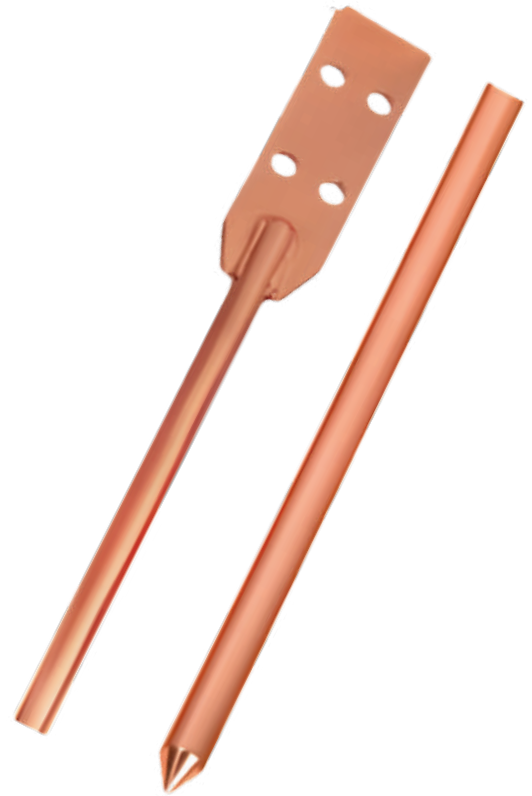

COPPER BONDED CHEMICAL EARTHING ELECTROD

OUTER PIPE DIA IN MM	INNER PIPE DIA IN MM	TERMINAL	LENGTH IN MM	PART NUMBER
50	25	40 X 5	2000	CBEE 502
50	25	40 X 5	3000	CBEE 503
65	32	50 X 6	2000	CBEE 652
65	32	50 X 6	3000	CBEE 653
80	40	75 X 10	2000	CBEE 802
80	40	75 X 10	3000	CBEE 803

Material:- Copper bonded on pipe with chemical. Customize size & copper coating also available.



EARTHING & GROUNDING

COPPER BONDED EARTH PLATE


The Copper earth plates are designed to be used with the LPS where the structure is surrounded by rocky area and where earth rods are not suitable.

They provide a long lasting Earthing solution and are installed in conjunction with low resistance Earthing compound with back fill compound.

Copper bonded earth plates are used when there is budgetary constraint.

WIDTH IN MM	LENGTH IN MM	THICKNESS	PART NUMBER
300	300	3	CBEP 303
600	600	3	CBEP 603
300	300	6	CBEP 306
600	600	6	CBEP 606

Material:- Copper on steel

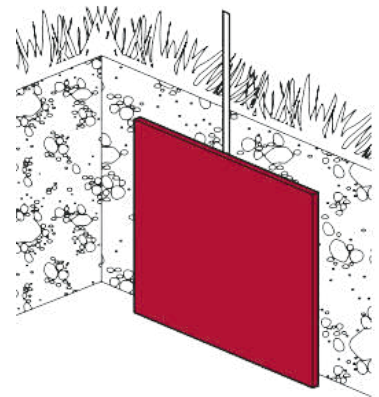


SOLID COPPER EARTH PLATE

The Copper earth plates are designed to be used with the LPS where the structure is surrounded by rocky area and where earth rods are not suitable.

They provide a long lasting Earthing solution and are installed in conjunction with low resistance Earthing compound with back fill compound.

WIDTH IN MM	LENGTH IN MM	THICKNESS	PART NUMBER
300	300	3	SCEP 303
600	600	3	SCEP 603

Material:- Copper

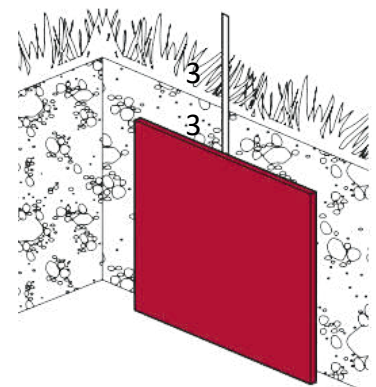

EARTHING & GROUNDING


EARTH ROD TO TAPE CLAMPS (TYPE A)

Tape A Clamps are used for connecting the earth rod to various sizes of copper or aluminum tap.

The clamps have a high resistance to corrosion and are mechanically strong to ensure a lasting connection.

ROD DIA MAX IN MM	MAXIMUM CONDUCTOR	PART NUMBER
12.7	26 X 12	TC 1226
16	26 X 12	TC 1626
16	40 X 12	TC 1640
16	51 X 19	TC 1651
20	31 X 9	TC 2031
20	40 X 6	TC 2040
20	51 X 12	TC 2051
25	26 X 10	TC 2526

Material:- Gunmetal & Bolt M10 x 25 Phosphor Bronze

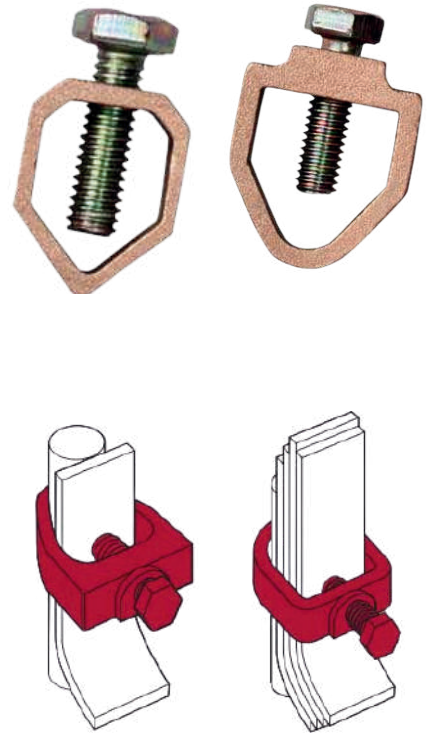


EARTH ROD TO CABLE CLAMPS (TYPE G)

The rod to cable clamp (G type) is used for connection between earth rod and copper conductor.

The clamp has a high strength body with excellent resistance to corrosion.

ROD DIA IN MM	CONDUCTOR RANGE IN SQ.MM	BOLT SIZE	PART NUMBER
12.7	16-50	M8	CCG12
14.2/16	16-70	M10	CCG16
17.2/20	35-95	M10	CCG20

Material:- Brass & Gunmetal

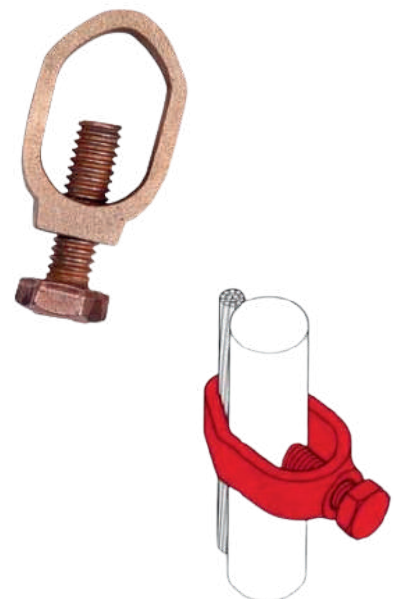

U BOLT CLAMPS



U Bolt clamps can be used to connect tape and cable to the earth rod or a combination of both.

The clamps have a U bolt connection onto a strong cast body providing a long lasting connection to the earth rod.

Single Plate Type For Horizontal Flat Tapes

CONDUCTOR SIZE IN SQ.MM	MAXIMUM ROD DIA IN MM	NUT SIZE	PART NUMBER
TAPE OR CABLE	16	M8	SPUC 16
	25	M10	SPUC 25
	31	M10	SPUC 31
	38	M10	SPUC 38
	50	M10	SPUC 50



Material:- U bolt - Copper & Clamp Body - Gunmetal



Double Plate Type For Vertical Flat Tapes & Rod to Cable Clamp GUV type

CONDUCTOR SIZE IN SQ.MM	MAXIMUM ROD DIA IN MM	NUT SIZE	PART NUMBER
25 x 3	16	M8	DPUC 16
	25	M10	DPUC 25
	31	M10	DPUC 31
	38	M10	DPUC38
	50	M10	DPUC50
16-70 Sq.mm	16	M8	DPRC167
70-120 Sq.mm	25	M8	DPRC 2512
150-300 Sq.mm	25	M8	DPRC 2530

Material:- U bolt - Copper & Clamp Body - Gunmetal

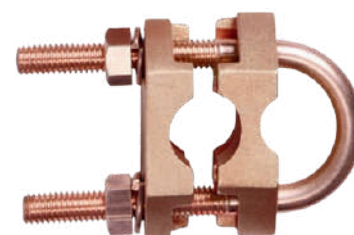


EARTHING & GROUNDING

SPLIT CONNECTOR CLAMPS

Split Connector Clamps are used to connect cable lugs to earth rod. Clamps are designed to be used for threaded & unthreaded rods.

ROD SIZE IN MM	ROD TYPE	PART NUMBER
5/8"	Threaded	SCC 06
3/4"	Threaded	SCC 10
14.2	Unthreaded	SCC 16
15	Unthreaded	SCC 25
16	Unthreaded	SCC 35
17.2	Unthreaded	SCC 50
20	Unthreaded	SCC 70

Material:- Gunmetal / Brass

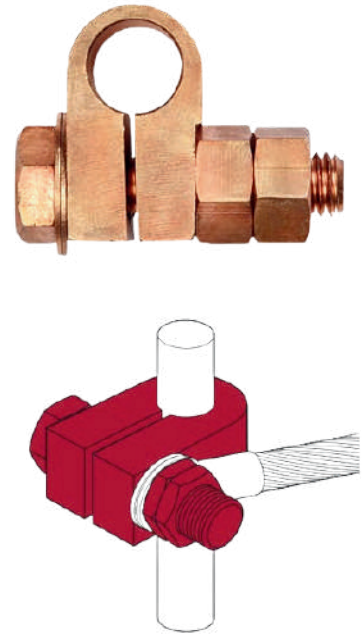


COPPER 'C' CLAMPS

C Clamps connectors are designed to provide effective connection between two circular conductors.

CONDUCTOR RANGE IN SQ.MM	PART NUMBER
35 – 35	CCL 3535
50 – 50	CCL 5050
70 – 35	CCL 7035
70 – 70	CCL 7070
95 – 95	CCL 9595
120 – 120	CCL 1212

Material:- Copper

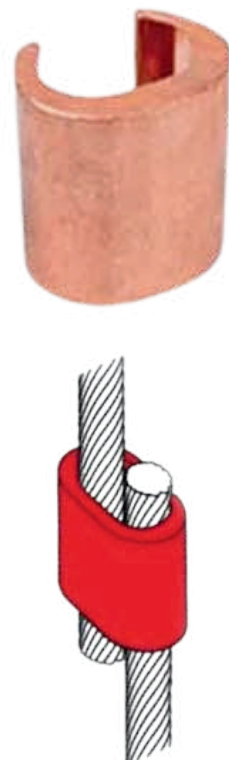



EARTHING & GROUNDING

SPLIT BOLT CONNECTORS

Split Bolt Connectors are used for tapping or joining stranded solid circular conductors.

STANDARD CONDUCTOR IN SQ.MM	PART NUMBER
6	SBC 06
10	SBC 10
16	SBC 16
25	SBC 25
35	SBC 35
50	SBC 50
70	SBC 70
95	SBC 95
120	SBC 120
150	SBC 150
185	SBC 185
240	SBC 240
300	SBC 300
400	SBC 400
500	SBC 500

Material:- Gunmetal / Brass

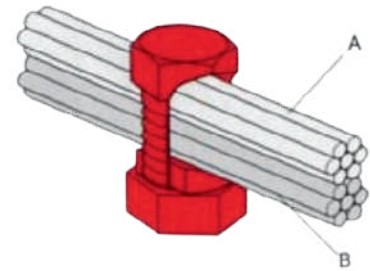

FLEXIBLE BRAID BOND

The Flexible copper Braid Bond are used for metal doors, gate, fences and railway carriage.

Customized length and size available as per customers requirement.

BRAID BOND SIZE IN MM	TO SUIT BOLT	LENGTH	PART NUMBER
25 X 3.5	M10	200	FBBC 200
25 X 3.5	M10	300	FBBC 300
25 X 3.5	M10	400	FBBC 400

Material:- Copper/ Tin Plated




EARTHING & GROUNDING

TOWER EARTH CLAMP - CIRCULAR CONDUCTOR

Tower Earth Clamps are Used for bonding copper flat tap on Metal surfaces.

CONDUCTOR RANGE IN SQ.MM	BOLT	PART NUMBER
16 – 70	M10 x 25	TEC C 70
70 – 120	M10 x 25	TEC C 120
120 – 185	M10 x 25	TEC C 185
185 – 240	M10 x 25	TEC C 240
240 – 300	M10 x 25	TEC C 300

Material:- Gunmetal / Brass

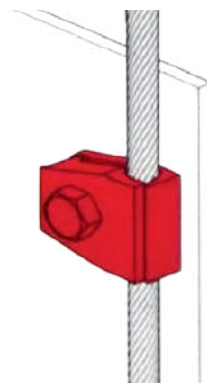


TOWER EARTH CLAMP - FLAT TAPE

Tower Earth Clamps are Used for bonding copper flat tap on Metal surfaces.

CONDUCTOR RANGE IN MM	BOLT	PART NUMBER
25 X 3	M10 x 25	TEC F 253

Material:- Gunmetal




EARTHING & GROUNDING

POLYMER EARTH PITS

Earth pits are used in isolating the connection made on the top of earth rods to provide access for testing and maintenance & Withstand load up to 5 ton.


LENGTH IN MM	WIDTH IN MM	HEIGHT IN MM	PART NUMBER
310	255	215	PEP 310



CONCRETE EARTH PITS

Earth pits are used in isolating the connection made on the top of earth rods to provide access for testing and maintenance & Withstand load up to 5 ton.

LENGTH IN MM	WIDTH IN MM	HEIGHT IN MM	PART NUMBER
310	310	170	CEP 310



EARTHING BACKFILL COMPOUND

Low-resistance earthing compound is an electrically conductive aggregate.

It is a grey, fine granular material used in place of other concrete aggregates such as sand. When mixed with cement ratio (3:1) and water it forms a permanent electrically conductive concrete.

TYPE	UNIT WEIGHT KG	PART NUMBER
LOW RESISTANCE EARTHING COMPOUND	25	BFC 25



EARTHING & GROUNDING

EARTH BARS AND DISCONNECTING LINKS

Earth Bars and Disconnecting links are designed to provide a common earthing connection in LPS.

Earth Bars made from Hard Drawn copper bus bar 50 mm x 6 mm (Tinned / Untinned).



Earth bars come in standard size as per below table & Customize size also available.

Base plate made from High impact UPVC & Also available in Steel.

PVC/DMC Insulators are used for Supporting Earth Bars and Disconnecting Links to the base.

EARTH BARS

TERMINATIONS NO.	LENGTH IN MM	PART NUMBER
6	400	EB 06
8	500	EB 08
10	650	EB 10
12	750	EB 12
14	850	EB 14
16	950	EB 16
18	1050	EB 18
20	1200	EB 20
22	1300	EB 22
24	1400	EB 24
26	1500	EB 26
28	1650	EB 28
30	1750	EB 30

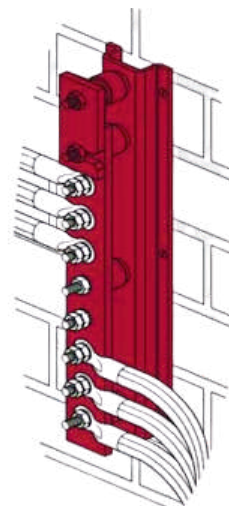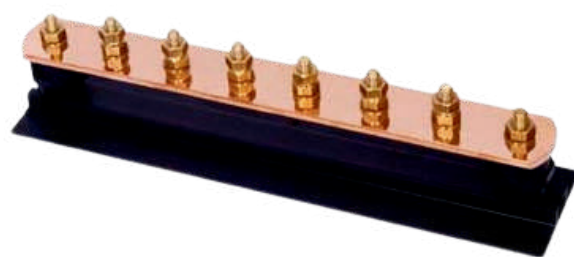

EARTH BAR DISCONNECTING LINK

DESCRIPTION	LENGTH IN MM	PART NUMBER
DISCONNECTING LINK	125	EBDL 01

Material:- Hard Drawn Copper Bar.


Fitting - M10 Screws, Nut & Washers available in

Brass, Phosphor Bronze or Stainless Steel.



EARTH BARS WITH SINGLE DISCONNECTING LINK

TERMINATIONS NO.	LENGTH IN MM	PART NUMBER
6	475	EBSD 06
8	575	EBSD 08
10	725	EBSD 10
12	825	EBSD12
14	925	EBSD 14
16	1025	EBSD 16
18	1175	EBSD 18
20	1275	EBSD 20
22	1375	EBSD 22
24	1475	EBSD 24
26	1575	EBSD 26
28	1725	EBSD 28
30	1825	EBSD 30

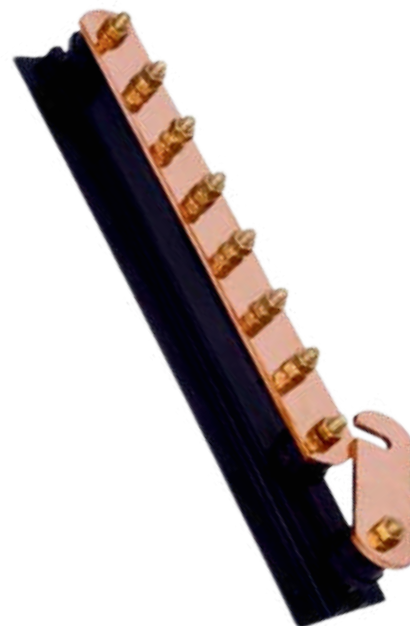

EARTH BARS WITH TWIN DISCONNECTING LINK

TERMINATIONS NO.	LENGTH IN MM	PART NUMBER
6	550	EBTD 06
8	650	EBTD 08
10	800	EBTD 10
12	900	EBTD12
14	1000	EBTD 14
16	1100	EBTD 16
18	1200	EBTD 18
20	1350	EBTD 20
22	1450	EBTD 22
24	1550	EBTD 24
26	1650	EBTD 26
28	1800	EBTD 28
30	1885	EBTD 30



EARTHING & GROUNDING

EARTH BONDING POINTS

Earth Bonding Points are used to connect the re-bar to the LPS.

NO OF HOLES	HOLE SIZE IN MM	PART NUMBER
1	M 10 X 20	EBP 01
2	M 10 X 20	EBP 02
4	M 10 X 20	EBP 04

Material:- Gunmetal / Brass



EARTH BAR INSULATORS

Earth bar Insulator is designed to have excellent electric and mechanical strength, heat and flame resistance.

TYPE	SIZE IN MM	THREAD SIZE	PART NUMBER
Insulator only	H 40 MM X W 46 MM	M10	EBI 01
Insulator with studs & nuts		M10	EBI 02




EARTH BOSS

Earth Boss is designed to provide an earth point on a steel structure.

Earth Boss is welded onto steel vessels, tanks & structure.

DIA IN MM	LENGTH IN MM	THREAD SIZE	PART NUMBER
40	40	M10	EB 40
50	50	M10	EB 40

Material:- Mild Steel

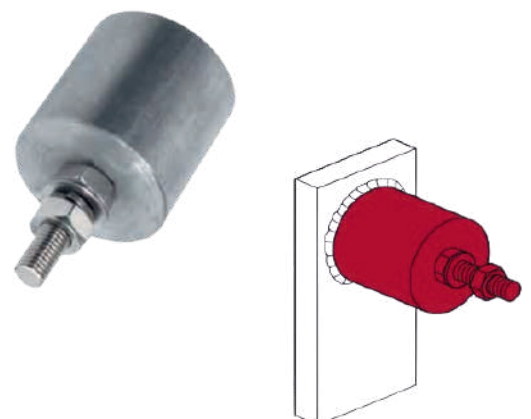

LIGHTNING PROTECTION SYSTEM

A Lightning Protection System (LPS) is designed to protect buildings and structures from the damaging effects of lightning by providing a controlled, low-impedance path for lightning current to safely reach the ground. A complete system typically consists of air terminals, down conductors, grounding electrodes, bonding components, connectors, and clamps.

Lightning can cause fire, structural damage, electrical surges, and equipment failure. An appropriately designed protection system helps intercept lightning strikes and directs the resulting current away from vulnerable building components, reducing the risk of damage and uncontrolled current paths.

A typical lightning protection system includes air terminals positioned at suitable high points of a structure and connected through down conductors to the grounding system. The conductors should follow suitable, direct routes while maintaining proper bonding with relevant metallic building components to help reduce dangerous potential differences.

The grounding system forms an essential part of lightning protection by providing a reliable path for dissipating lightning current into the earth. Depending on soil conditions, structure requirements, and design parameters, grounding electrodes may include copper-bonded earth rods, earth plates, earth mats, or other suitable grounding arrangements.

The traditional Franklin-type approach uses strategically positioned air terminals and interconnected conductors to provide a defined conductive path from the protected structure to earth. System design should consider the building geometry, exposure, conductor routing, grounding characteristics, applicable standards, and required protection level.

Brizall develops and manufactures grounding and lightning-protection components designed to support reliable electrical safety systems. Our product range includes grounding electrodes, terminals, clamps, connectors, tapes, earth mats, and associated accessories for residential, commercial, industrial, and infrastructure applications.

LIGHTING PROTECTION SYSTEM


AIR TERMINAL ROD

Taper pointed air rods form an important part of the air terminal network of a lightning protection system.

Air Terminal Rods are supplied with a lock nut enabling the rod to be locked tight against the conductor.

ROD DIA IN MM	LENGTH IN MM	THREAD SIZE	PART NUMBER
15	500/1000	5/8"	ATR 15
20	500/1000	3/4"	ATR 20

Material:- Copper / Copper Bonded / Aluminium / Brass

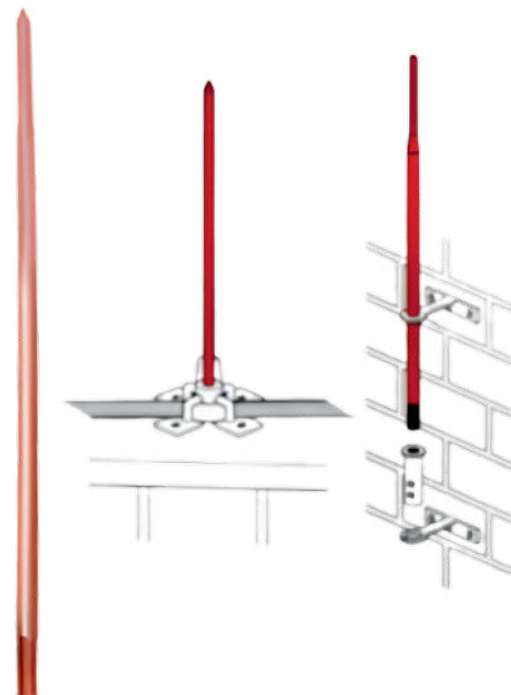


MULTI POINT

Used in conjunction with the taper pointed air rods.

AIR ROD DIA IN MM	PART NUMBER
15	MP 15
20	MP 20

Material:- Brass / Gunmetal

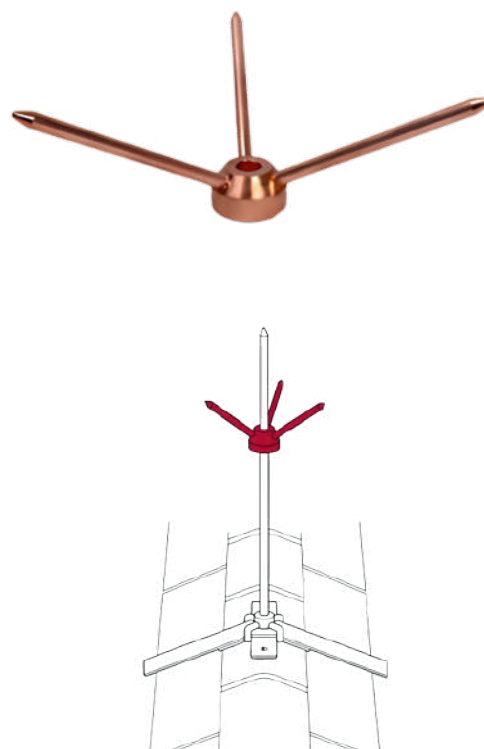

LIGHTING PROTECTION SYSTEM


AIR TERMINAL ROD (BLUNT HEAD)

Air Terminal Blunt Head Rod are more prone to be struck by lightning strike when compared with pointed Air Terminal Pointed rod.

Air Terminal Rods are supplied with a lock nut enabling the rod to be locked tight against the conductor.

ROD DIA IN MM	LENGTH IN MM	THREAD SIZE	PART NUMBER
15	500/1000	5/8"	ATRB 15
20	500/1000	3/4"	ATRB 20

Material:- Copper / Copper Bonded / Aluminium / Brass


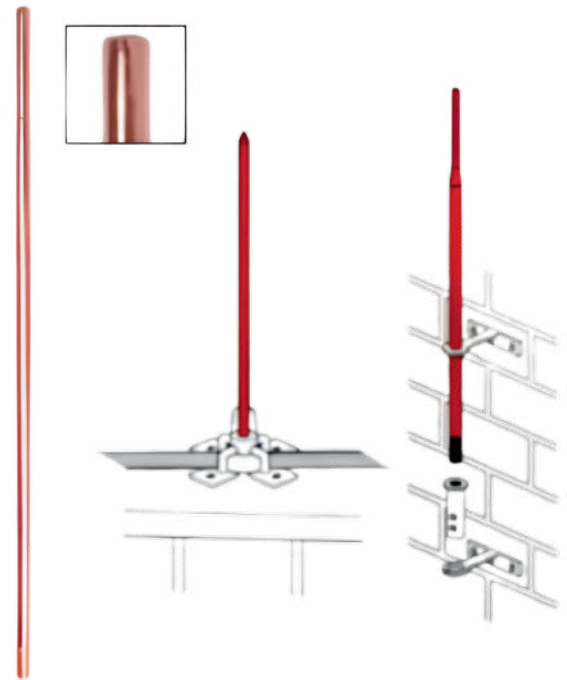


AIR ROD SADDLE

Saddles are used to support Air Rods on flat roof surfaces & connection between flat conductor and Air Rod.

AIR ROD DIA	FLAT CONDUCTOR SIZE IN MM	THREAD SIZE	PART NUMBER
15	25X3	5/8"	15 ARS
20	25X3	3/4"	15 ARS

Material:- Brass / Gunmetal

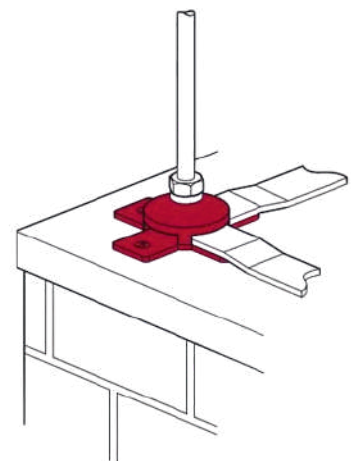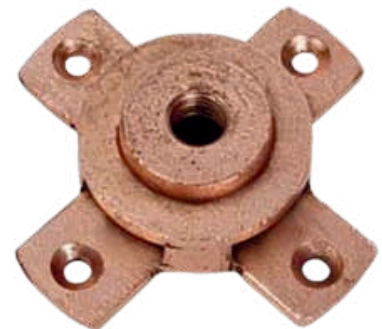



LIGHTING PROTECTION SYSTEM

AIR ROD RIDGE SADDLE

Ridge Saddles fix into the roof network of the Lighting Protection System connecting the tape to the Air rod.

AIR ROD DIA	FLAT CONDUCTOR SIZE IN MM	THREAD SIZE	PART NUMBER
16	25X3	5/8"	ARRS 16
20	25X3	3/4"	ARRS 16

Material:- Brass / Gunmetal

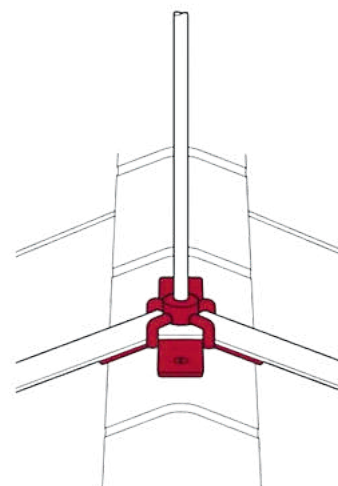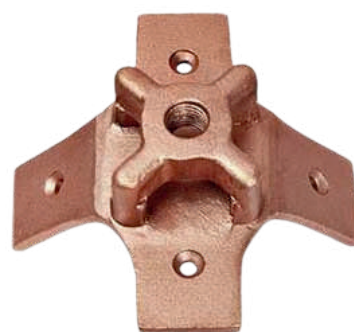


AIR ROD FIXING SIDE BRACKET SET

Side brackets are mainly used inside of the building or chimney for conjunction with air rod to tape coupling.

AIR ROD DIA	FLAT CONDUCTOR SIZE IN MM	THREAD SIZE	PART NUMBER
16	25X3	5/8"	ARRS 16
20	25X3	3/4"	ARRS 16

Material:- Brass / Gunmetal

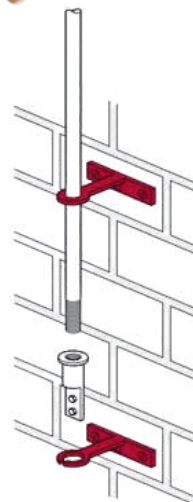


LIGHTING PROTECTION SYSTEM

METALLIC DC TAPE CLIP

Metallic DC Clip in Gunmetal & Aluminium to hold the flat conductor onto the structure surface.

FLAT CONDUCTOR SIZE IN MM	PART NUMBER
20 X 3	DCT 203
25 X 3	DCT 253
40 X 6	DCT 406
50 X 6	DCT 506

Material:- Gunmetal / Brass / Aluminium
For Use Bare copper Tap/ Aluminium Tap / PVC covered in Both

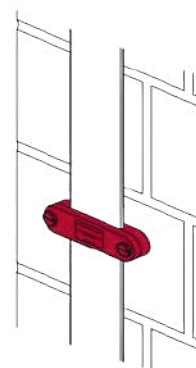


TAPE CLIP

Tape Clip in Gunmetal & Aluminium to hold the flat conductor onto the structure surface.

FLAT CONDUCTOR SIZE IN MM	PART NUMBER
20 X 3	TC 203
25 X 3	TC 253
40 X 6	TC 406
50 X 6	TC 506

Material:- copper / Gunmetal / Aluminium
For Use Bare copper Tap/ Aluminium Tap / PVC covered in Both

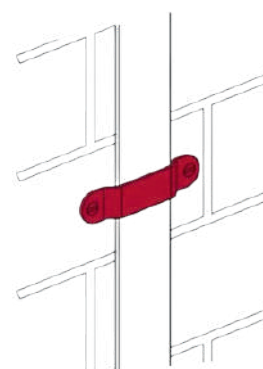

LIGHTING PROTECTION SYSTEM

OBLONG JUNCTION CLAMP

Oblong junction clamp is designed to join a range of flat tape in through position.

In many applications the clamp allows the conductors to be overlapped and secured by two bolts.

For Use with Bare Copper Tapes or Bare Aluminium Tapes.

FLAT CONDUCTOR SIZE IN MM	PART NUMBER
26 x 8	OBJC 268

Material:- Gunmetal / Aluminium





PLATE TYPE TEST CLAMP

Plate Type Test Clamp is Used to form a disconnecting joint between the flat conductor system and the earthing system.

The clam is suitable for use in heavy duty conductor to be joined in a crossover or T connection.

FLAT CONDUCTOR SIZE IN MM	PART NUMBER
26 x 8	PTTC 268

Material:- Gunmetal / Aluminium





SCREW DOWN TEST CLAMP

Screw down test clamp is used for inspection or testing of copper conductor.

The clamp is used for flat conductor to be joined in a crossover or T connection.

FLAT CONDUCTOR SIZE IN MM	PART NUMBER
26 x 8	SDTC 268

Material:- Gunmetal / Aluminium




LIGHTING PROTECTION SYSTEM

FLAT TAPE TO CIRCULAR CONDUCTOR CLAMP

Flat tape to circular conductor clamps are suitable for crossing over tapes and cable, making straight through joints or T connections to be formed.

FLAT CONDUCTOR IN MM	CIRCULAR CONDUCTOR IN SQ MM	PART NUMBER
25 x 3	50	FTCC 2550
25 x 3	70	FTCC 2570
25 x 3	90	FTCC 2590

Material:- Gunmetal / Aluminium

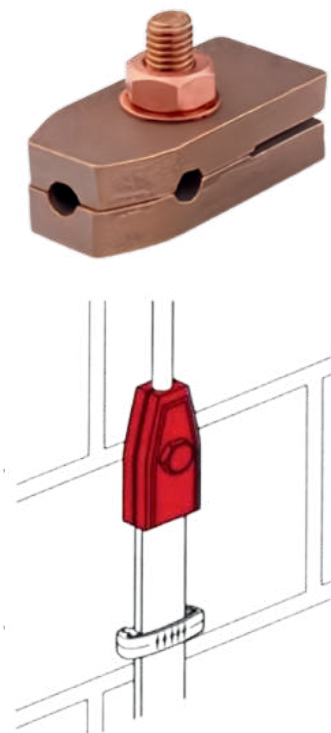


SQUARE JUNCTION CLAMP (FLAT TAPES)

Square Junction Clamp is designed for crossing over tapes, Making straight through joints or T connections in flat tapes.

For Use with Bare Copper Tapes or Bare Aluminium Tapes Or PVC coated in Both

FLAT CONDUCTOR SIZE IN MM	PART NUMBER
20 X 3	SJCT 203
25 x 3	SJCT 253
40 X 6	SJCT 406
50 X 6	SJCT 506

Material:- Gunmetal / Aluminium

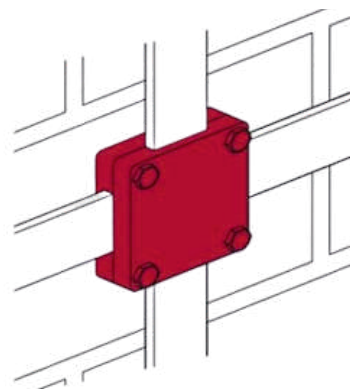

LIGHTING PROTECTION SYSTEM


BI METALLIC CONNECTORS

BI Metallic connectors are made by friction welding joints between high conductivity copper and aluminium.

The connector is used to join aluminium and copper without the process of tinning, riveting or wrapping.

FLAT CONDUCTOR SIZE IN MM	PART NUMBER
25 x 3	BMC 268

Material:- Copper and Aluminium

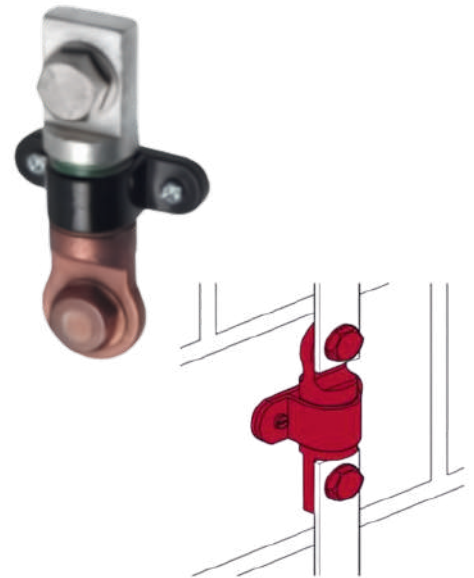


BACK PLATE HOLDFAST

Back plate holdfast is designed to be used where it is necessary to hold the conductor away from the surface of the structure.

LENGTH IN MM	PART NUMBER
74	BPHF 074

Material:- Copper and Aluminium

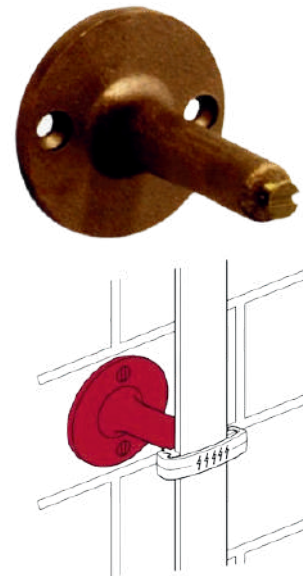


T JUNCTION CLAMP (CIRCULAR)

T junction clamps are used for T joints of 8 mm circular conductors.

CIRCULAR CONDUCTOR DIA IN MM	PART NUMBER
8	TJCC 8

Material:- Gunmetal / Aluminium

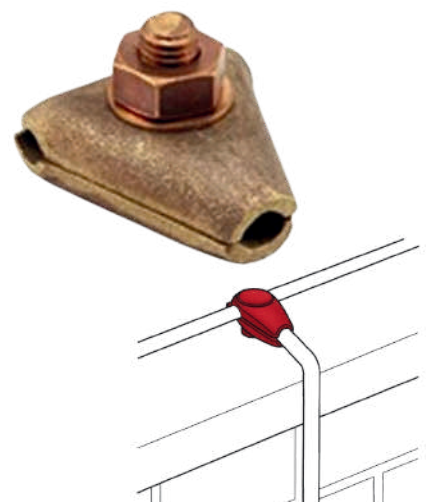



LIGHTING PROTECTION SYSTEM

ONE HOLE CABLE CLIP

One Hole Cable Clip is used for fixing circular conductor to the steel surface.

CONDUCTOR SIZE IN SQ. MM	CIRCULAR CONDUCTOR DIA IN MM	PART NUMBER
35		OHCC 35
50	8	OHCC 50
70	10	OHCC 70
95		OHCC 95
120		OHCC 120

Material:- Copper / Aluminium

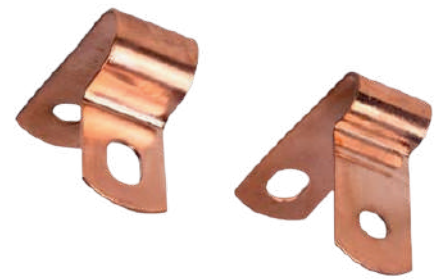


CABLE SADDLE

Heavy duty Cable saddle is used for fixing circular conductor to the steel surface.

CONDUCTOR SIZE IN SQ. MM	CIRCULAR CONDUCTOR DIA IN MM	PART NUMBER
35		CSH 35
50	8	CSH 50
70	10	CSH 70
95		CSH 95
120		CSH 120

Material:- Copper / Aluminium




LIGHTING PROTECTION SYSTEM

SQUARE JUNCTION CLAMP (CIRCULAR)

Square Junction Clamp is designed for crossing over circular conductors, Making straight through joints or T connections in circular conductors.

CONDUCTOR SIZE IN SQ. MM	CIRCULAR CONDUCTOR DIA IN MM	PART NUMBER
35		SJCC 35
50	8	SJCC 50
70	10	SJCC 70
95		SJCC 95
120		SJCC 120

Material:- Gunmetal / Aluminium

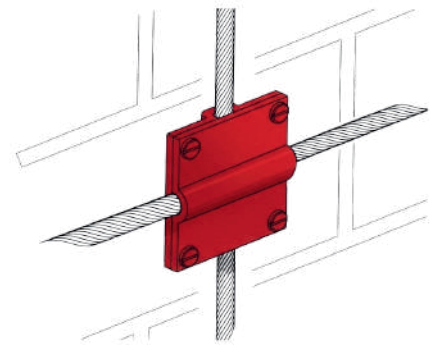


PARALLEL JUNCTION CLAMP (CIRCULAR)

Parallel junction clamps are used to join two parallel circular conductors.

CIRCULAR CONDUCTOR DIA IN MM	PART NUMBER
25 – 50	PJCC 2550
35 – 70	PJCC 3770
70 – 95	PJCC 7095
95 – 120	PJCC 9512

Material:- Gunmetal / Aluminium

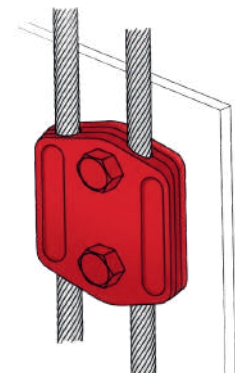


LIGHTING PROTECTION SYSTEM

AIR ROD CONDUCTOR SADDLE

Air rod conductor saddles are used for providing an effective connection between Air Rod and circular conductor.

AIR ROD DIA IN MM	CIRCULAR CONDUCTOR SIZE IN SQ MM	THREAD SIZE	PART NUMBER
15	35	5/8"	ARCS 1535
15	50	5/8"	ARCS 1550
15	70	5/8"	ARCS 1570
15	95	5/8"	ARCS 1595
20	35	3/4"	ARCS 2035
20	50	3/4"	ARCS 2050
20	70	3/4"	ARCS 2070
20	95	3/4"	ARCS 2095

Material:- Gunmetal / Aluminium

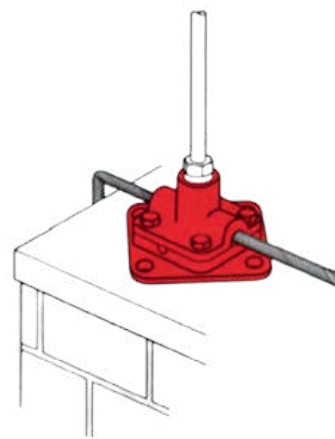

BARE COPPER TAPE / TINNED BARE COPPER TAPE

Bare Copper Tape is used on both Earthing Protection & Lightning Protection Applications.

Copper Tapes are highly conductive and annealed for easy to use with radius edges.

Also available in Tinned Copper Tape

SIZE IN MM	PART NUMBER
20 X 3	BCT 203
25 X 3	BCT 253
25 X 6	BCT 256
30 X 3	BCT 303
40 X 6	BCT 406
50 X 6	BCT 506

Material:- Copper / Tinned Copper



LIGHTING PROTECTION SYSTEM

BARE ALUMINIUM TAPE

Bare Aluminium Tape is used on both Earthing & Lightning Protection Application.

Aluminium tape being soft for easy to use with radius edges.

Also available in PVC covered aluminium tape.

SIZE IN MM	PART NUMBER
25 X 3	BAT 253
50 X 3	BAT 503

Material:- Aluminium / PVC Covered Aluminium Tape




COPPER BONDED BUS BAR

The Copper Bonded BUSBAR is made from low carbon steel and a molecularly bonded copper covering of 99.9% pure copper to give lasting resistance to corrosion.

Standard Copper Coating thickness is 254 micron or (10 mil) or (0.25 mm).

BUS BAR SIZE IN MM	LENGTH IN MM	PART NUMBER
25 X 6	3000	CBBB 256
50 X 6	3000	CBBB 506

Material:- 99.9% Pure electrolytic copper Molecularly Bonded in steel core.

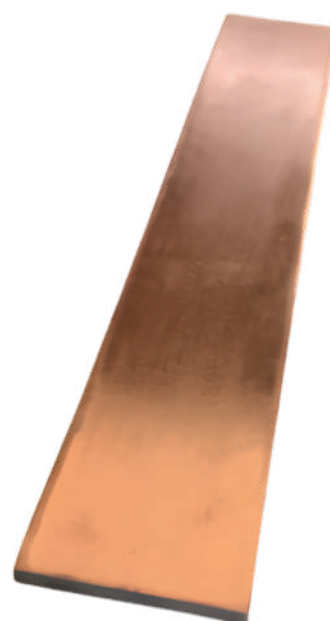

Cable glands are mechanical cable-entry and sealing devices used to securely connect cables to electrical, automation, instrumentation, telecommunications, and control enclosures. They are available in metallic and non-metallic constructions and can be selected according to cable type, enclosure requirements, environmental conditions, and application.

MAIN FUNCTIONS OF CABLE GLANDS

Cable sealing: Provides a secure seal around the outer cable sheath, helping prevent dust, moisture, and other contaminants from entering the enclosure.

Ingress protection: Supports the required enclosure protection level when the appropriate gland and accessories are selected.

Environmental protection: Helps seal the cable-entry point against moisture and other environmental influences.

Earth continuity: Metallic cable glands can provide electrical continuity for suitable armoured or shielded cable applications.

Cable retention: Provides mechanical grip and strain relief to help resist cable pull-out forces.

Reliable cable entry: Maintains a secure connection between the cable and equipment while supporting safe, organized installation.

Specialized applications: Cable glands designed for hazardous or demanding environments should be selected according to the applicable equipment certification, installation requirements, and relevant standards.

Brizall cable glands are designed to provide dependable cable entry, sealing, retention, and protection for electrical and industrial applications.

CABLE GLANDS

BW TYPE CABLE GLANDS

BWL Brass Cable Glands used for all types of steel wire armoured cable, Providing mechanical cable retention and electrical continuity via armour wire.

Size:- 20 mm to 90 mm S & L

Standard:- BS 6121

IP Rating:- IP 30



Option Threads:- METRIC, NPT, BSP & PG.

Finish:- Natural Brass & Nickel Finish

Operation Temperature:- -80 degree to + 80 degree

Accessories:- PVC Shroud, Lock Nuts & Earth Tags

BW 2 PART

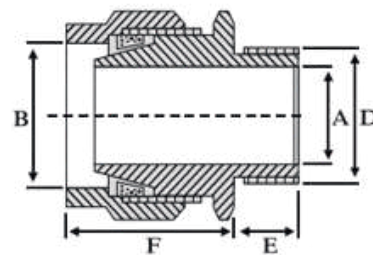

GLAND SIZE	THREAD SIZE		THREAD LENGTH	CABLE RANGE		PART NUMBER
	METRIC	NPT		MIN	MAX	
BW 20S	M20	1/2"	10	11,50	15,50	GLBW4 20S
BW 20	M20	1/2"	10	14,00	20,50	GLBW4 20L
BW 25	M25	3/4"	10	20,00	27,20	GLBW4 25L
BW 32	M32	1"	10	26,30	33,50	GLBW4 32L
BW 40	M40	1 1/4"	15	32,00	40,00	GLBW4 40L
BW 50S	M50	1 1/2"	15	38,20	46,30	GLBW4 50S
BW 50	M50	2"	15	44,00	52,60	GLBW4 50L
BW 63S	M60	2"	15	50,10	59,00	GLBW4 63S
BW 63	M60	2 1/2"	15	56,00	65,30	GLBW4 63L
BW 75S	M70	2 1/2"	15	62,00	71,60	GLBW4 75S
BW 75	M70	3"	15	68,00	78,00	GLBW4 75L
BW 90	M90	3"	20	80,50	91,00	GLBW2 90L

Material:- Brass

CABLE GLANDS

BW TYPE CABLE GLANDS

BWL Brass Cable Glands used for all types of steel wire armoured cable, Providing mechanical cable retention and electrical continuity via armour wire.

Size:- 20 mm to 90 mm S & L

Standard:- BS 6121

IP Rating:- IP 30



Option Threads:- METRIC, NPT, BSP & PG.

Finish:- Natural Brass & Nickel Finish

Operation Temperature:- -80 degree to + 80 degree

Accessories:- PVC Shroud, Lock Nuts & Earth Tags

BW 4 PART

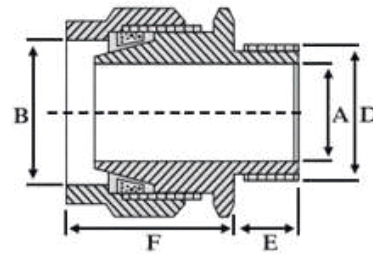

GLAND SIZE	THREAD SIZE		THREAD LENGTH	CABLE RANGE		PART NUMBER
	METRIC	NPT		MIN	MAX	
BW 20S	M20	1/2"	10	11,50	15,50	GLBW4 20S
BW 20	M20	1/2"	10	14,00	20,50	GLBW4 20L
BW 25S	M25	3/4"	10	18,00	24,00	GLBW4 25S
BW 25	M25	3/4"	10	20,00	27,20	GLBW4 25L
BW 32S	M32	1"	10	26,30	33,50	GLBW4 32S
BW 32	M32	1"	10	26,30	33,50	GLBW4 32L
BW 40S	M40	1 1/4"	13	31,50	39,50	GLBW4 40S
BW 40	M40	1 1/4"	13	32,00	40,00	GLBW4 40L
BW 50S	M50	1 1/2"	13	38,20	46,30	GLBW4 50S
BW 50	M50	2"	13	44,00	52,60	GLBW4 50L
BW 63S	M60	2"	14	50,10	59,00	GLBW4 63S
BW 63	M60	2 1/2"	14	56,00	65,30	GLBW4 63L
BW 75S	M70	2 1/2"	15	62,00	71,60	GLBW4 75S
BW 75	M70	3"	15	68,00	78,00	GLBW4 75L
BW 90S	M90	3"	18	80,50	91,00	GLBW4 90S
BW 90	M90	3"	18	80,50	91,00	GLBW2 90L

Material:- Brass

CABLE GLANDS

CW TYPE CABLE GLANDS

CW Brass Cable Glands are used with Plastic and Rubber (Elastomer) sheathed cable. Indoor & Outdoor whenever it is required to provide sealing on cable outer sheath.

CW glands are weatherproof gland and can be used in corrosive conditions when protected with shroud. Positive armour locking, effective earth continuity, increased mechanical strength.

Size:- 20 mm to 90 mm S & L

Standard:- BS 6121



IP Rating:- IP 66

Option Threads:- METRIC, NPT, BSP & PG.

Finish:- Natural Brass & Nickel Finish

Operation Temperature:- -80 degree to + 80 degree

Accessories:- PVC Shroud, Lock Nuts & Earth Tags

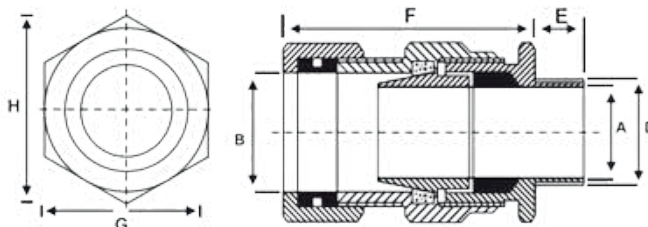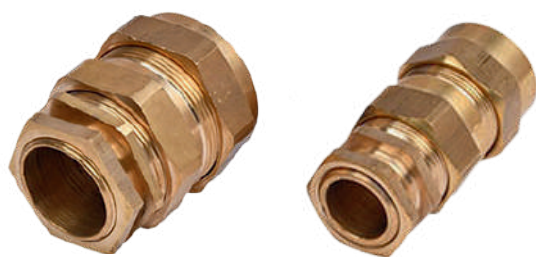

GLAND SIZE	THREAD SIZE		THREAD LENGTH	CABLE RANGE		PART NUMBER
	METRIC	NPT		MIN	MAX	
CW 20S	M20	1/2"	10	11,50	15,50	GLCW 20S
CW 20	M20	1/2"	10	14,00	20,50	GLCW 20L
CW 25S	M25	3/4"	10	18,00	24,00	GLCW 25S
CW 25	M25	3/4"	10	20,00	27,20	GLCW 25L
CW 32S	M32	1"	10	26,30	33,50	GLCW 32S
CW 32	M32	1"	10	26,30	33,50	GLCW 32L
CW 40S	M40	1 1/4"	13	31,50	39,50	GLCW 40S
CW 40	M40	1 1/4"	13	32,00	40,00	GLCW40L
CW 50S	M50	1 1/2"	13	38,20	46,30	GLCW50S
CW 50	M50	2"	13	44,00	52,60	GLCW50L
CW 63 S	M60	2"	14	50,10	59,00	GLCW63S
CW 63	M60	2 1/2"	14	56,00	65,30	GLCW 63L
CW 75S	M70	2 1/2"	15	62,00	71,60	GLCW 75S
CW 75	M70	3"	15	68,00	78,00	GLCW 75L
CW 90S	M90	3"	18	80,50	91,00	GLCW 90S
CW 90	M90	3"	18	80,50	91,00	GLCW 90L

Material:- Brass

CABLE GLANDS

A1/A2 TYPE CABLE GLANDS

A1/A2 Brass Cable Glands are used with unarmored elastomer and plastic insulated cable. Indoor & Outdoor whenever it is required to provide sealing on cable outer sheath.

The glands provide a single pull resistant seal on the outer sheath of unarmored cable.

Size:- 20 mm to 90 mm S & L

Standard:- BS 6121



IP Rating:- IP 66 & 68

Option Threads:- METRIC, NPT, BSP & PG.

Finish:- Natural Brass & Nickel Finish

Operation Temperature:- -80 degree to + 80 degree

Accessories:- PVC Shroud, Lock Nuts & Earth Tags



GLAND SIZE	THREAD SIZE		THREAD LENGTH	CABLE RANGE		PART NUMBER
	METRIC	NPT		MIN	MAX	
A1/A2 20S	M20	1/2"	10	8,00	11,50	GLA1A2 20S
A1/A2 20	M20	1/2"	10	11,00	13,50	GLA1A2 20L
A1/A2 25S	M25	3/4"	10	13,00	16,50	GLA1A2 25S
A1/A2 25	M25	3/4"	10	16,00	19,50	GLA1A2 25L
A1/A2 32	M32	1"	10	19,00	25,50	GLA1A2 32L
A1/A2 40S	M40	1 1/4"	15	23,00	29,00	GLA1A2 40S
A1/A2 40S	M40	1 1/4"	15	25,00	32,00	GLA1A2 40L
A1/A2 50S	M50	1 1/2"	15	31,50	37,00	GLA1A2 50S
A1/A2 50	M50	2"	15	36,50	43,00	GLA1A2 50L
A1/A2 63S	M63	2"	15	42,50	50,00	GLA1A2 63S
A1/A2 63	M63	2 1/2"	15	49,50	55,00	GLA1A2 63L
A1/A2 75S	M75	2 1/2"	15	54,50	61,00	GLA1A2 75S
A1/A2 75	M75	3"	15	60,50	67,00	GLA1A2 75L
A1/A2 90	M90	3"	20	65,00	78,00	GLA1A2 90L

Material:- Brass

CABLE GLANDS

E1W TYPE CABLE GLANDS

E1W Type Brass Cable Glands use for Indoor Or Outdoor all types of SWA cable.

E1W type cable glands provide a seal on the inner sheath, a seal on the outer sheath and armour clamp for armoured cable.

The armour clamp provides an electrical bond between the armour cable and the glands.

Size:- 20 mm to 90 mm S & L

Standard:- BS 6121



IP Rating:- IP 66 & IP 67

Option Threads:- METRIC, NPT, BSP & PG.

Finish:- Natural Brass & Nickel Finish

Operation Temperature:- -80 degree to + 80 degree

Accessories:- PVC Shroud, Lock Nuts & Earth Tags

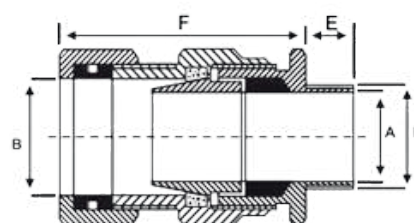

GLAND SIZE	THREAD SIZE		THREAD LENGTH	CABLE RANGE		CABLE RANGE		PART NUMBER
	METRIC	NPT		MIN	MAX	MIN	MAX	
E1W 20S	M20	1/2"	15	8,80	11,70	11,80	16,00	GLE1W 20S
E1W 20	M20	1/2"	15	11,40	14,00	14,00	20,80	GLE1W 20L
E1W 25S	M25	3/4"	15	13,00	16,00	18,00	24,00	GLE1W 25S
E1W 25	M25	3/4"	15	17,30	20,00	20,30	27,40	GLE1W 25L
E1W 32S	M32	1"	15	20,00	23,00	24,50	31,00	GLE1W 32S
E1W 32	M32	1"	15	24,20	26,30	26,50	33,50	GLE1W 32L
E1W 40S	M40	1 1/4"	15	26,00	29,00	30,40	36,00	GLE1W 40S
E1W 40	M40	1 1/4"	15	29,50	32,10	33,20	40,00	GLE1W 40L
E1W 50S	M50	1 1/2"	15	33,00	38,10	40,00	46,50	GLE1W 50S
E1W 50	M50	2"	20	38,00	44,00	44,00	52,60	GLE1W 50L
E1W 63S	M60	2"	20	44,00	50,50	50,00	59,00	GLE1W 63S
E1W 63	M60	2 1/2"	20	50,00	56,00	56,00	66,00	GLE1W 63L
E1W 75S	M70	2 1/2"	20	56,00	62,00	63,50	71,00	GLE1W 75S
E1W 75	M70	3"	20	62,00	60,50	69,00	78,00	GLE1W 75L
E1W 90	M90	3"	20	65,00	80,00	84,00	96,00	GLE1W 90L
E1W 100	M100	3 1/2"	20	82,00	90,00	84,00	102,00	GLE1W 100L

Material:- Brass

CABLE LUGS & CONNECTORS

Cable lugs and connectors are critical components for creating safe, secure, and reliable electrical connections. They are designed for terminating and joining cables in electrical equipment, switchgear, power distribution systems, and industrial installations.

Manufactured from high-conductivity materials such as copper, aluminium, and bimetallic combinations, Brizall cable lugs and connectors are engineered to provide excellent electrical conductivity, strong mechanical connections, and reliable long-term performance.

APPLICATIONS

- Power distribution and electrical networks
- Switchgear and control panels
- Transformers and substations
- Industrial and commercial installations
- Solar and renewable energy systems
- Earthing and grounding systems
- Power, control and instrumentation cables
- Infrastructure and utility projects

FEATURES & BENEFITS

- High electrical conductivity and low contact resistance
- Strong mechanical connection and durability
- Copper, aluminium and bimetallic options
- Excellent corrosion resistance with suitable surface finishes
- Wide range of cable sizes and configurations
- Suitable for high-current applications
- Reliable performance in demanding environments
- Designed for easy and secure installation
- Long service life and consistent performance

SELECTION CRITERIA

- Cable conductor size and cross-sectional area
- Conductor material: copper or aluminium
- Cable type: single, stranded or multi stranded
- Application and installation environment
- Voltage and current requirements
- Lug/connector material and surface finish
- Connection method: crimping, compression or mechanical
- Required standards and customer specifications


INSTALLATION GUIDELINES

- Select the correct lug or connector according to the cable size.
- Use the recommended crimping or compression tools.
- Ensure cable ends are clean and free from damage.
- Follow the specified crimping sequence and dimensions.
- Ensure proper tightening torque for mechanical connections.
- Prevent direct contact between incompatible metals without suitable bimetallic solutions.
- Inspect the completed connection before energizing the system.

CABLE TERMINALS

COPPER CABLE LUG

Cable Lugs manufactured from high conductive Pure electrolytic copper and Tin plated to provide excellent corrosion resistance.

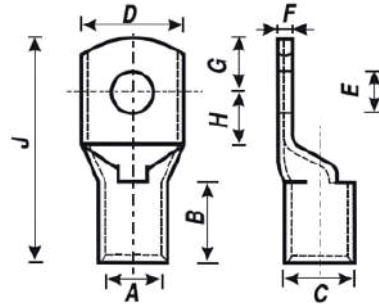


CABLE SQ. MM & STUD HOLE	STUD HOLE E	A	C	D	F	B	H	G	J	PART NUMBER
1.5 - 4	4.2	1.8	3.7	8	1	5	5	4	16	CCL - 0154
1.5 - 5	5.2	1.8	3.7	8	1	5	5	4	16	CCL - 0155
1.5 - 6	6.5	1.8	3.7	10	0.8	5	6	5	18	CCL - 0156
2.5 - 4	4.2	2.4	4	8	1	7	5	4	18	CCL - 0254
2.5 - 5	5.2	2.4	4	10	0.8	7	6	5	20	CCL - 0255
2.5 - 6	6.5	2.4	4	10	0.8	7	6	5	20	CCL - 0256
4 - 4	4.2	3.1	4.8	10	1	7	6	5	20	CCL - 0404
4 - 5	5.2	3.1	4.8	10	1	7	6	5	20	CCL - 0405
4 - 6	6.5	3.1	4.8	10	1	7	6	5	20	CCL - 0406
6 - 5	5.2	3.8	5.5	10	1.2	9	6	5	23	CCL - 0605
6 - 6	6.5	3.8	5.5	12	1	9	9	6	27	CCL - 0606
6 - 8	8.4	3.8	5.5	12	1	9	9	6	27	CCL - 0608
6 - 10	10.5	3.8	6	15	1.2	9	11	9	32	CCL - 0610
10 - 6	6.5	4.5	6.2	12	1.2	9	7	6	25	CCL - 1006
10 - 8	8.4	4.5	6.2	12	1.2	9	9	6	27	CCL - 1008
10 - 10	10.5	4.5	6.8	15	1.3	10	11	9	32	CCL - 1010
16 - 6	6.5	5.4	7.1	12	1.4	12	7	7	30	CCL - 1606
16 - 8	8.4	5.4	7.1	12	1.4	12	9	7	32	CCL - 1608
16 - 10	10.5	5.4	7.6	15	1.4	12	12	8	36	CCL - 1610
25 - 6	6.5	6.8	8.8	13	2	14	7	7	30	CCL - 2506
25 - 8	8.4	6.8	8.8	16	2	14	11	10	37	CCL - 2508
25 - 10	10.5	6.8	8.8	16	2	14	11	10	37	CCL - 2510
25 - 12	12.7	6.8	9.2	16	2	14	12	10	41	CCL - 2512
35 - 6	6.5	8.2	10.6	15	2.4	14	9	9	35	CCL - 3506
35 - 8	8.4	8.2	10.6	15	2.4	14	9	9	35	CCL - 3508
35 - 10	10.5	8.2	10.6	18	2	14	10	11	38	CCL - 3510
35 - 12	12.7	8.2	10.6	18	2	15	10	11	38	CCL - 3512
50 - 6	6.5	9.5	12.4	18	2.0	19	10	11	43	CCL - 5006

CABLE TERMINALS

COPPER CABLE LUG

Cable Lugs manufactured from high conductive Pure electrolytic copper and Tin plated to provide excellent corrosion resistance.

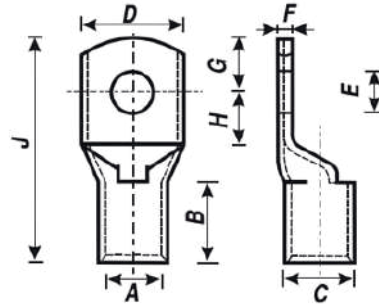


CABLE SQ. MM & STUD HOLE	STUD HOLE E	A	C	D	F	B	H	G	J	PART NUMBER
50 - 8	8.4	9.5	12.4	18	2.9	19	11	10	43	CCL - 5008
50 - 10	10.5	9.5	12.4	18	2.9	19	11	10	43	CCL - 5010
50 - 12	12.7	9.5	12.4	18	2.9	19	11	10	43	CCL - 5012
70 - 8	8.4	11.2	14.7	21	3.5	21	13	12	50	CCL - 7008
70 - 10	10.5	11.2	14.7	21	3.5	21	13	12	50	CCL - 7010
70 - 12	12.7	11.2	14.7	21	3.5	21	13	12	50	CCL - 7012
95 - 8	8.2	13.5	17.4	25	3.9	23	13	13	55	CCL - 9508
95 - 10	10.5	13.5	17.4	25	3.9	23	13	13	55	CCL - 9510
95 - 12	12.7	13.5	17.4	25	3.9	23	13	13	55	CCL - 9512
95 - 14	14.2	13.5	17.4	25	3.9	23	13	13	55	CCL - 9514
120 - 8	8.2	15.0	19.4	28	4.4	25	14	14	60	CCL - 12008
120 - 10	10.5	15	19.4	28	4.4	25	14	14	60	CCL - 12010
120 - 12	12.7	15	19.4	28	4.4	25	14	14	60	CCL - 12012
120 - 14	14.2	15	19.4	28	4.4	25	14	14	60	CCL - 12014
120 - 16	16.5	15	19.4	28	4.4	25	14	14	60	CCL - 12016
150 - 8	8.2	16.5	21.2	30	4.7	30	16	16	69	CCL - 15008
150 - 10	10.5	16.5	21.2	30	4.7	30	16	16	69	CCL - 15010
150 - 12	12.7	16.5	21.2	30	4.7	30	16	16	69	CCL - 15012
150 - 14	14.7	16.5	21.2	30	4.7	30	16	16	69	CCL - 15014
150 - 16	16.5	16.5	21.2	30	4.7	30	16	16	69	CCL - 15016
185 - 10	10.5	18.5	23.5	34	5.0	36	17	17	78	CCL - 18510
185 - 12	12.7	18.5	23.5	34	5.0	36	17	17	78	CCL - 18512
185 - 14	14.7	18.5	23.5	34	5.0	36	17	17	78	CCL - 18514
185 - 16	16.5	18.5	23.5	34	5.0	36	17	17	78	CCL - 18516
185 - 20	20.5	18.5	23.5	34	5.0	36	17	17	78	CCL - 18520
240 - 10	10.5	18.5	26.5	38	5.5	42	20	20	92	CCL - 24010
240 - 12	12.7	21	26.5	38	5.5	42	20	20	92	CCL - 24012
240 - 14	14.7	21	26.5	38	5.5	42	20	20	92	CCL - 24014

CABLE TERMINALS

COPPER CABLE LUG

Cable Lugs manufactured from high conductive Pure electrolytic copper and Tin plated to provide excellent corrosion resistance.

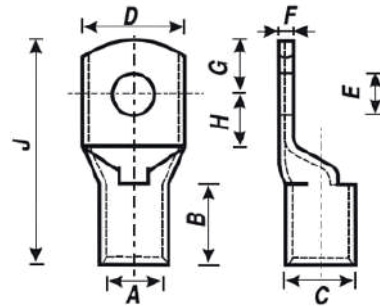


CABLE SQ. MM & STUD HOLE	STUD HOLE E	A	C	D	F	B	H	G	J	PART NUMBER
240 - 16	16.5	21	26.5	38	5.5	42	20	20	92	CCL - 24016
240 - 20	20.5	21	26.5	38	5.5	42	20	20	92	CCL - 24020
300 - 12	12.7	23.5	30	43	6.5	46	22	22	101	CCL - 30012
300 - 14	14.7	23.5	30	43	6.5	46	22	22	101	CCL - 30014
300 - 16	16.5	23.5	30	43	6.5	46	22	22	101	CCL - 30016
300 - 20	20.5	23.5	30	43	6.5	46	22	22	101	CCL - 30020
400 - 12	12.7	28.5	36.5	50	8	49	26	26	114	CCL - 40012
400 - 14	14.2	28.5	36.5	50	8	49	26	26	114	CCL - 40014
400 - 16	16.5	28.5	36.5	50	8	49	26	26	114	CCL - 40016
400 - 20	20.5	28.5	36.5	50	8	49	26	26	114	CCL - 40020
500 - 14	14.7	30	39	56	9	53	28	28	124	CCL - 50014
500 - 16	16.5	30	39	56	9	53	28	28	124	CCL - 50016
500 - 20	20.5	30	39	56	9	53	28	28	124	CCL - 50020
630 - 16	16.5	35	45	65	10	61	33	33	144	CCL - 63016
630 - 20	20.5	35	45	65	10	61	33	33	144	CCL - 63020
630 BL	10.5	35	45	65	10	61	33	33	144	CCL - 630 BL
800 - 16	16.5	39	50.6	73	11.6	78	40	35	170	CCL - 80016
800 - 20	21.0	39	50.6	73	11.6	78	40	35	170	CCL - 80020
800 BL	-	39	50.6	73	11.6	78	40	35	170	CCL - 800 BL
1000 - 20	21.0	43	56.2	81	13.2	90	45	45	200	CCL - 100020
1000	-	43	50.2	81	13.2	90	45	45	200	CCL - 1000 BL

Material:- Pure electrolytic copper tin plated.

CABLE TERMINALS

STANDARD BARREL CONNECTOR (FERRULE)

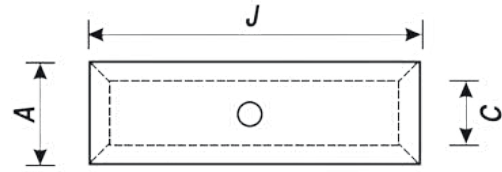


CABLE SQ. MM	A	C	J	PART NUMBER
1.5	1.8	3.7	12	CCF - 1.5
2.5	2.4	4	15	CCF - 2.5
4	3.1	4.8	15	CCF - 4
6	3.8	5.5	15	CCF - 6
10	4.5	6.2	20	CCF - 10
16	5.4	7.1	20	CCF - 16
25	6.8	8.8	32	CCF - 25
35	8.2	10.6	36	CCF - 35
50	9.5	12.4	40	CCF - 50
70	11.2	14.7	45	CCF - 70
95	13.5	17.4	45	CCF - 95
120	15	19.4	45	CCF - 120
150	16.5	21.2	55	CCF - 150
185	18.5	23.5	60	CCF - 185
240	21	26.5	80	CCF - 240
300	23.5	30	85	CCF - 300
400	28.5	36.5	85	CCF - 400
500	30	39	100	CCF - 500
550	31.7	41.5	110	CCF - 550
630	35	45	110	CCF - 630
800	39	50.6	150	CCF - 800
1000	43	56.2	170	CCF - 1000

Material:- Pure electrolytic copper tin plated.

CABLE TERMINALS

COPPER CABLE LUGS - 4 HOLE



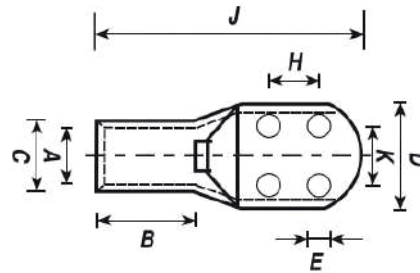


CABLE SQ. MM & STUD HOLE	STUD HOLE E	A	C	D	F	B	H	G	J	PART NUMBER
300 - 8 X 4	8.5	23.5	30	8	1	5	5	4	101	CL4H - 300
400 - 8 X 4	8.5	27.5	36	10	0.8	5	6	5	114	CL4H - 400
500 - 8 X 4	8.5	30	39	8	1	7	5	4	124	CL4H - 500
630 - 8 X 4	8.5	35	45	10	0.8	7	6	5	144	CL4H - 630
800 - 8 X 4	8.5	39	50.6	10	0.8	7	6	5	170	CL4H - 800
1000 - 8 X 4	8.5	43	56.2	10	1	7	6	5	200	CL4H -1000

Material:- Pure electrolytic copper tin plated.

COPPER LAY-IN LUGS

These dual rated Panelboard lugs are manufactured from high strength extruded Aluminium alloy and electro tin plated to provide low contact resistance.

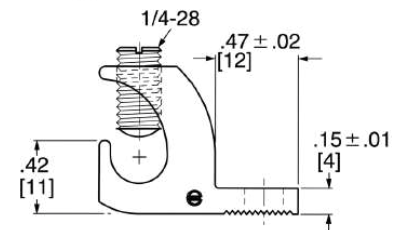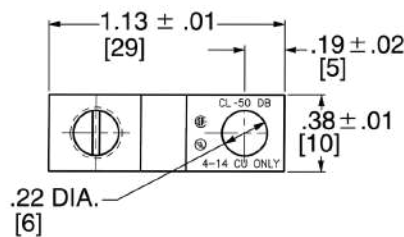



CONDUCTOR RANGE	STUD HOLE	PART NUMBER
14 AWG - 4 AWG	#10	CLIN
14 AWG - 4 AWG	#10	CLIN TN

Material:- Copper

CABLE TERMINALS

BI-METALLIC CABLE TERMINAL (COPPER – ALUMINIUM)

Bi-Metallic Cable Terminals are used for Aluminium Cable to Copper Busbars.

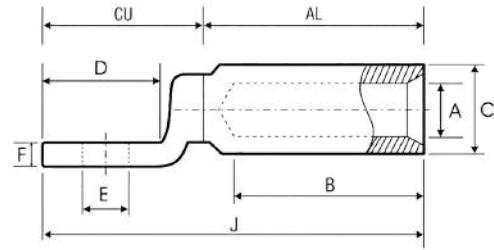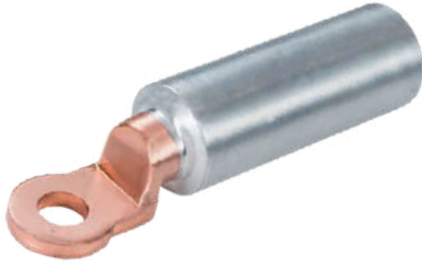



CABLE SQ. MM	STUD HOLE E	A	C	B	D	F	J	PART NUMBER
16 - 10	11	6	14	40	20	3	76	BMT - 1610
25 - 12	13	7	14	40	20	3	76	BMT - 2512
35 - 12	13	8	14	40	20	3	76	BMT - 3512
50 - 12	13	10	16	45	25	5	90	BMT - 5012
70 - 12	13	11.3	18	45	25	5	90	BMT - 7012
95 - 12	13	13.5	22	45	25	5	90	BMT - 9512
120 - 12	13	15	22	60	30	6	112	BMT - 12012
150 - 12	13	16.5	25	60	30	6	112	BMT - 15012
185 - 12	13	18.5	28	60	35	7.5	124	BMT - 18512
185 - 16	17	18.5	28	60	35	7.5	124	BMT - 18516
240 - 12	13	21	32	60	35	7.5	124	BMT - 24012
240 - 16	17	21	32	60	35	7.5	124	BMT - 24016
300 - 12	13	23.5	34	70	35	7.5	136	BMT - 30012
300 - 16	17	23.5	34	70	35	7.5	136	BMT - 30016
400 - 16	17	26	38	80	36	10	148	BMT - 40016
500 - 16	17	29	44	90	50	10	175	BMT - 50016
630 - 16	17	32.5	44	90	50	10	175	BMT - 63016

Material:- Copper & Aluminium

CABLE TERMINALS

BI-METALLIC CABLE CONNECTOR (COPPER – ALUMINIUM)

Bi-Metallic Cable Connectors are used for Aluminium Cable to Copper Cable.

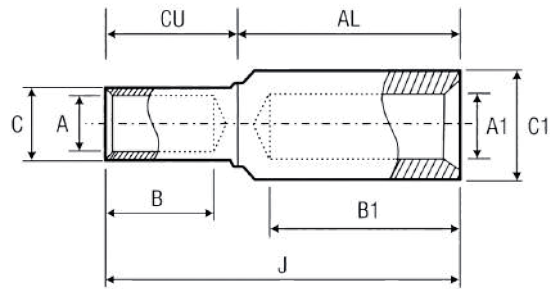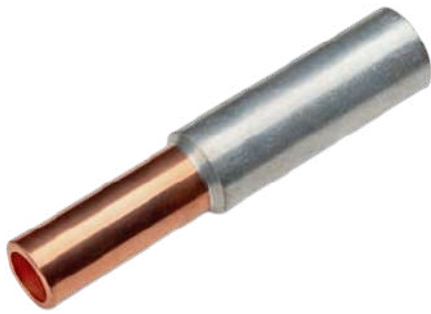

ALUMINIUM CABLE SQ MM	COPPER CABLE SQ MM	A	C	B	A1	C1	B1	J	PART NUMBER
16	16	5.5	8.5	25	6	14	40	75	BMC - 1616
25	16	5.5	8.5	25	7	14	40	75	BMC - 2516
25	25	7	30	25	7	14	40	76	BMC - 2525
35	16	5.5	8.5	25	8	14	40	76	BMC - 3516
35	25	7	10	25	8	14	40	76	BMC - 3525
35	35	8.2	12.5	25	8	14	40	77	BMC - 3535
50	25	7	10	25	10	16	45	82	BMC - 5025
50	35	8.2	12.5	25	10	16	45	82	BMC - 5035
50	50	10	14.5	30	10	16	45	88	BMC - 5050
70	35	8.2	12.5	25	11.3	18	45	83	BMC - 7035
70	50	10	14.5	30	11.3	18	45	89	BMC - 7050
70	70	11.5	16.5	35	11.3	18	45	94	BMC - 7070
95	50	10	14.5	30	13.5	22	45	90	BMC - 9550
95	70	11.5	16.5	35	13.5	22	45	95	BMC - 9570
95	95	13.5	19	40	13.5	22	45	101	BMC - 9595
120	70	11	16.5	35	15	22	33	111	BMC - 12070
120	95	13.5	19	40	15	22	35	116	BMC - 12095
120	120	15.5	21	40	15	22	35	117	BMC - 120120
150	95	13.5	19	40	16.5	25	35	117	BMC - 15095
150	120	15.5	21	40	16.5	25	45	118	BMC - 150120
150	150	17	23.5	45	16.5	25	45	123	BMC - 150150
185	120	15.5	21	40	18.5	28	60	119	BMC - 185120
185	150	17	23.5	45	18.5	28	60	124	BMC - 185150
185	185	19	25.5	45	18.5	28	60	125	BMC - 185185
240	150	17	23.5	45	21	32	60	125	BMC - 240150
240	185	19	25.5	45	21	32	60	126	BMC - 240185
240	240	21.5	29	50	21	32	60	132	BMC - 240240



Material:- Copper & Aluminium

CABLE TERMINALS

COPPER MECHANICAL OFFSET TONGUE TERMINAL LUGS

Cable Lugs Manufactured From High copper alloy terminal with offset tongue for joining a wide range of cable to equipment pads or bar.

Easy to install with screwdriver or wrench connector is reusable. Plain copper finish.

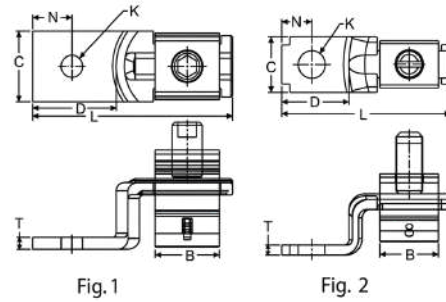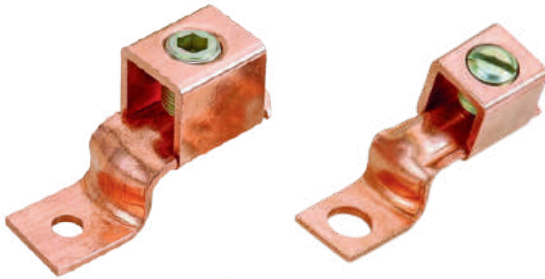


CONDUCTOR RANGE	STUD HOLE	SCREW TYPE	B MM	C MM	D MM	H MM	K MM	L MM	T MM	PART NUMBER
14 AWG-10 AWG	#8	SLOT	0.28	0.31	0.47	0.66	0.14	1.02	0.07	CSLU-25
14 AWG-6 AWG	16	SLOT	0.43	0.39	0.57	0.91	0.20	1.24	0.07	CSLU-35
8 AWG-2 AWG	25	SLOT	0.50	0.47	0.61	1.05	0.26	1.55	0.08	CSLU-70
2 AWG-1/0	16	SLOT	0.61	0.62	0.86	1.50	0.26	1.98	0.11	CSLU-125
4 AWG-3/0	25	7	0.72	0.75	1.20	1.40	0.39	2.20	0.16	CSLU-175
2 AWG-4/0	35	8.2	0.94	0.99	1.24	1.64	0.34	2.55	0.12	CSLU-225
1/0-350 kcmil	25	7	1.22	0.99	1.60	2.63	0.39	2.83	0.12	CSLU-300
1/0-500 kcmil	35	8.2	1.42	1.50	2.12	2.74	0.39	4.09	0.18	CSLU-400

Material:- Copper

CABLE TERMINALS

ALUMINIUM MECHANICAL LUGS (PB TYPE)

These dual rated Panelboard lugs are manufactured from high strength extruded Aluminium alloy and electro tin plated to provide low contact resistance.

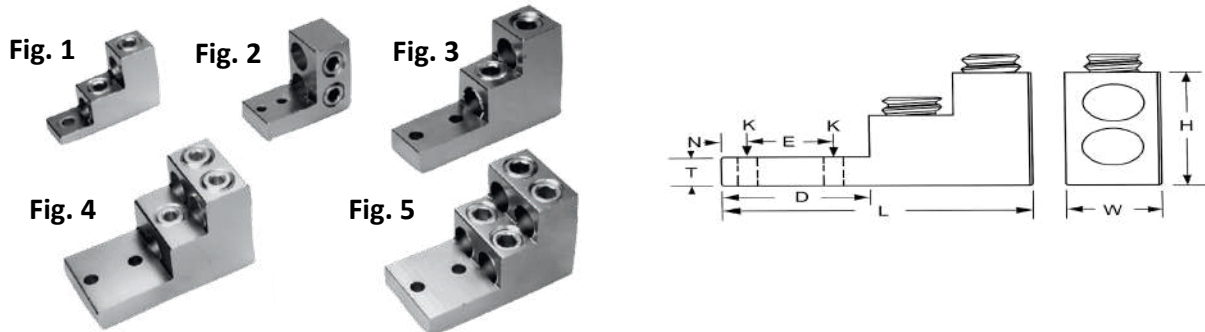

CONDUCTOR RANGE	STUD HOLE	FIG. NO.	D MM	L MM	N MM	W MM	E MM	T MM	H MM	PART NUMBER
6 AWG - 300 kcmil	5/16	1	0.94	3.00	0.47	1.00	0.00	0.31	2	AML - PB 30U-2N
4 AWG - 500 kcmil	1/4	2	2.31	4.91	0.38	1.44	1.25	0.75	3	AML - PB 34U-2N
2 AWG - 600 kcmil	3/8	3	2.31	4.91	0.38	1.5	1.38	0.75	3	AML - PB 36U-2N
2 AWG - 600 kcmil	3/8	4	2.31	4.91	0.38	2.5	1.38	0.75	3	AML - PB 36U-3N
2 AWG - 600 kcmil	3/8	5	2.31	4.91	0.38	2.5	1.38	0.75	3	AML - PB 36U-4N
1/0 - 750 kcmil	3/8	3	2.31	4.91	0.38	1.69	1.38	0.75	3	AML - PB 39U-2N
1/0 - 750 kcmil	3/8	4	2.31	4.91	0.38	3.06	1.38	0.75	3	AML - PB 39U-3N
1/0 - 750 kcmil	3/8	5	2.31	4.91	0.38	3.06	1.38	0.75	3	AML - PB 39U-4N

Material:- Aluminium

CABLE TERMINALS

ALUMINIUM MECHANICAL LUGS (TA TYPE)

These dual rated one -conductor lugs are manufactured from high strength extruded aluminium alloy and electro tin plated to provide low contact resistance.

ONE CONDUCTOR




Fig. 1






Fig. 2



Fig. 3



Fig. 4



CONDUCTOR RANGE	STUD HOLE	FIG. NO.	D MM	L MM	N MM	W MM	E MM	T MM	H MM	PART NUMBER
14 AWG - 6 AWG	1/4	1	0.63	1.06	0.25	0.50	0.00	0.09	0.50	AML - TA 6U
14 AWG - 2 AWG	1/4	1	0.63	1.16	0.31	0.50	-	0.10	0.55	AML - TA 2U
14 AWG - 1/0	1/4	1	0.81	1.50	0.44	0.63	-	0.19	0.92	AML - TA 25U
14 AWG - 2/0	1/4	2	0.81	1.47	0.45	0.63	-	0.19	0.80	AML - TA 26U
6 AWG - 250 kcmil	5/16	2	0.94	2.00	0.47	1.00	-	0.25	1.14	AML - TA 29U
6 AWG - 300 kcmil	5/16	2	0.94	2.00	0.45	1.00	-	0.25	1.14	AML - TA 30U
6 AWG - 350 kcmil	3/8	2	1.03	2.25	0.52	1.13	-	0.25	1.27	AML - TA 31U
4 AWG - 500 kcmil	3/8	2	1.50	2.81	0.88	1.51	-	0.31	1.58	AML - TA 34U
2 AWG - 600 kcmil	3/8	2	1.72	3.19	0.78	1.50	-	0.44	1.58	AML - TA 36U
300 kcmil - 800kcmil	1/2	2	1.85	3.38	0.81	1.75	-	0.50	1.95	AML - TA 40U
500 kcmil - 1000 kcmil	1/2	2	1.69	3.38	0.88	1.75	-	0.50	1.95	AML - TA 44U
6 AWG - 350 kcmil	1/2	3	3.16	5.50	0.63	1.25	1.75	0.38	1.52	AML - TA 31U-2N
2 AWG - 600 kcmil	1/2	4	3.22	4.69	0.63	1.50	1.75	0.44	1.57	AML - TA 36U-2N
300 kcmil - 800kcmil	1/2	4	3.03	4.75	0.63	1.75	1.75	0.50	1.95	AML - TA 40U-2N
500 kcmil - 1000 kcmil	1/2	4	3.03	4.75	0.63	1.75	1.75	0.50	1.95	AML - TA 44U-2N



Material:- Aluminium

CABLE TERMINALS

ALUMINIUM MECHANICAL LUGS (AU TYPE)

These dual rated two -conductor lugs are manufactured from high strength extruded Aluminium alloy and electro tin plated to provide low contact resistance.

TWO CONDUCTOR

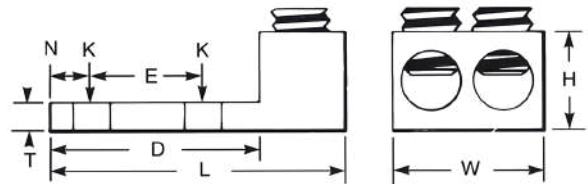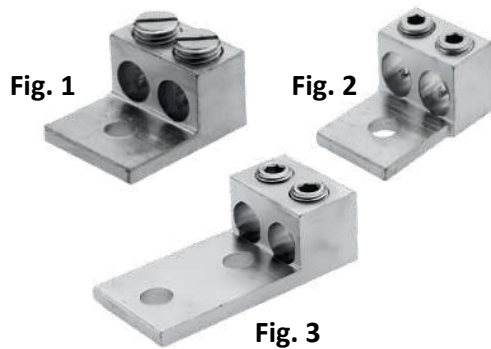

CONDUCTOR RANGE	STUD HOLE	FIG. NO.	D MM	L MM	N MM	W MM	E MM	T MM	H MM	PART NUMBER
14 AWG - 1/0	1/4	1	0.81	1.47	0.44	1.13	0.00	0.19	0.79	AML - AU 25U
14 AWG - 2/0	1/4	2	0.81	1.47	0.44	1.25	-	0.19	0.80	AML - AU 26U
6 AWG - 250 kcmil	3/8	2	1.50	2.56	0.50	1.66	-	0.25	1.20	AML - AU 29U
6 AWG - 350 kcmil	1/2	2	1.69	2.88	0.88	1.94	-	0.25	1.25	AML - AU 31U
2 AWG - 600 kcmil	1/2	2	1.75	3.20	0.63	2.41	-	0.44	1.58	AML - AU 36U
300 kcmil - 800 kcmil	5/8	2	1.66	3.38	0.88	3.19	-	0.50	1.95	AML - AU 40U
500 kcmil - 1000 kcmil	5/8	2	1.66	3.50	0.88	3.52	-	0.50	1.95	AML - AU 44U
6 AWG - 350 kcmil	1/2	3	3.00	4.50	0.63	2.31	1.75	0.31	1.39	AML - AU 31U-2N
2 AWG - 600 kcmil	1/2	3	3.22	4.69	0.63	2.41	1.75	0.44	1.39	AML - AU 36U-2N
300 kcmil - 800 kcmil	1/2	3	3.03	4.75	0.63	3.19	1.75	0.50	1.95	AML - AU 40U-2N
500 kcmil - 1000 kcmil	1/2	3	3.03	4.75	0.63	3.19	1.75	0.50	1.95	AML - AU 44U-2N

Material:- Aluminium

NOTES



BRIZALL

WWW.brizall.com

BRIZALL GROUNDING PRIVATE LIMITED



Head Office Address

Plot No. C1-55 & 71, 100 Shed Area
Near. Dupen Laboratory,
Silvassa Road, GIDC, VAPI-396 195



Contact

Phone: 0260-2450962
Mobile: +91-9824565003



Email

info@brizall.com
brizallgrounding@gmail.com

BRIZALL GROUNDING LLC



USA Office Address

800 Russell Lane, Milpitas,
CA-95035, USA



Contact

Mobile: +1 408 571 2062



Email

sales@brizall.com
brizallgrounding@gmail.com