

LFO: SCHMITT (U1A) + INTEGRATOR (U1B), RATE, TREM range switch

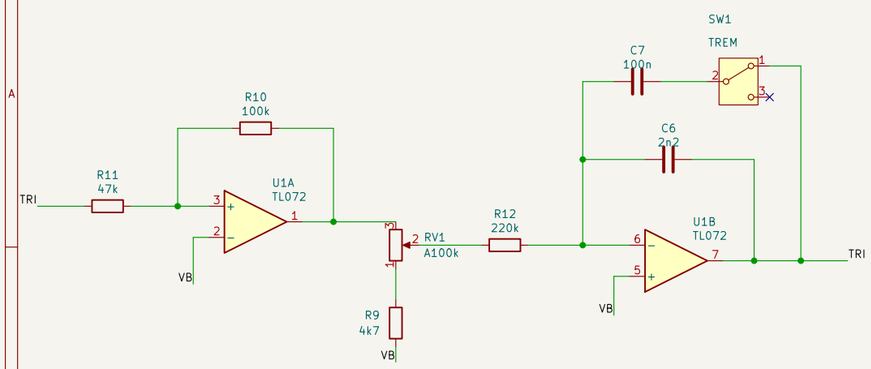


LFO ~1–24 Hz with C7 switched in; ~50 Hz – 1.1 kHz on C6 alone (46x).

VCA: 3080 OTA (U2) + Q1 OUTPUT FOLLOWER

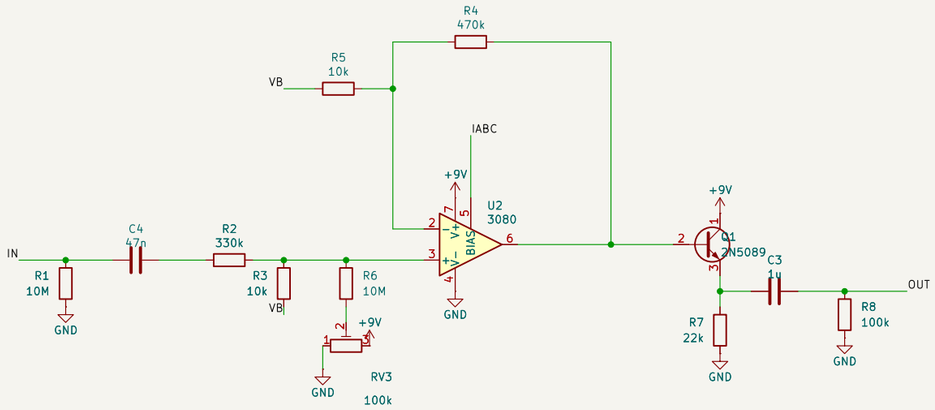


TRIM (through R6 10M) nulls the LFO bleed-through at the 3080 input.


DEPTH –> 3080 CONTROL CURRENT (rate LED D4)

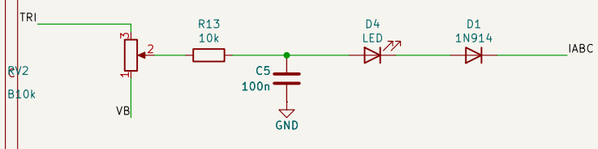


POWER, VB (two-LED reference), LEDs & PADS

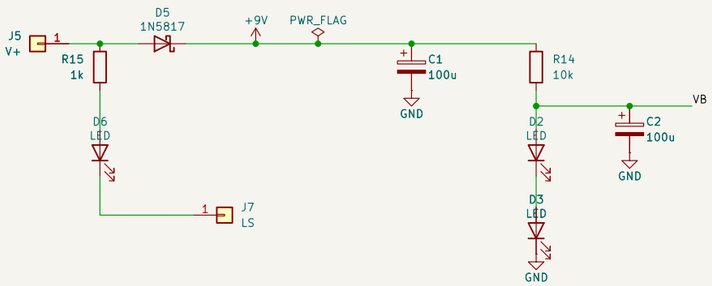







Eagle refs: IC1/2=U1/2, RATE/DEPTH/TRIM=RV1–3, TREM=SW1, RLED=R15
John Hollis design: TL072 LFO + 3080 OTA tremolo, TREM switch = LFO / audio range
Faithful transcription of ~/Documents/eagle/projects/Frobnicator (sch == brd)

Super-Freq

Sheet: /
File: Frobnicator.kicad_sch

Title: Frobnicator (as built)

Size: A3	Date: 2026-09-29	**Rev: Eagle 2023**
KiCad E.D.A. 10.0.4		Id: 1/1