

INPUT GAIN (U1A, replaces the original 3-transistor preamp)

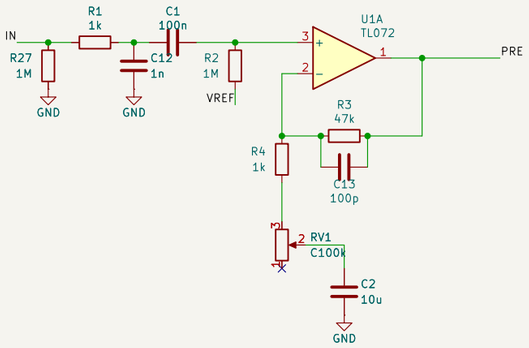

GAIN: C100k rheostat, clockwise = more gain


DRIVE STAGE, +-3 V LIMITER & SYMMETRY (U1B, as the original IC1a)

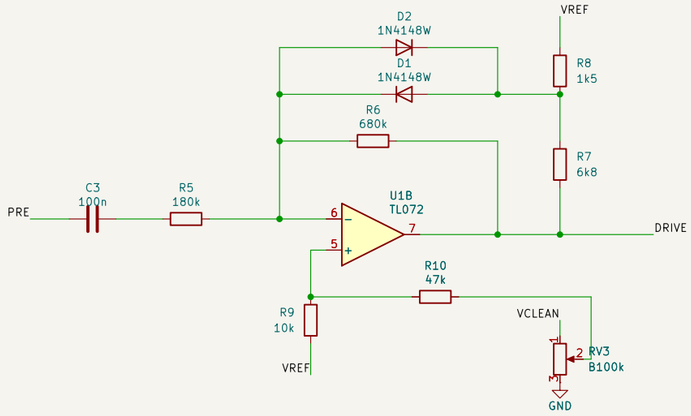


Diodes to the 6k8/1k5 tap limit DRIVE to about 6 V p-p (the 2023 build had them straight across the feedback: +-0.6 V)


SYMMETRY: centre = symmetric folds

POWER, VREF & OFF-BOARD WIRING

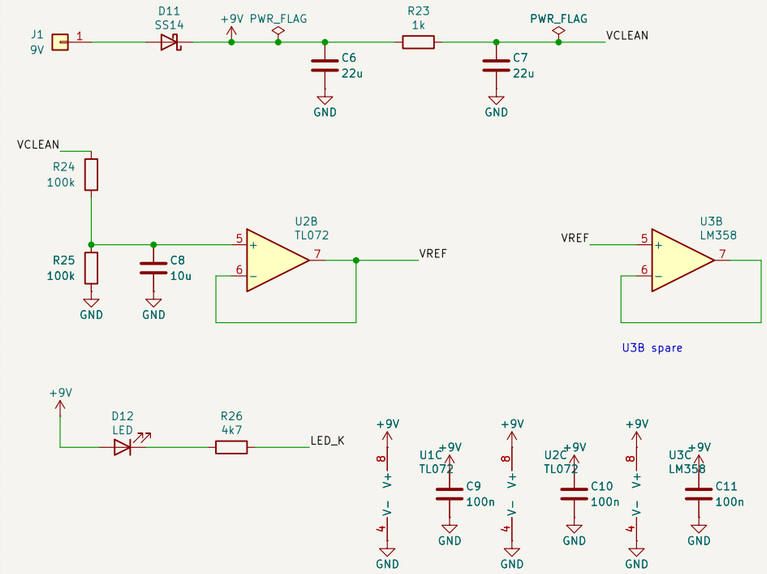


WAVE SHAPER: DIODE LADDER (+-0.5 / 1 / 1.5 / 2 V) & DIFFERENCE AMP (U2A)

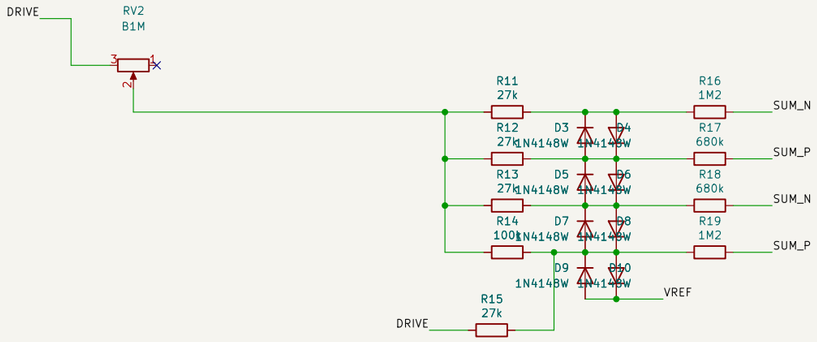

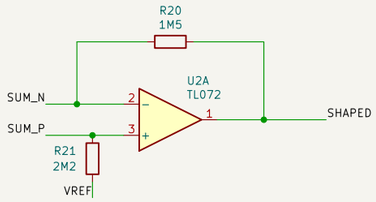

TONE & OUTPUT (U3A)

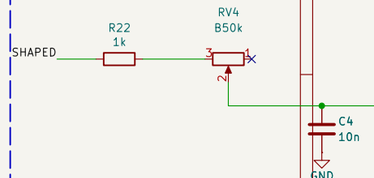

TONE: clockwise = brighter

OFF-BOARD WIRING



Each diode pair starts conducting at a higher level; the alternating +/- summing flips the gain each time = folding

FOLD: B1M rheostat, clockwise = more folding (continuous version of the original 3-way switch)

Ladder and summing values as the ETI original (R29 2M7 -> 2M2)

J1 = 9V, J2 = 9V ground, J4/J5 = jack grounds

Ladder/summing values as original (R29 2M7 -> 2M2)
TL072 gain stage, +-3 V limited drive restored, FOLD pot, SYMMETRY, TONE, buffered VREF
After ETI Guide to Making Music (1988) Hyper-Fuzz and the 2023 Eagle build
Super-Freq

Sheet: /
File: HyperFuzz.kicad_sch

Title: Hyper Fuzz SMD (ETI Hyper-Fuzz, updated)

Size: A3	Date: 2026-09-26	**Rev: 1.0**
KiCad E.D.A. 10.0.4		Id: 1/1