


POWER & BIAS

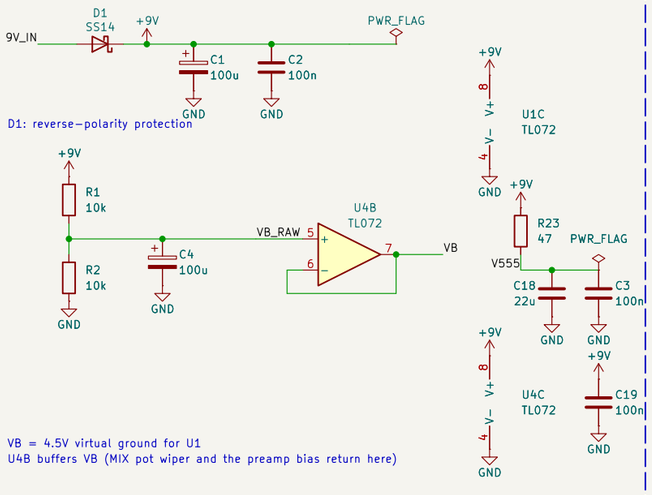


INPUT & PREAMP (U1A)

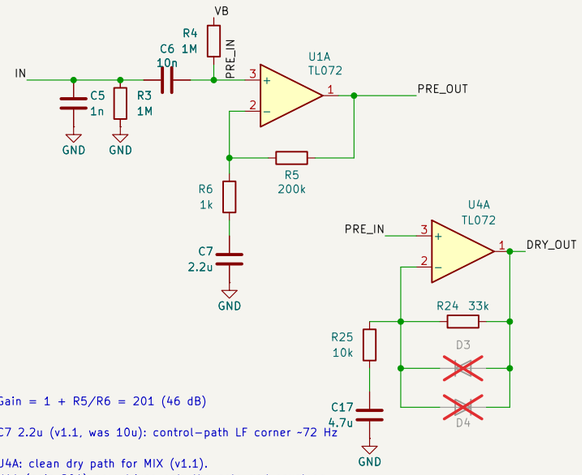

ENVELOPE & GATE

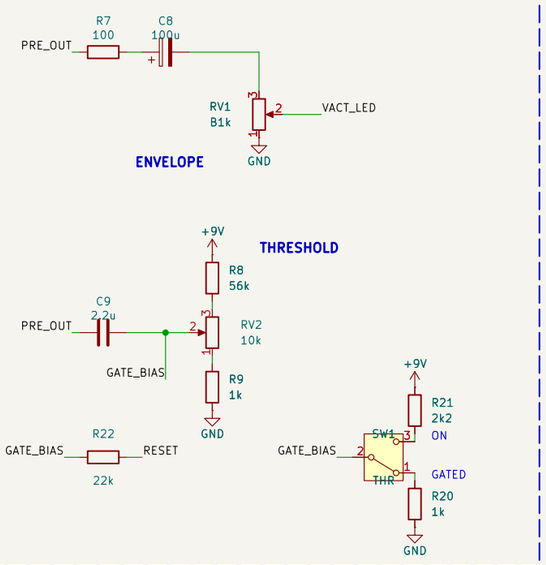


OFF–BOARD WIRING

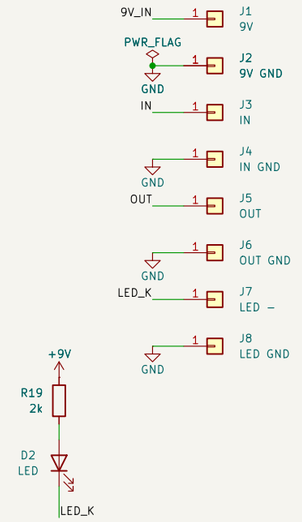


OSCILLATOR (U2 TLC555)

FREQUENCY

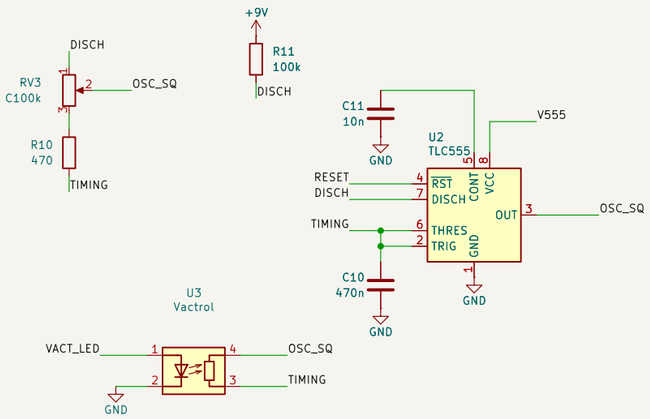

MIX & OUTPUT (U1B)

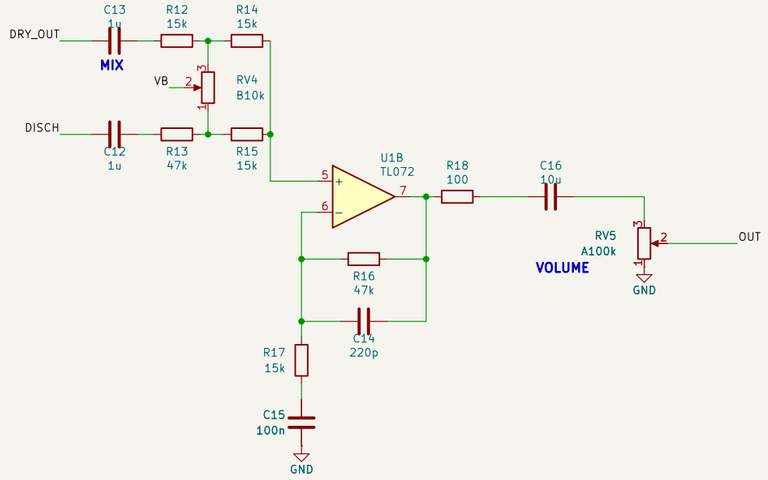

NOTES

1. SMD passives 0805 (hand–solder pads) unless noted; C9 is 1206. LCSC field = JLCPCB part number.
2. Hand–soldered: RV1, RV3–RV5 (Alpha 16mm), RV2 (3362P trimmer), SW1 (Taiway 100 toggle), D2 (3mm LED), U3 (DIY vactrol), J1–J8 wire pads. D3/D4 optional (3 mm LEDs / 1N4148, not fitted).
3. Changes from Eagle v2: R16 feedback connected, RV3 pin 1 to DISCH, R7/R18/C3/C11 added, C7 220n–>10u, C4 47u elec–>22u MLCC.
4. v1.1 (2026–10–03): C4 100u elec; R22 22k into RESET; C7 2.2u; R23/C18 555 supply filter; C12/C13 1u; U4A clean dry path; U4B VB buffer; THRESHOLD pot –> SW1 toggle (GATED / GLITCH / ON) + RV2 3362P trimmer; R13 47k (mix balance).

Enclosure: Hammond 1590B
Converted from Eagle UglyFace_021 for JLCPCB SMD assembly

Sheet: /
File: UglyFace_03.kicad_sch

Title: Ugly Face 3 – SMD

Size: A3	Date: 2026–10–03	**Rev: 1.1**
KiCad E.D.A. 10.0.4		Id: 1/1