


POWER & BIAS

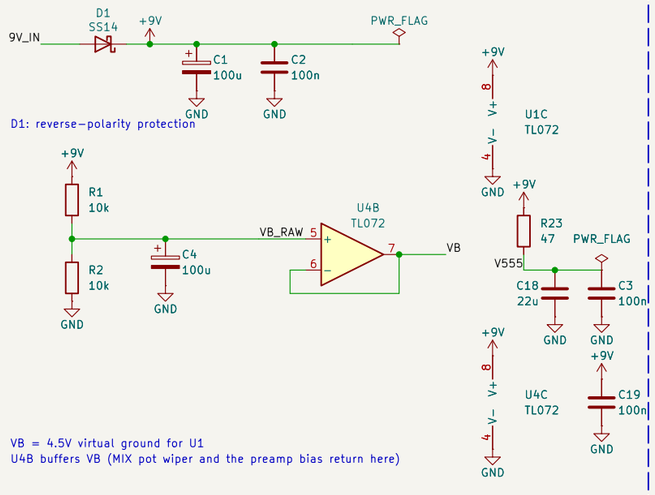


INPUT & PREAMP (U1A)

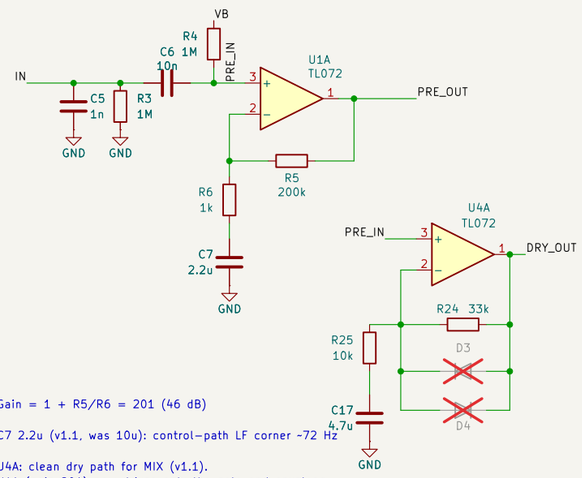

ENVELOPE & GATE

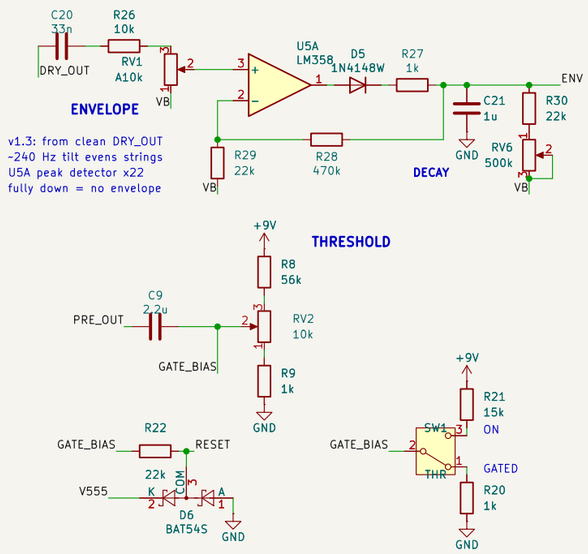


OFF-BOARD WIRING

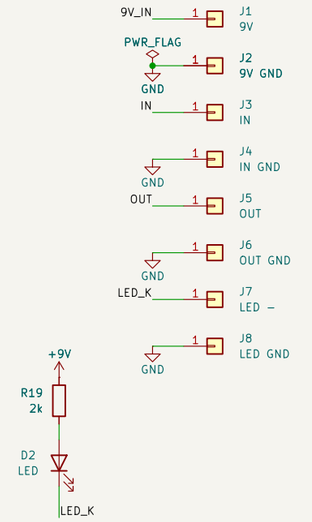


OSCILLATOR (U2 TLC555)


FREQUENCY

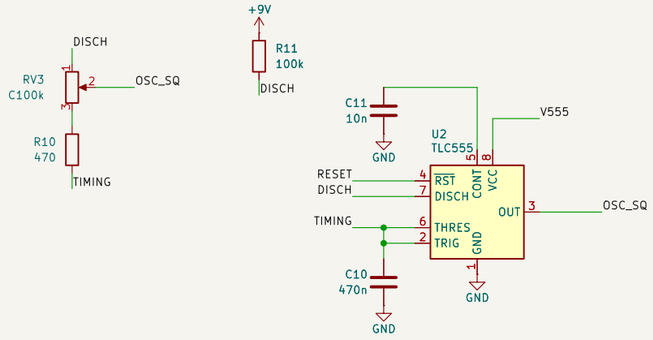

VACTROL DRIVER (U5B, Q1)

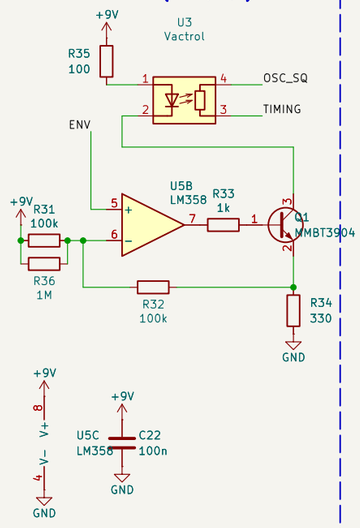

MIX & OUTPUT (U1B)

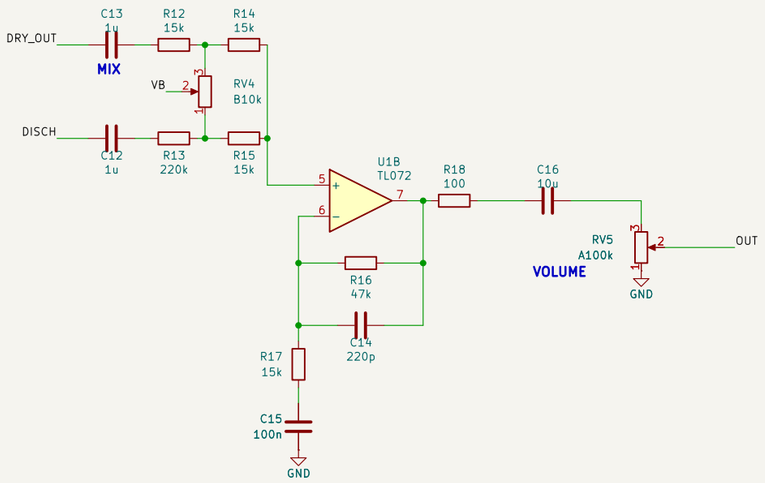

NOTES

1. SMD passives 0805 (hand-solder pads) unless noted; C9 is 1206. LCSC field = JLCPCB part number.
2. Hand-soldered: RV1, RV3-RV5 (Alpha 16mm), RV2 (3362P trimmer), SW1 (Taiway 100 toggle), D2 (3mm LED), U3 (DIY vactrol), J1-J8 wire pads. D3/D4 optional (3 mm LEDs / 1N4148, not fitted).
3. Changes from Eagle v2: R16 feedback connected, RV3 pin 1 to DISCH, R7/R18/C3/C11 added, C7 220n->10u, C4 47u elec->22u MLCC.
4. v1.1 (2026-10-03): C4 100u elec; R22 22k into RESET; C7 2.2u; R23/C18 555 supply filter; C12/C13 1u; U4A clean dry path; U4B VB buffer;
   THRESHOLD pot -> SW1 toggle (GATED / GLITCH / ON) + RV2 3362P trimmer; R13 47k (mix balance).
5. v1.3 (2026-10-16): new envelope (U5 LM358 detector + Q1 LED driver, fed from DRY_OUT; R7/C8 removed; RV1 A10k level; RV6 DECAY trim);
   D6 BAT54S RESET clamp; R21 15k (THR ON lets the guitar through); R13 220k (MIX balance).

Enclosure: Hammond 1590B
Converted from Eagle UglyFace_021 for JLCPCB SMD assembly

Sheet: /
File: UglyFace_03.kicad_sch

Title: Ugly Face 3 — SMD

Size: A3	Date: 2026-10-16	**Rev: 1.3**
KiCad E.D.A. 10.0.4		Id: 1/1