

INPUT GAIN (U1A) + DRIVE + ONE VULCAN STAGE (Q1)

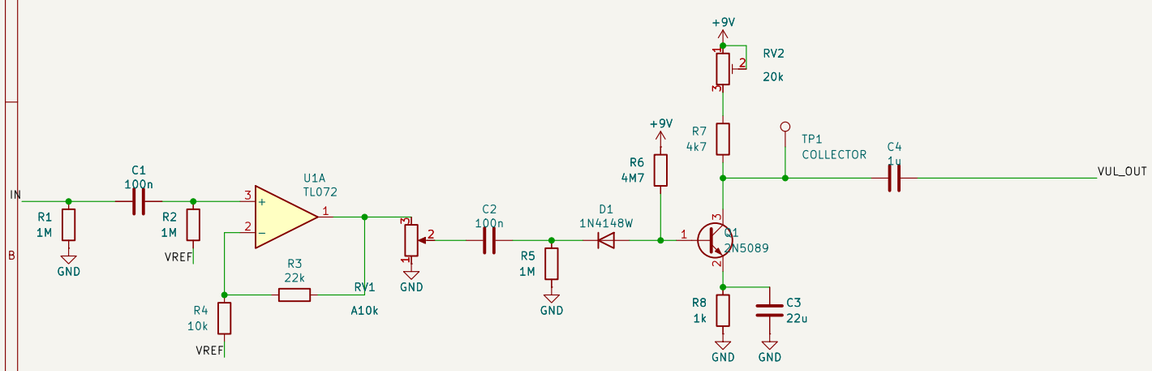

Set RV2 (BIAS) for 4.5 V at TP1 (Q1 collector), per the original Vulcan designer.


DRIVE = 0 to x3.2 of the guitar into the stage: even-harmonic warmth at low settings, hard clipping at full.

PAD + BUFFER (U1B) + ACTIVE BAXANDALL BASS / TREBLE (U2A) + VOLUME

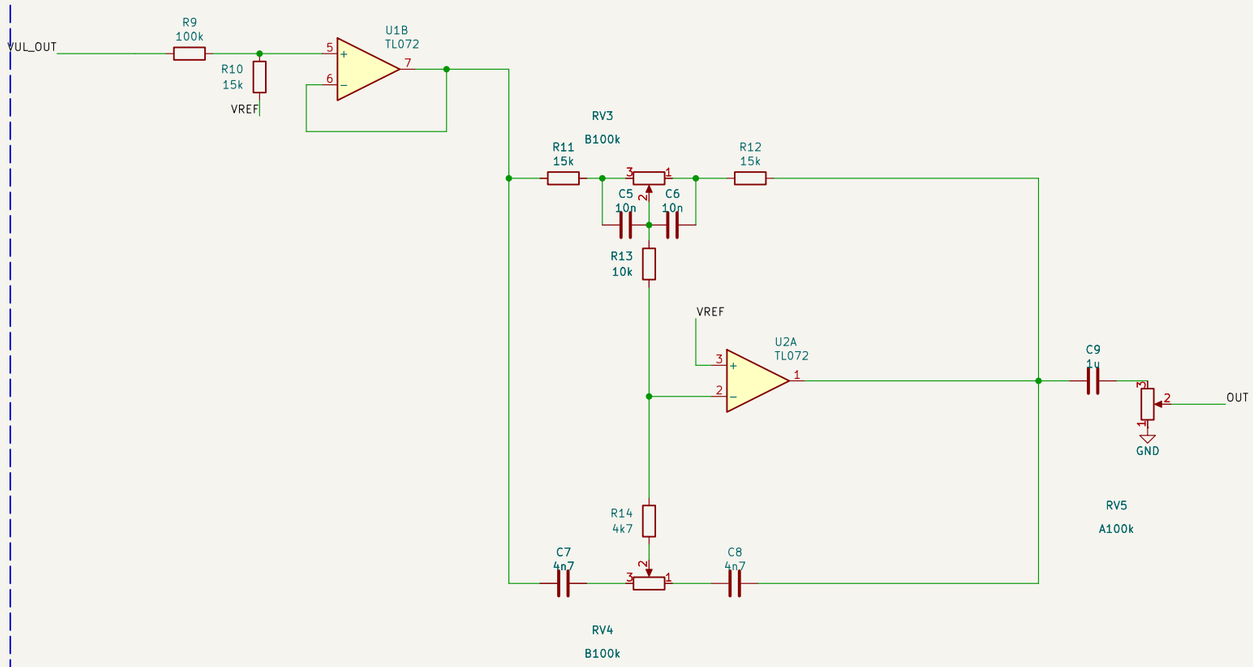

Flat at noon (unity). BASS +−14 dB @ 100 Hz, TREBLE +−12 dB @ 5 kHz. Pot pin 3 (CW) = boost.

POWER, VREF (U2B buffer), LED & PADS

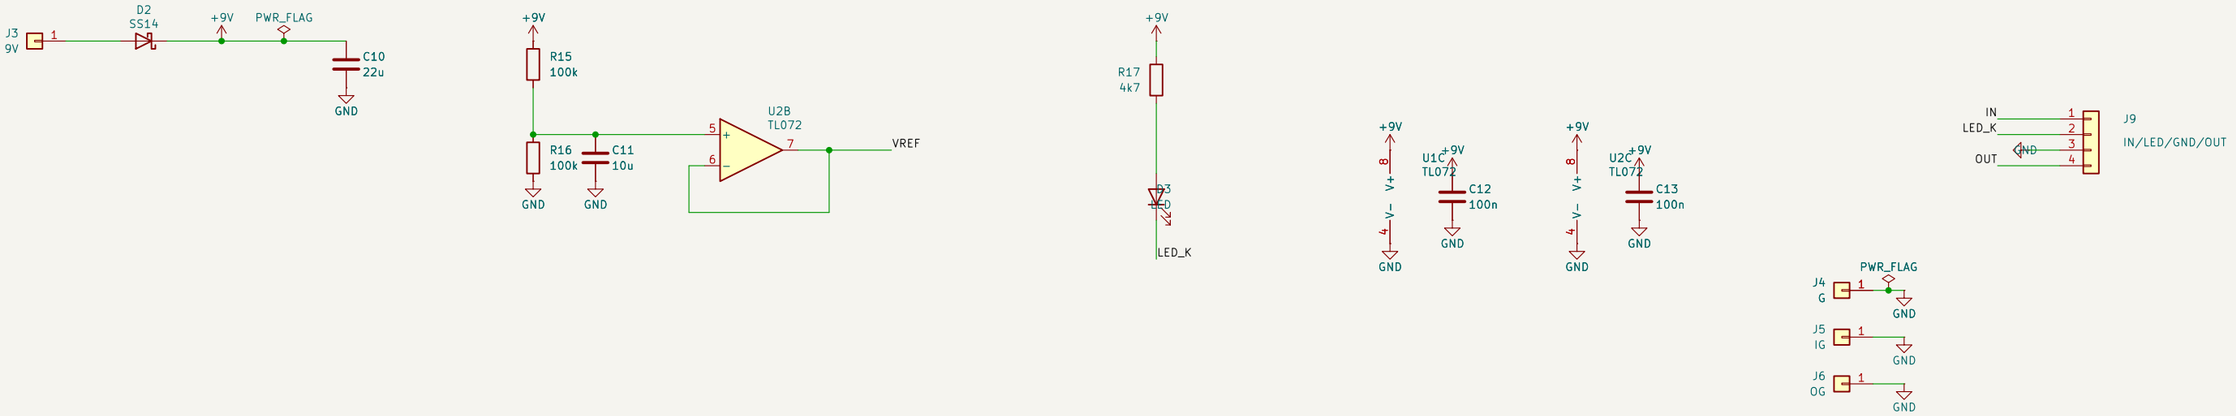

DRAFT for review
Input gain x3.2 > DRIVE > one diode-coupled 2N5089 stage (BIAS trim) > active Baxandall > VOLUM
Single Vulcan stage overdrive (Vulcan roadmap spin-off)
Super-Freq

Sheet: /
File: VulcanOD.kicad_sch

Title: Vulcan OD SMD

Size: A3	Date: 2026-09-29	**Rev: 1.0 draft**
KiCad E.D.A. 10.0.4		Id: 1/1