


INPUT + STAGE 1 (Q1)

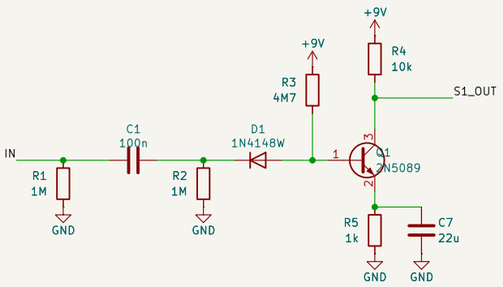


GAIN + BASS-CUT SHELF + STAGE 2 (Q2)

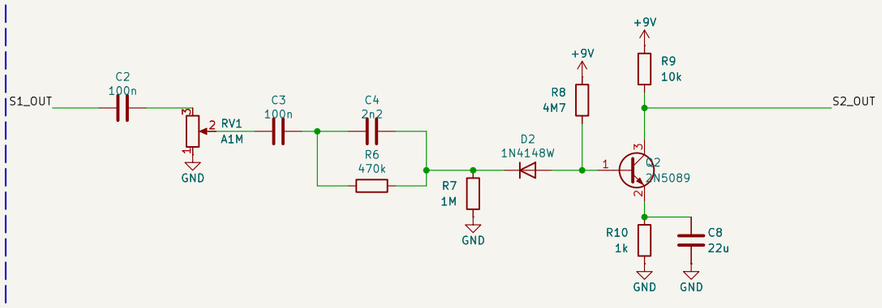


STAGE 3 (Q3) + VOLUME

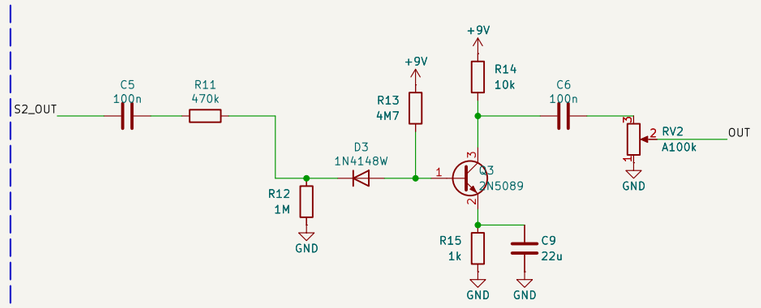

POWER, LED & OFF-BOARD WIRING

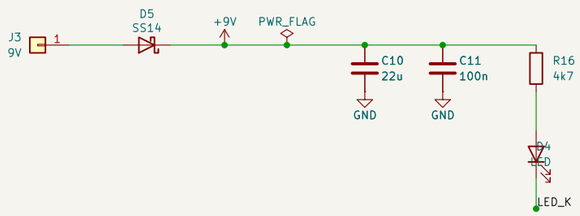





Each stage: 1M to ground -> series diode (K at node, A at base) -> base biased 4M7 from +9V; 10k collector, 1k + 22u emitter.

Q1-Q3: 2N5089 in the TO-92 row (E B C), hand-soldered; SOT-23 pads are an optional MMBT5089. Vc ~2-4.5 V with hFE 500-1200.

SS14, LED after the diode, ceramic caps, ribbon header
Three diode-coupled 2N5089 stages (TO-92 EBC or SOT-23); GAIN, VOLUME
Clean SMD redraw of Eagle "Vulcan v1 OSHPark" (same refs and values)

Super-Freq

Sheet: /
File: Vulcan.kicad_sch

Title: Vulcan SMD v2

Size: A3	Date: 2026-09-29	**Rev: 2.0 draft**
KiCad E.D.A. 10.0.4		Id: 1/1