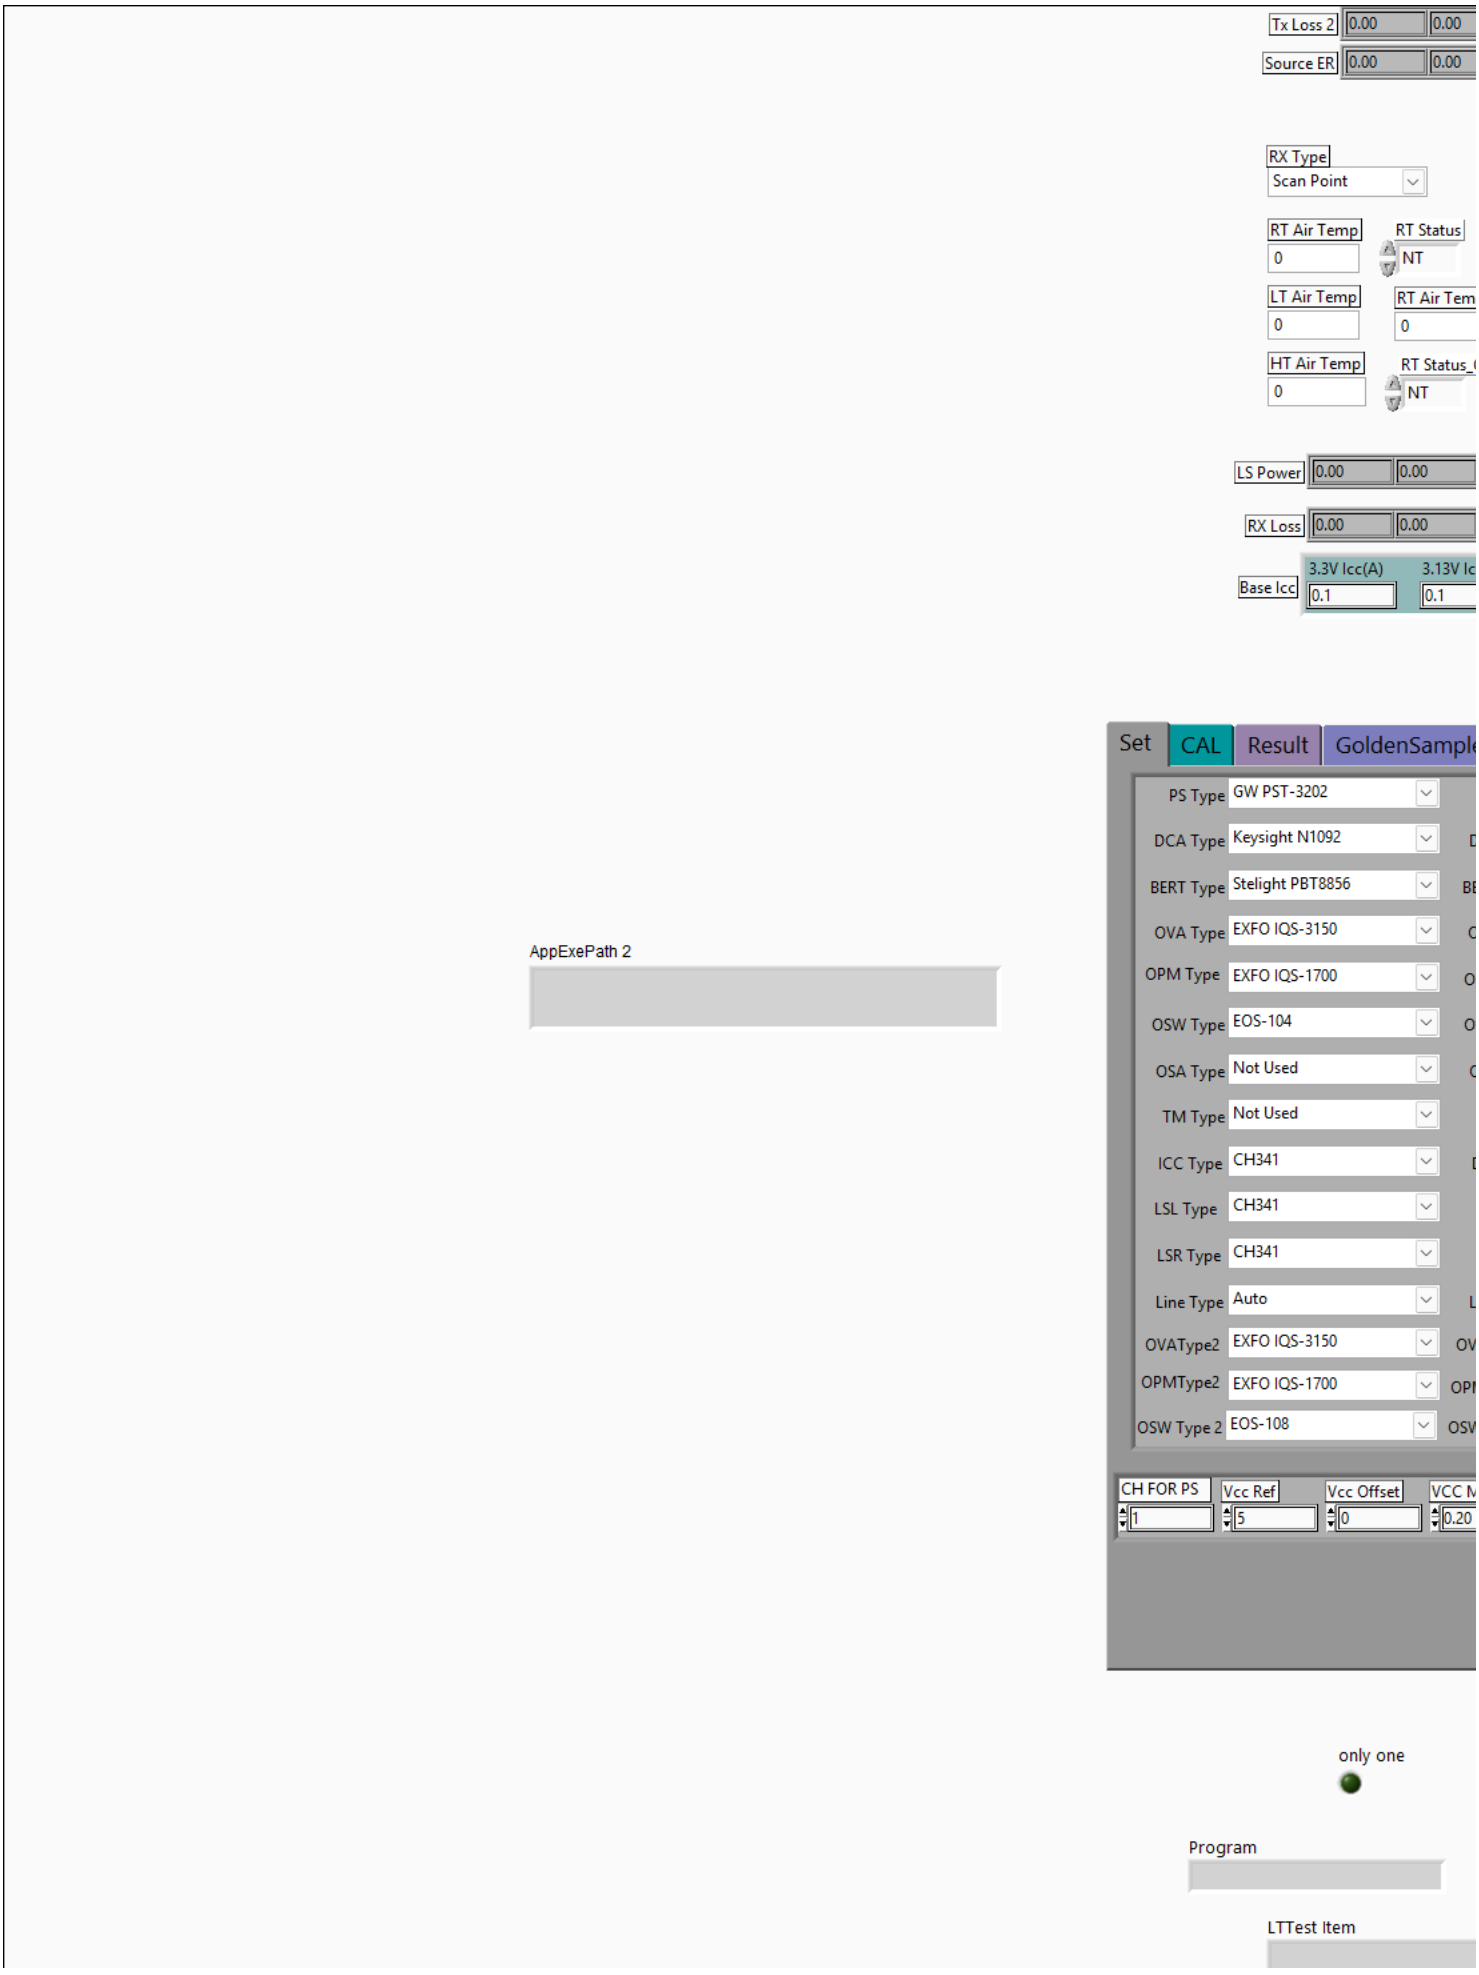
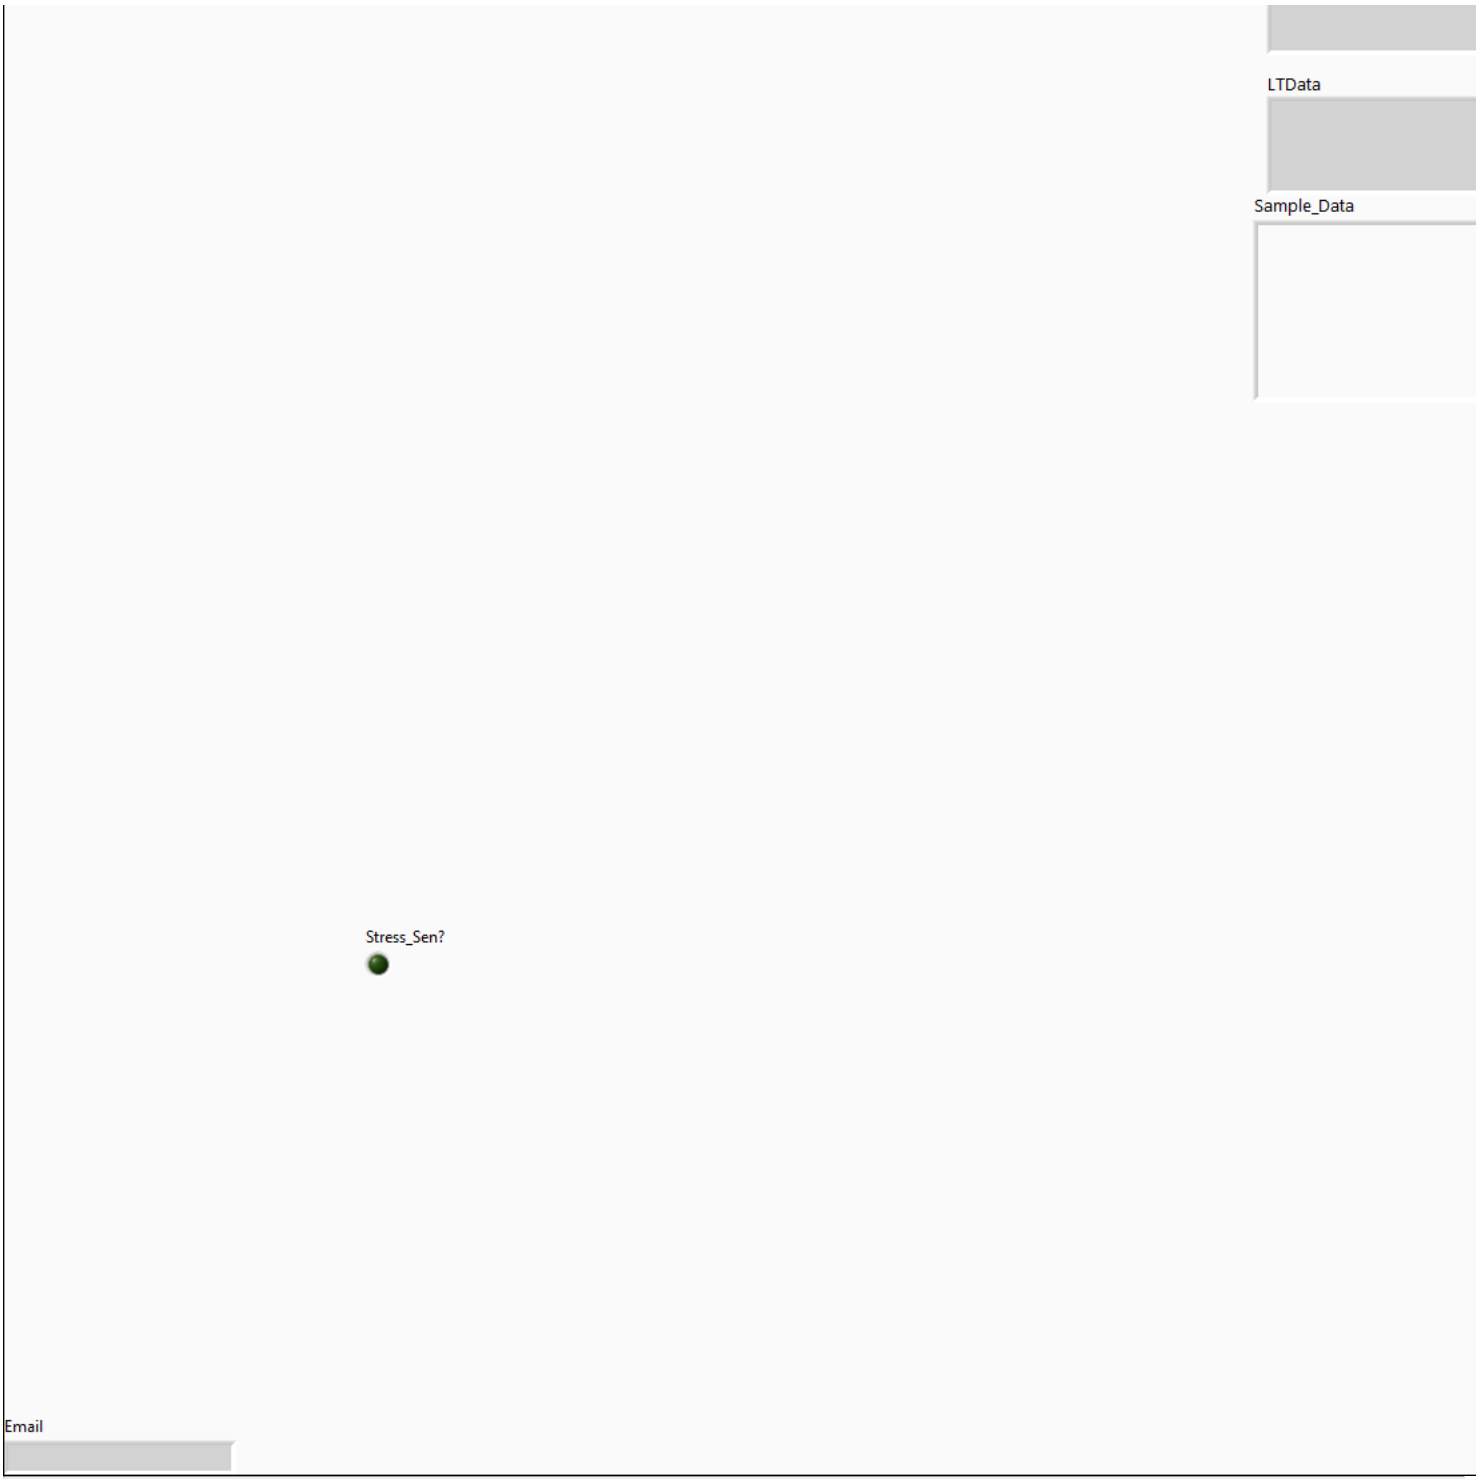
800G_TRx_Test.vi

Connector Pane



Front Panel


Tx Loss 2
0.00
0.00
Source ER
0.00
0.00
RX Type
Scan Point
RT Air Temp
0
RT Status
NT
LT Air Temp
0
RT Air Tem
0
HT Air Temp
0
RT Status_
NT
LS Power
0.00
0.00
RX Loss
0.00
0.00
Base Icc
3.3V Icc(A)
0.1
3.13V Ic
0.1
Set
CAL
Result
GoldenSample
PS Type
GW PST-3202
DCA Type
Keysight N1092
BERT Type
Stelight PBT8856
OVA Type
EXFO IQS-3150
OPM Type
EXFO IQS-1700
OSW Type
EOS-104
OSA Type
Not Used
TM Type
Not Used
ICC Type
CH341
LSL Type
CH341
LSR Type
CH341
Line Type
Auto
OVAType2
EXFO IQS-3150
OPMType2
EXFO IQS-1700
OSW Type 2
EOS-108
CH FOR PS
1
Vcc Ref
5
Vcc Offset
0
VCC M
0.20
AppExePath 2
only one
Program
LTTest Item



Controls and Indicators

Save Image[Save Image]
Loss Cal[Tx Loss Cal]
Main[Main]
Start Test[TRx Test]
Exit[Exit]

退出程序

Device[Device]

[PS Type]
[PS Visa]
[DCA Type]
[DCA Visa]

 **[BERT Type]**
 **[BERT Visa]**
 **[OVA Type]**
 **[OVA Visa]**
 **OPM Type**
 **[OPM Visa]**
 **OSW Type**
 **[OSW Visa]**
 **OSA Type**
 **[OSA Visa]**
 **TM Type**
 **[TM Visa]**
 **ICC Type**
 **[DUT Visa]**
 **LSL Type**
 **[LSL Visa]**
 **LSR Type**
 **[LSR Visa]**
 **Line Type**
 **[Line Visa]**
 **[OVAType2]**
 **[OVA Visa2]**
 **OPMType2**
 **[OPM Visa 2]**
 **OSW Type 2**
 **[OSW Visa 2]**

 **Type[Type]**

 **[MPO-SR8]**
 **[MPO-DR8]**

- **[LC-LR8]**
- **[LC-2*FR4]**

1V Select[1V Select]

Rx Loss[Rx Loss]

- **Tx Loss**

Source TxP[LS TxP]

- **Tx Loss**

Source ER[Source ER]

- **Tx Loss**

Loss Cal[Rx Loss Cal]

Base Icc[Icc Cal]

- **3.3V Icc(A)[3.3V Icc]**
- **3.13V Icc(A)[3.13V Icc]**
- **3.47V Icc(A)[3.47V Icc]**

Chk Vcc[Chk Vcc]

MX100 Ch[Power From]

Test Ch[Test Ch]

- **Boolean**

SN

Test Type

Operate

DutAirControl

RX Loss[RX Loss]

- **Tx Loss**

LS Power[LS Power]

- **Tx Loss**

SZ

- **CH FOR PS[CH FOR PS]**

  The numeric control determines the channel no. that user want to set

  Valid Ranges: 1 to 3 (PSS is only 1).

  Default Value: 1
- **Att Start[Att Start]**
- **OPM Ch[OPM Ch]**
- **RXP max[RXP max]**
- **RXP min[RXP min]**
- **Thermo Ch[Thermo Ch]**
- **Los Start[Los Start]**
- **OPM C port[OPM C port]**
- **BERT Time[BERT Time]**
- **Sen Step 2[Sen Step 2]**
- **Vcc Offset[Vcc Offset]**
- **Vcc Ref[Vcc Ref]**
- **Sen Step 1[Sen Step 1]**
- **[DCA Channel]**
- **Sen Step 1[Tempoffset]**
- **Emissivity RT Oracle[Emissivity]**
- **BERT Time[ATT Delay(s)]**
- **Emissivity LT Oracle[Emissivity LT]**
- **Emissivity HT Oracle[Emissivity HT]**

Emissivity RT AWS[Emissivity RT AWS]
Sen Step 1[Tempoffset LT]
Sen Step 1[Tempoffset HT]
Emissivity RT AWS[Emissivity LT AWS]
Emissivity RT AWS[Emissivity HT AWS]
Sen Step 1[VCC Multiplier]

Start Test[L]
[Only_Test]
Select
Start Time
initL
Start Test[Golden]
Sample_Data
QH
only one
customer
Infrared Visa
选项卡控件
选项卡控件 2
HT Air Temp
LT Air Temp
Final Test Data

字符串

RT Air Temp
RT Status
RX Type
RT Air Temp_GS
RT Status_GS
Sen[Sen]
All Result[All Result]
Tx Test Step[Tx Step]
Rx Test Step[Rx Step]
Main Step[Main Step]
Tx Loss[Tx Loss]

Tx Loss

FilePath[FilePath]
Email[Email]
Stress_Sen?
AppExePath[AppExePath 2]
WO
PC

String/Binary data is the data of Windows registry type String or Binary.

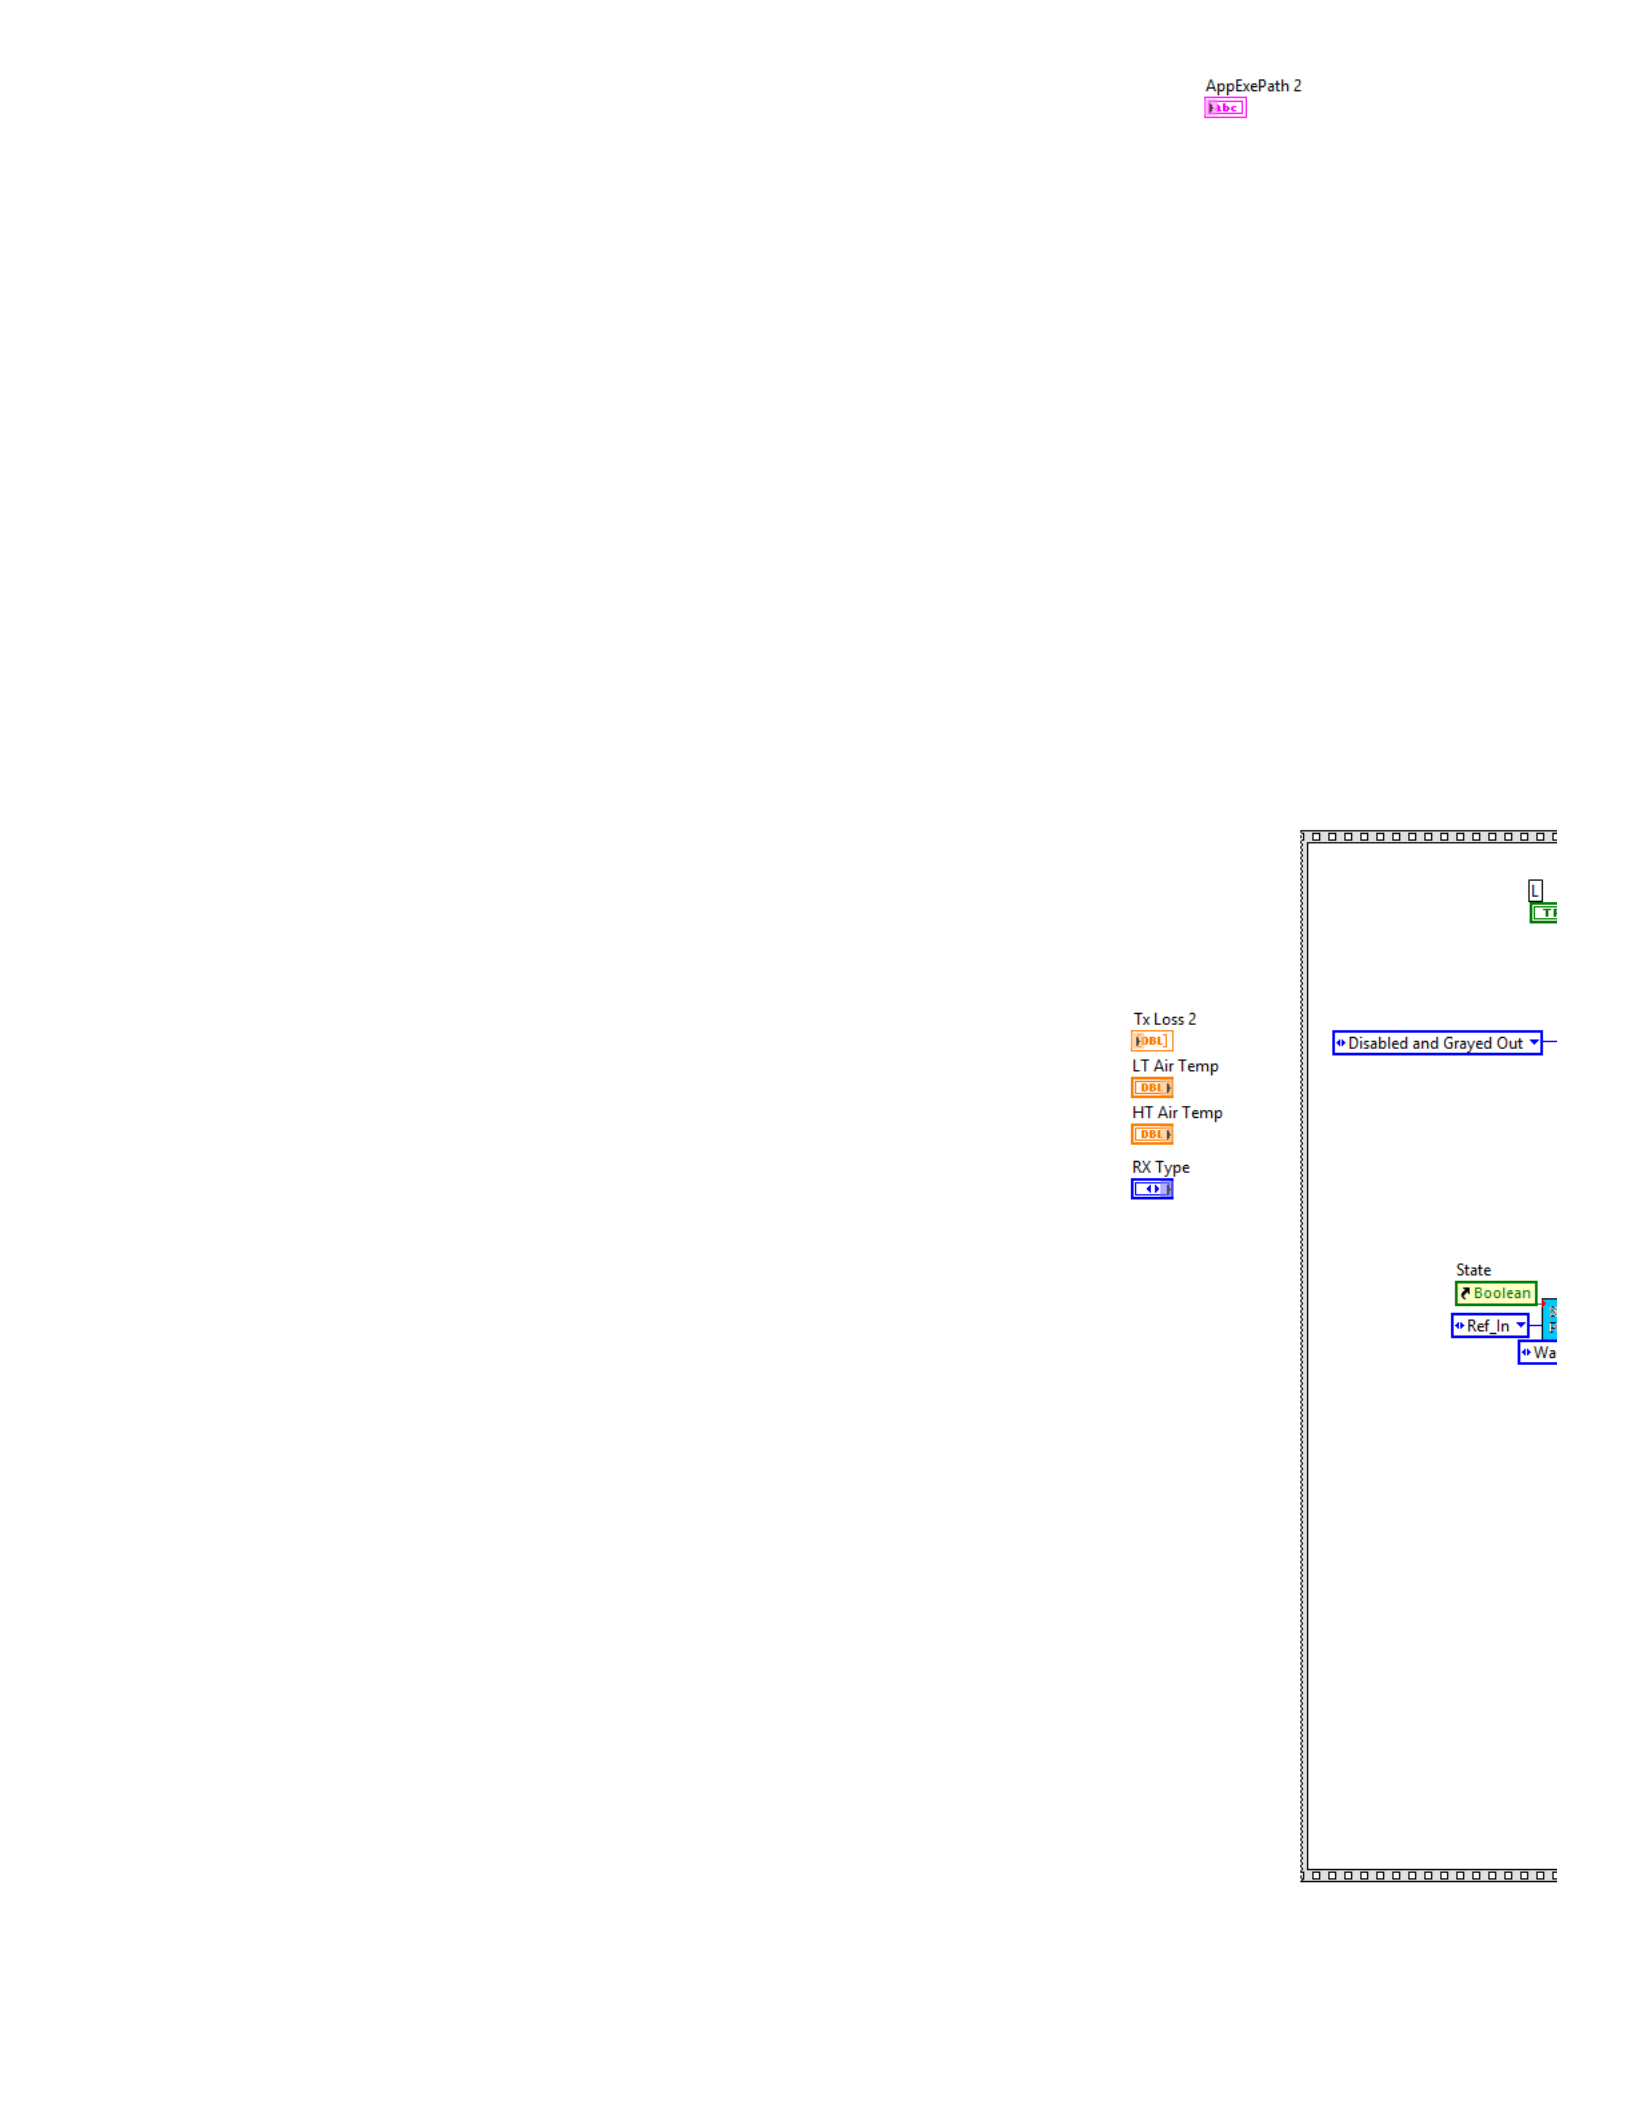
PC 2

String/Binary data is the data of Windows registry type String or Binary.

3T
APC
State[State]
LT
HT
ALL Time(S)
Program
Display 2
RTTest Item
RTData
HTTest Item
HTData

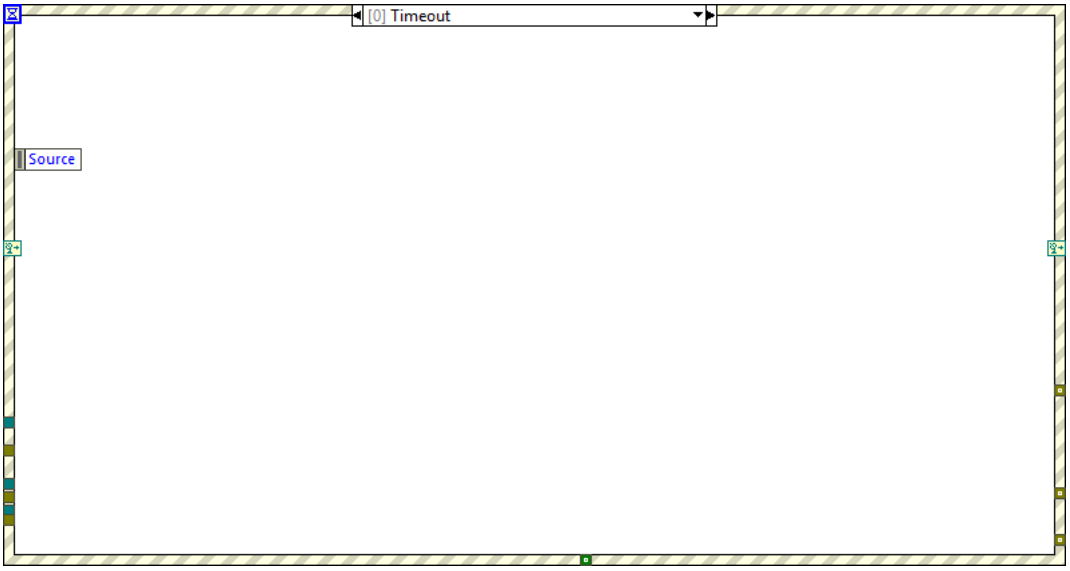
- LTTest Item
- LTData
- Result
- All Result[Gobalspec]
- All Result[GobalData]
- State[State 2]
- G_Save
- G_S
- Sen[Sen 2]
- Sen[Sen 3]
- [CH1 Cal]
- CH2 Cal[CH2 Ca]
- [CH3 Cal]
- [CH4 Cal]
- [CH5 Cal]
- [CH6 Cal]
- [CH7 Cal]
- [CH8 Cal]
- Temp Cal
    - AWS?
    - PF Array
        -
    - Times
    - Station
- SEN Record
    - Lie
        - COL
    - SEN
        -
- Tx Loss[Tx Loss 2]
    - Tx Loss
- Tx Loss2?
- T1
- Wav JPG Path
    - JPG F
- Table Value
    -
- PF_CH
    -
- ERROR
    -

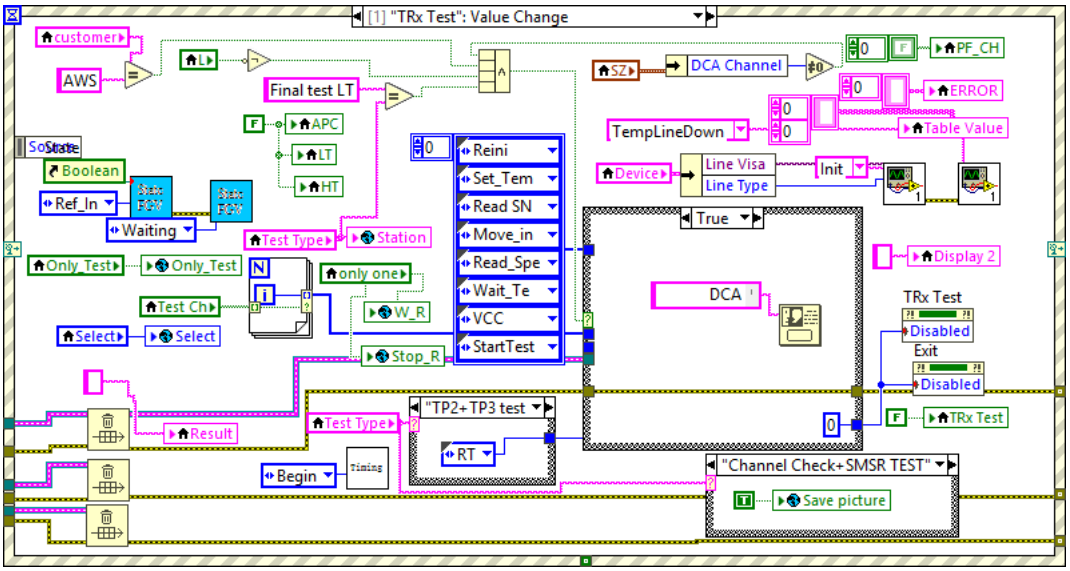
Block Diagram



AppExePath 2
Tx Loss 2
LT Air Temp
HT Air Temp
RX Type
Disabled and Grayed Out
State
Boolean
Ref_In


Email


Stress_Sen?






[1] "TRx Test": Value Change
customer
AWS
Final test LT
APC
LT
HT
Boolean
Ref_In
Waiting
Test Type
Station
Only_Test
Only_Test
Test Ch
Select
Select
only one
W_R
Stop_R
Reini
Set_Tem
Read SN
Move_in
Read_Spe
Wait_Te
VCC
StartTest
SZ
DCA Channel
PF_CH
ERROR
TempLineDown
Table Value
Device
Line Visa
Line Type
Init
True
DCA
Display 2
TRx Test
Disabled
Exit
Disabled
TRx Test
Result
Test Type
"TP2+TP3 test
RT
Begin
Timing
"Channel Check+SMSR TEST"
Save picture



"APC_Test"
RT



"FQC"
ATS



"Golden_DDM
GS RT



"LT_Test"
LT



"HT_Test"
HT



"Final test"
ATS

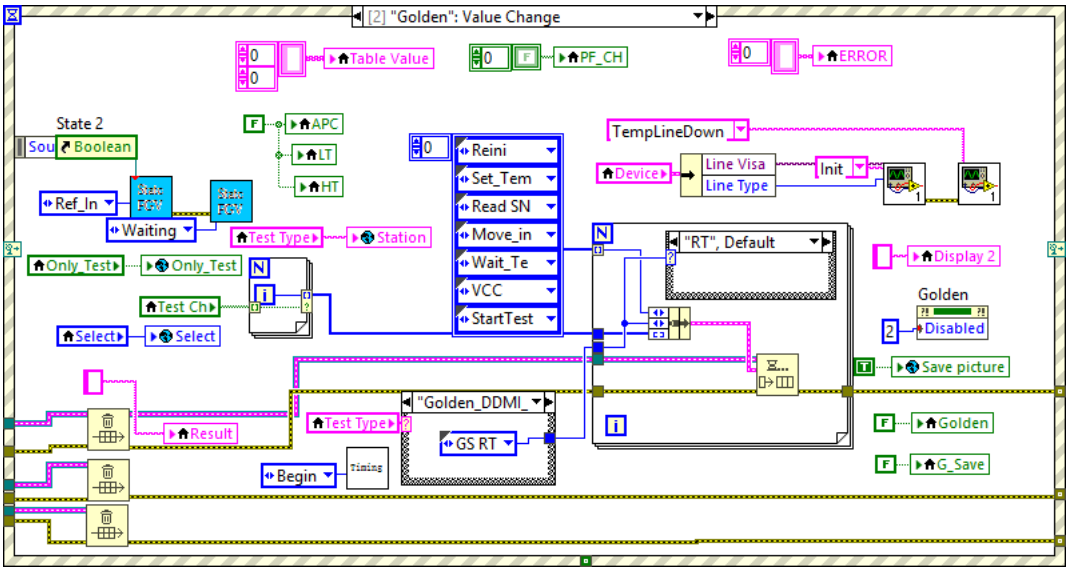

"Final test LT"
ATS LT


"Final test HT"
ATS HT



"¼Ù", Default
Save picture



False
"ATS".."ATS HT"
Only_Test



"RT", Default



[2] "Golden": Value Change
Table Value
PF_CH
ERROR
State 2
Boolean
APC
LT
HT
Ref_In
Waiting
Test Type
Station
Only_Test
Test Ch
Select
Reini
Set_Tem
Read SN
Move_in
Wait_Te
VCC
StartTest
TempLineDown
Device
Line Visa
Line Type
Init
"RT", Default
Display 2
Golden
Disabled
Save picture
Golden
G_Save
"Golden_DDMI_
GS RT
Result
Begin
Timing



"ATS".."ATS HT"
Only_Test



"APC_Test"
RT



"FQC"
ATS



"TP2+TP3 test",
RT

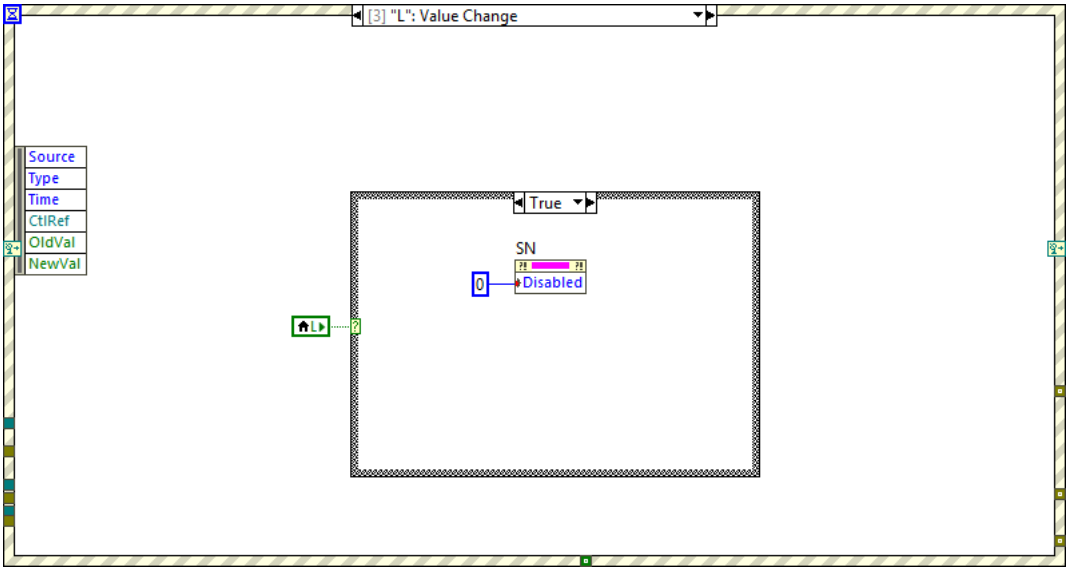

"LT_Test"
LT

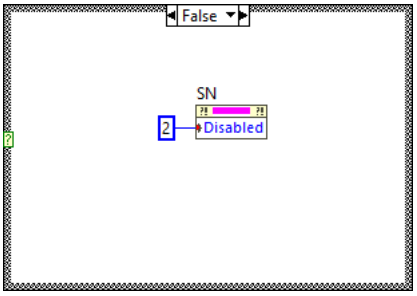

"HT_Test"
HT

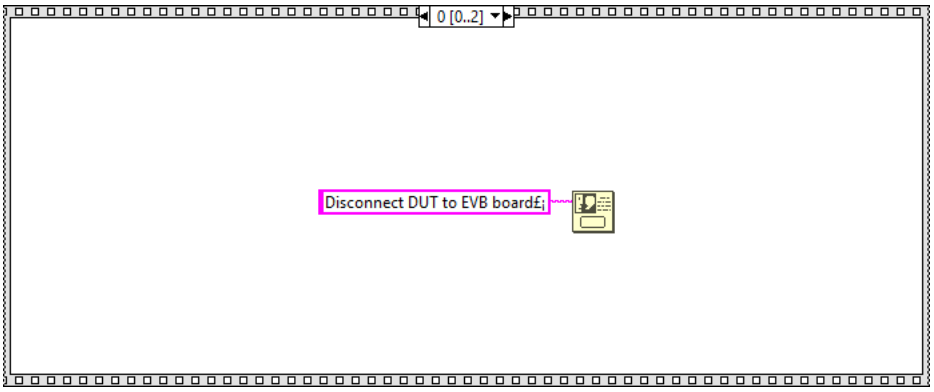

"Final test"
ATS

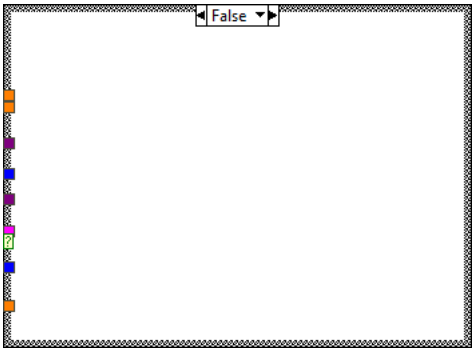

"Final test LT"
ATS LT

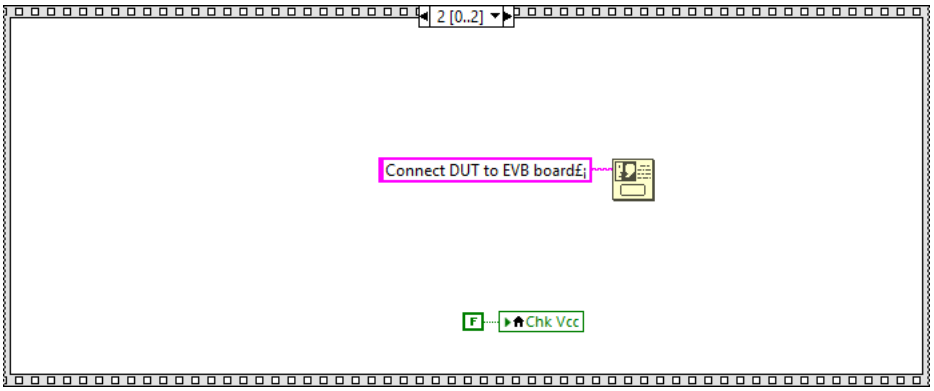

"Final test HT"
ATS HT

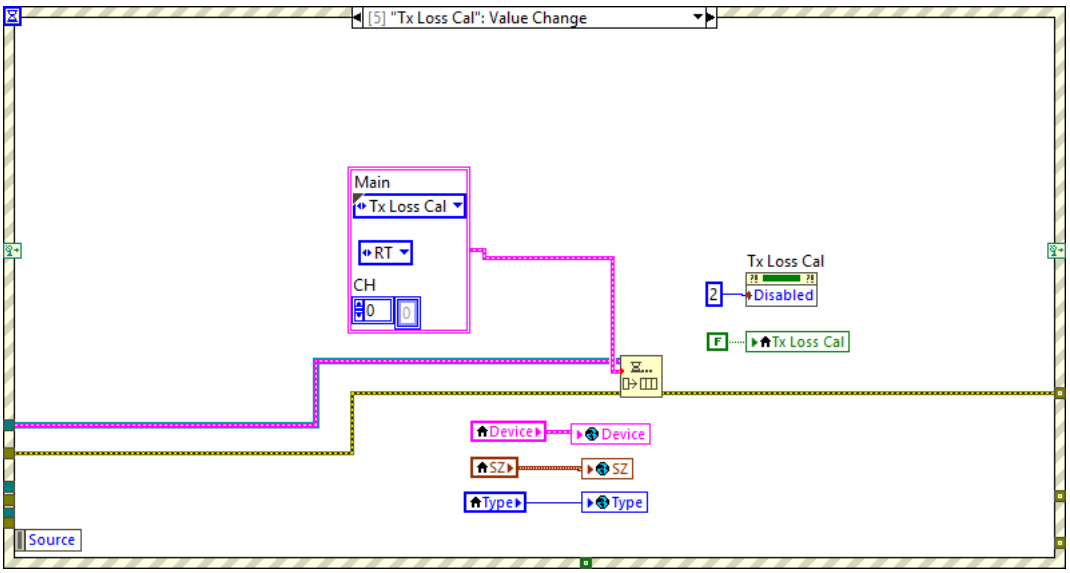

[3] "L": Value Change
Source
Type
Time
CtlRef
OldVal
NewVal
True
SN
0
Disabled

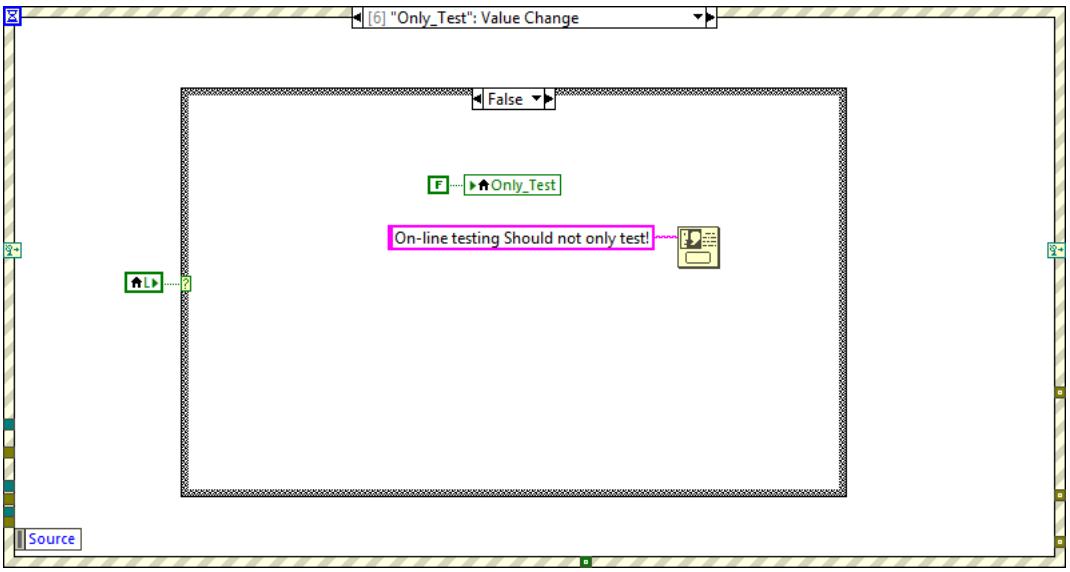

False
SN
2
Disabled

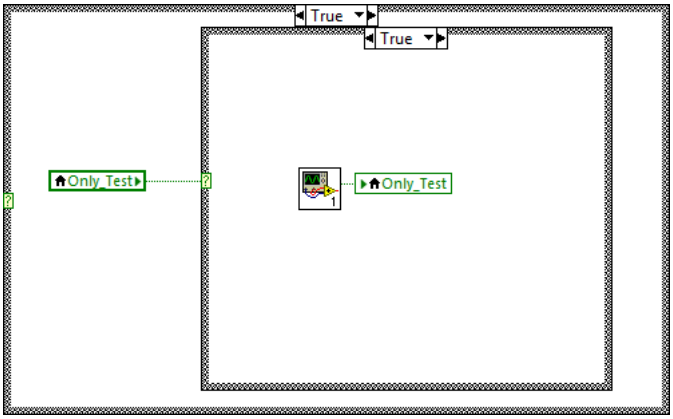

0 [0..2]
Disconnect DUT to EVB board£¡

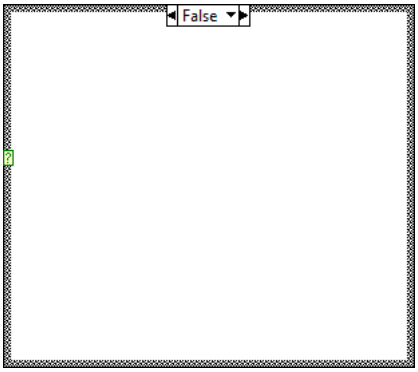

False

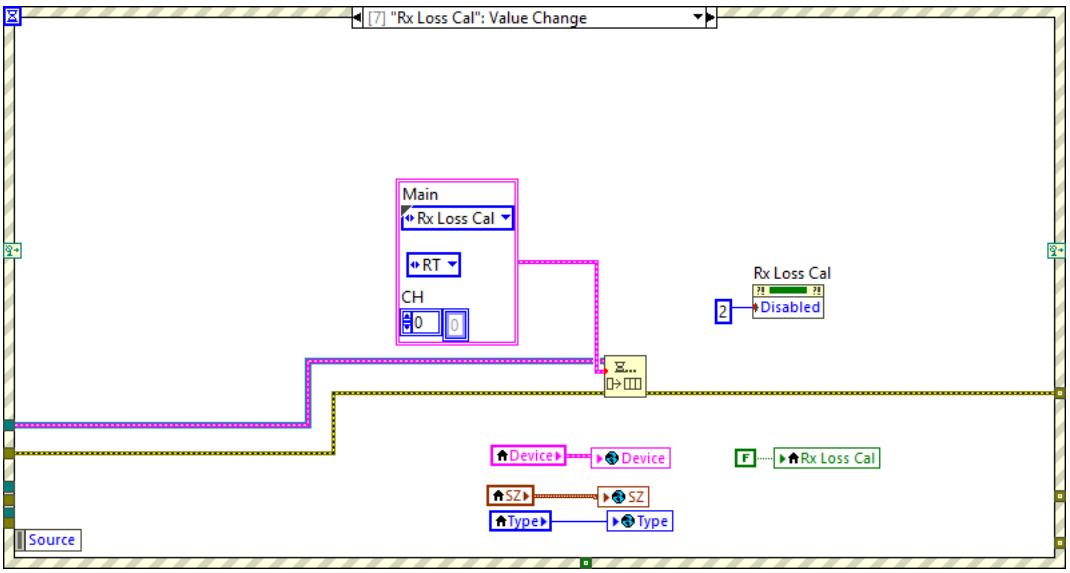

2 [0..2]
Connect DUT to EVB board£¡
F
Chk Vcc

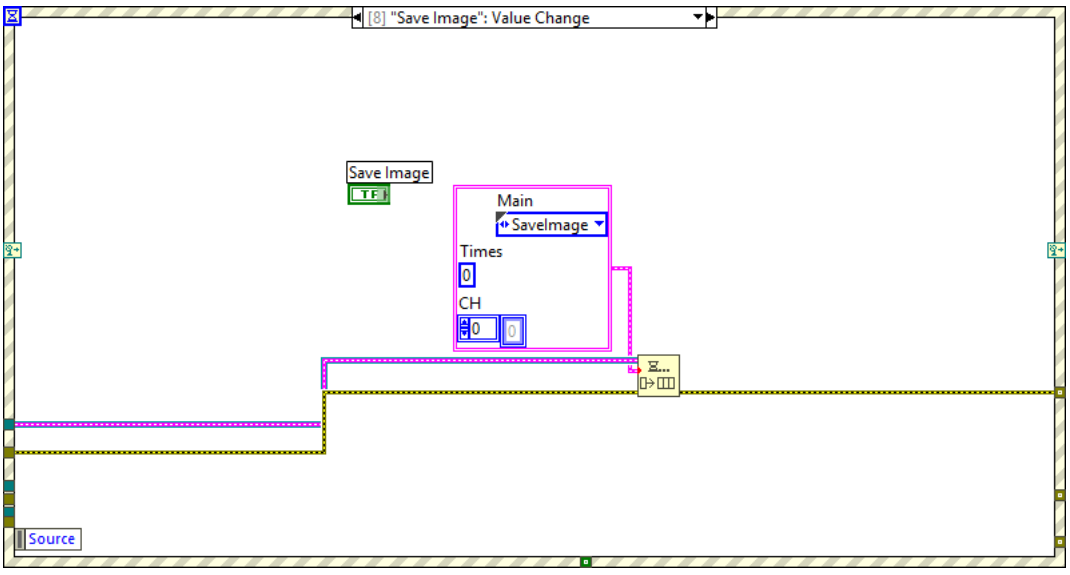

[5] "Tx Loss Cal": Value Change
Main
Tx Loss Cal
RT
CH
0
0
Tx Loss Cal
2
Disabled
F
Tx Loss Cal
Device
Device
SZ
SZ
Type
Type
Source

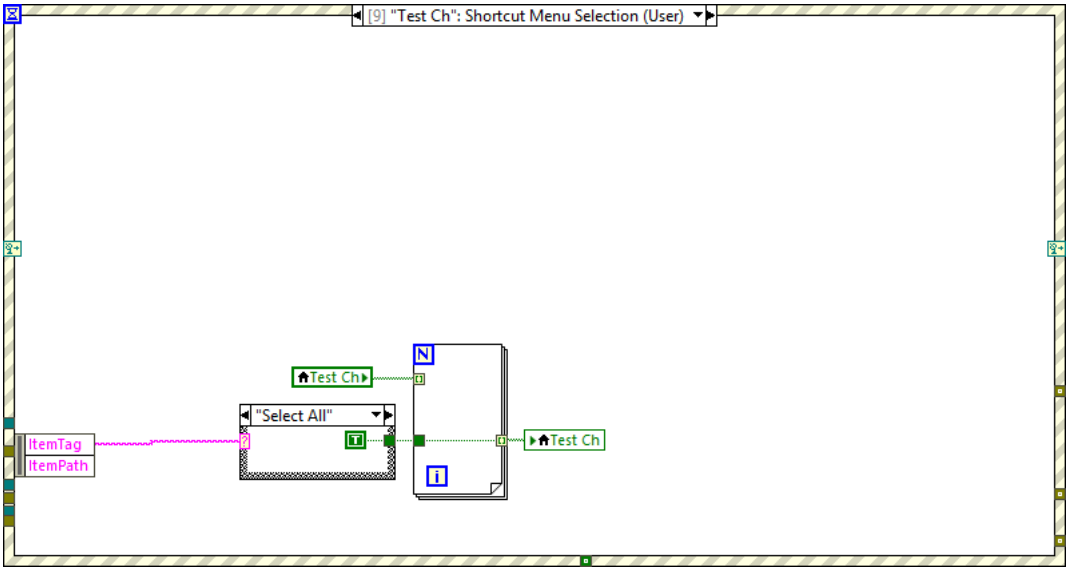

[6] "Only_Test": Value Change
False
F
Only_Test
On-line testing Should not only test!
Source



True
True
Only_Test
Only_Test

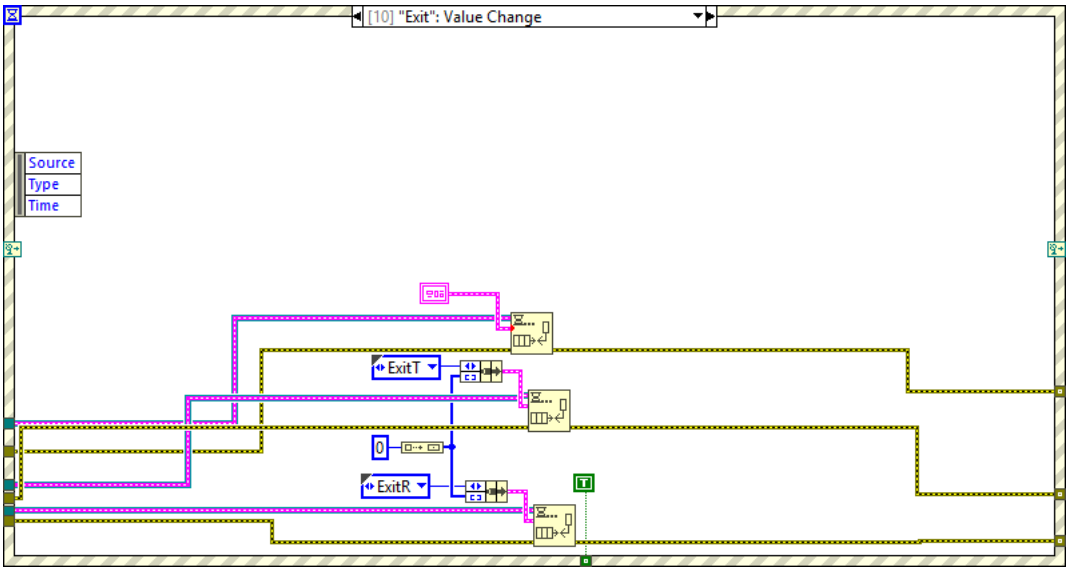

False

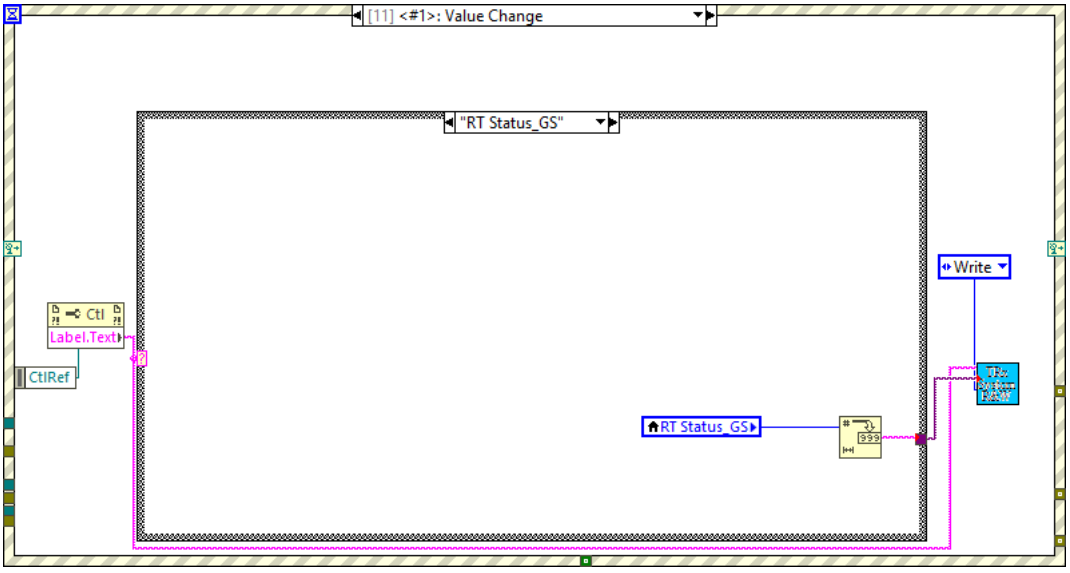

[7] "Rx Loss Cal": Value Change
Main
Rx Loss Cal
RT
CH
0
0
Rx Loss Cal
2
Disabled
Device
Device
F
Rx Loss Cal
SZ
SZ
Type
Type
Source

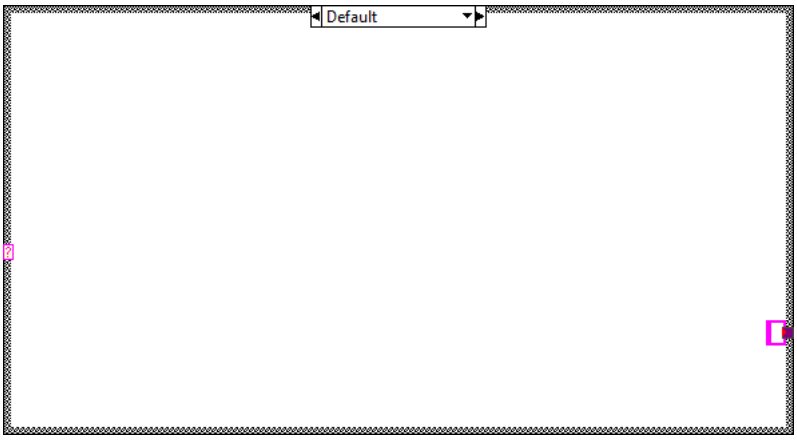

[8] "Save Image": Value Change
Save Image
TF
Main
SaveImage
Times
0
CH
0
0
Source

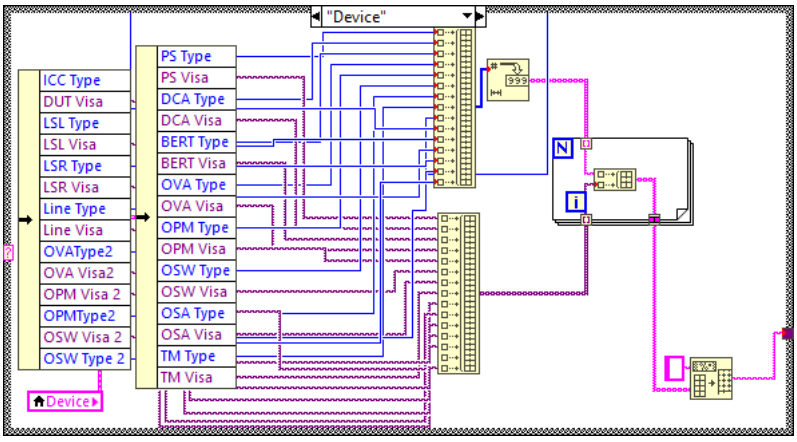

[9] "Test Ch": Shortcut Menu Selection (User)
Test Ch
"Select All"
ItemTag
ItemPath
Test Ch

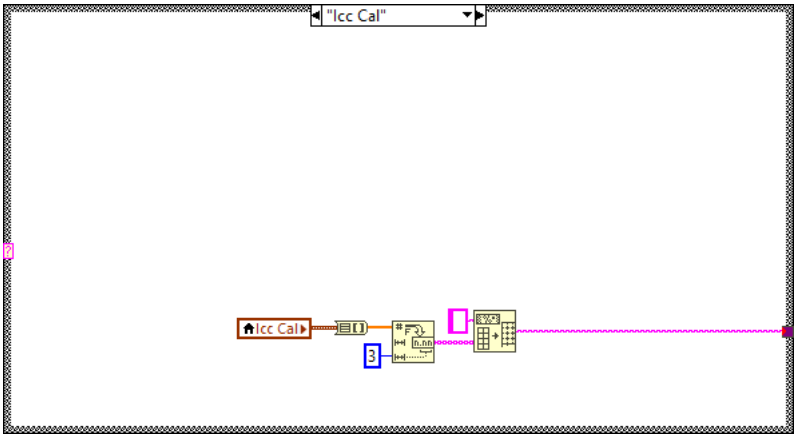

"Empty All", De
F

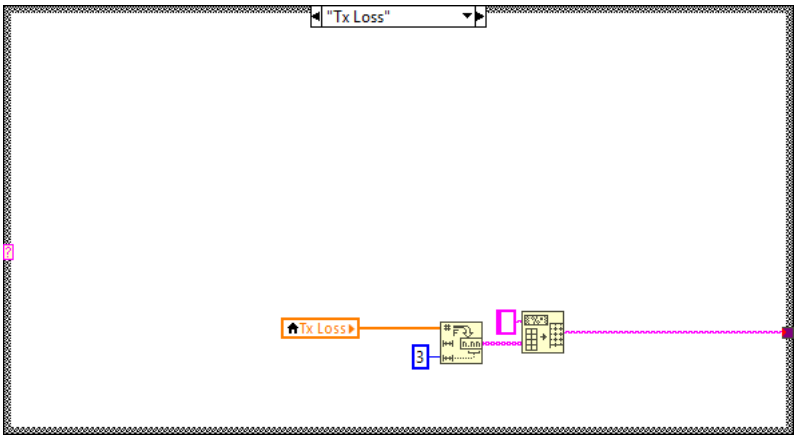

[10] "Exit": Value Change
Source
Type
Time
ExitT
0
ExitR

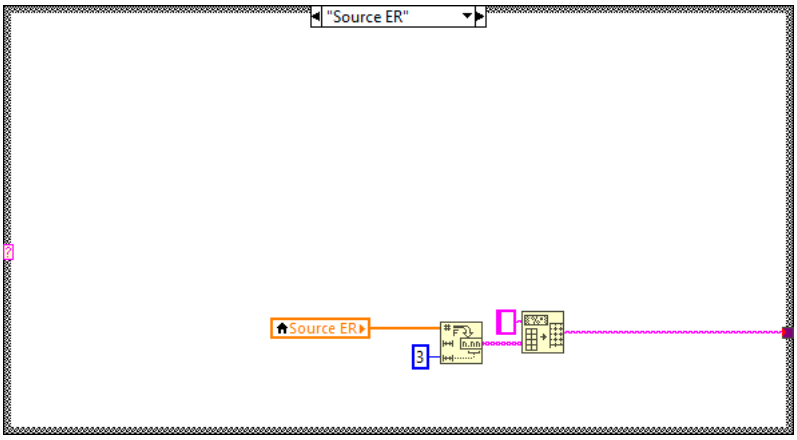

[11] <#1>: Value Change
"RT Status_GS"
Ctl
Label.Text
CtlRef
RT Status_GS
Write

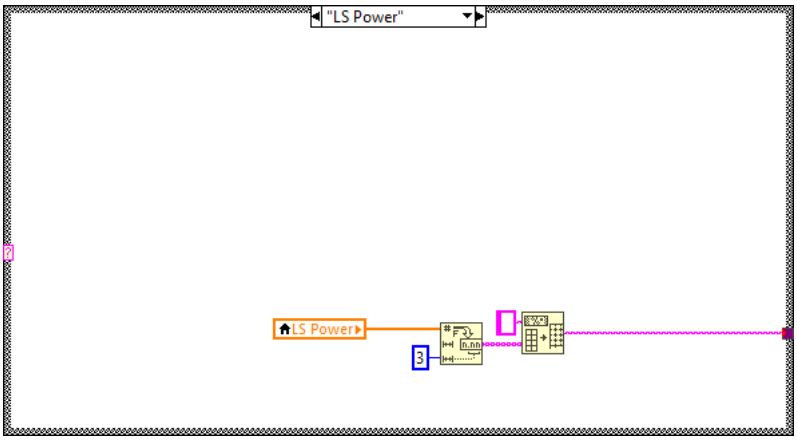

Default

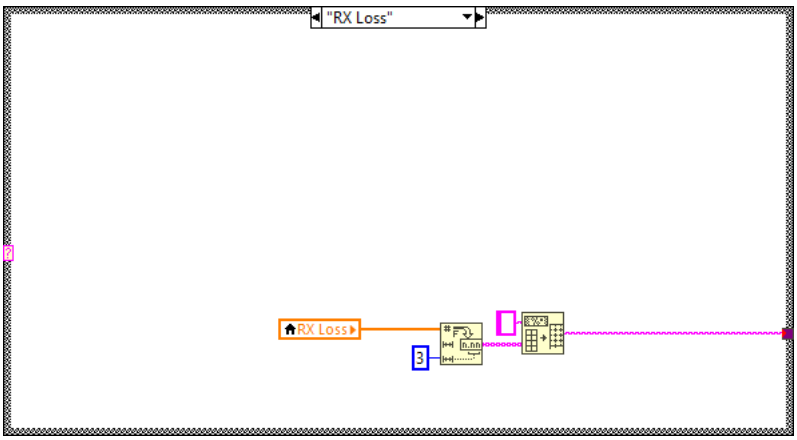

"Device"
ICC Type
DUT Visa
LSL Type
LSL Visa
LSR Type
LSR Visa
Line Type
Line Visa
OVAType2
OVA Visa2
OPM Visa 2
OPMType2
OSW Visa 2
OSW Type 2
PS Type
PS Visa
DCA Type
DCA Visa
BERT Type
BERT Visa
OVA Type
OVA Visa
OPM Type
OPM Visa
OSW Type
OSW Visa
OSA Type
OSA Visa
TM Type
TM Visa
Device
999
N
i

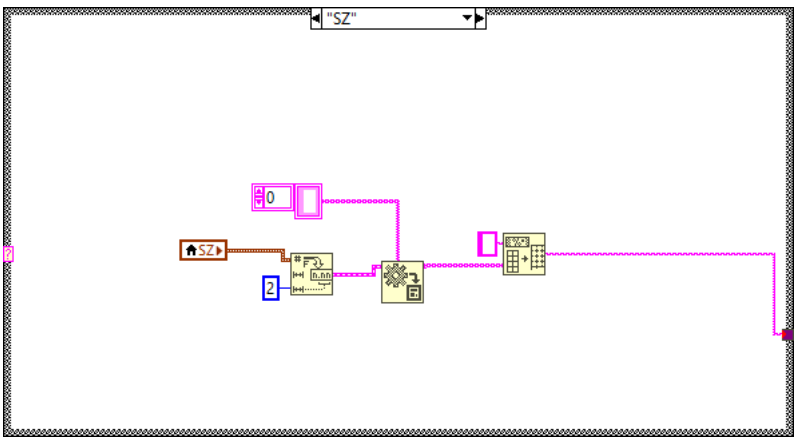

"Icc Cal"
Icc Cal
3

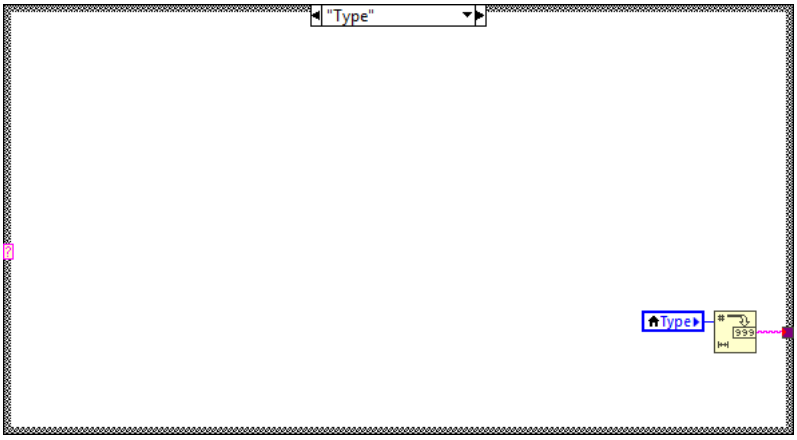

"Tx Loss"
Tx Loss
3

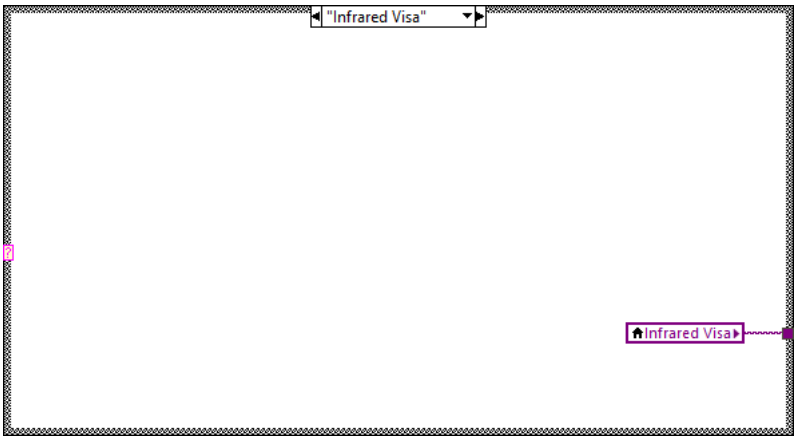

"Source ER"
Source ER
3

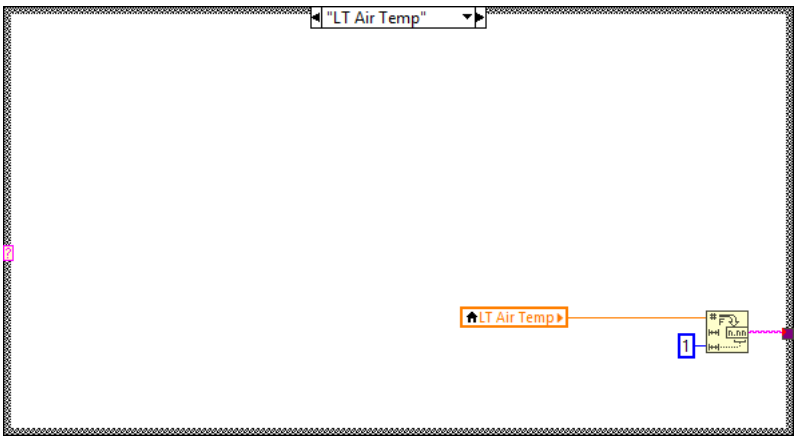

"LS Power"
LS Power
3

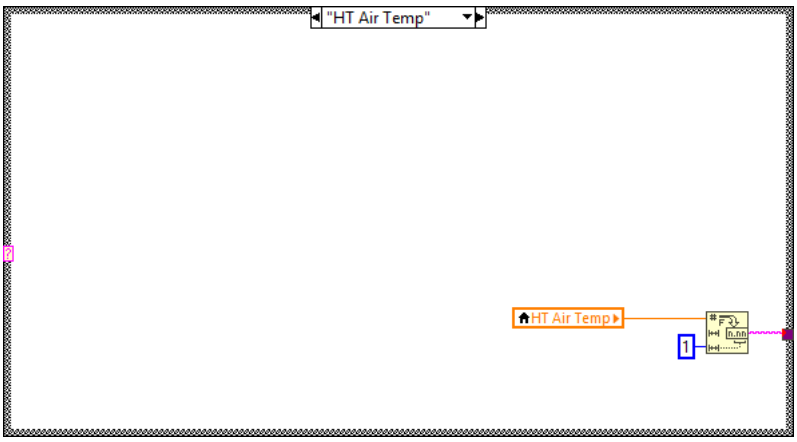

"RX Loss"
RX Loss
3

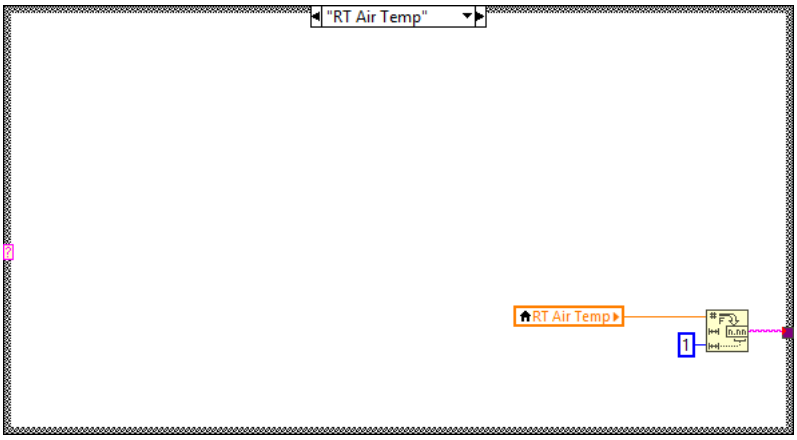

"SZ"
0
SZ
2

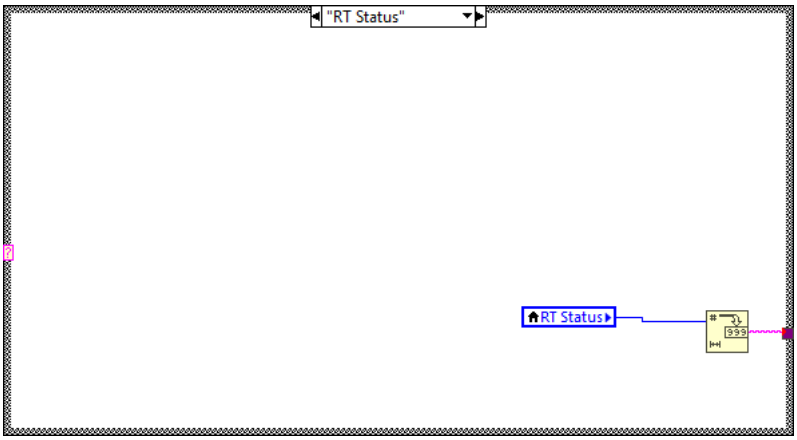

"Type"
Type

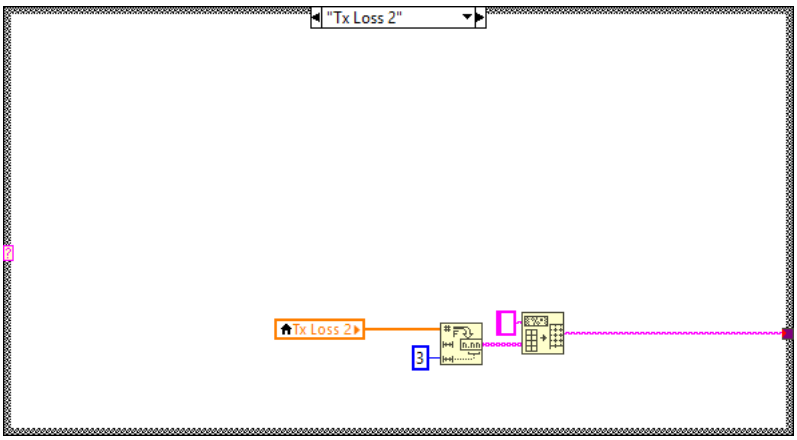

"Infrared Visa"
Infrared Visa

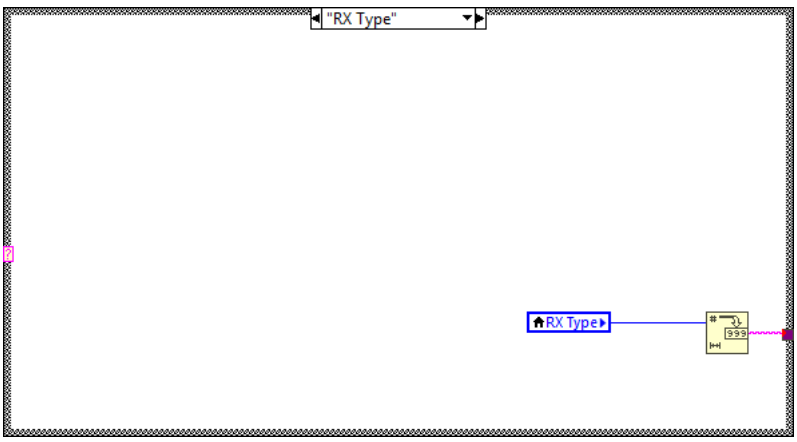

"LT Air Temp"
LT Air Temp
1

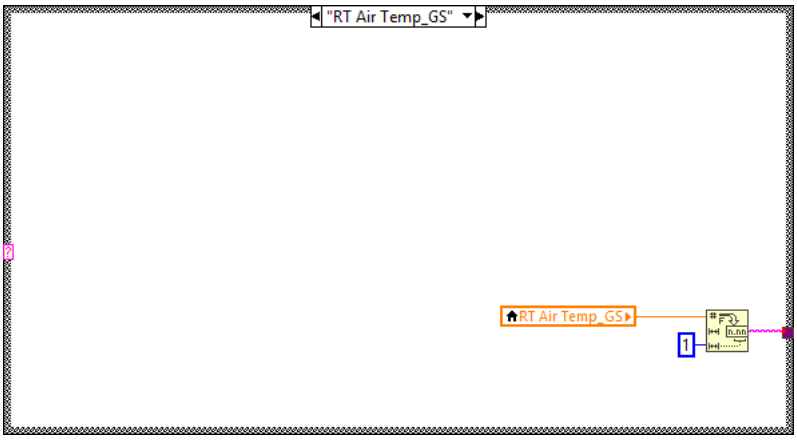

"HT Air Temp"
HT Air Temp
1

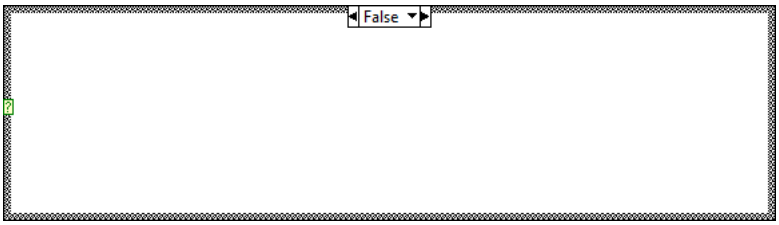

"RT Air Temp"
RT Air Temp
1


"RT Status"
RT Status



"Tx Loss 2"
Tx Loss 2
3


"RX Type"
RX Type

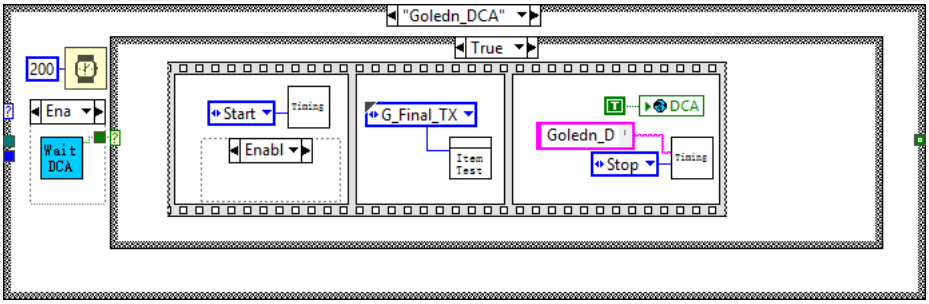

"RT Air Temp_GS"
RT Air Temp_GS
1

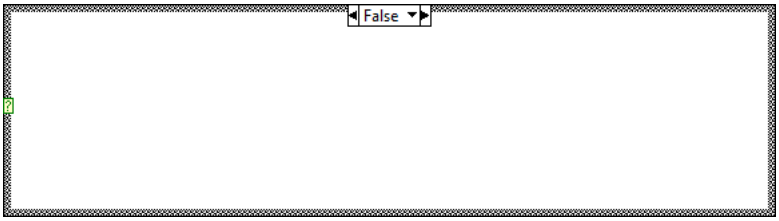

False



Enabled


True

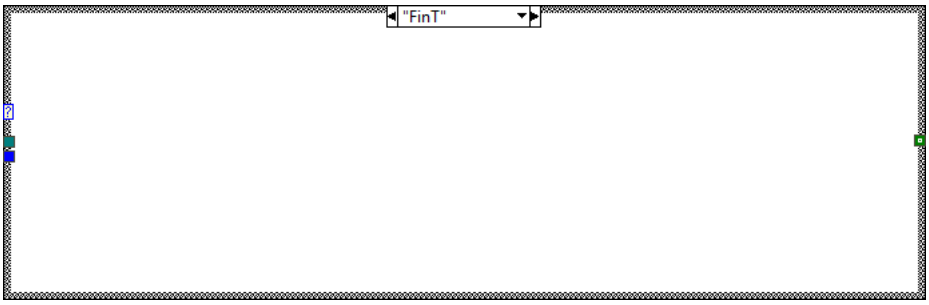

Disa
DCA

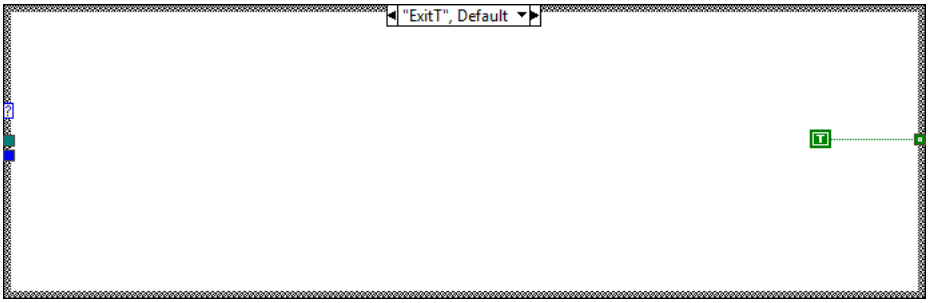

"Goledn_DCA"
True
200
Ena
Wait DCA
Start
Timing
Enabl
G_Final_TX
Item Test
DCA
Goledn_D
Stop
Timing

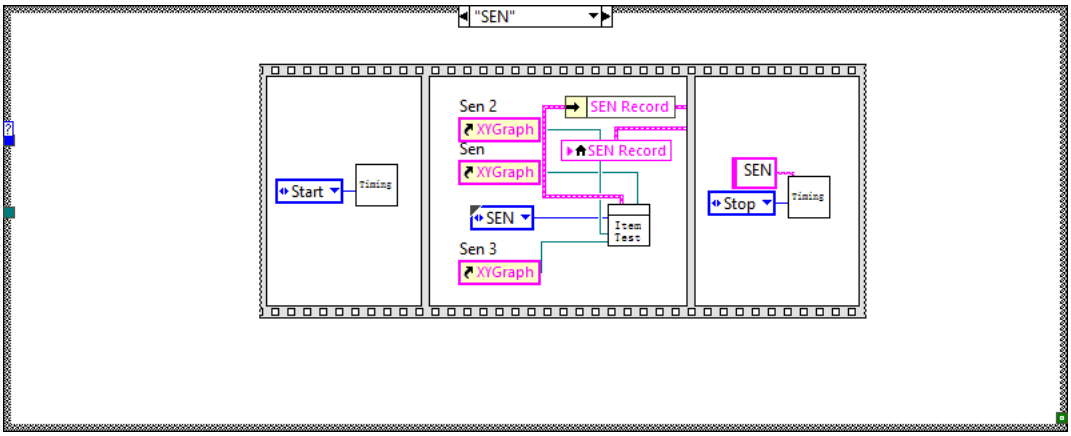

False

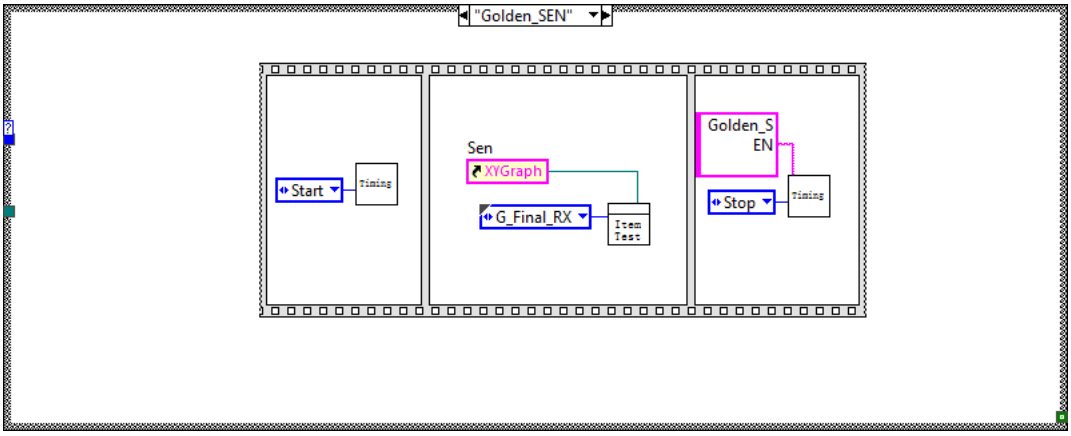

Disabled
DCA

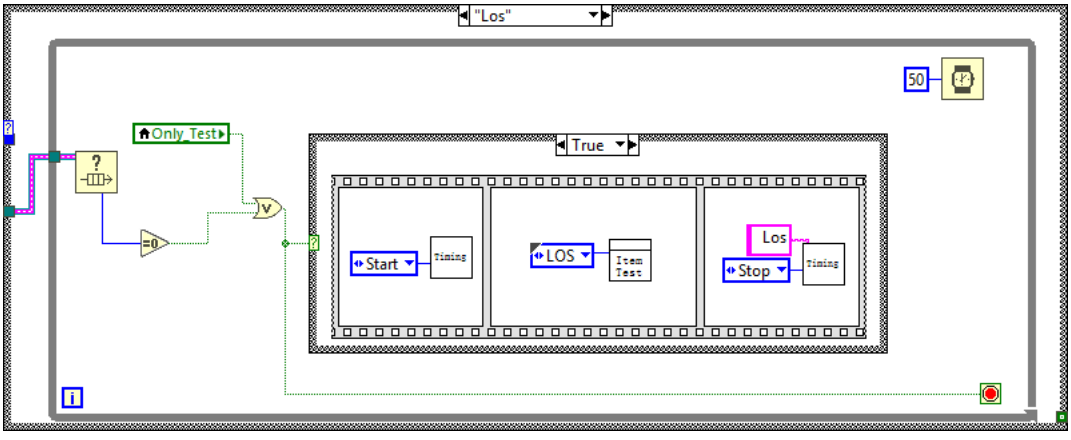

Disa
DCA

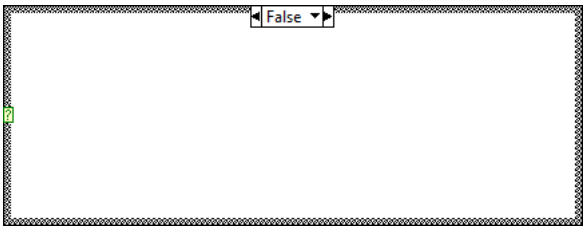

"FinT"

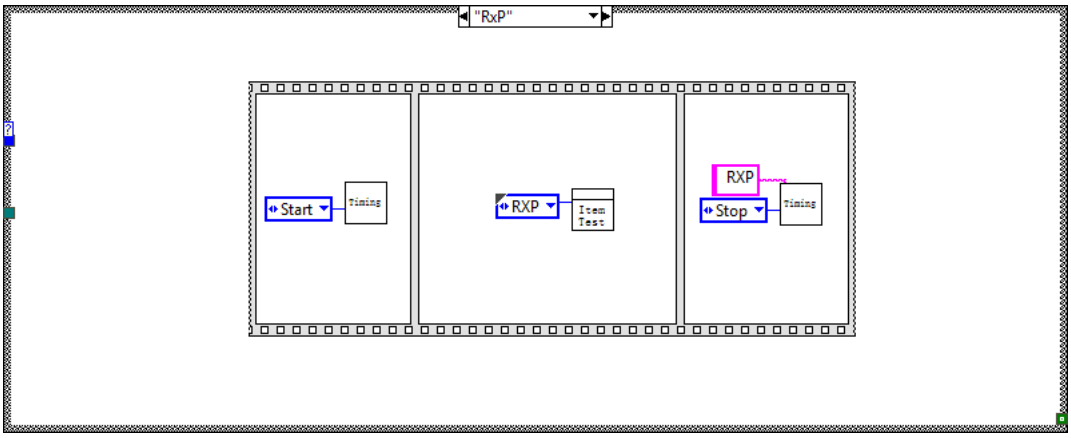

"ExitT", Default
T

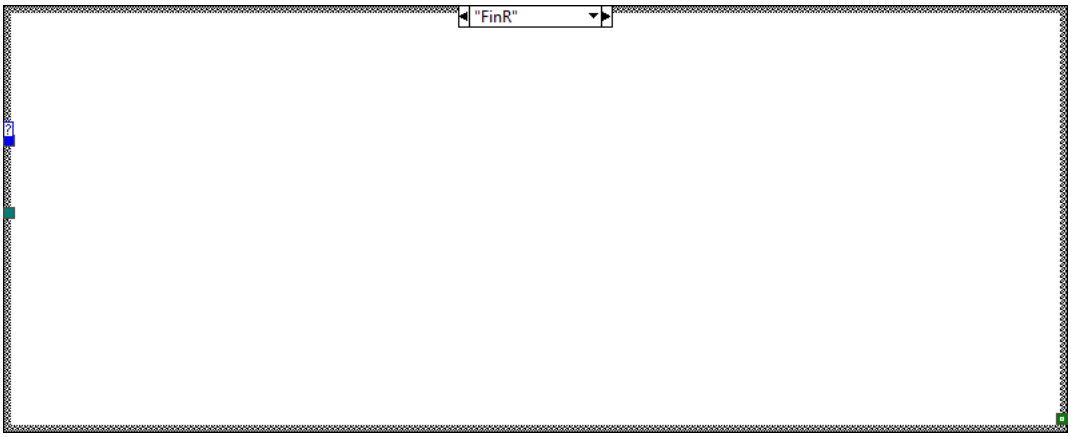

"SEN"
Start
Timing
Sen 2
XYGraph
SEN Record
Sen
XYGraph
SEN Record
SEN
Item Test
Sen 3
XYGraph
SEN
Stop
Timing

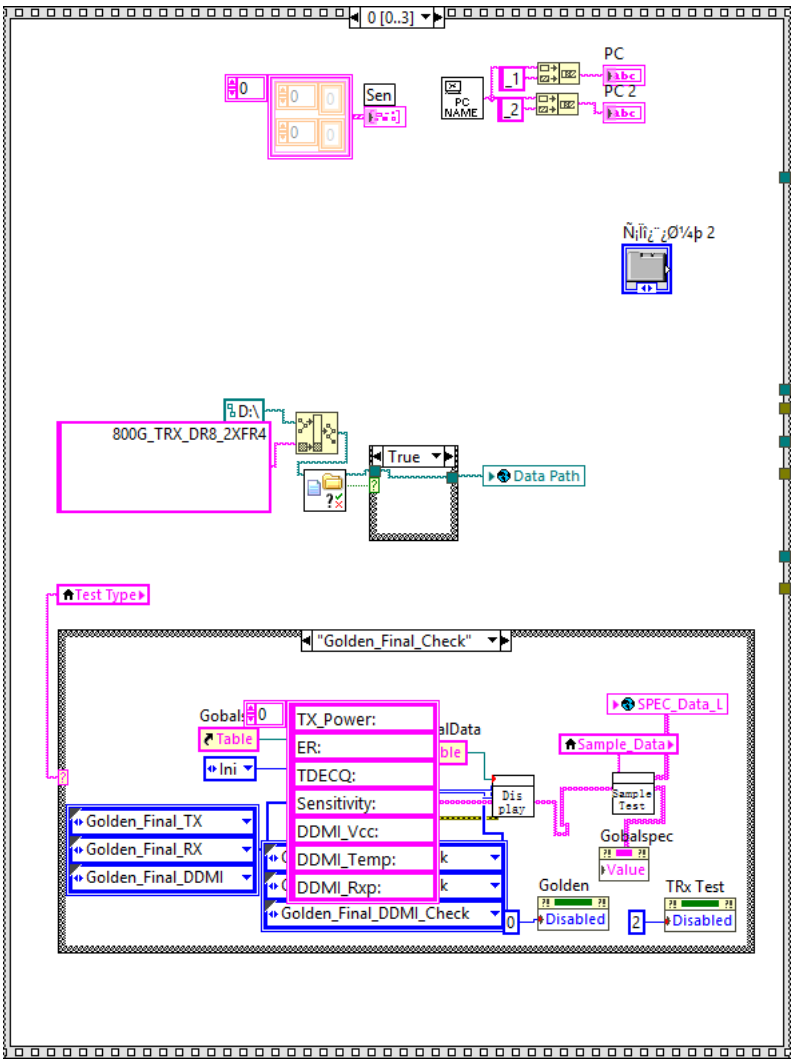

"Golden_SEN"
Start
Timing
Sen
XYGraph
G_Final_RX
Item Test
Golden_SEN
Stop
Timing



"Los"
50
Only_Test
?
=0
V
True
Start
Timing
LOS
Item Test
Los
Stop
Timing
i

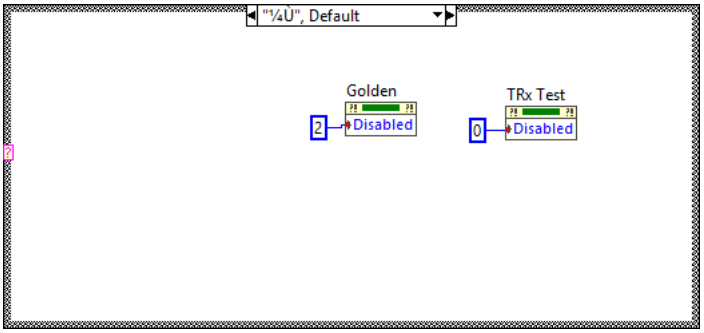

False

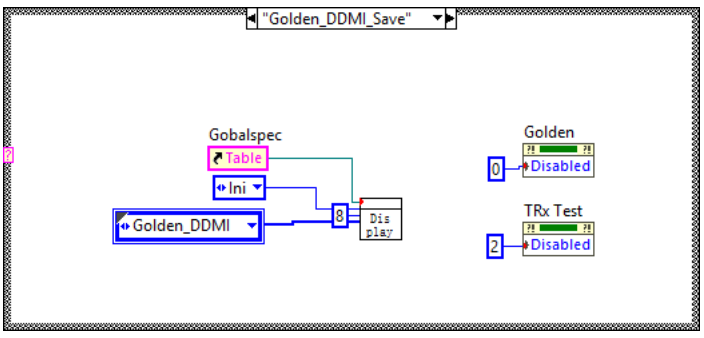

"RxP"
Start
Timing
RXP
Item Test
RXP
Stop
Timing

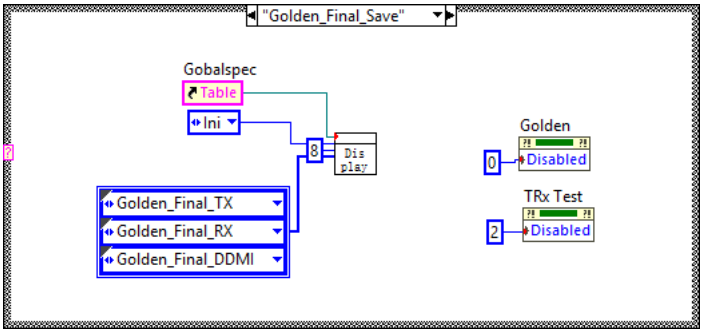

"FinR"

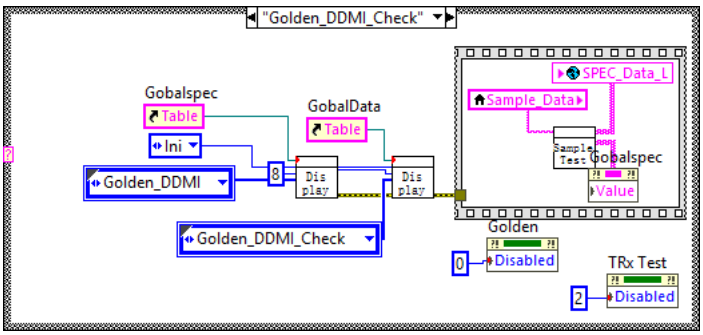

0 [0..3]
PC
PC 2
Sen
PC NAME
Ñ¡Ïï¿¨¿Ø¼þ 2
D:\
800G_TRX_DR8_2XFR4
True
Data Path
Test Type
"Golden_Final_Check"
Gobalspec
Table
Ini
TX_Power:
ER:
TDECQ:
Sensitivity:
DDMI_Vcc:
DDMI_Temp:
DDMI_Rxp:
Golden_Final_TX
Golden_Final_RX
Golden_Final_DDMI
Golden_Final_DDMI_Check
Dis play
SPEC_Data_L
Sample_Data
Sample Test
Gobalspec
Value
Golden
Disabled
TRx Test
Disabled

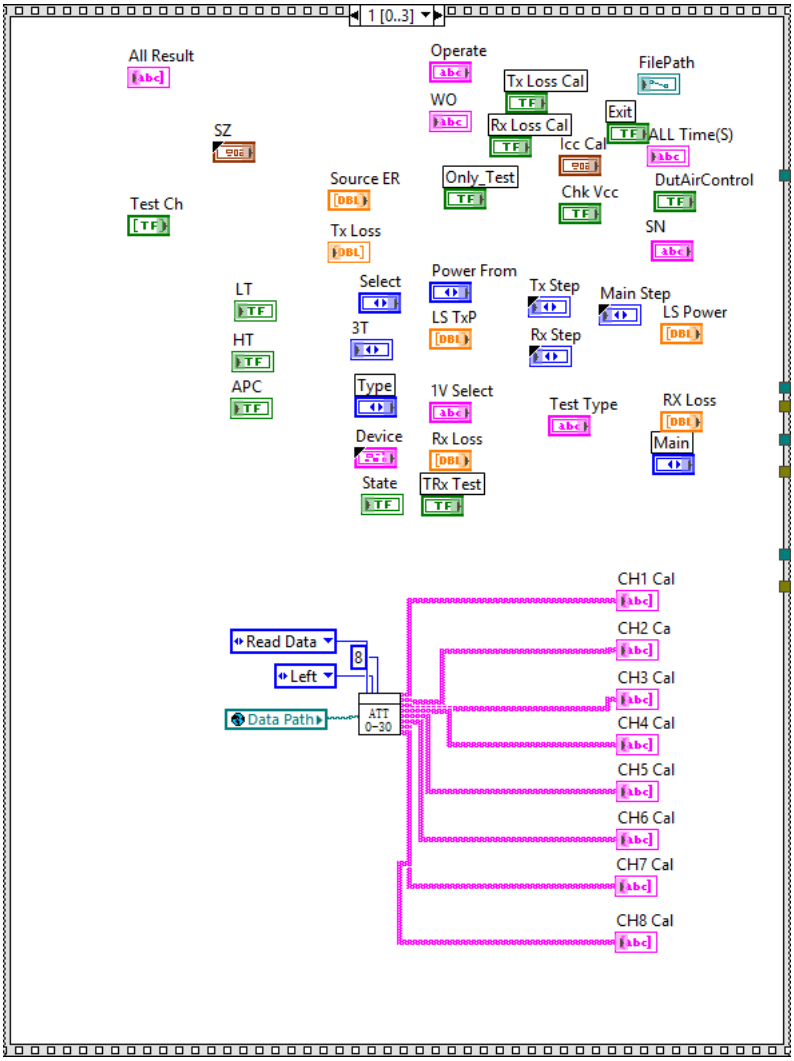

False

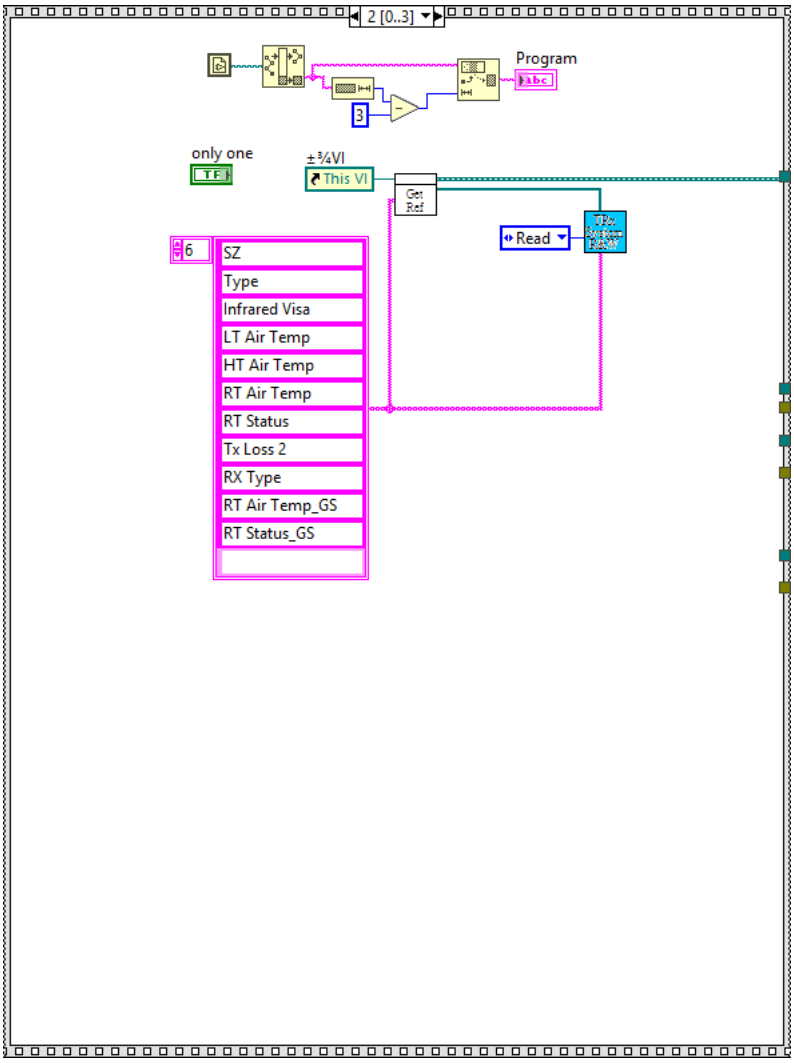

"¼Ù", Default
Golden
Disabled
TRx Test
Disabled

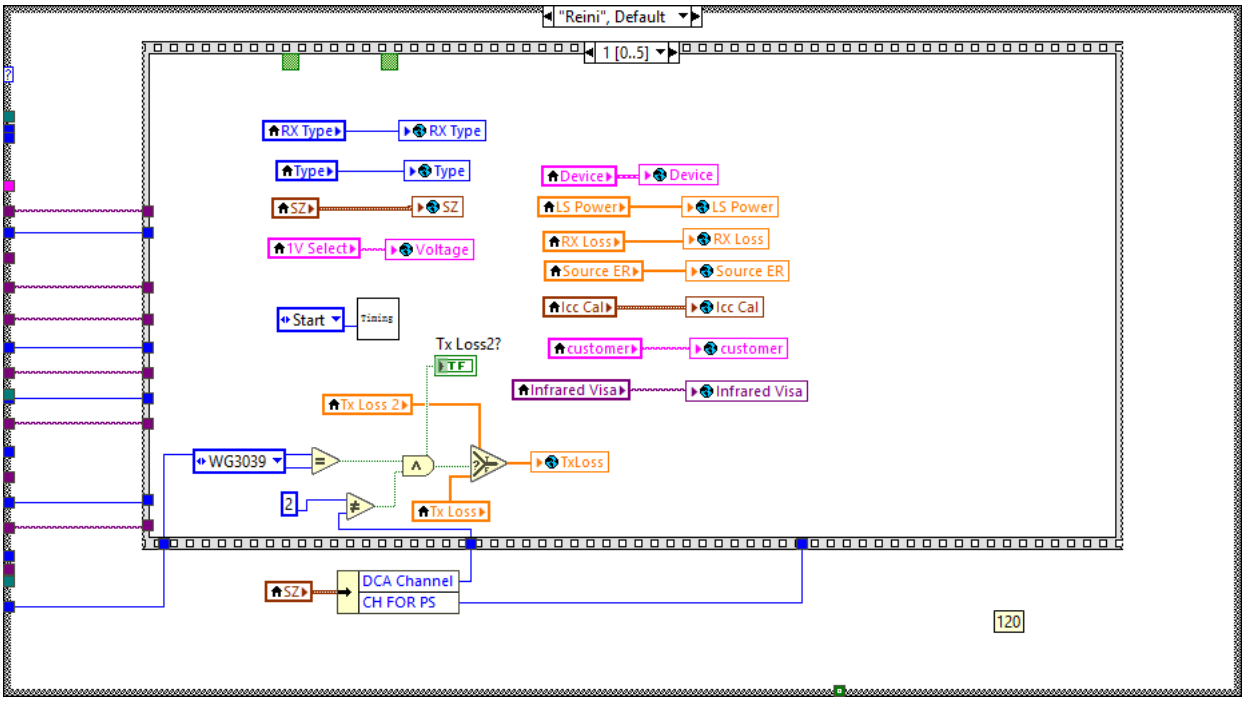

"Golden_DDMI_Save"
Gobalspec
Table
Ini
Golden_DDMI
Dis play
Golden
Disabled
TRx Test
Disabled

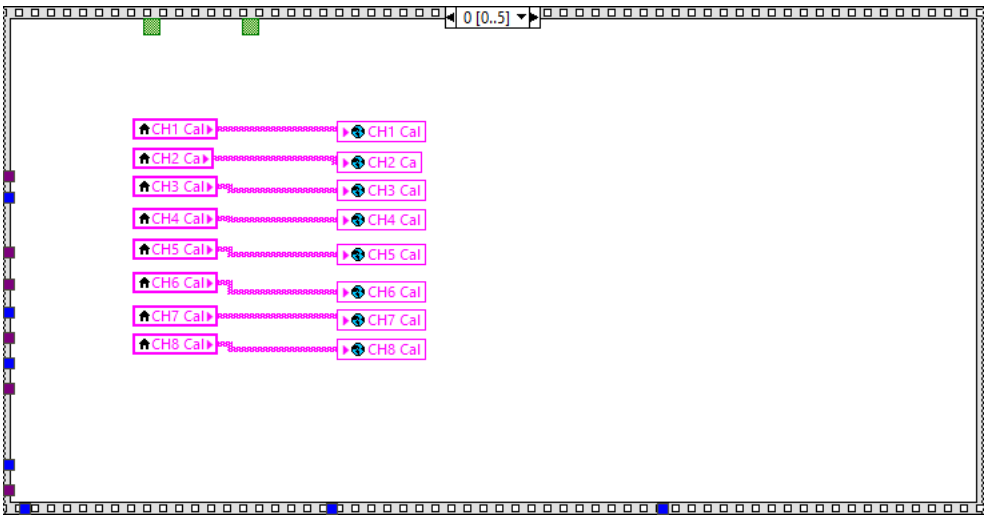

"Golden_Final_Save"
Gobalspec
Table
Ini
Dis play
Golden_Final_TX
Golden_Final_RX
Golden_Final_DDMI
Golden
Disabled
TRx Test
Disabled

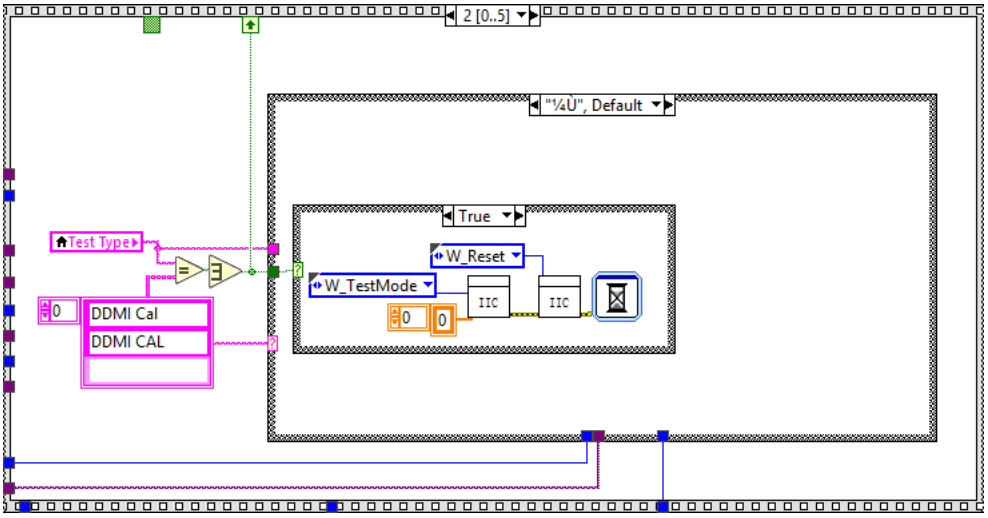

"Golden_DDMI_Check"
Gobalspec
Table
Ini
Golden_DDMI
GobalData
Table
Dis play
Golden_DDMI_Check
SPEC_Data_L
Sample_Data
Sample Test
Gobalspec
Value
Golden
Disabled
TRx Test
Disabled

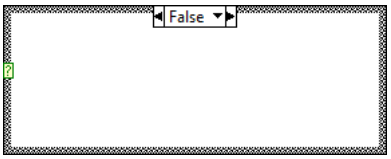

1 [0..3]
All Result
SZ
Test Ch
Source ER
Tx Loss
LT
HT
APC
Select
3T
Type
Device
State
Operate
WO
Tx Loss Cal
Rx Loss Cal
Only_Test
Power From
LS TxP
1V Select
Rx Loss
TRx Test
Exit
Icc Cal
Chk Vcc
Tx Step
Rx Step
Test Type
FilePath
ALL Time(S)
DutAirControl
SN
Main Step
LS Power
RX Loss
Main
Read Data
Left
Data Path
ATT 0-30
CH1 Cal
CH2 Ca
CH3 Cal
CH4 Cal
CH5 Cal
CH6 Cal
CH7 Cal
CH8 Cal

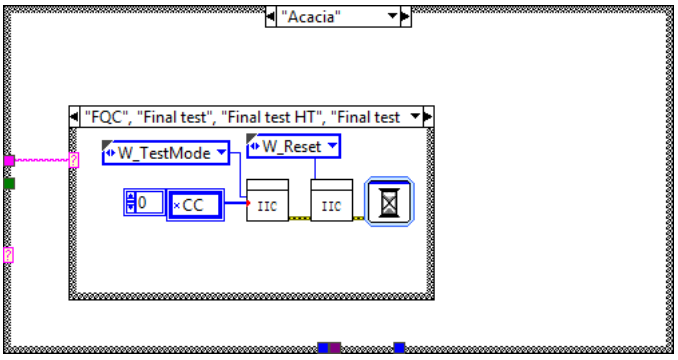

2 [0..3]
Program
abc
3
only one
TF
±¾VI
This VI
Get Ref
Read
6
SZ
Type
Infrared Visa
LT Air Temp
HT Air Temp
RT Air Temp
RT Status
Tx Loss 2
RX Type
RT Air Temp_GS
RT Status_GS

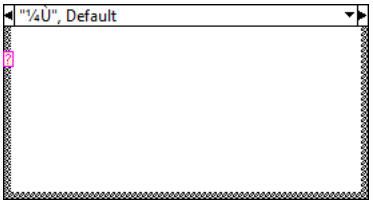

"Reini", Default
1 [0..5]
RX Type
Type
SZ
1V Select
Voltage
Start
Timing
Tx Loss2?
TF
Tx Loss 2
WG3039
2
Tx Loss
TxLoss
Device
LS Power
RX Loss
Source ER
Icc Cal
customer
Infrared Visa
DCA Channel
CH FOR PS
120

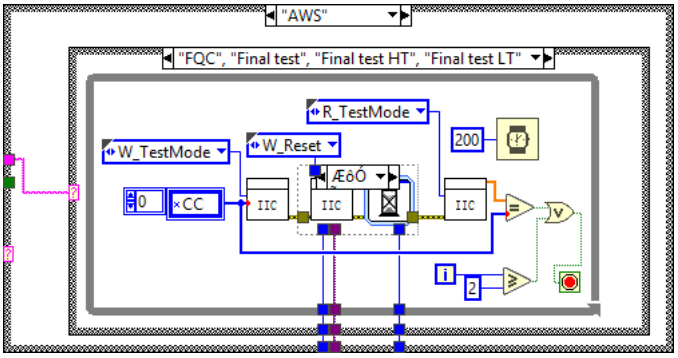

0 [0..5]
CH1 Cal
CH1 Cal
CH2 Ca
CH2 Ca
CH3 Cal
CH3 Cal
CH4 Cal
CH4 Cal
CH5 Cal
CH5 Cal
CH6 Cal
CH6 Cal
CH7 Cal
CH7 Cal
CH8 Cal
CH8 Cal

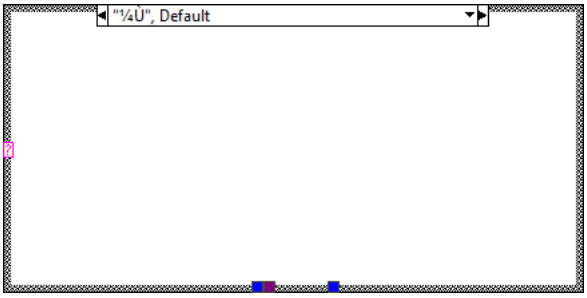

2 [0..5]
"¼Ù", Default
True
Test Type
W_Reset
W_TestMode
IIC
IIC
0
0
0
DDMI Cal
DDMI CAL



False

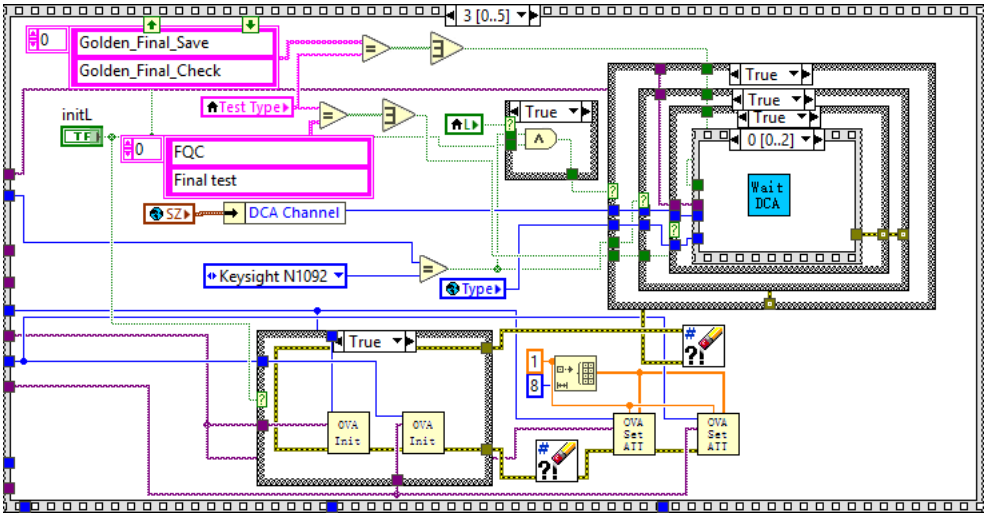

"Acacia"
"FQC", "Final test", "Final test HT", "Final test
W_TestMode
W_Reset
0
×CC
IIC
IIC



"¼Ù", Default



"AWS"
"FQC", "Final test", "Final test HT", "Final test LT"
R_TestMode
W_TestMode
W_Reset
200
0
CC
IIC
IIC
IIC
i
2



"¼Ù", Default



Disabled



3 [0..5]
0
Golden_Final_Save
Golden_Final_Check
initL
TF
Test Type
0
FQC
Final test
SZ
DCA Channel
Keysight N1092
Type
True
True
True
True
0 [0..2]
Wait DCA
True
OVA Init
OVA Init
OVA Set ATT
OVA Set ATT
1
8



False



False

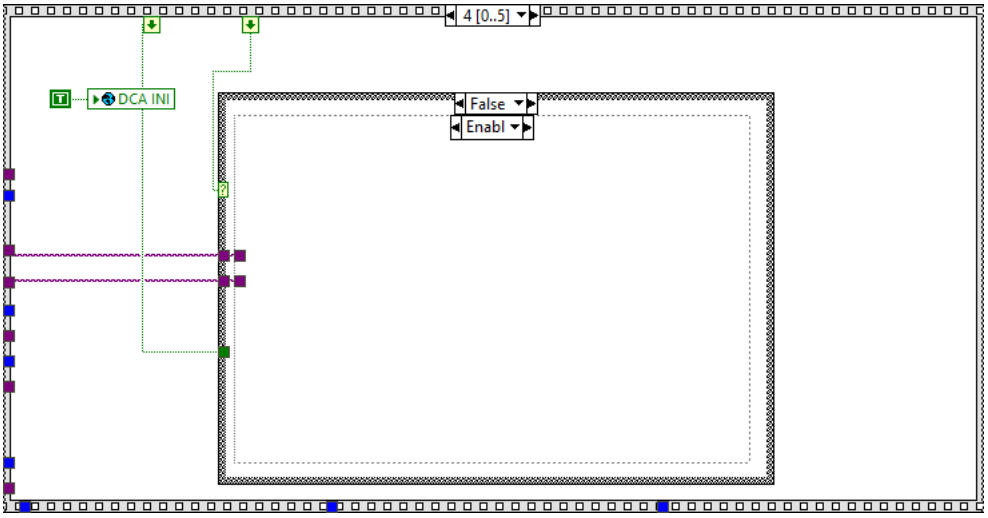

False

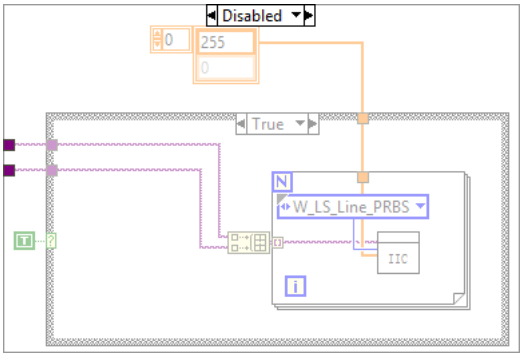

1 [0..2]
X1092A
FAM4
Inis

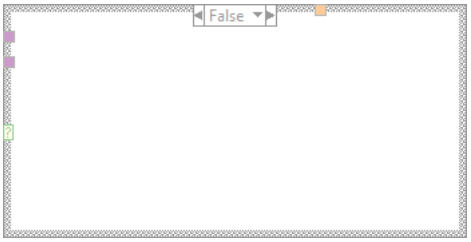

2 [0..2]
DCA

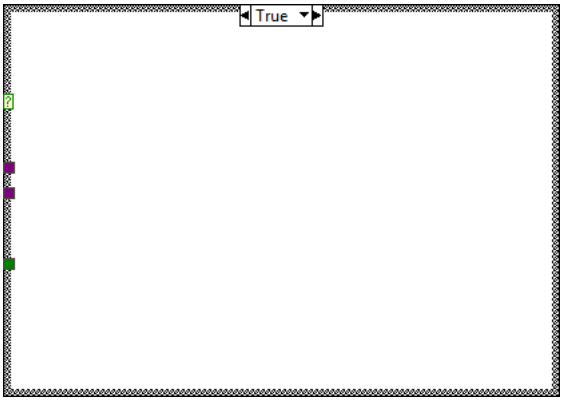

False

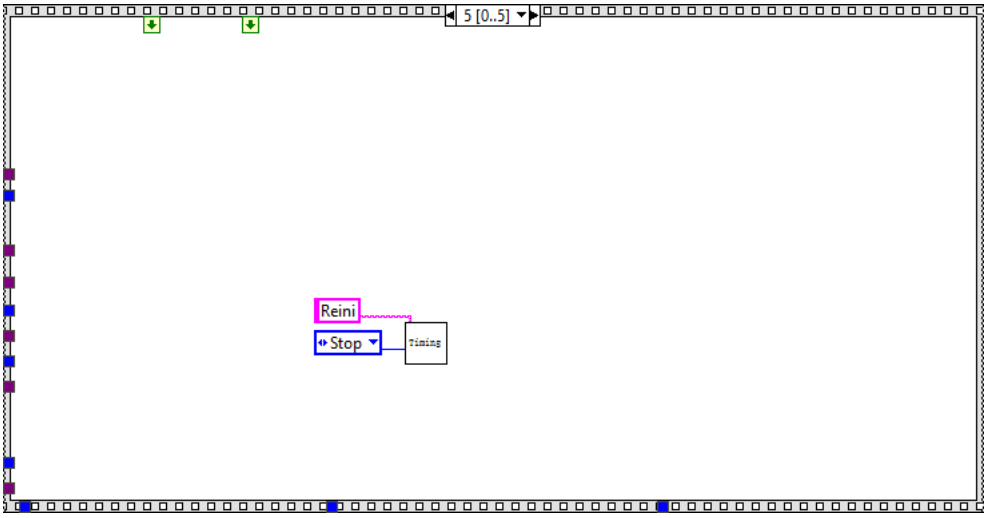

False

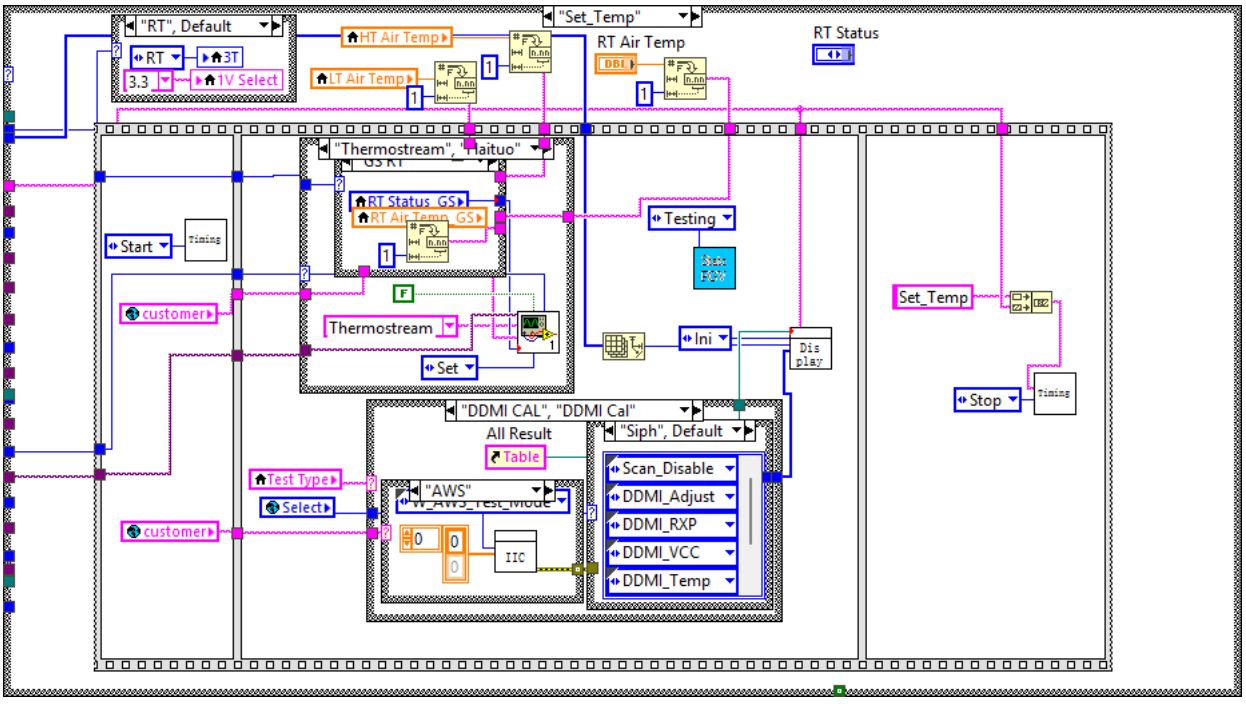

4 [0..5]
DCA INI
False
Enabl



Disabled
0
255
0
True
N
W_LS_Line_PRBS
IIC
i



False



True


5 [0..5]
Reini
Stop
Timing



"RT", Default
RT
3T
3.3
1V Select
HT Air Temp
LT Air Temp
"Set_Temp"
RT Air Temp
RT Status
"Thermostream", "Haituo"
RT Status_GS
RT Air Temp_GS
Testing
Start
Timing
customer
Thermostream
Set
Ini
Dis play
Set_Temp
Stop
"DDMI CAL", "DDMI Cal"
All Result
Table
"Siph", Default
Scan_Disable
DDMI_Adjust
DDMI_RXP
DDMI_VCC
DDMI_Temp
Test Type
Select
"AWS"
IIC



"Not Used", Default

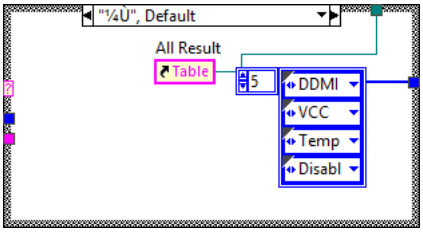

RT , Default
Enabl
RT Status



Disabled
22



Disabled
15

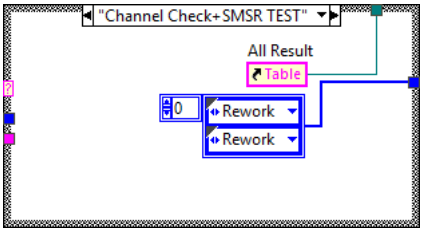

HT , AT3 HT
HT
72.5

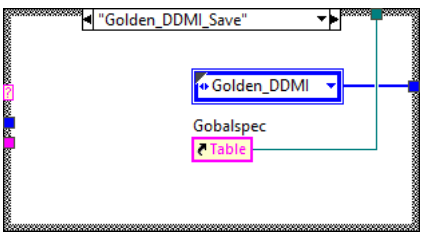

LT , AT3 LT
LT
-2.5

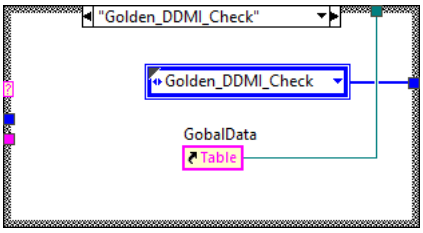

"¼Ù", Default
All Result
Table
5
DDMI
VCC
Temp
Disabl

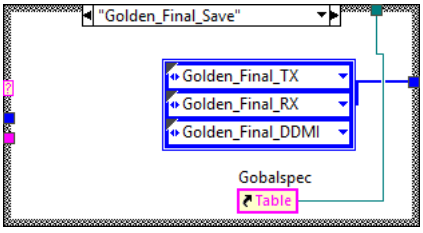

"EML"
DDMI_Adjust_TX
DDMI_RXP
DDMI_VCC
DDMI_Temp

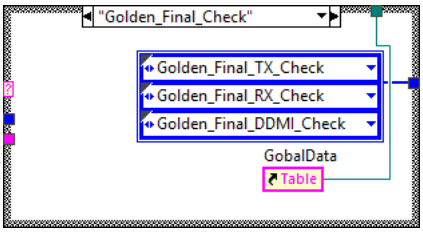

"¼Ù", Default



"Channel Check+SMSR TEST"
All Result
Table
0
Rework
Rework



"Golden_DDMI_Save"
Golden_DDMI
Gobalspec
Table



"Golden_DDMI_Check"
Golden_DDMI_Check
GobalData
Table

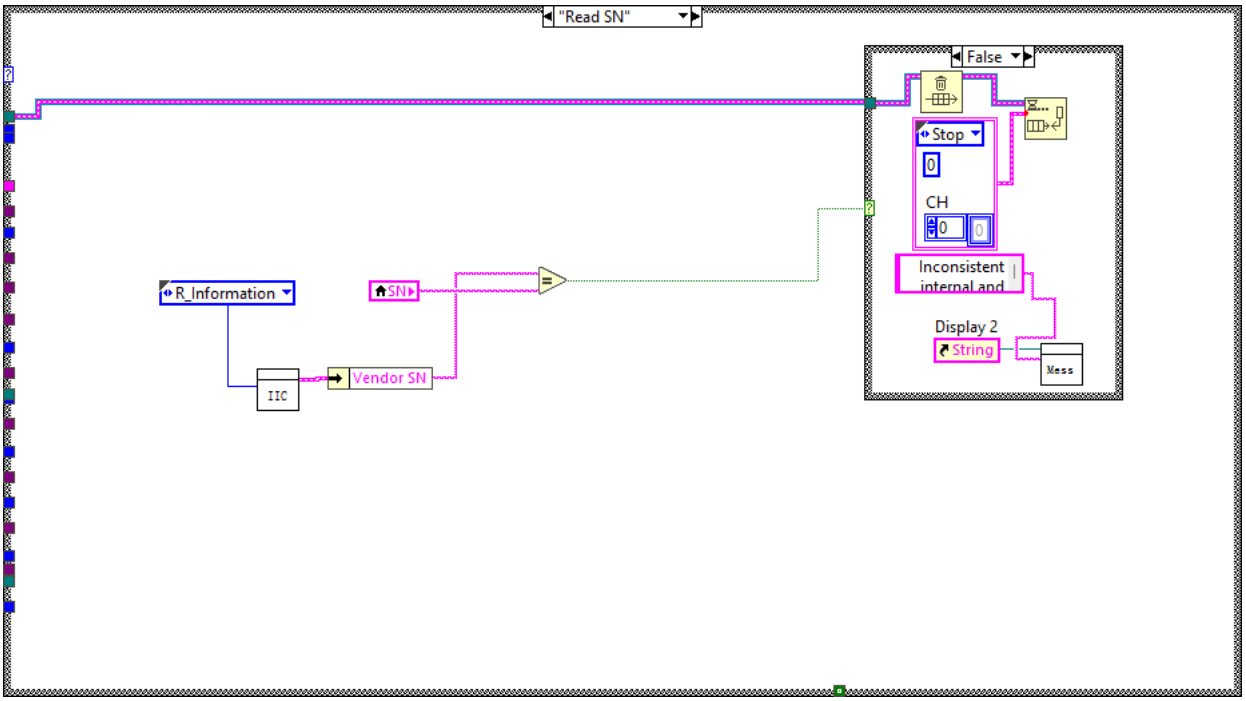

"Golden_Final_Save"
Golden_Final_TX
Golden_Final_RX
Golden_Final_DDMI
Gobalspec
Table

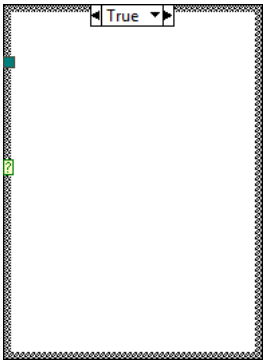

"Golden_Final_Check"
Golden_Final_TX_Check
Golden_Final_RX_Check
Golden_Final_DDMI_Check
GobalData
Table

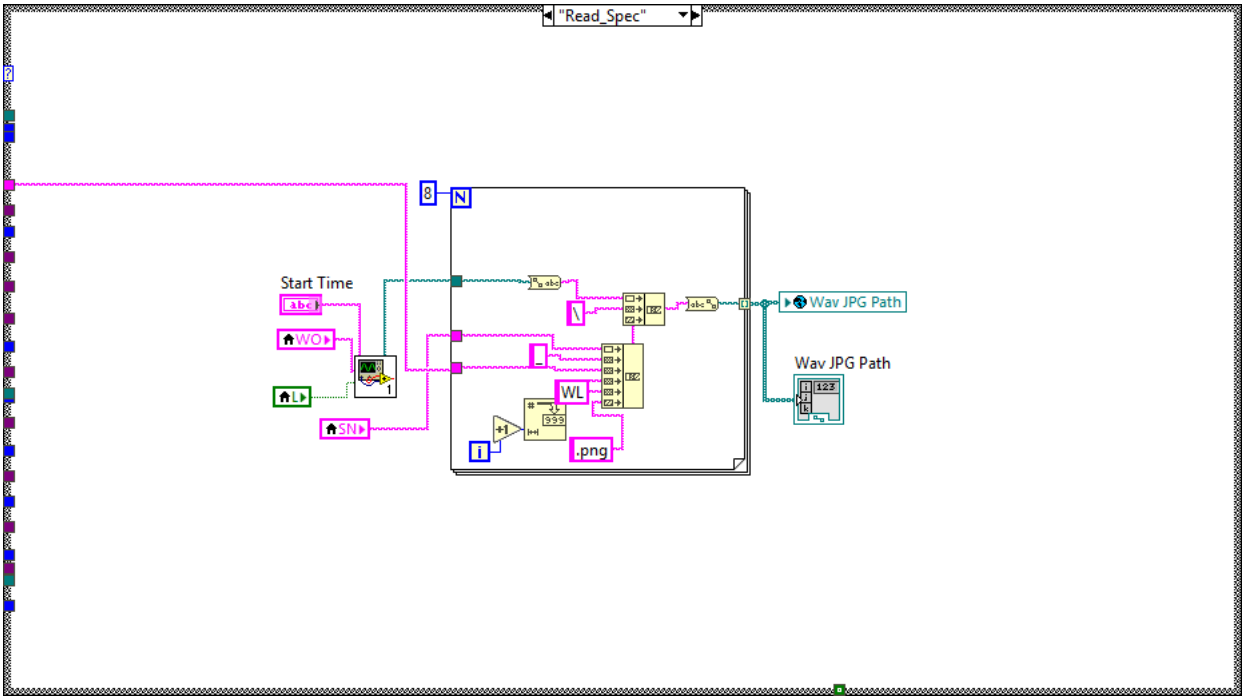

"HT", "ATS HT"
HT
3T
3.3
1V Select

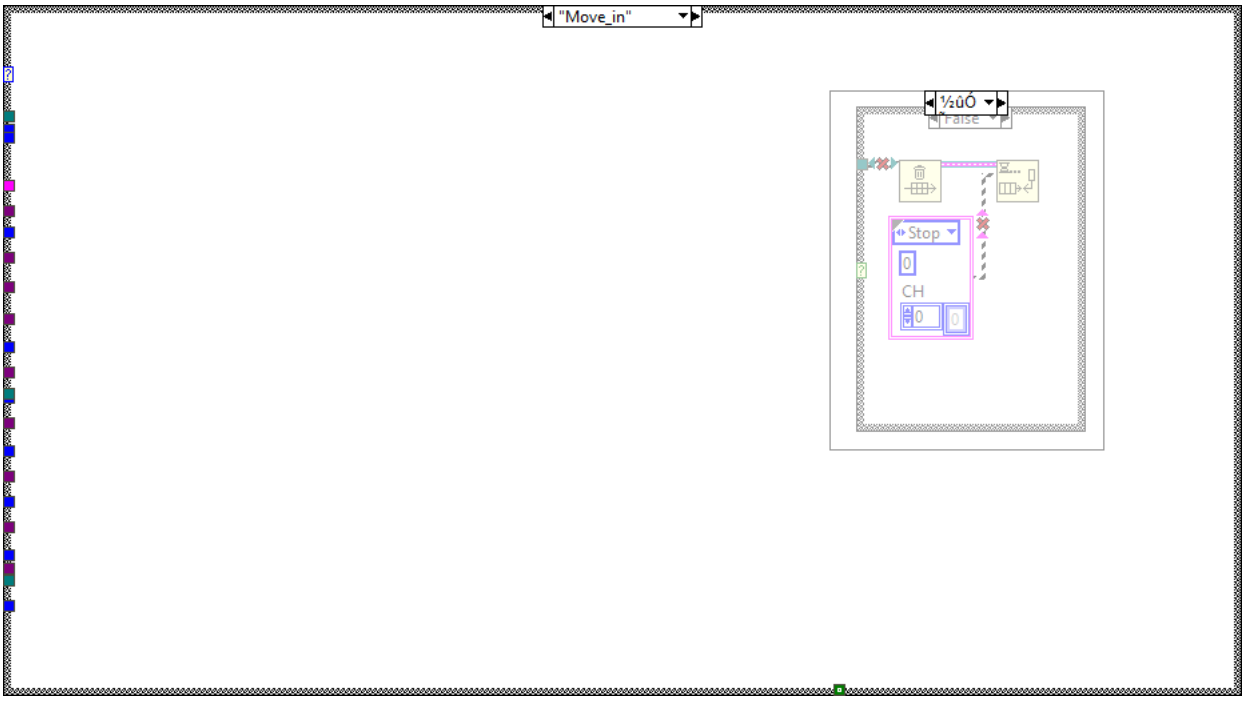

"LT", "ATS LT"
LT
3T
3.3
1V Select



True

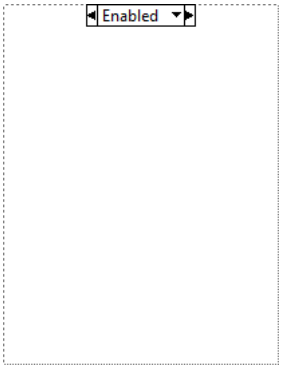

"Read SN"
False
Stop
0
CH
0
0
Inconsistent internal and
Display 2
String
Mess
R_Information
SN
IIC
Vendor SN

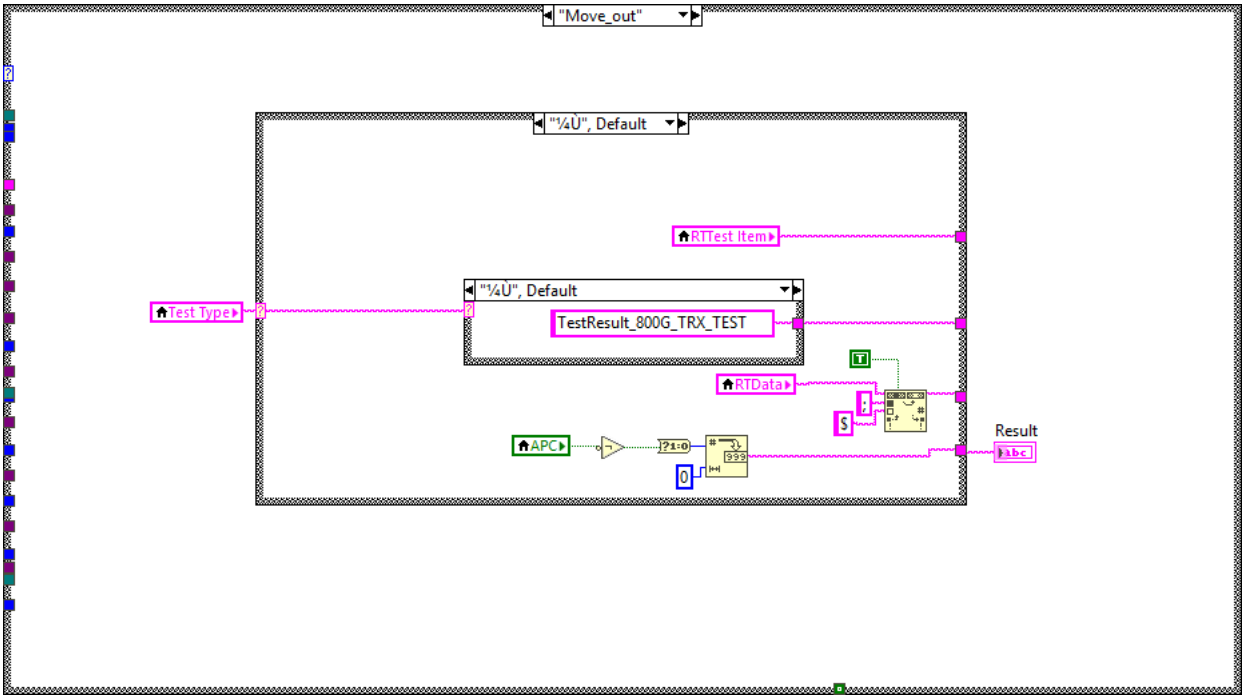

True



"Read_Spec"
Start Time
WO
L
SN
1
8
N
\
_
WL
000
+1
i
.png
Wav JPG Path
Wav JPG Path

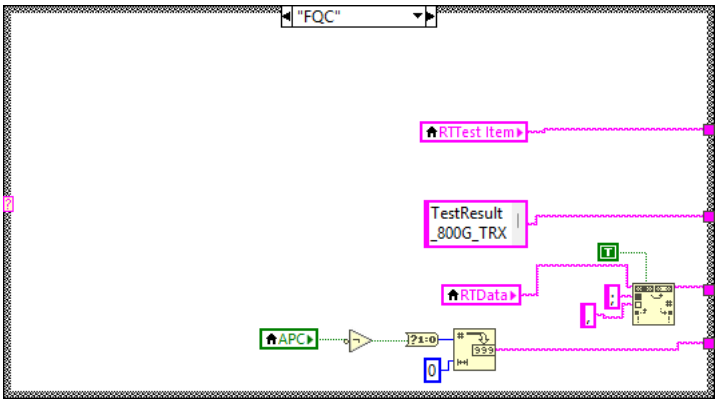

"Move_in"
½ûÓ
False
Stop
0
CH
0
0

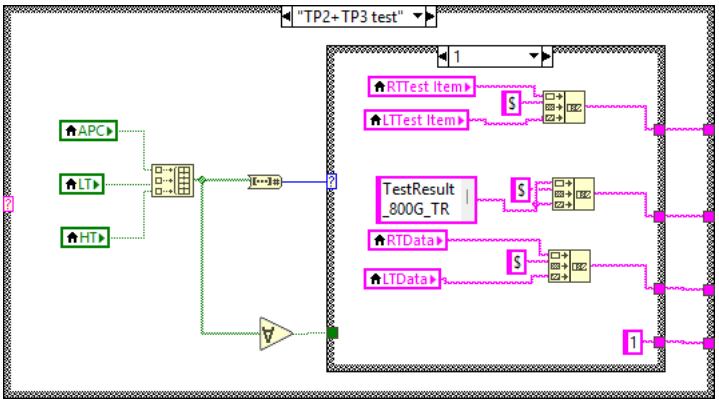

True



Enabled



"Move_out"
"¼Ù", Default
RTTest Item
Test Type
"¼Ù", Default
TestResult_800G_TRX_TEST
RTData
APC
Result

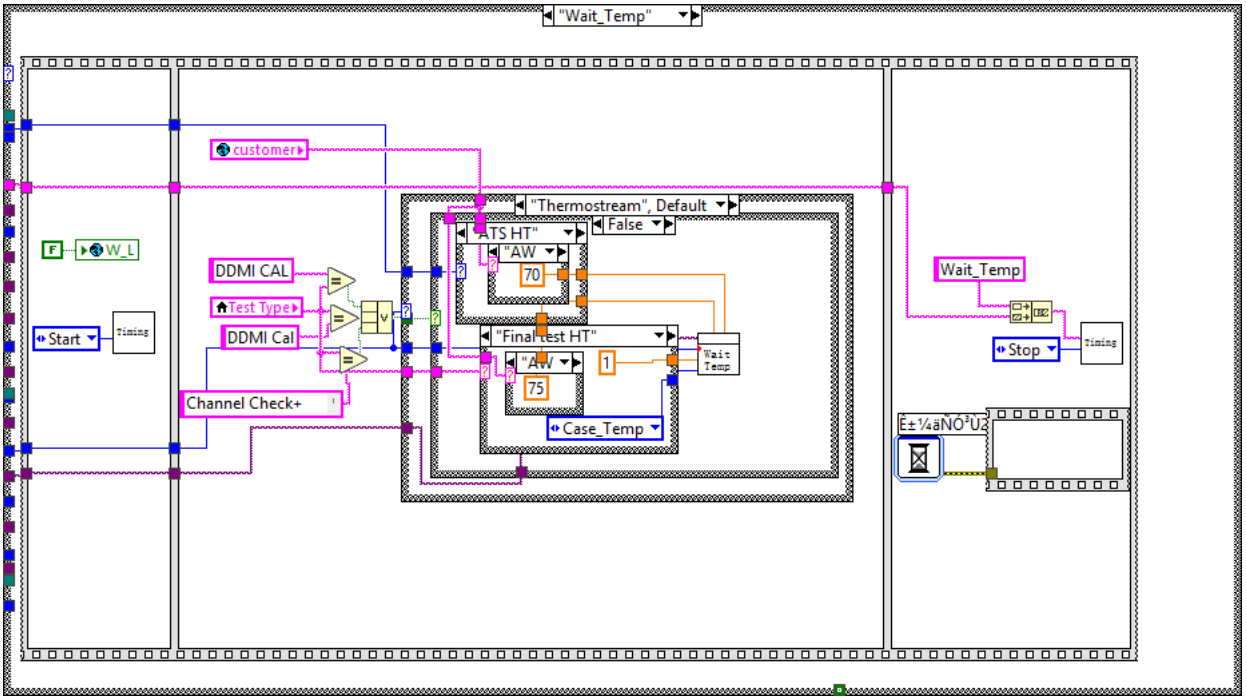

"Golden_DDMI_Check", "Golden_DDMI_Sa
TestResult_800G_Golden_Sample_TEST

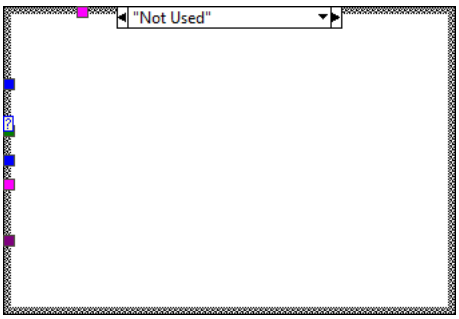

"FQC"
RTTest Item
TestResult _800G_TRX
RTData
APC



"TP2+TP3 test"
1
APC
LT
HT
RTTest Item
LTTest Item
TestResult _800G_TR
RTData
LTData
1


7, Default
RTTest Item
LTTest Item
HTTest Item
TestResult _800G_TR
RTData
LTData
HTData
0



0
RTTest Item
TestResult _800G_TRX
RTData
1


"Wait_Temp"
customer
W_L
Start
Timing
DDMI CAL
Test Type
DDMI Cal
Channel Check+
"Thermostream", Default
ATS HT"
False
"AW
70
"Final test HT"
"AW
75
1
Wait Temp
Case_Temp
Wait_Temp
Stop
Timing


"Not Used"



T", Defaul
"AW
30



"¼U
30



TS LT"
"AW
-5


"¼U
-5



"¼U
70


HT"
70
77


T"
-7
0



"¼Ù"_Default
"AW
40
1
Case_Temp

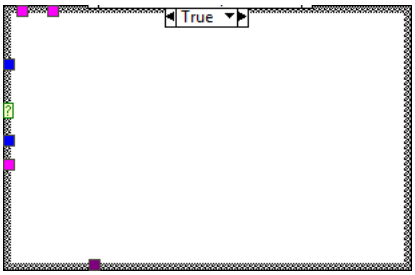

"¼U
40

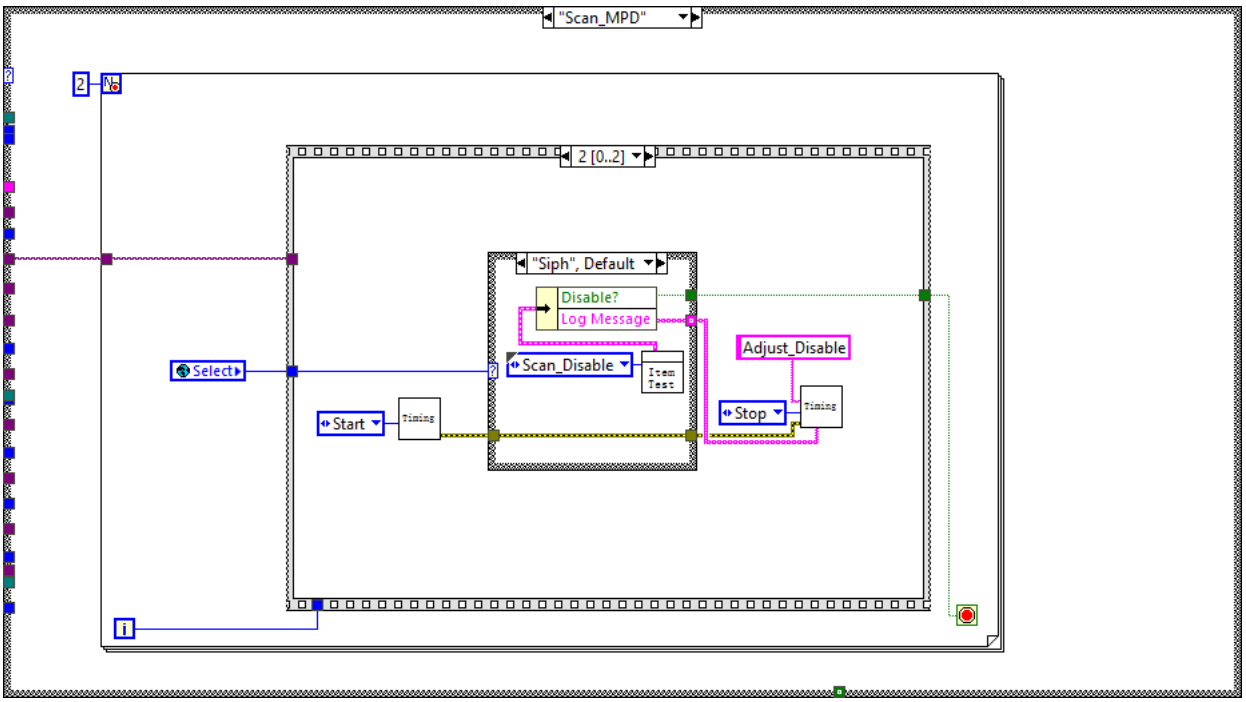

"Final test LT"
"AW
0
1
Case_Temp

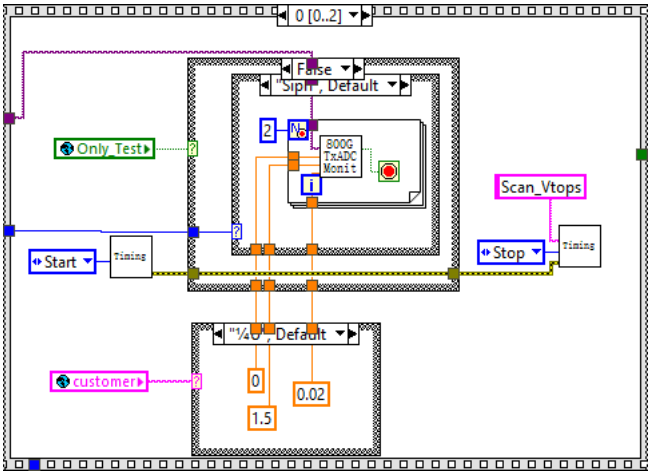

"¼U
0



"¼U
75



"Golden_DDMI_Check
60
1
MI_Temp



True



"Scan_MPD"
2
2 [0..2]
"Siph", Default
Disable?
Log Message
Scan_Disable
Item Test
Adjust_Disable
Select
Start
Timing
Stop
Timing
i

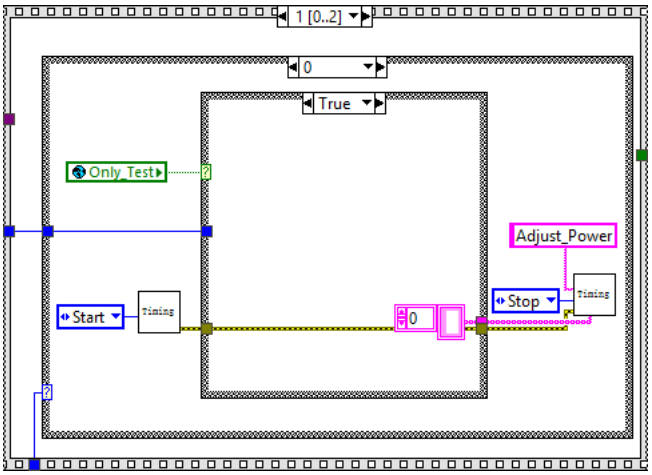

0 [0..2]
False
"Siph", Default
2
800G TxADC Monit
i
Only_Test
Start
Timing
Scan_Vtops
Stop
Timing
"¼ Default
customer
0
1.5
0.02

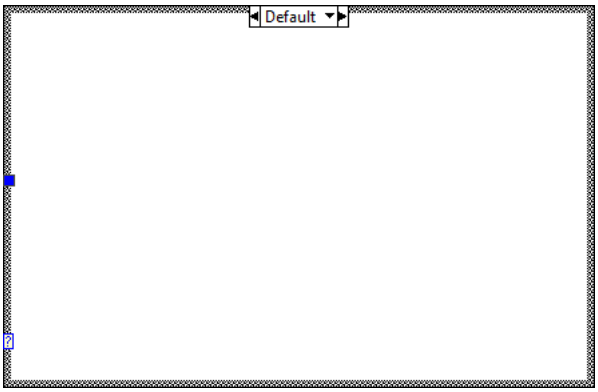

EME



True



"Acacia"
0
2
0.01



"AW3"
0.5
3
0.02

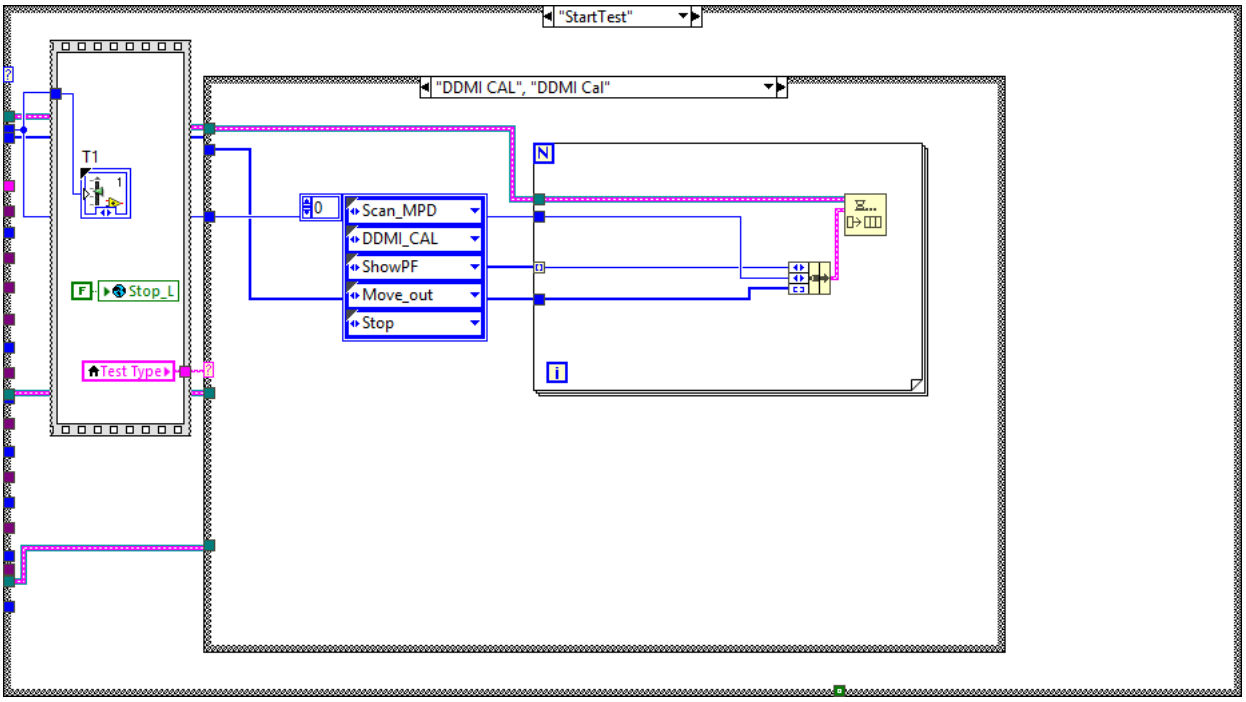

1 [0..2]
0
True
Only_Test
Adjust_Power
Start
Timing
0
Stop
Timing

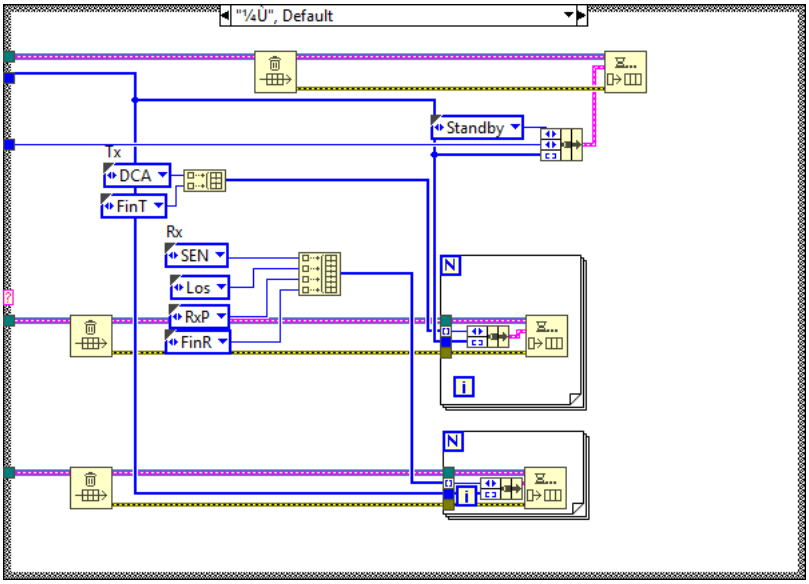

Default

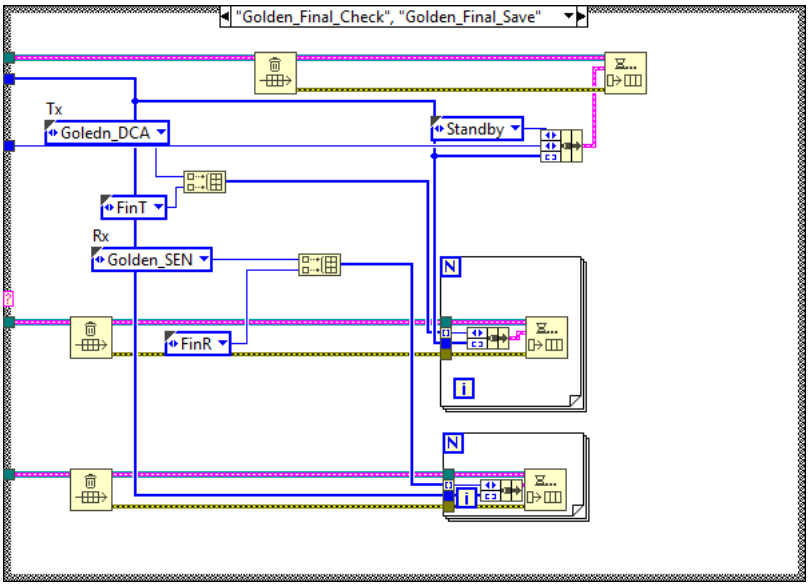

False
"Siph", Default
Adjust Power
Item Test
Log Message

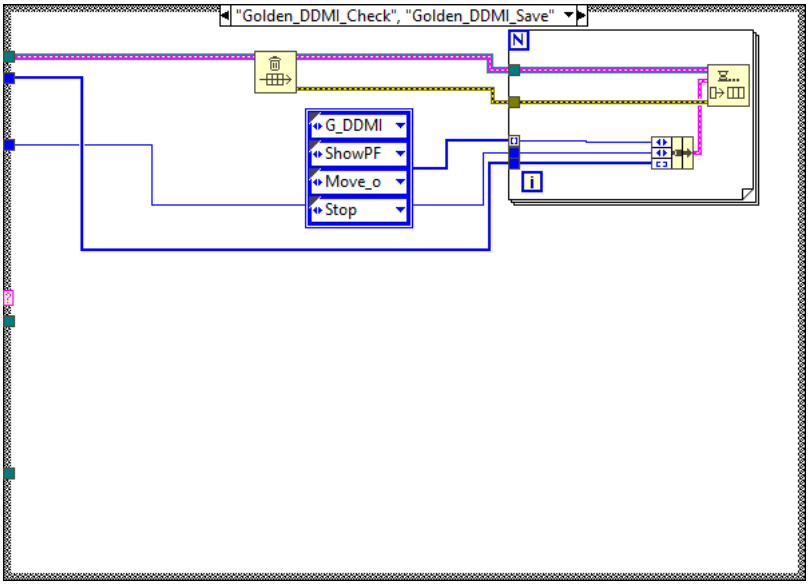

"EML"

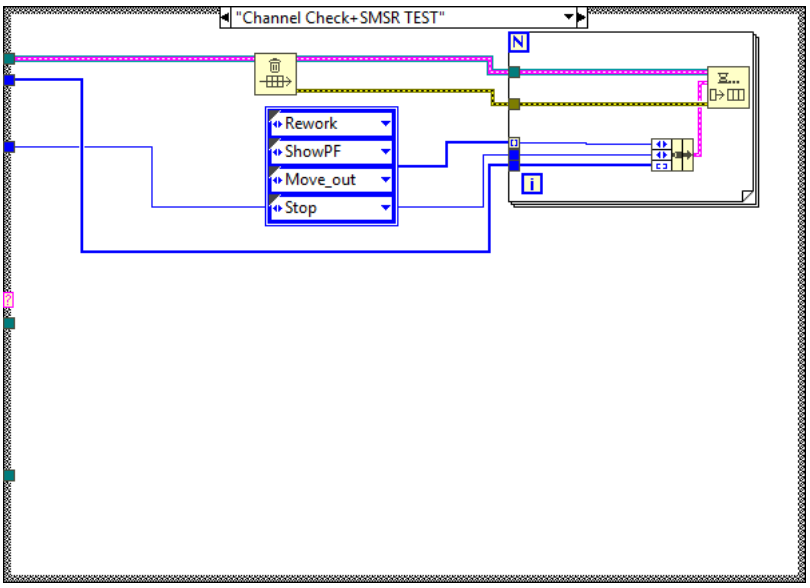

"EML"

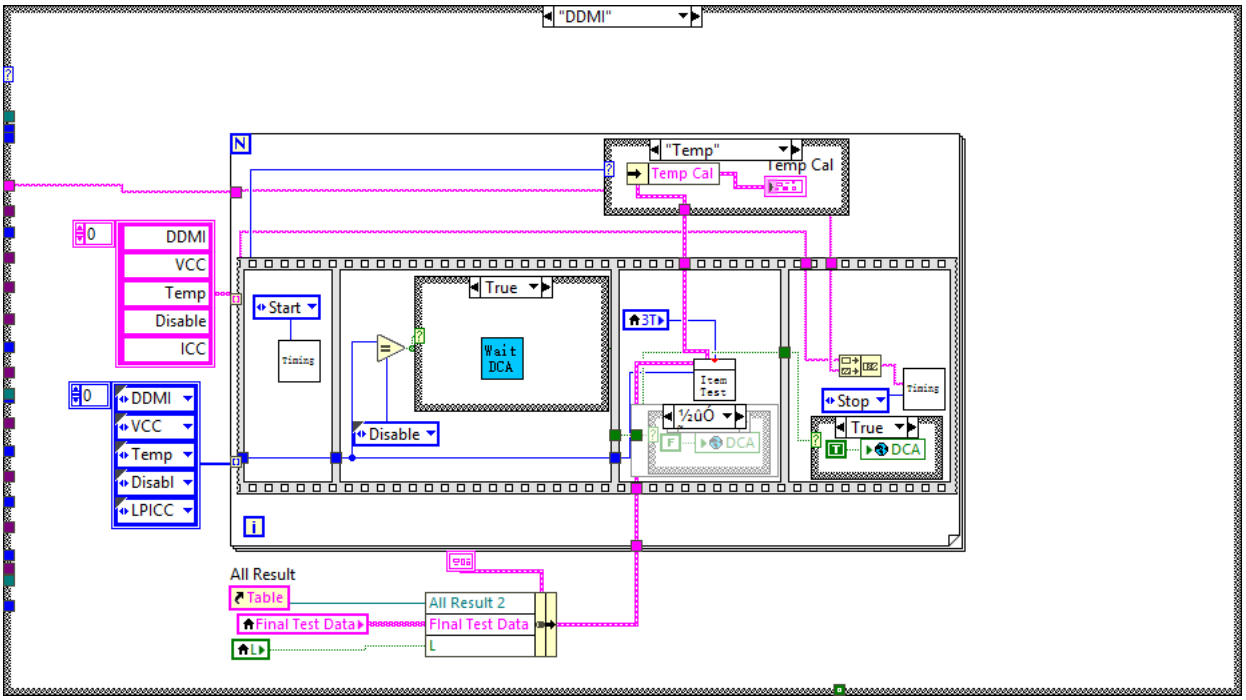

"StartTest"
"DDMI CAL", "DDMI Cal"
T1
Stop_L
Test Type
0
Scan_MPD
DDMI_CAL
ShowPF
Move_out
Stop



"¼Ù", Default
Standby
Tx
DCA
FinT
Rx
SEN
Los
RxP
FinR


"Golden_Final_Check", "Golden_Final_Save"
Tx
Goledn_DCA
Standby
FinT
Rx
Golden_SEN
FinR
N
i



"Golden_DDMI_Check", "Golden_DDMI_Save"
G_DDMI
ShowPF
Move_o
Stop
N
i



"Channel Check+SMSR TEST"
Rework
ShowPF
Move_out
Stop
N
i



"DDMI"
"Temp"
Temp Cal
Temp Cal
0
DDMI
VCC
Temp
Disable
ICC
0
DDMI
VCC
Temp
Disabl
LPICC
Start
Timing
True
Wait
DCA
Disable
3T
Item
Test
½úÔ
F
DCA
Stop
Timing
True
DCA
All Result
Table
Final Test Data
All Result 2
Final Test Data
L

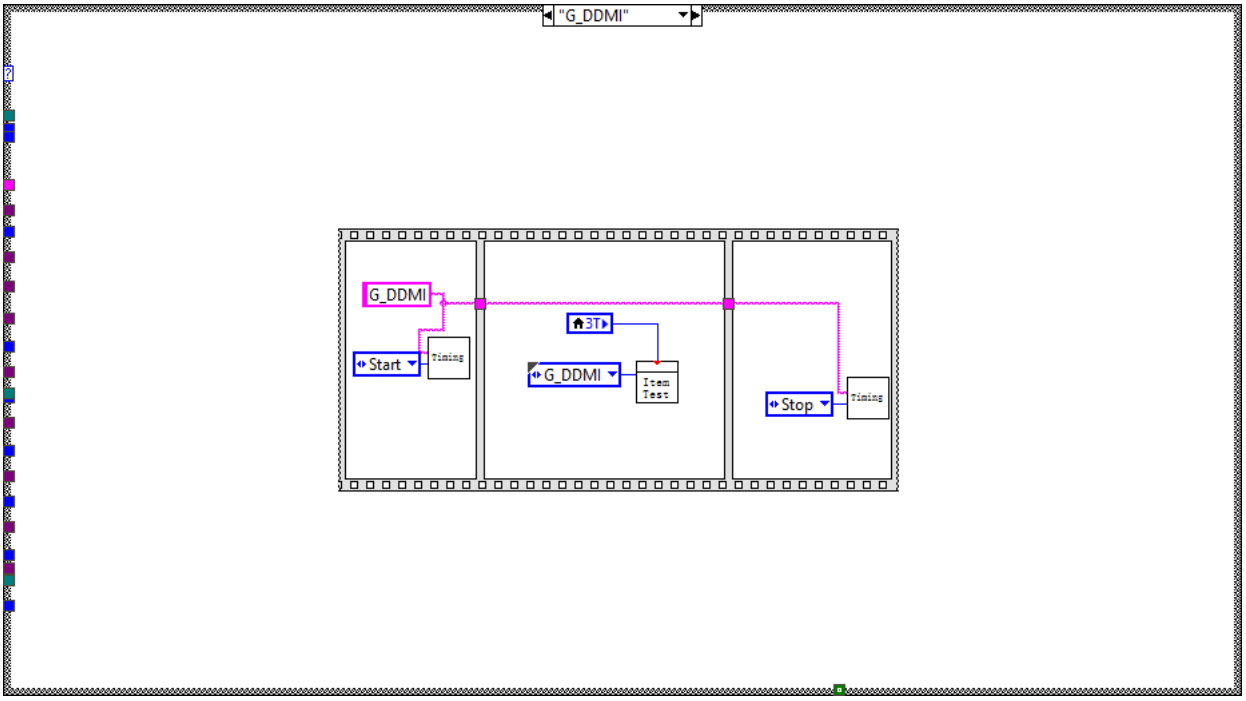

½úÔ

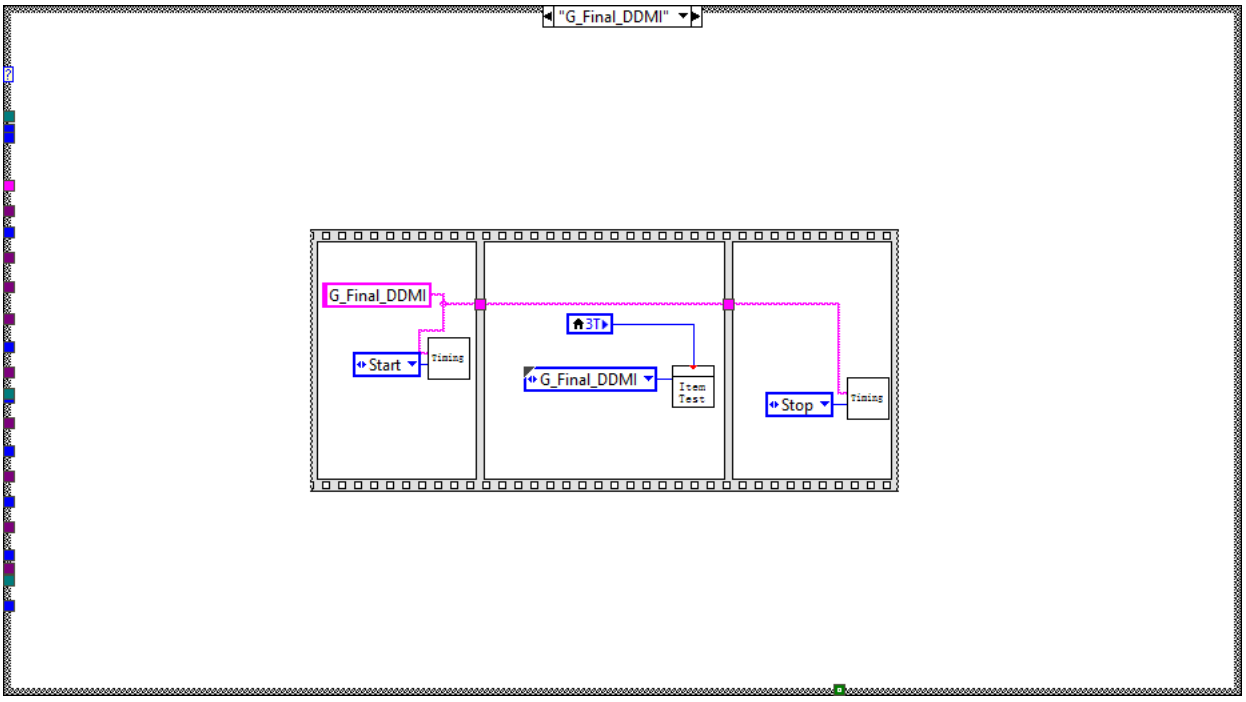

Enabled

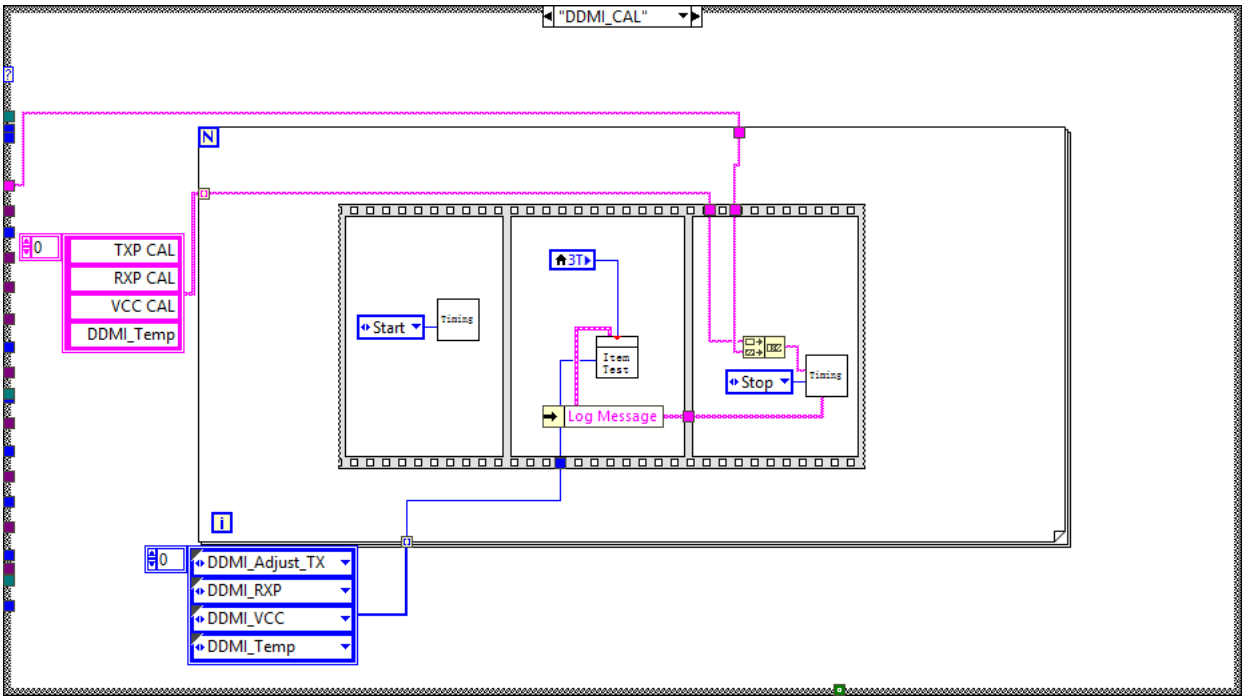

False

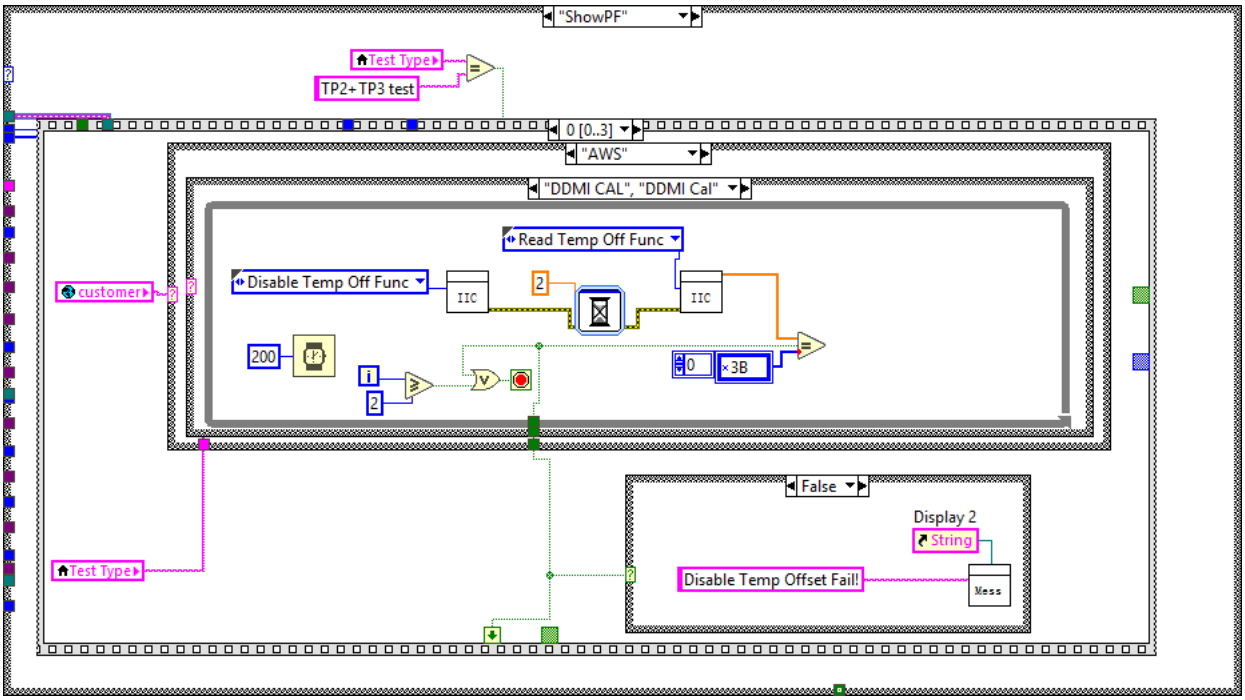

False

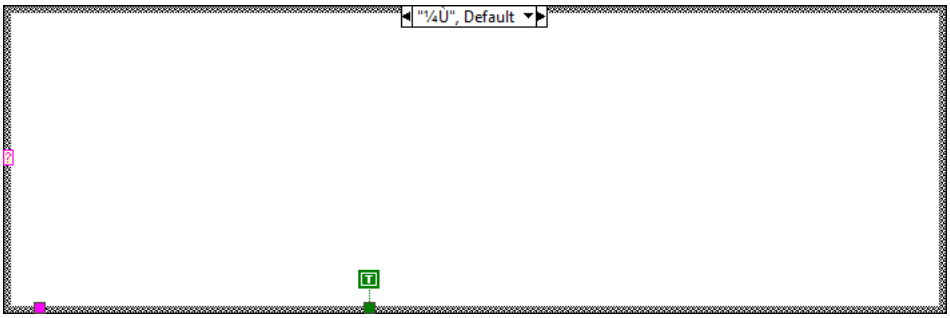

"DCA", Default

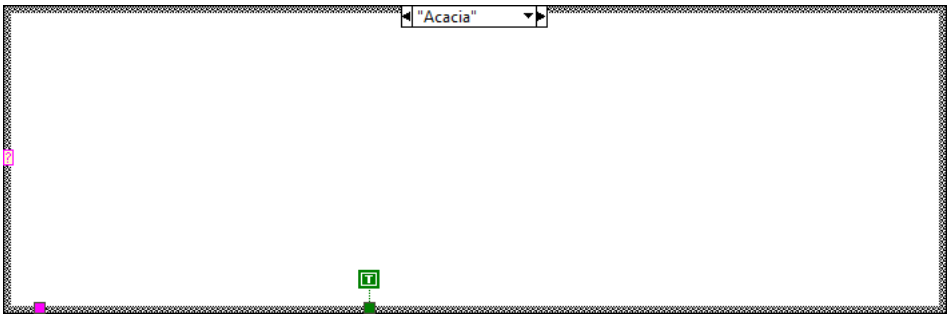

"G_DDMI"
G_DDMI
Start
Timing
3T
G_DDMI
Item
Test
Stop
Timing

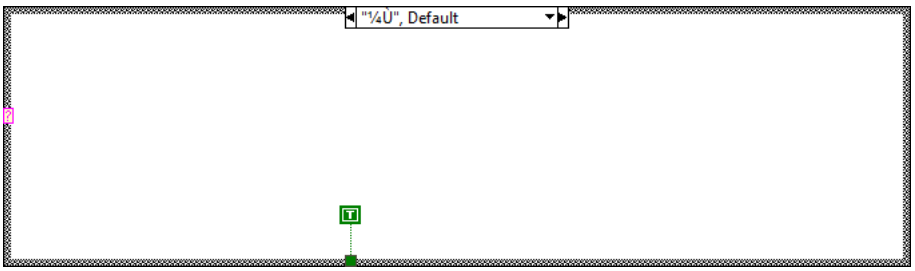

"G_Final_DDMI"
G_Final_DDMI
Start
Timing
3T
G_Final_DDMI
Item Test
Stop
Timing

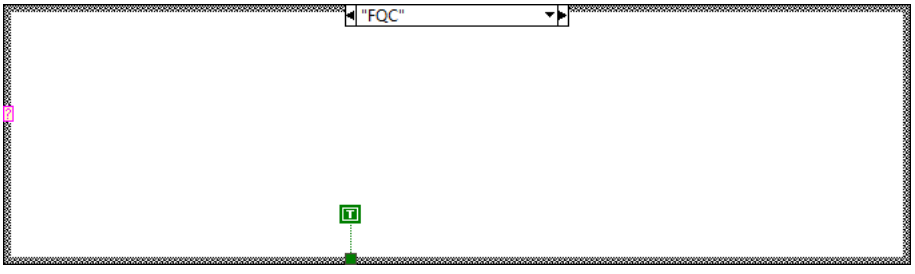

"DDMI_CAL"
N
0
TXP CAL
RXP CAL
VCC CAL
DDMI_Temp
Start
Timing
3T
Item Test
Log Message
Stop
Timing
i
0
DDMI_Adjust_TX
DDMI_RXP
DDMI_VCC
DDMI_Temp

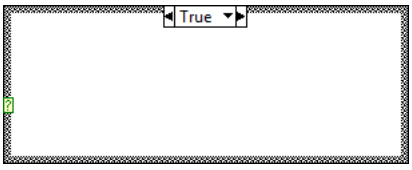

"ShowPF"
Test Type
TP2+TP3 test
0 [0..3]
"AWS"
"DDMI CAL", "DDMI Cal"
Read Temp Off Func
Disable Temp Off Func
IIC
IIC
customer
2
200
i
2
0
×3B
False
Display 2
String
Disable Temp Offset Fail!
Mess
Test Type

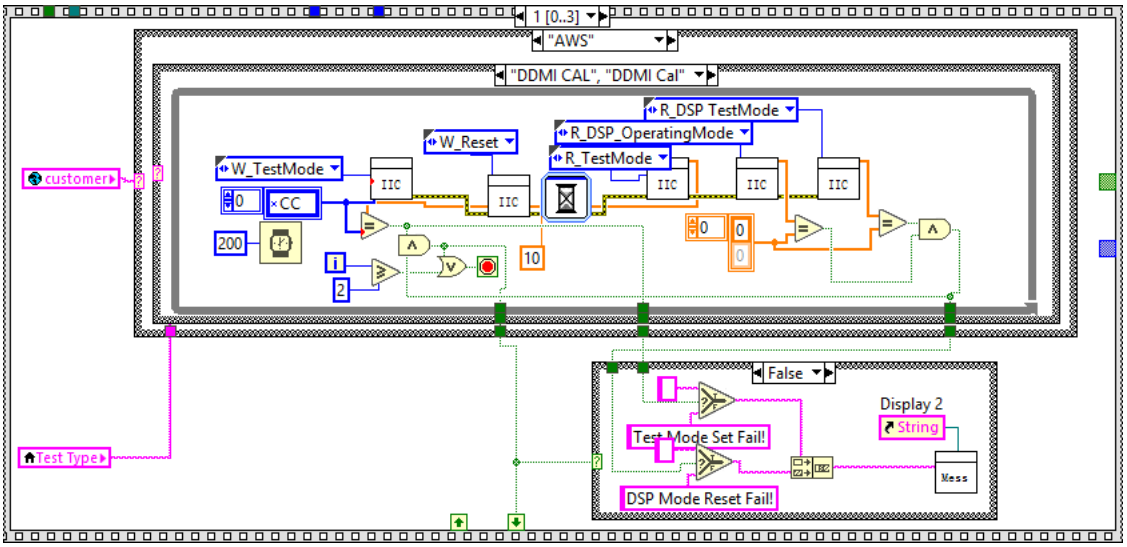

"¼Ù", Default

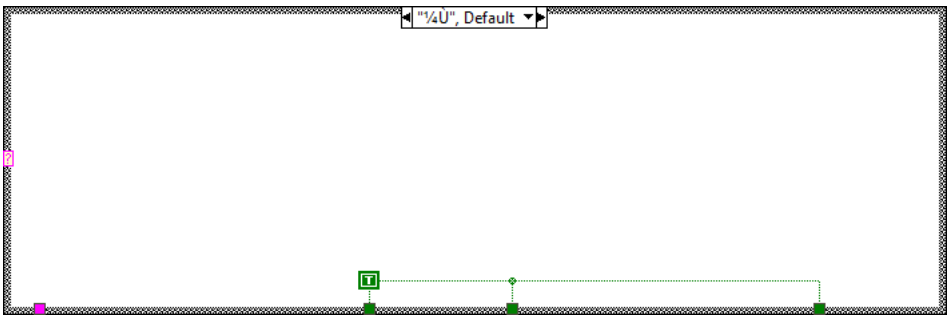

"Acacia"

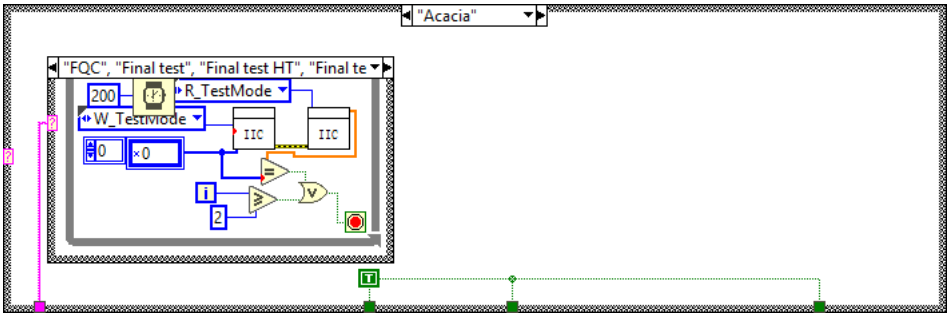

"¼Ù", Default

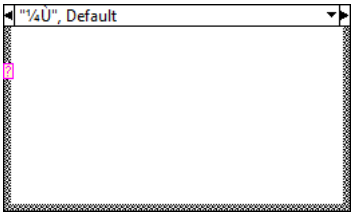

"FQC"

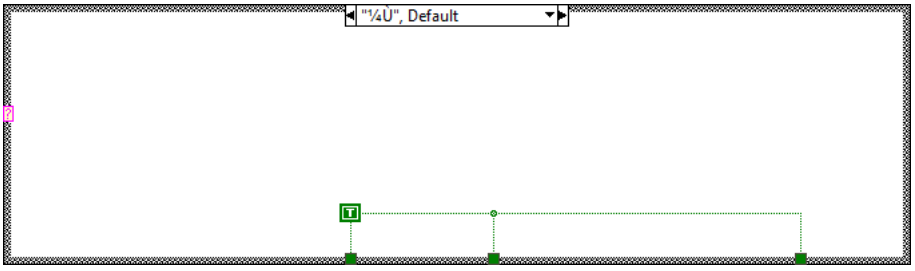

True

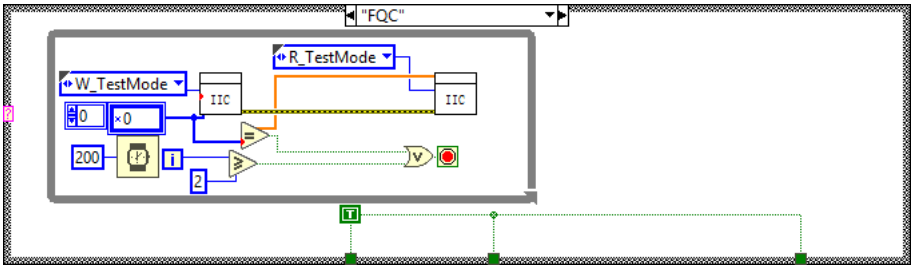

1 [0..3]
"AWS"
"DDMI CAL", "DDMI Cal"
R_DSP TestMode
R_DSP_OperatingMode
R_TestMode
W_Reset
W_TestMode
customer
IIC
0
CC
200
i
2
10
False
Display 2
String
Test Mode Set Fail!
DSP Mode Reset Fail!
Mess
Test Type

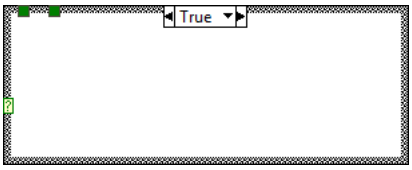

"¼Ù", Default

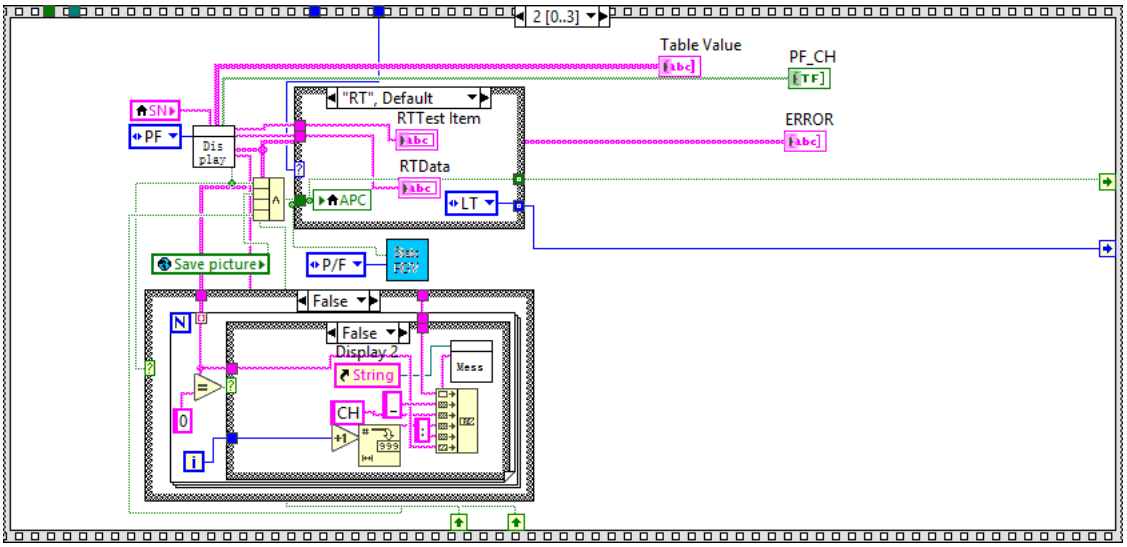

"Acacia"
"FQC", "Final test", "Final test HT", "Final te
200
R_TestMode
W_TestMode
IIC
0
×0
i
2



"¼Ù", Default



"¼Ù", Default



"FQC"
R_TestMode
W_TestMode
IIC
IIC
0
0
200
i
2



True

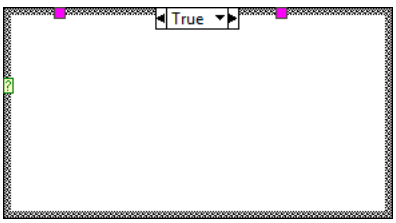

2 [0..3]
Table Value
PF_CH
SN
PF
Dis play
"RT", Default
RTTest Item
ERROR
RTData
APC
LT
Save picture
P/F
False
False
Display 2
String
Mess
CH
0
i

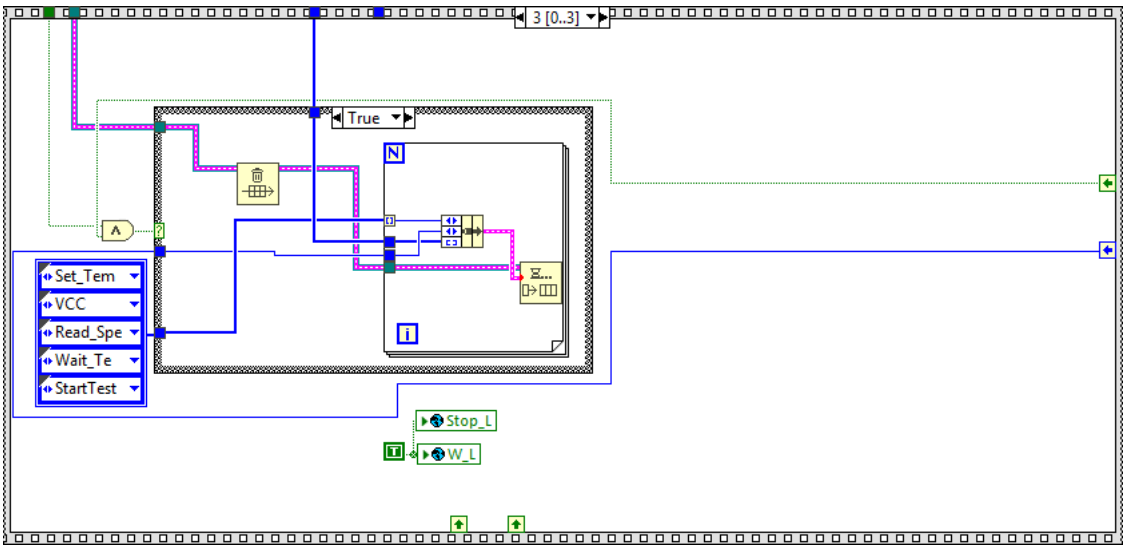

"HT"
HTTest Item
HTData
HT

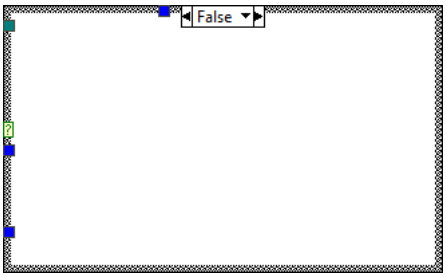

"ATS".."ATS HT"
RTTest Item
RTData
APC

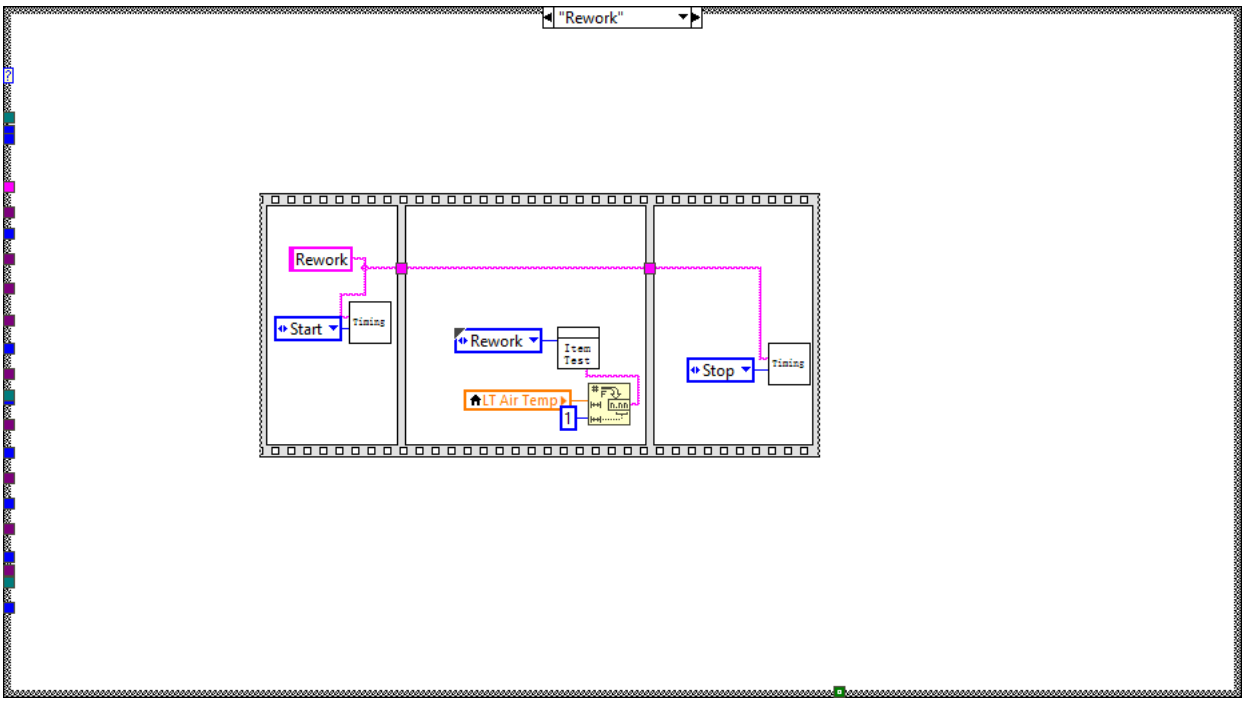

"LT"
LTTest Item
LTData
LT
HT

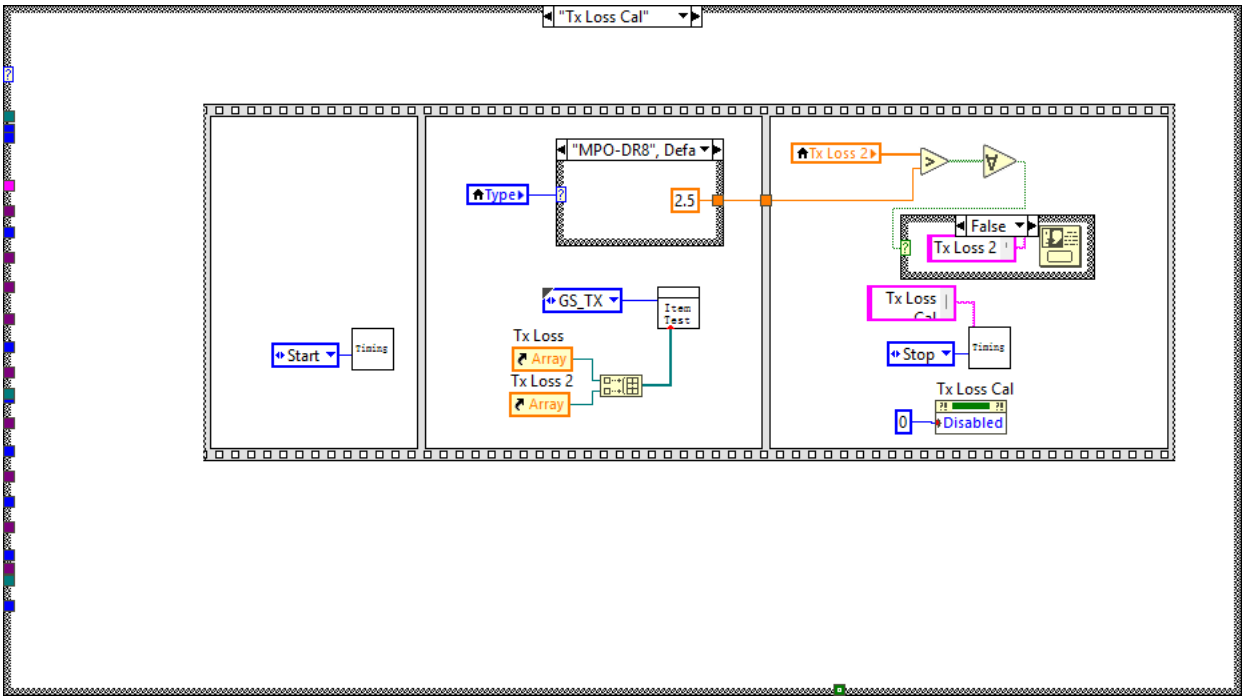

True



True



3 [0..3]
True
Set_Tem
VCC
Read_Spe
Wait_Te
StartTest
Stop_L
W_L

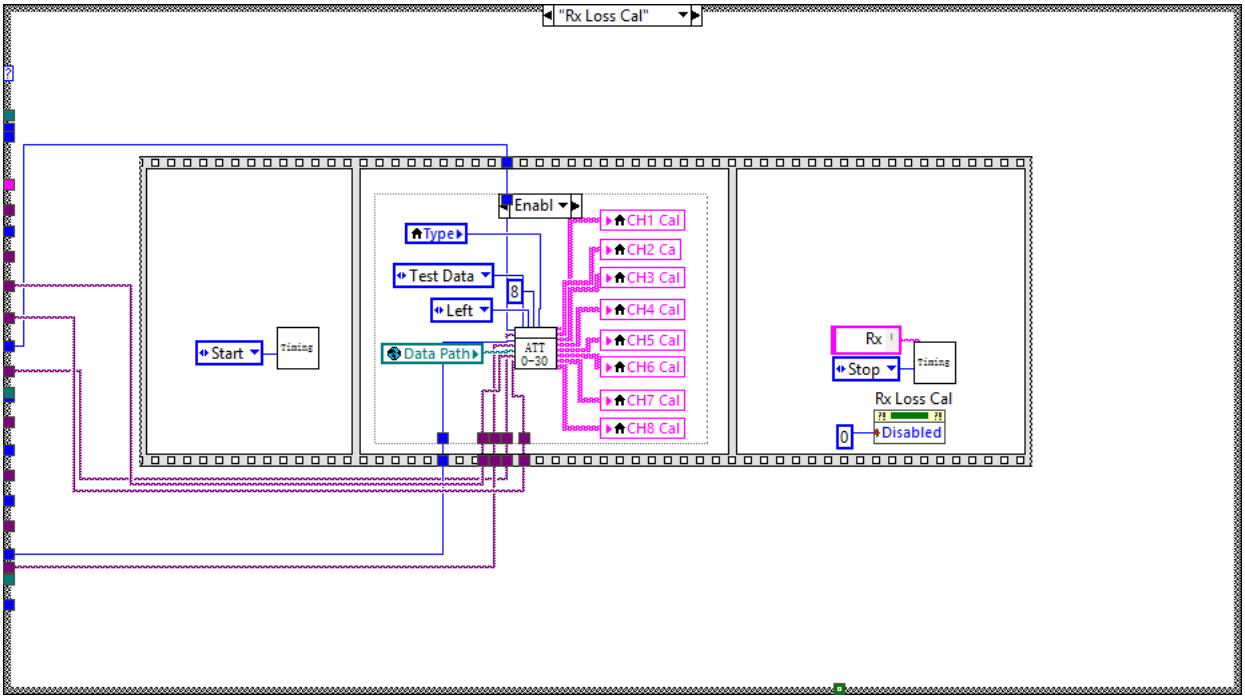

False



"Rework"
Rework
Start
Timing
Rework
Item Test
LT Air Temp
Stop
Timing

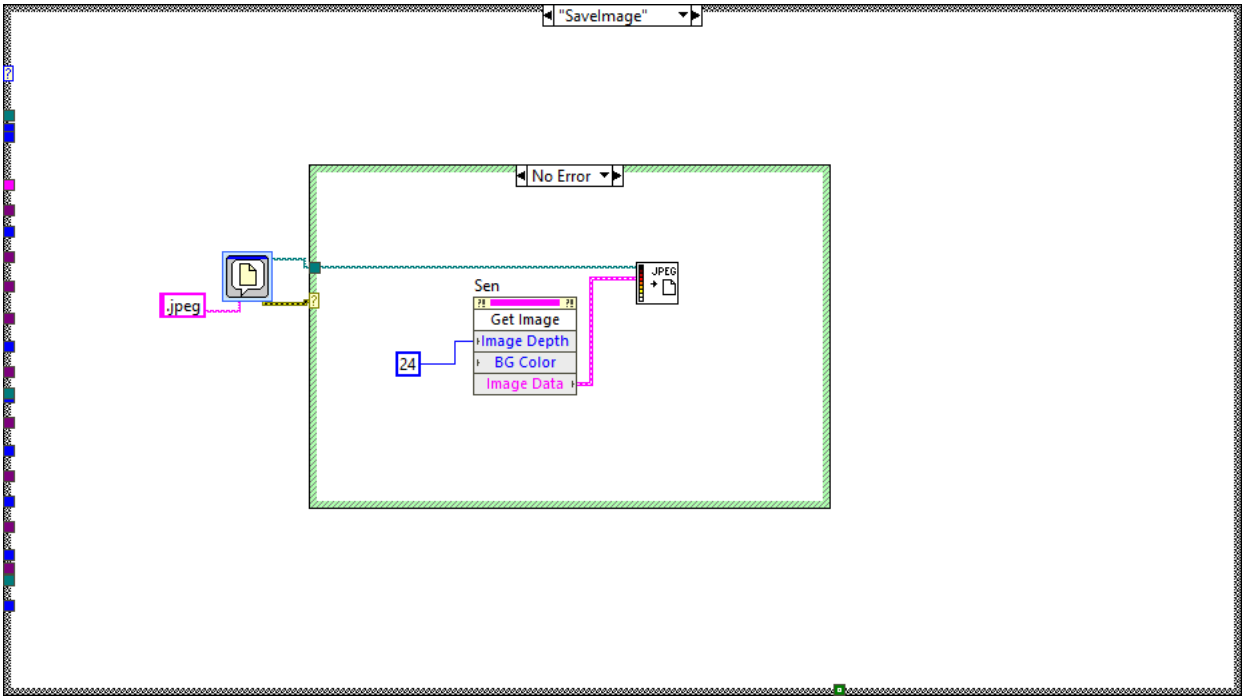

"Tx Loss Cal"
"MPO-DR8", Defa
Type
2.5
Tx Loss 2
False
Tx Loss 2
GS_TX
Item Test
Tx Loss
Array
Tx Loss 2
Array
Start
Timing
Tx Loss Cal
Stop
Timing
Tx Loss Cal
0
Disabled

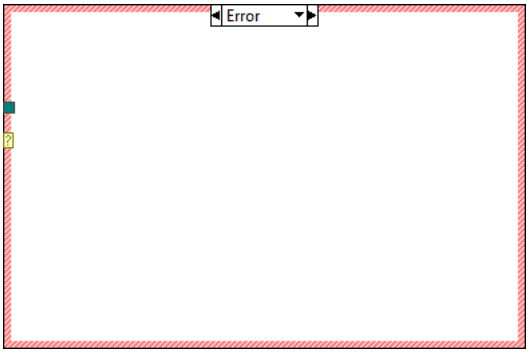

"LC-2*FR4"
3.5

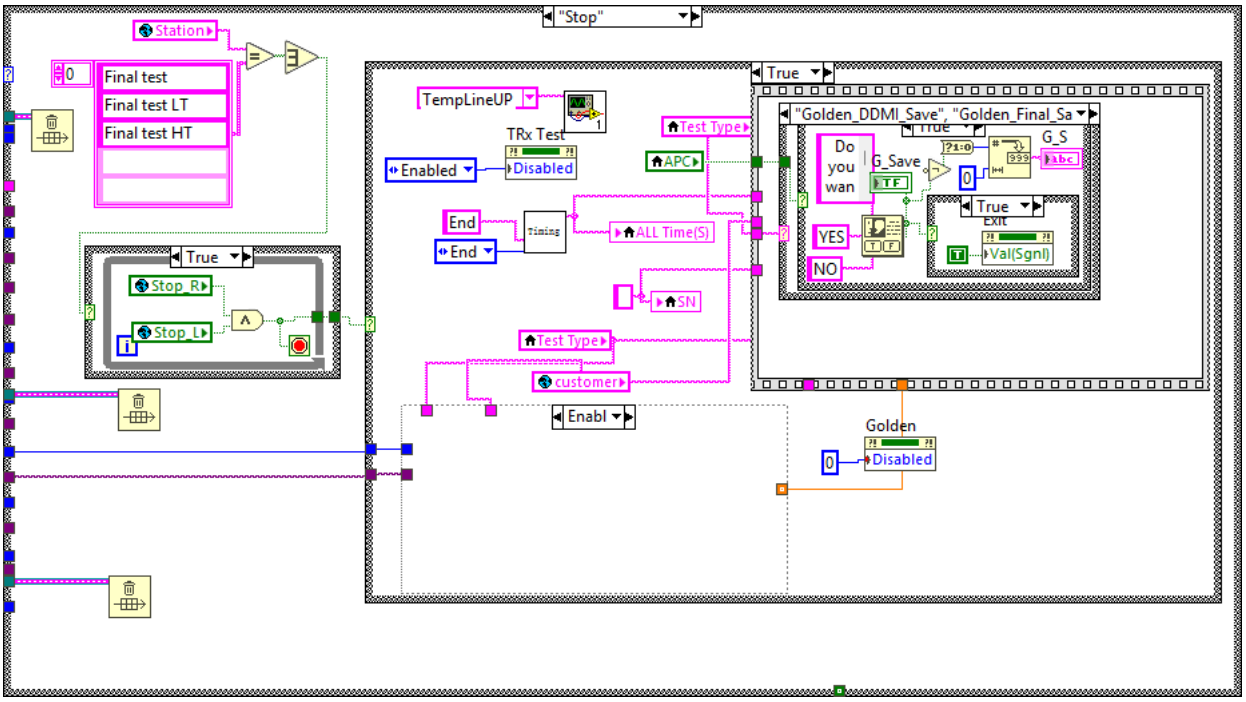

True

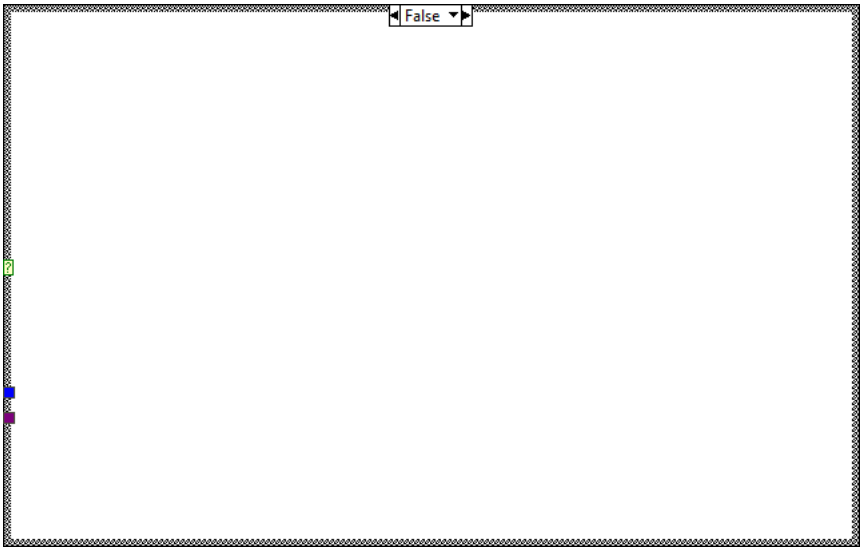

"Rx Loss Cal"
Enabl
Type
Test Data
8
Left
Data Path
ATT 0-30
CH1 Cal
CH2 Ca
CH3 Cal
CH4 Cal
CH5 Cal
CH6 Cal
CH7 Cal
CH8 Cal
Start
Timing
Rx
Stop
Timing
Rx Loss Cal
0
Disabled



Disabled
GS_RX
Item Test
LS Power
Array
RX Loss
Array



"SaveImage"
No Error
.jpeg
Sen
Get Image
Image Depth
BG Color
Image Data
24
JPEG



Error

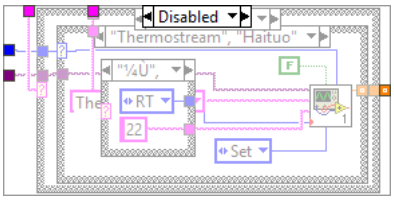

"Stop"
Station
0
Final test
Final test LT
Final test HT
True
Stop_R
Stop_L
TempLineUP
TRx Test
Enabled
Disabled
End
End
Timing
ALL Time(S)
SN
Test Type
customer
Enabl
Test Type
APC
True
"Golden_DDMI_Save", "Golden_Final_Sa
Do you wan
G_Save
G_S
YES
NO
True
Exit
Val(Sgnl)
Golden
0
Disabled


False



"¼Ù", Default
Exit
Val(Signl)


False



False

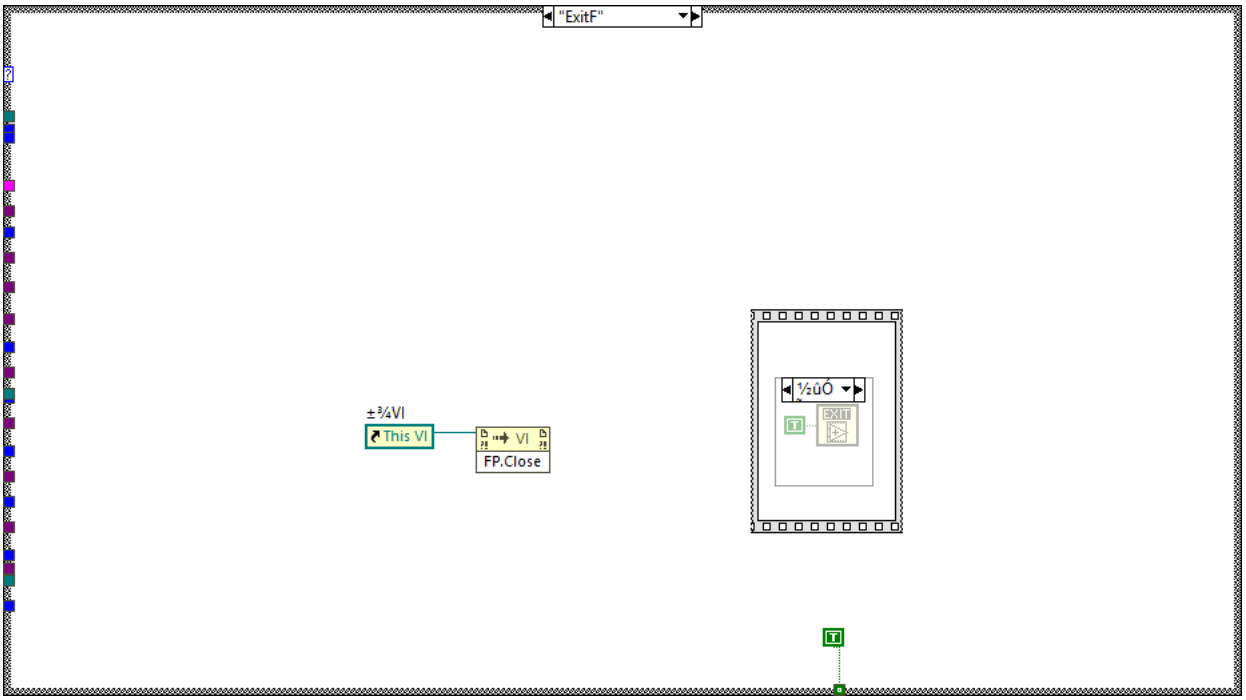

Disabled
"Thermostream", "Haituo"
"¼Ù",
F
RT
22
Set
1



Disabled
0

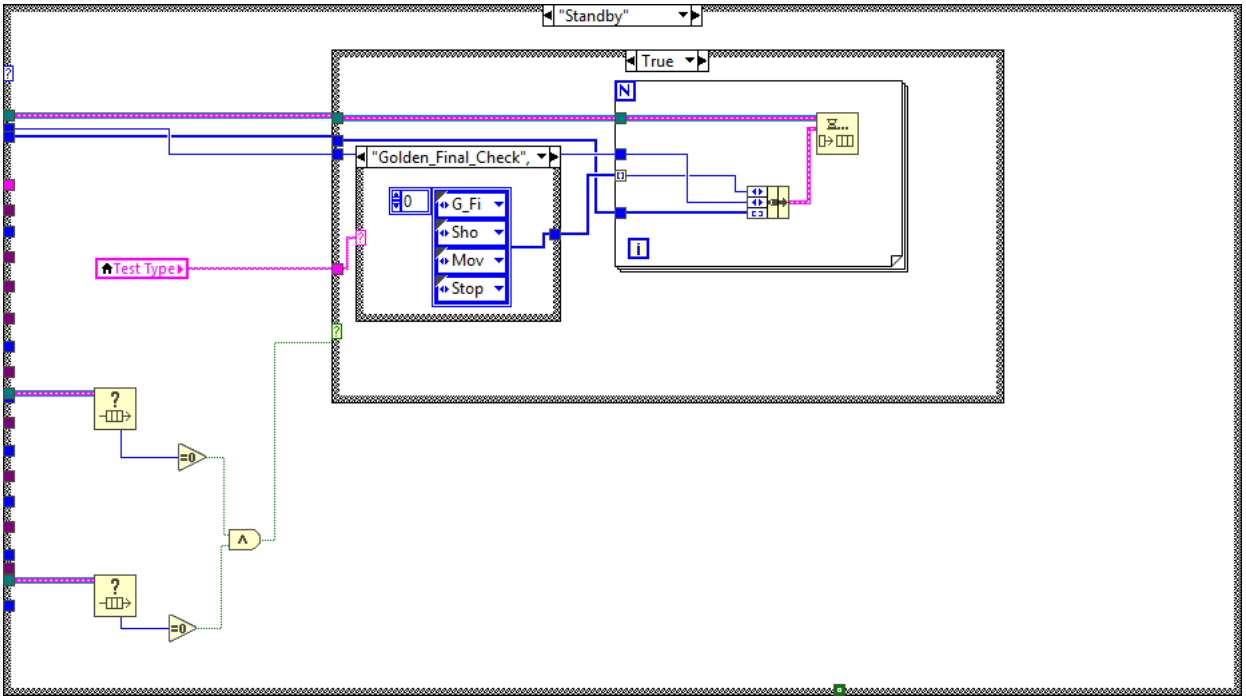

"Not Used", Default

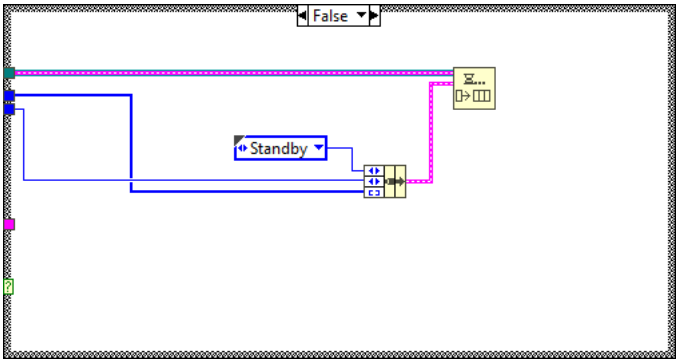

"AWS"
LT
15



False


"ExitF"
±¾VI
This VI
VI
FP.Close
½úÓ



Enable


"Standby"
True
N
"Golden_Final_Check",
0
G_Fi
Sho
Mov
Stop
Test Type
=0
=0


False
Standby


















List of SubVIs and Express VIs with Configuration Information

Clear Errors.vi
C:\Program Files (x86)\National Instruments\LabVIEW 2025\vi.lib\Utility\error.llb\Clear Errors.vi

Check if File or Folder Exists.vi
C:\Program Files (x86)\National Instruments\LabVIEW 2025\vi.lib\Utility\libraryn.llb\Check if File or Folder Exists.vi

G_100G.vi
C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\G_100G.vi

SZ.ctl
C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\SZ.ctl

OPM Type.ctl
C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\OPM Type.ctl

Device.ctl
C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\Device.ctl

Step_To_Item.vi
C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\Step_To_Item.vi

subFile Dialog.vi
C:\Program Files (x86)\National Instruments\LabVIEW 2025\vi.lib\express\express input\FileDialogBlock.llb\subFile Dialog.vi

subTimeDelay.vi

C:\Program Files (x86)\National Instruments\LabVIEW 2025\vi.lib\express\express execution control\TimeDelayBlock.llb\subTimeDelay.vi



Dispaly.vi

C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\Dispaly.vi



I2C_Step.ctl

C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\I2C_Step.ctl



800G SIP Tx MPD Monitor.vi

C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\800G SIP Tx MPD Monitor.vi



Display_Step.ctl

C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\Display_Step.ctl



IIC.vi

C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\IIC.vi



Write JPEG File.vi

C:\Program Files (x86)\National Instruments\LabVIEW 2025\vi.lib\picture\jpeg.llb\Write JPEG File.vi



Wait_Temp.vi

C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\Wait_Temp.vi



Set Temp.vi

C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\Set Temp.vi



Save Picture.vi

C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\Save Picture.vi



Message_Display.vi

C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\Message_Display.vi



PS Read Current.vi

C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\PS Read Current.vi



Auto Adjust Vcc.vi

C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\Auto Adjust Vcc.vi



OVA Set Chs Att.vi

C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\OVA Set Chs Att.vi



OVA Init.vi

C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\OVA Init.vi



N1092A DCA PAM4 Initial.vi

C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\N1092A DCA PAM4 Initial.vi



Wait DCA Idle.vi

C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\Wait DCA Idle.vi



Write Password.vi

C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\Write Password.vi



EVB Icc Calibration.vi

C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\EVB Icc Calibration.vi



Check Vcc.vi

C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\Check Vcc.vi



PSM4_Get_Ref.vi

C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\PSM4_Get_Ref.vi



Item_Test.vi

C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\Item_Test.vi



Temp Type.ctl

C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\Temp Type.ctl



Item_Step.ctl

C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\Item_Step.ctl



TRx_System_R&W.vi

C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\TRx_System_R&W.vi



DDMI_Cal.vi

C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\DDMI_Cal.vi



Timing.vi

C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\Timing.vi


PSM4_State_FGV.vi

C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\PSM4_State_FGV.vi


TempLineControl.vi

C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\TempLineControl.vi


0-30ATT.vi

C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\0-30ATT.vi


Get_Golden_Sample_Data.vi

C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\Get_Golden_Sample_Data.vi


read Computer Name.vi

C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\read Computer Name.vi


Main_Step.ctl

C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\Main_Step.ctl


RX_Step.ctl

C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\RX_Step.ctl


TX_Step.ctl

C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\TX_Step.ctl


PS on-off.vi

C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\PS on-off.vi

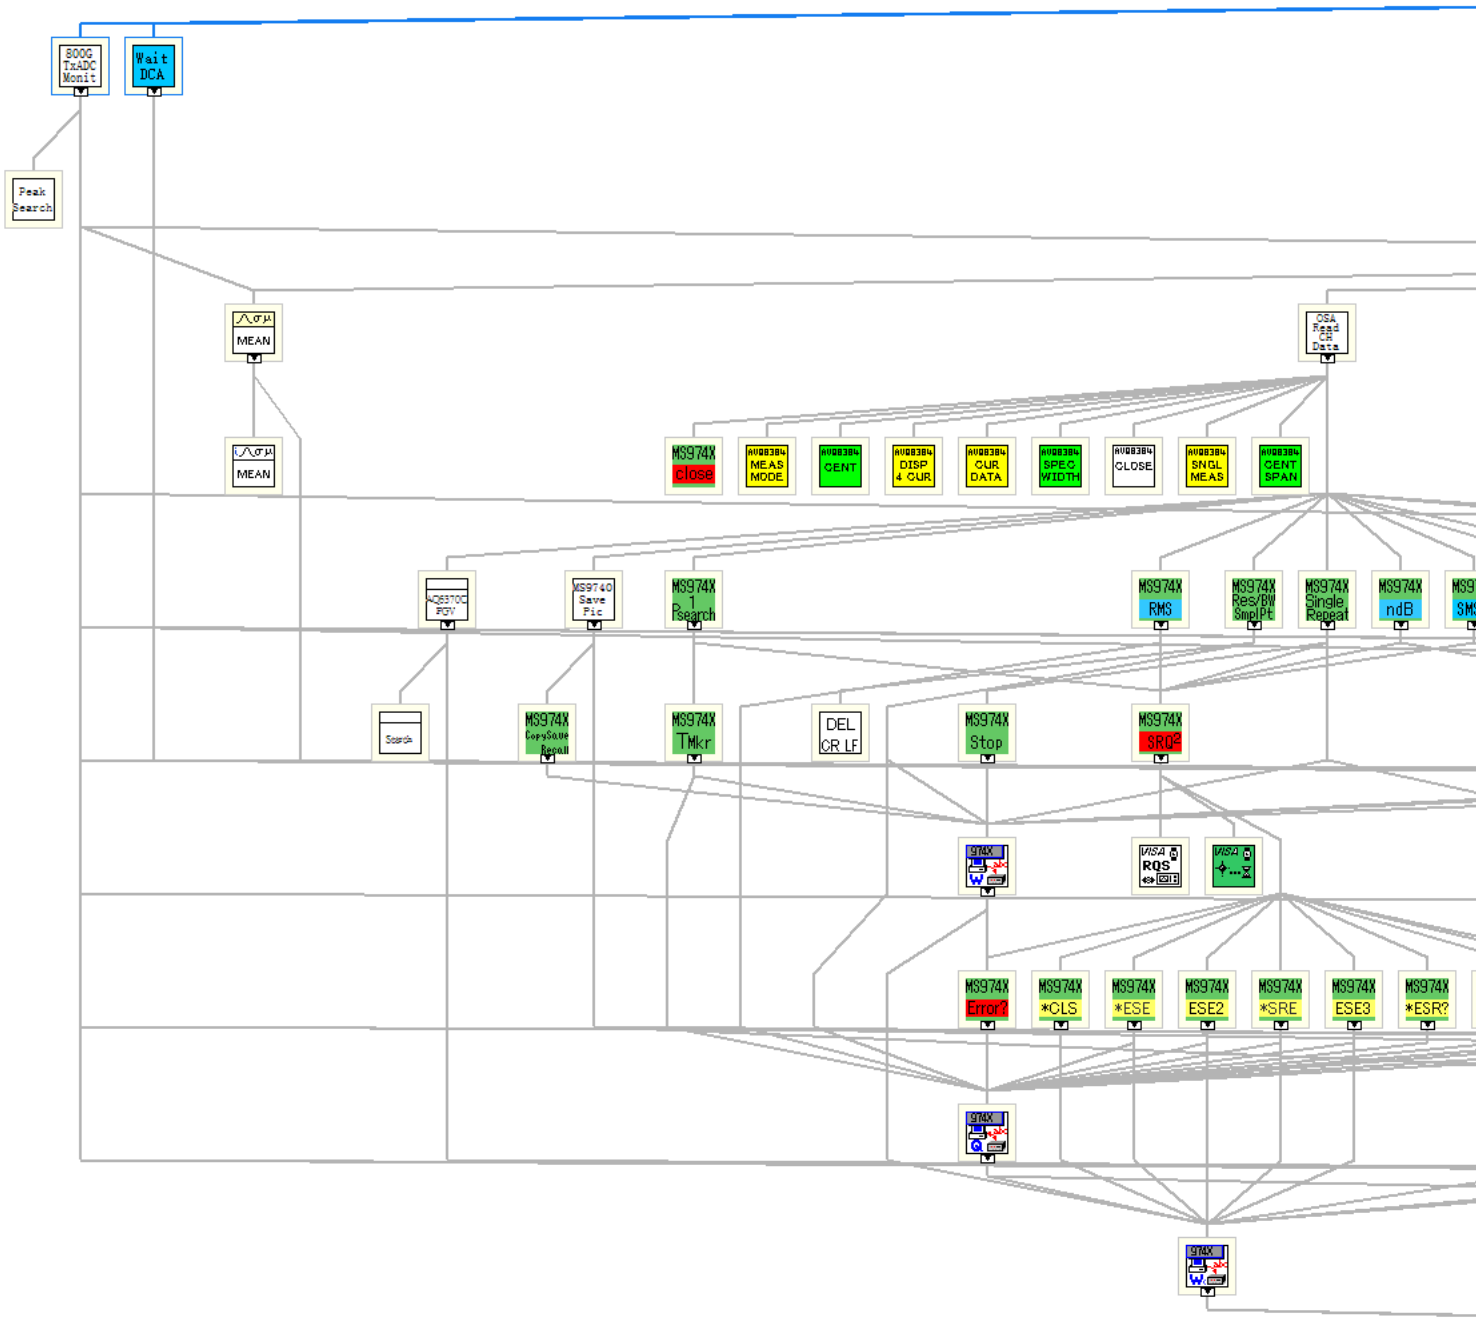
---

VI Revision History


"800G_TRx_Test.vi History"


Current Revision: 2048

Position in Hierarchy


SOOG TxADC Monit
Wait DCA
Peak Search
MEAN
MEAN
OSA Read CH Data
MS974X close
AVOB384 MEAS MODE
AVOB384 CENT
AVOB384 DISP 4 CUR
AVOB384 CUR DATA
AVOB384 SPEC WIDTH
AVOB384 CLOSE
AVOB384 SNGL MEAS
AVOB384 CENT SPAN
AQ6370C FOV
MS9740 Save Pic
MS974X Psearch
MS974X RMS
MS974X Res/BW Smpl/Pt
MS974X Single Repeat
MS974X ndB
Search
MS974X Copy&Save Recall
MS974X TMkr
DEL CR LF
MS974X Stop
MS974X SRQ?
MS974X
VISA RQS
VISA
MS974X Error?
MS974X *CLS
MS974X *ESE
MS974X ESE2
MS974X *SRE
MS974X ESE3
MS974X *ESR?
MS974X
MS974X


Iconified Cluster Constants



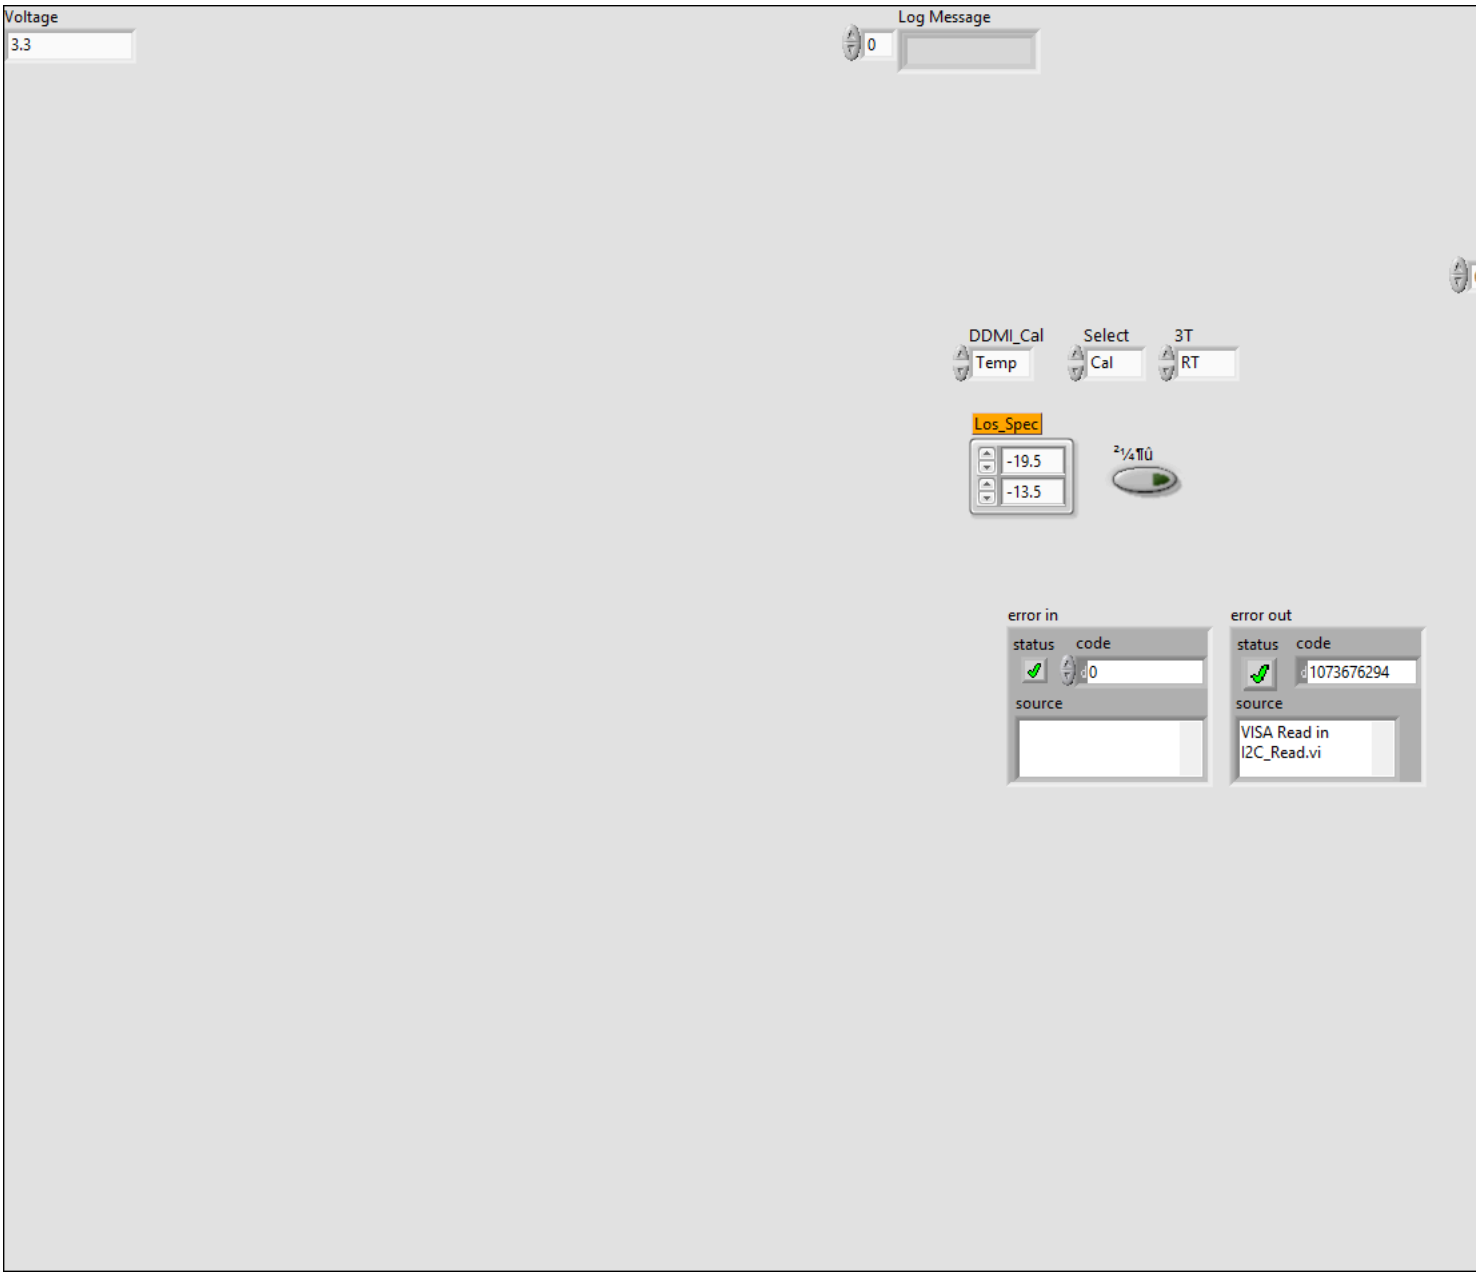


DDMI_Cal.vi

Connector Pane



Front Panel



Controls and Indicators

DDMI_Cal
Select
3T
error in

error in can accept error information wired from VIs previously called. Use this information to decide if any functionality should be bypassed in the event of errors from other VIs.

Right-click the **error in** control on the front panel and select **Explain Error** or **Explain Warning** from the shortcut menu for more information about the error.

status

status is TRUE (X) if an error occurred or FALSE (checkmark) to indicate a warning or that no error occurred.

Right-click the **error in** control on the front panel and select **Explain Error** or **Explain Warning** from the shortcut menu for more information about the error.

code

code is the error or warning code.

Right-click the **error in** control on the front panel and select **Explain Error** or **Explain Warning** from the shortcut menu for more information about the error.

source

source describes the origin of the error or warning.

Right-click the **error in** control on the front panel and select **Explain Error** or **Explain Warning** from the shortcut menu for more information about the error.

Los_Spec

Numeric

布尔

Voltage

Data

error out

The **error in** cluster can accept error information wired from VIs previously called. Use this information to decide if any functionality should be bypassed in the event of errors from other VIs.

The pop-up option **Explain Error** (or Explain Warning) gives more information about the error displayed.

status

The **status** boolean is either TRUE (X) for an error, or FALSE (checkmark) for no error or a warning.

The pop-up option **Explain Error** (or Explain Warning) gives more information about the error displayed.

code

The **code** input identifies the error or warning.

The pop-up option **Explain Error** (or Explain Warning) gives more information about the error displayed.

source

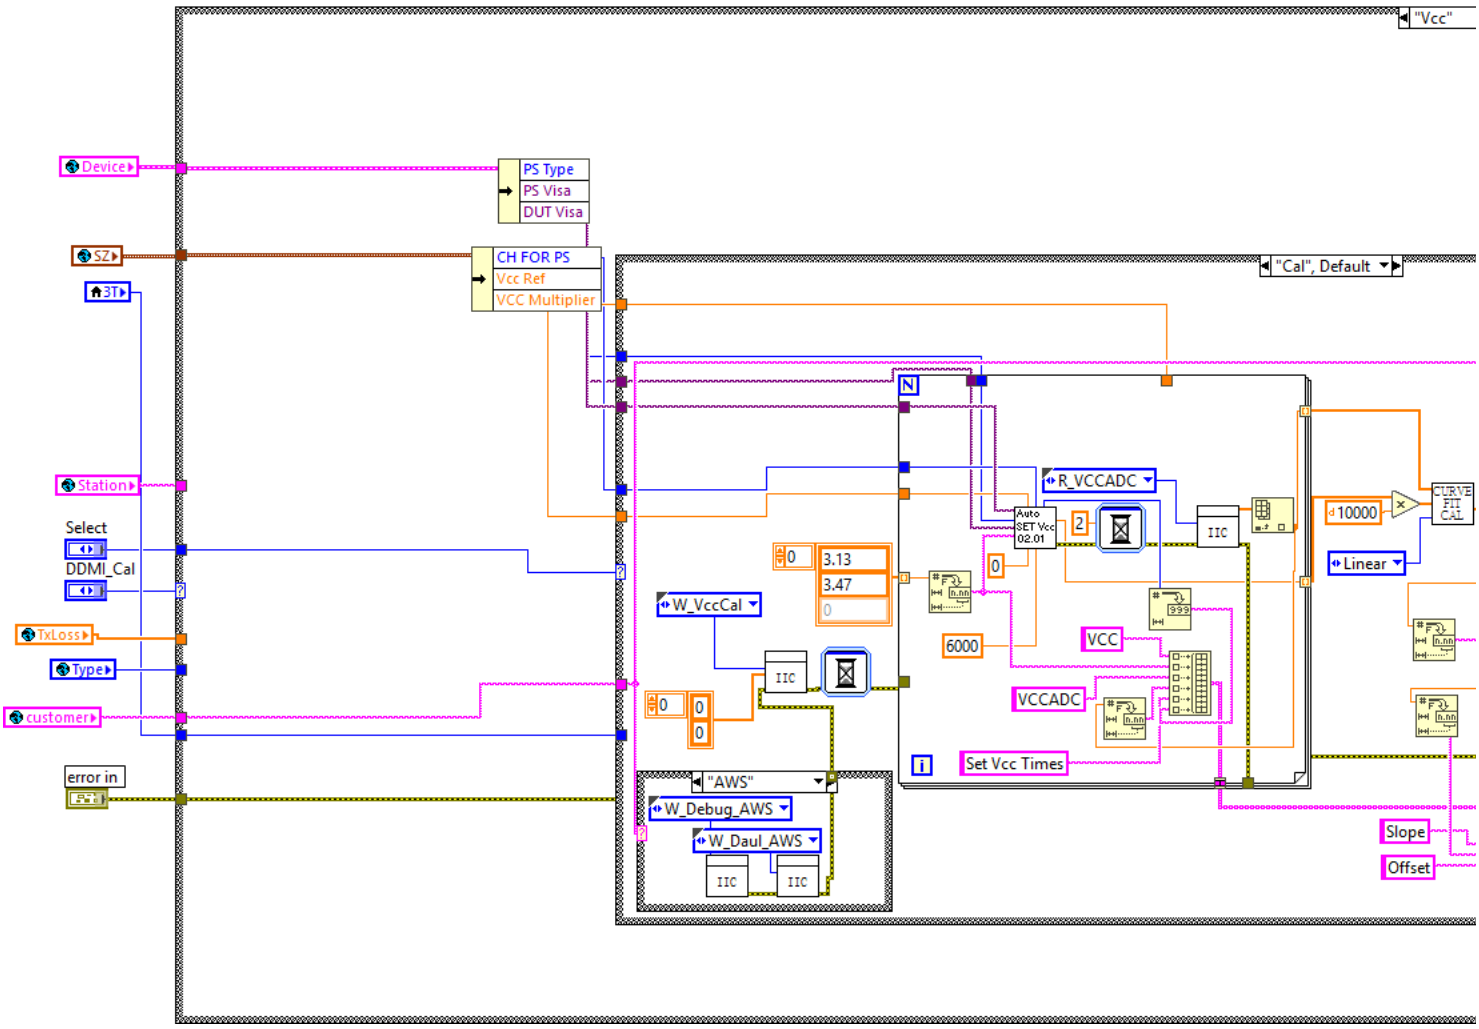
The **source** string describes the origin of the error or warning.

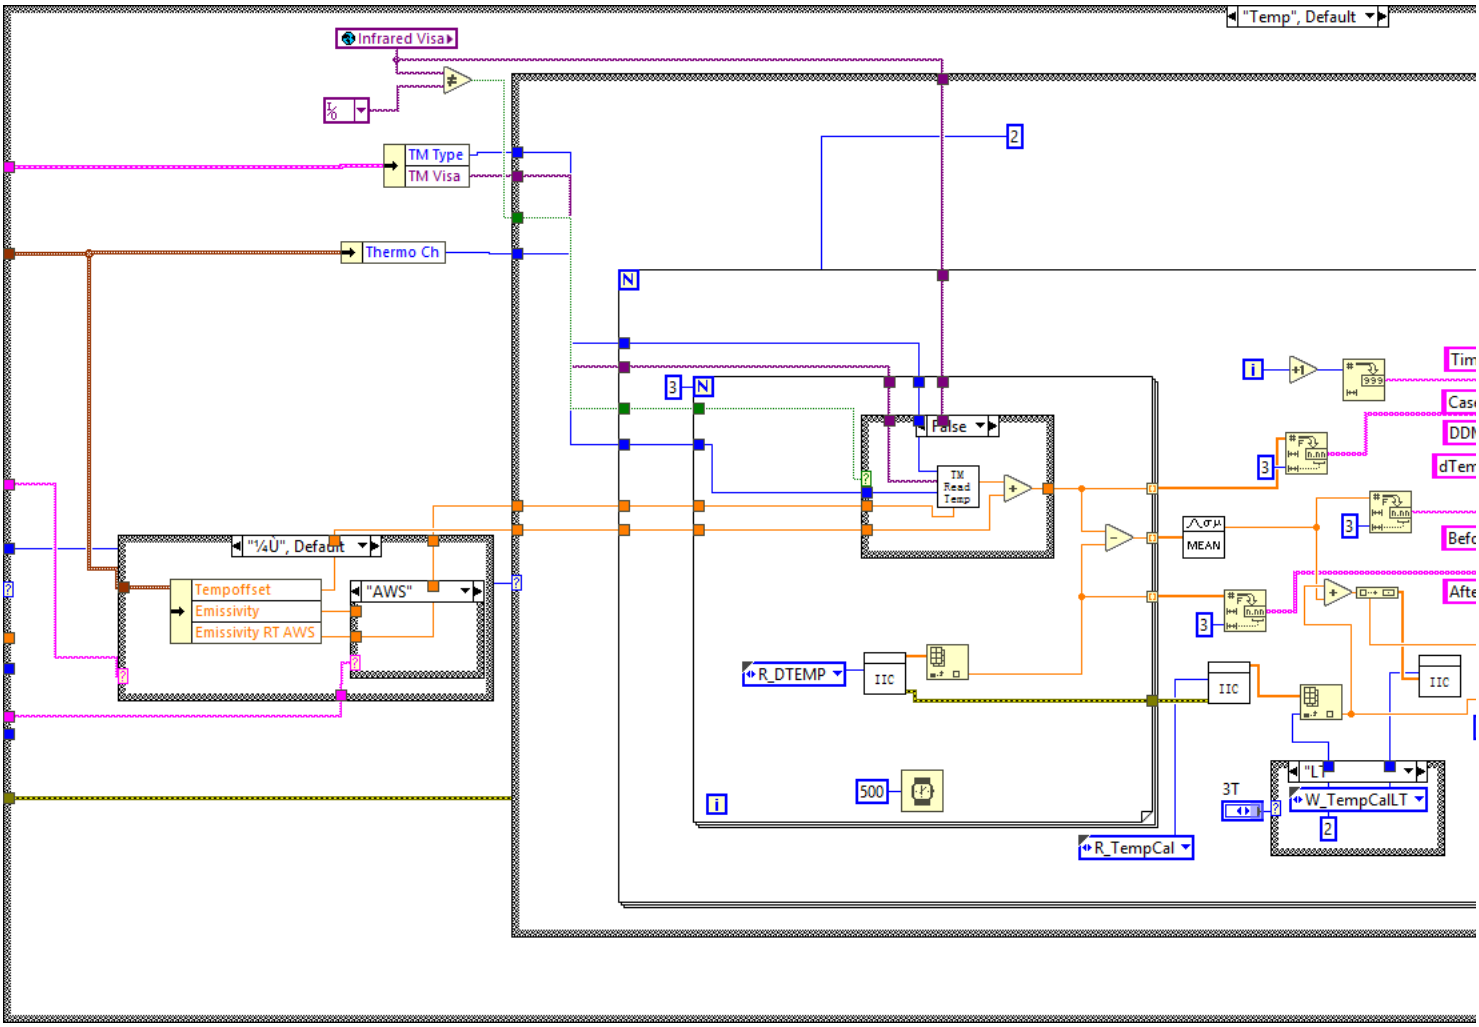
The pop-up option **Explain Error** (or Explain Warning) gives more information about the error displayed.


Log Message


Numeric


Block Diagram

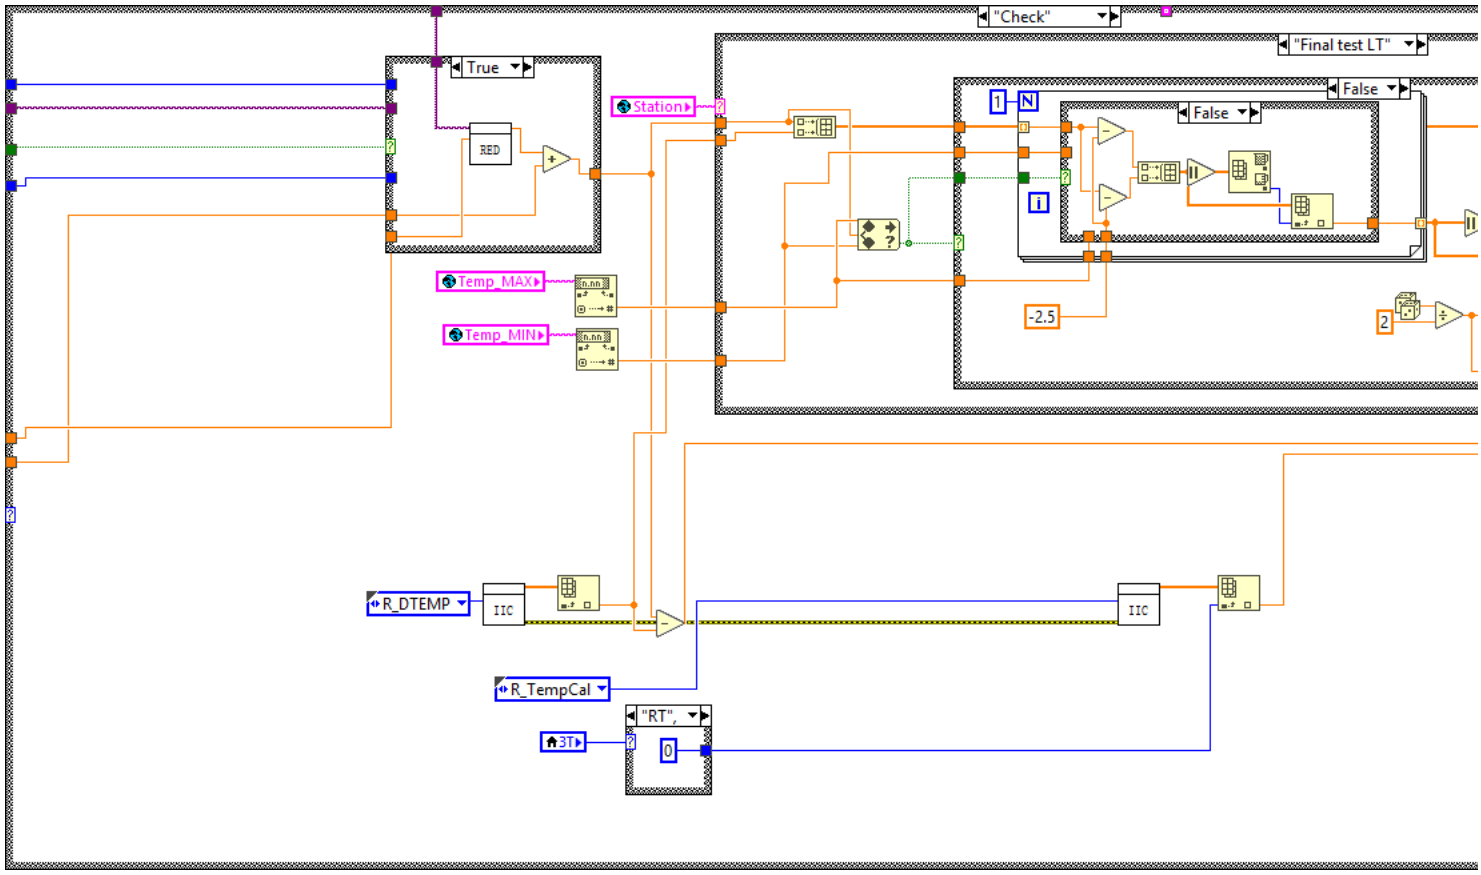

"Vcc"
Device
SZ
3T
Station
Select
DDMI_Cal
TxLoss
Type
customer
error in
PS Type
PS Visa
DUT Visa
CH FOR PS
Vcc Ref
VCC Multiplier
"Cal", Default
W_VccCal
0
3.13
3.47
0
IIC
R_VCCADC
Auto SET Vcc 02.01
2
0
6000
VCC
VCCADC
Set Vcc Times
10000
Linear
CURVE FIT CAL
Slope
Offset
"AWS"
W_Debug_AWS
W_Daul_AWS
IIC
IIC


"Temp", Default
Infrared Visa
TM Type
TM Visa
Thermo Ch
2
N
3
N
Pause
TM Read Temp
"¼Ù", Default
Tempoffset
Emissivity
Emissivity RT AWS
"AWS"
MEAN
R_DTEMP
IIC
500
R_TempCal
3T
W_TempCalLT
2


True
RED



0
W_TempCalRT

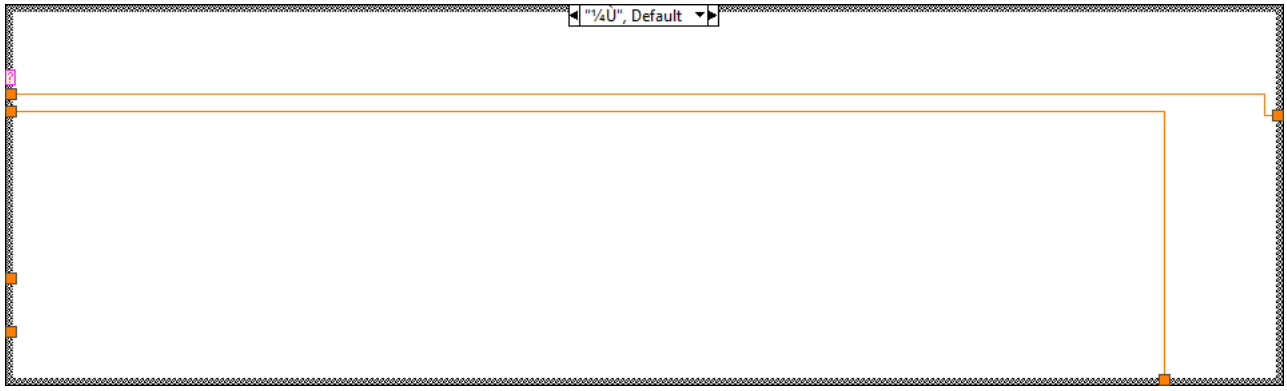

W_TempCalHT
1



"Check"
"Final test LT"
True
RED
Station
Temp_MAX
Temp_MIN
False
False
1
N
i
-2.5
2
R_DTEMP
IIC
IIC
R_TempCal
"RT",
0
3T

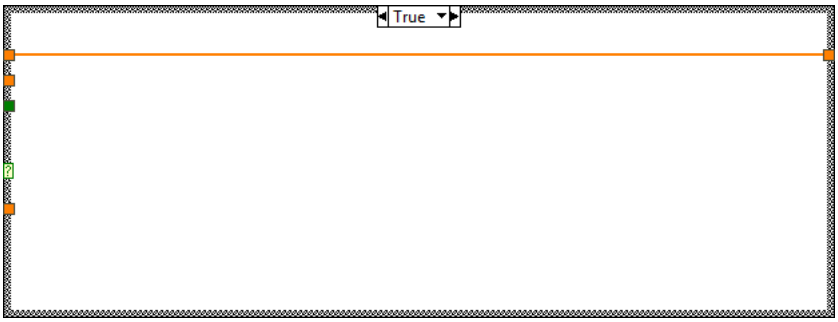

"HT"
1

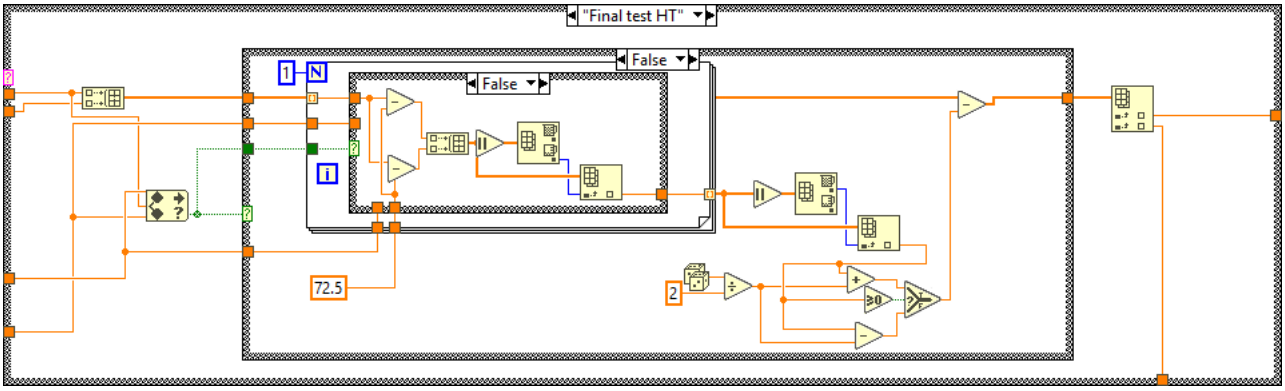

"LT"
2



False
TM
Read
Temp

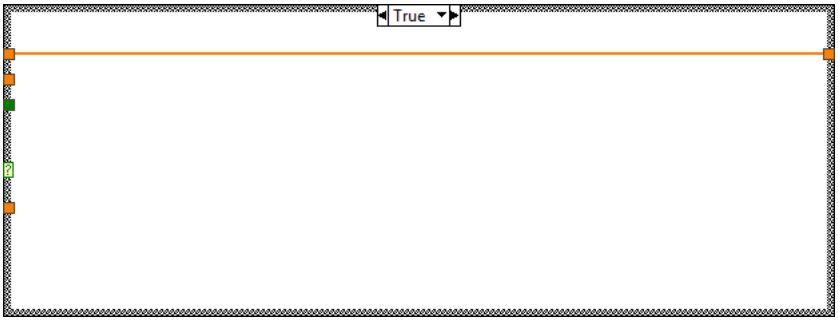

"¼U", Default



True
NaN

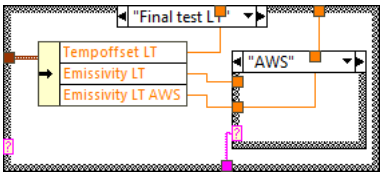

True



"Final test HT"
False
False
1
N
1
72.5
2

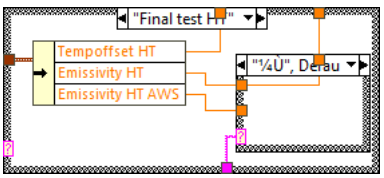

True
NaN



True



"¼U", Derau



"Final test LT"
Tempoffset LT
Emissivity LT
Emissivity LT AWS
"AWS"

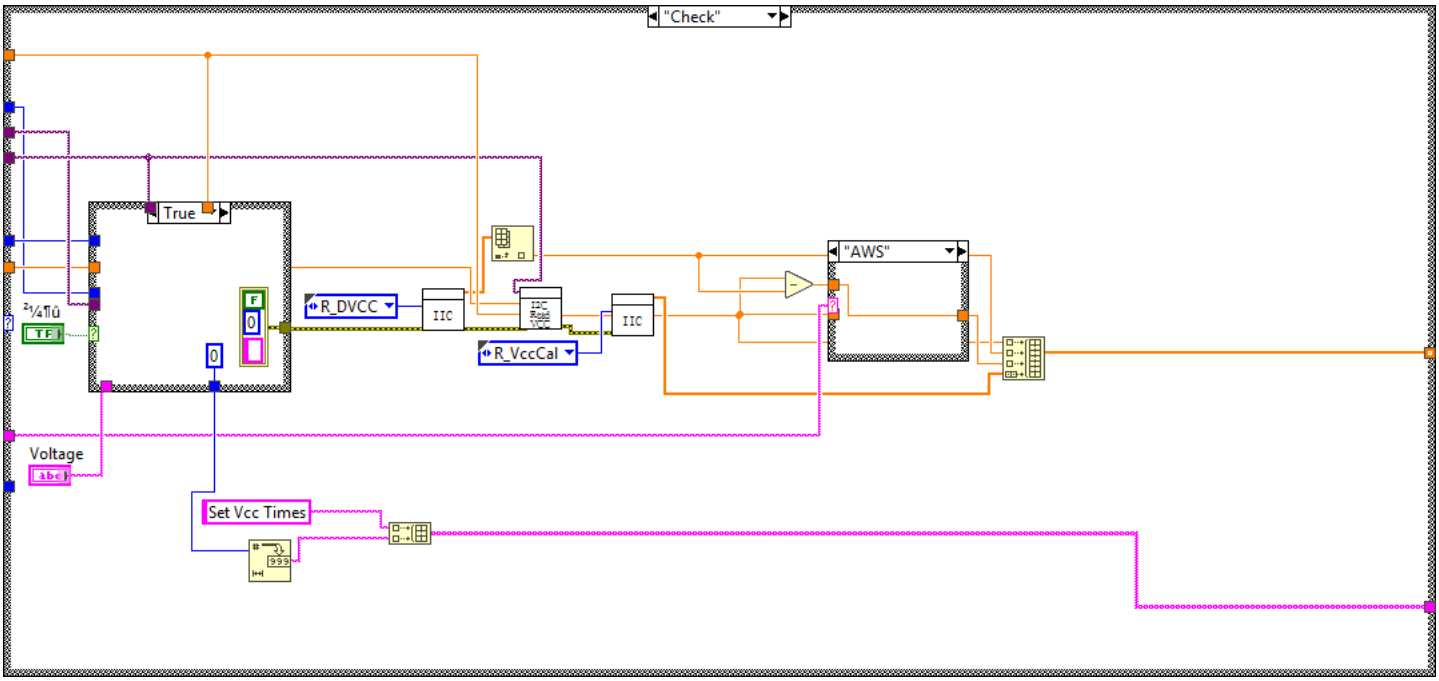

"¼U", Derau



"Final test HT"
Tempoffset HT
Emissivity HT
Emissivity HT AWS
"¼U", Derau



"AWS"

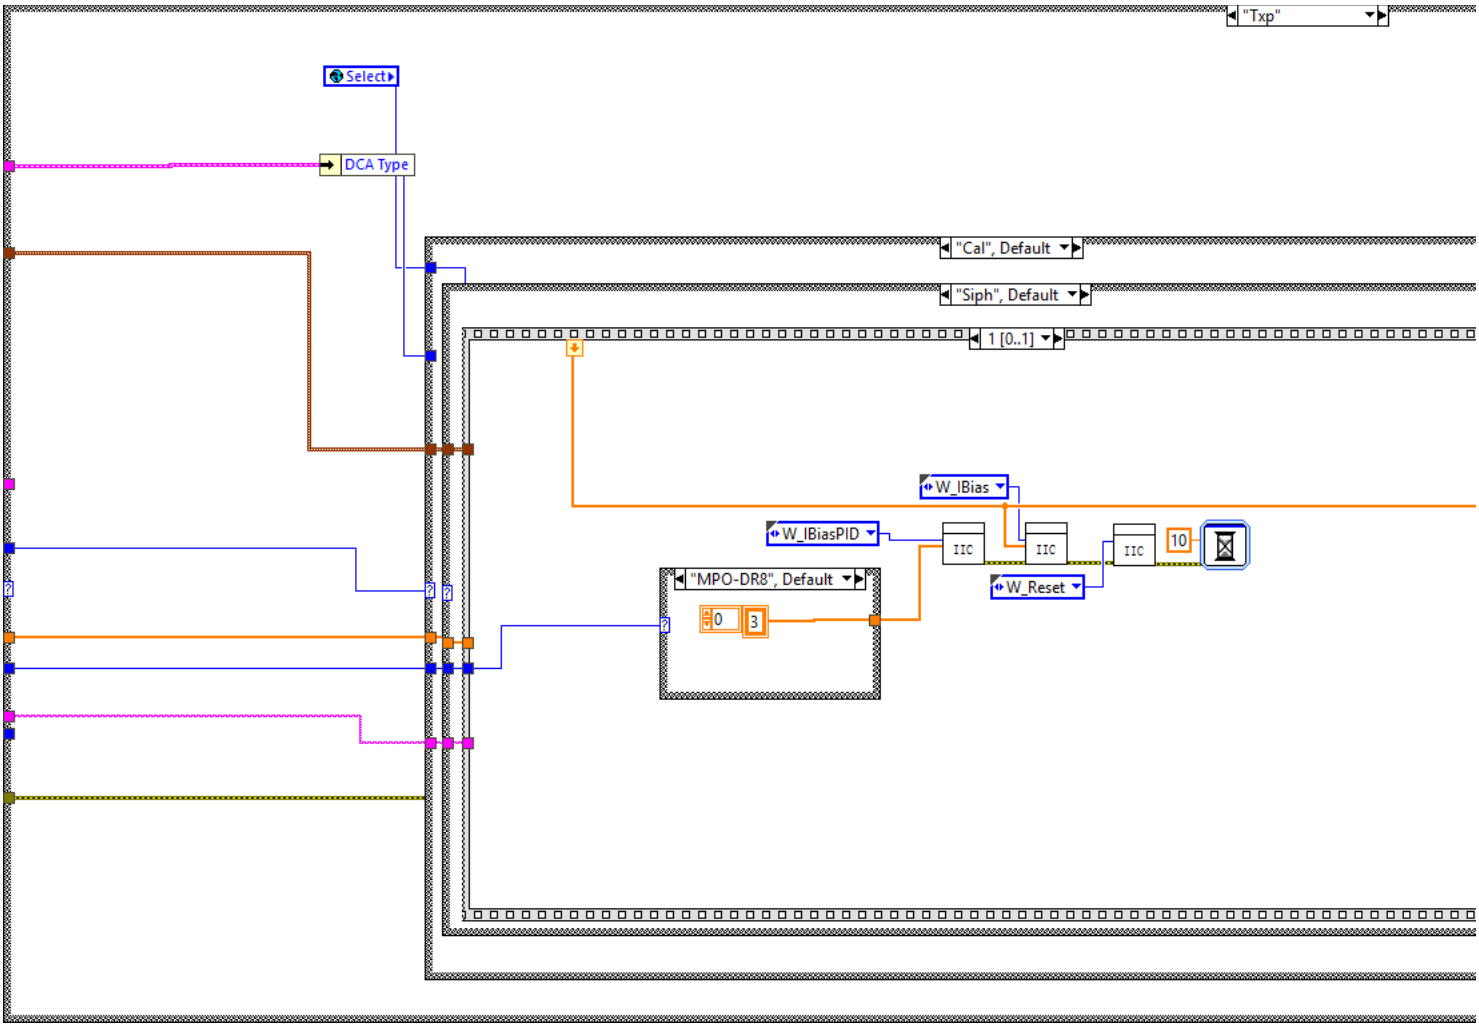

"¼Ù", Default

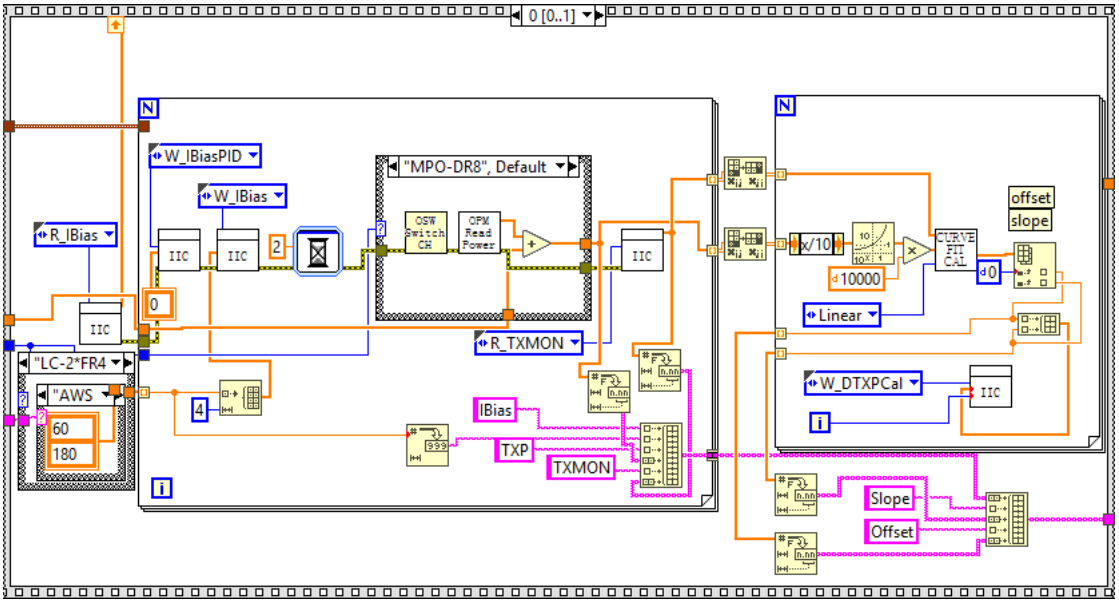

"¼Ù", Default



"Check"
True
R_DVCC
IIC
R_VccCal
IIC
"AWS"
Voltage
Set Vcc Times


False
Auto
SET Vcc
02.01
0
6000



"¼Ù", Default
100



"Txp"
Select
DCA Type
"Cal", Default
"Siph", Default
1 [0..1]
W_IBias
W_IBiasPID
IIC
IIC
IIC
10
W_Reset
"MPO-DR8", Default
0
3



0 [0..1]
N
W_IBiasPID
W_IBias
R_IBias
IIC
IIC
2
0
IIC
"MPO-DR8", Default
OSW Switch CH
OPM Read Power
IIC
R_TXMON
"LC-2*FR4
"AWS
60
180
4
IBias
TXP
TXMON
999
N
offset
slope
x/10
10
10^x
1
CURVE FIT CAL
d0
10000
Linear
W_DTXPCal
IIC
i
Slope
Offset



"LC-LR8"
N
OSW Switch CH
DCA Read Power
i

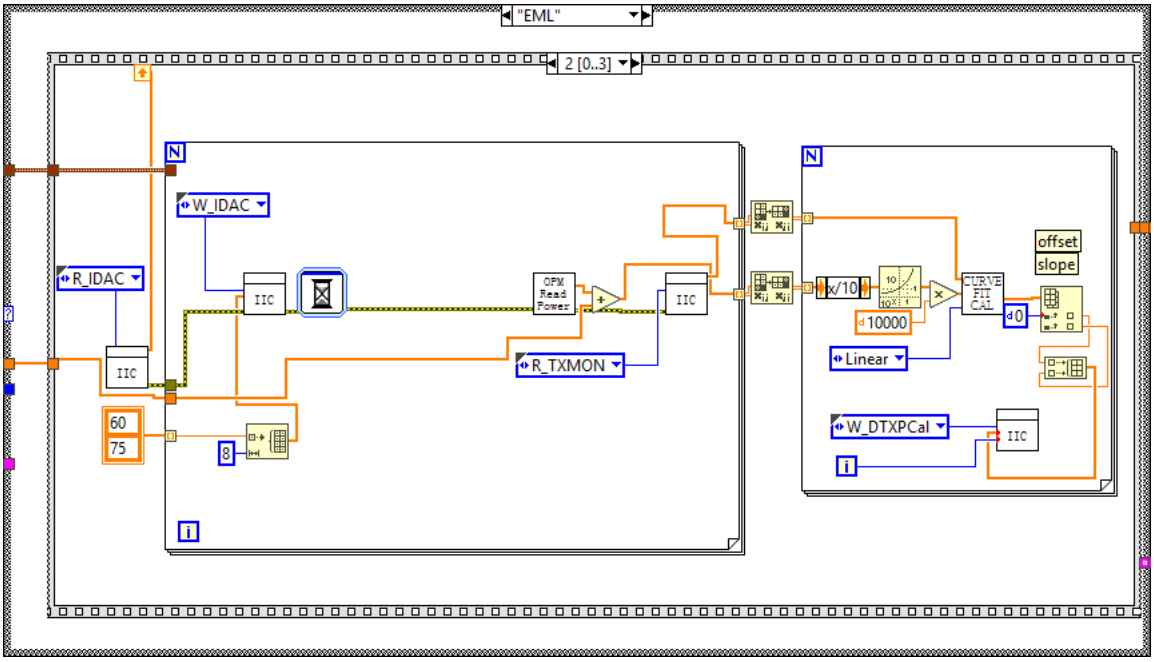

"¼Ù",
70
130

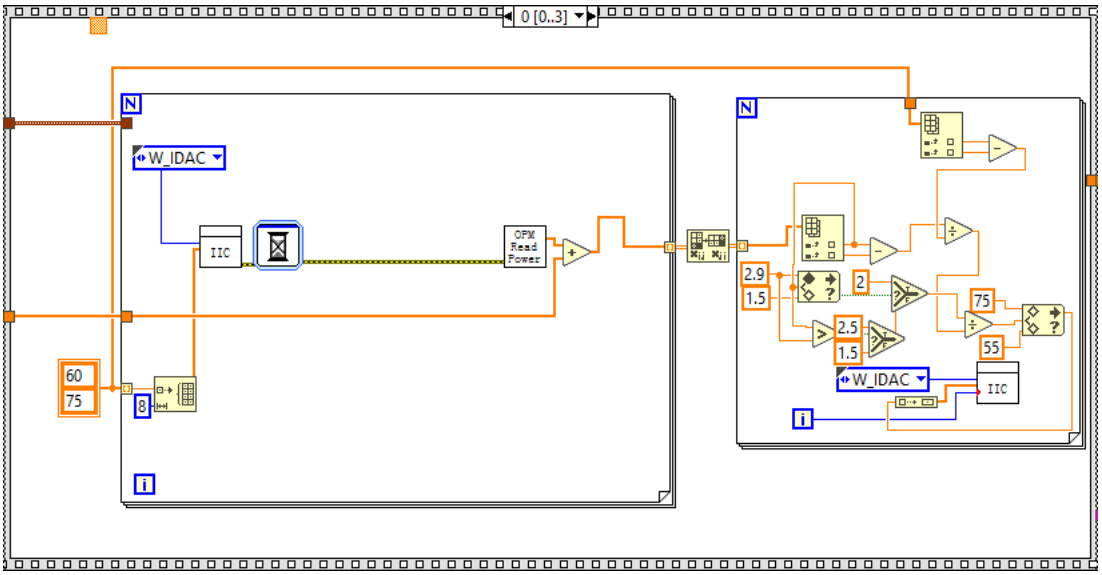

"MPO-DR
"A
100
300

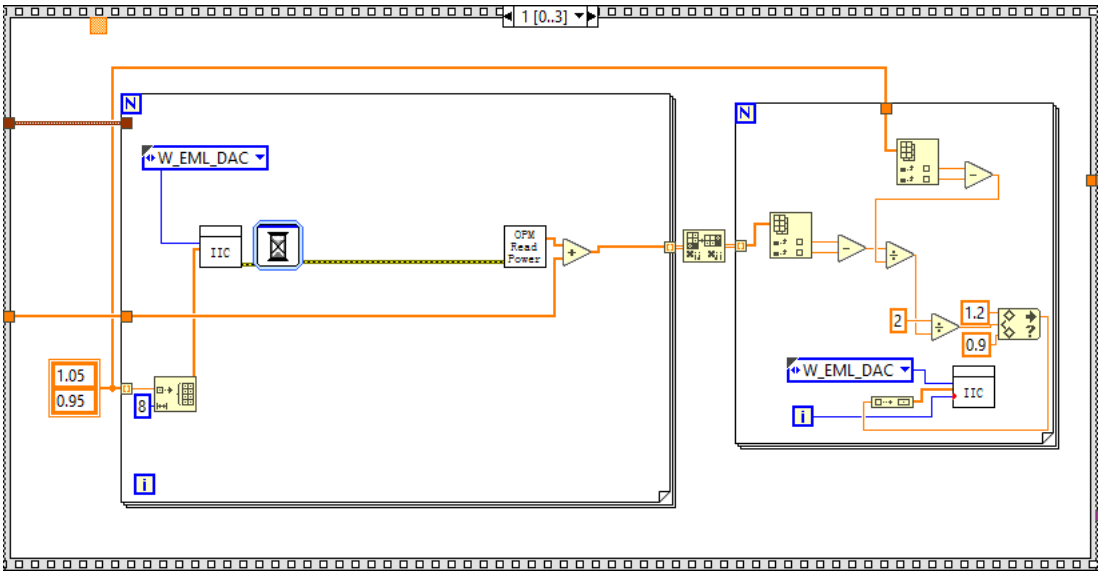

"¼
100
200

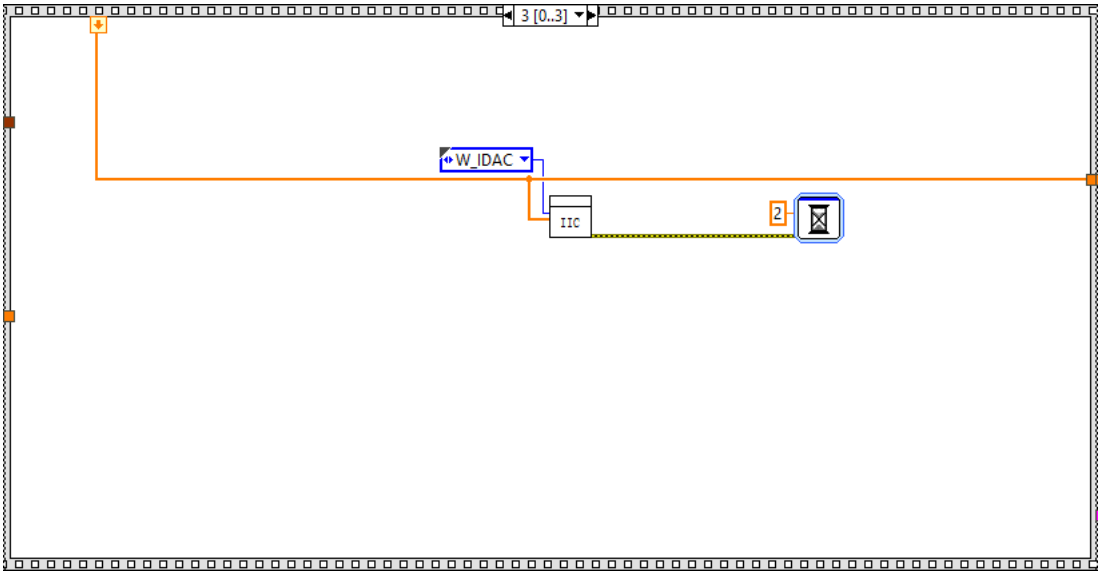

"Ac
80
120

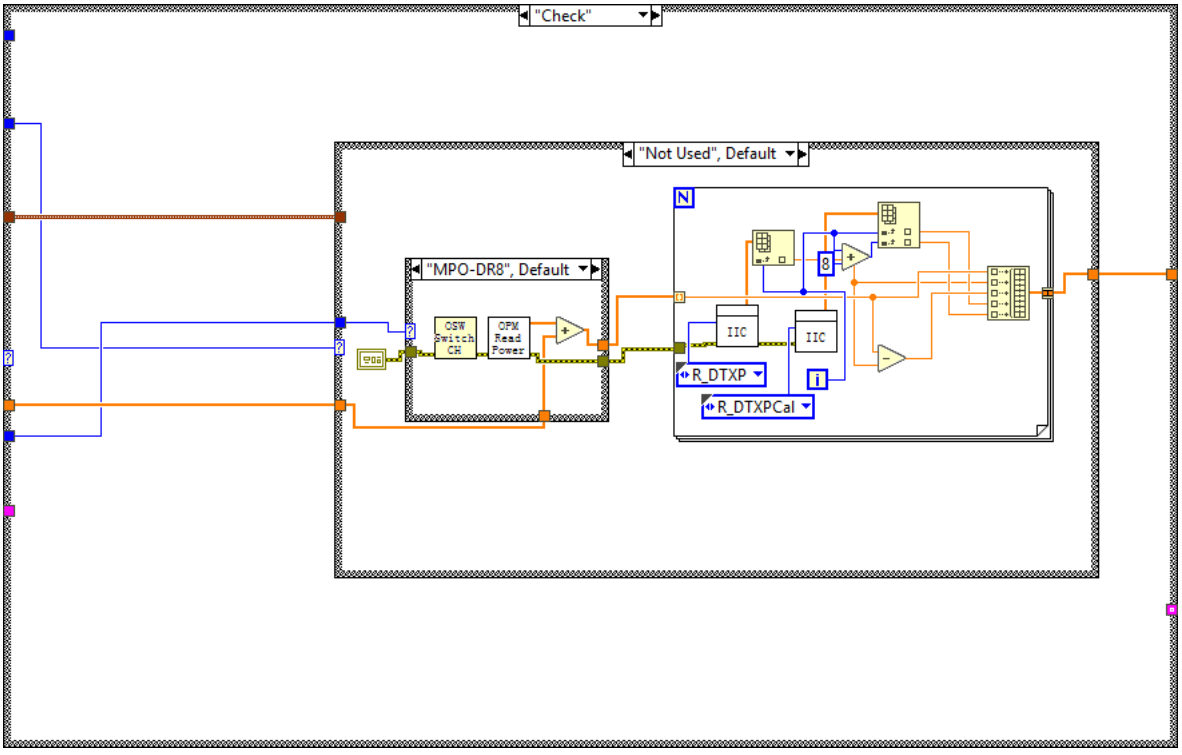

"LC-2*FR4"
0
15



"EML"
2 [0..3]
N
W_IDAC
R_IDAC
IIC
OPM Read Power
R_TXMON
60
75
8
i
x/10
10000
CURVE FIT CAL
offset
slope
0
Linear
W_DTXPCal

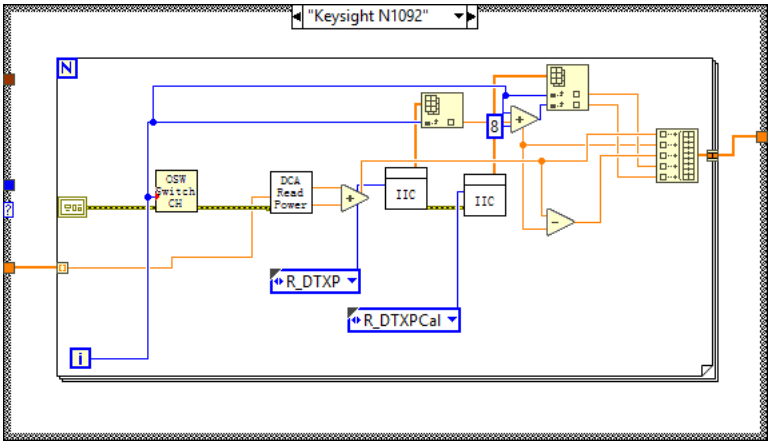

0 [0..3]
N
W_IDAC
IIC
OPM Read Power
60
75
8
i
2.9
1.5
2
2.5
1.5
75
55
W_IDAC
IIC

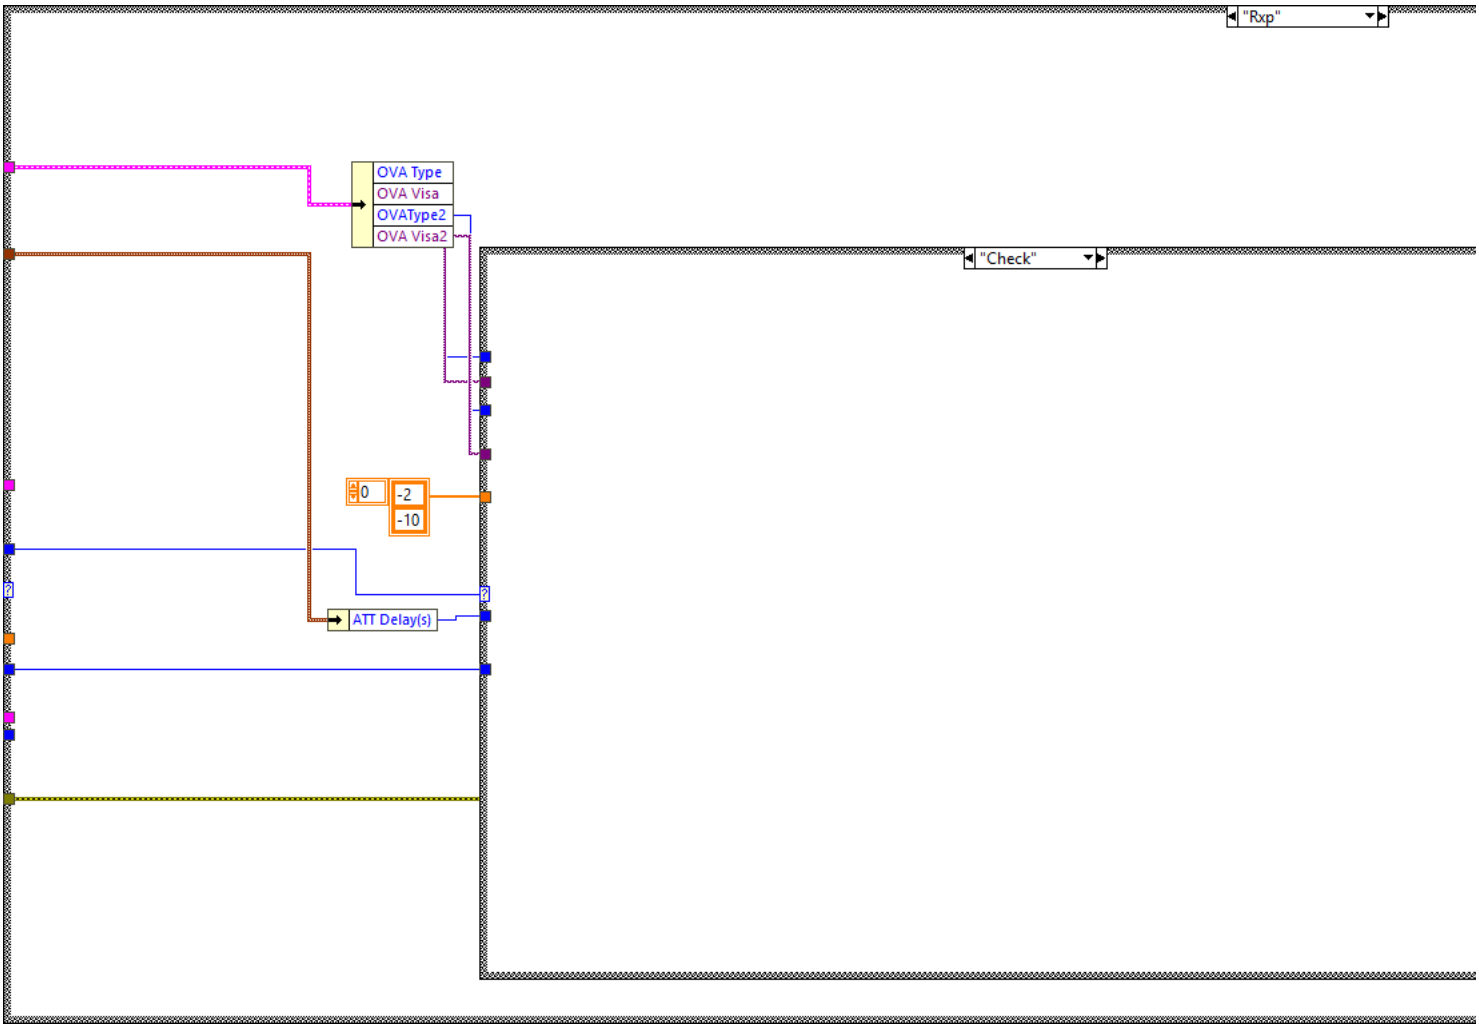

1 [0..3]
W_EML_DAC
IIC
OPM Read Power
1.05
0.95
8
2
1.2
0.9
W_EML_DAC
IIC
i

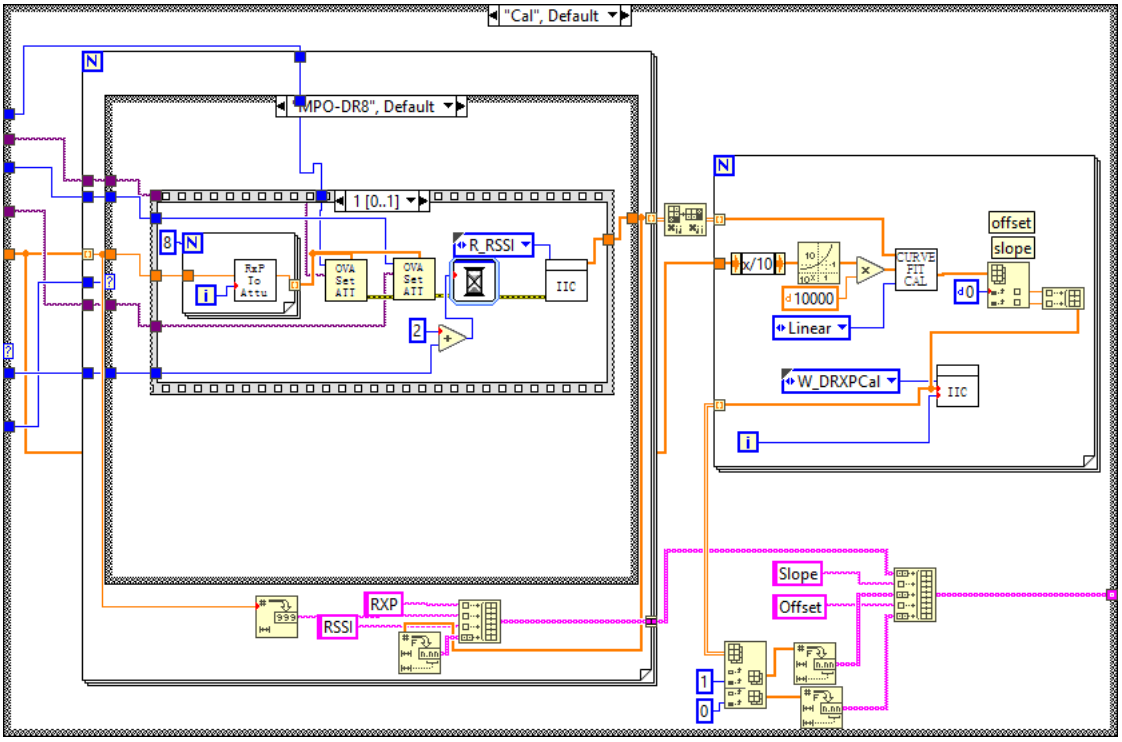

3 [0..3]
W_IDAC
IIC
2

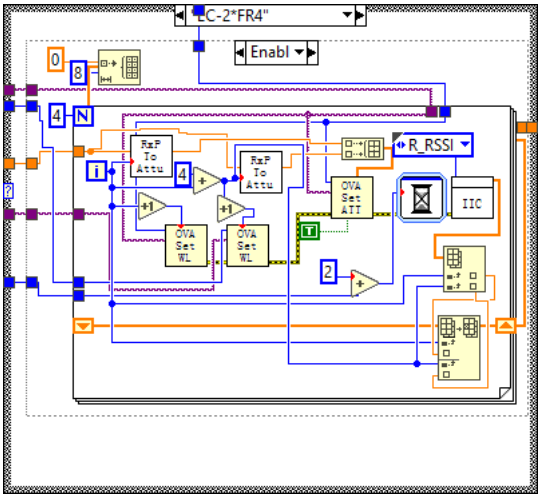

"Check"
"Not Used", Default
"MPO-DR8", Default
OSW Switch CH
OPM Read Power
IIC
IIC
8
R_DTXP
R_DTXPCal
i

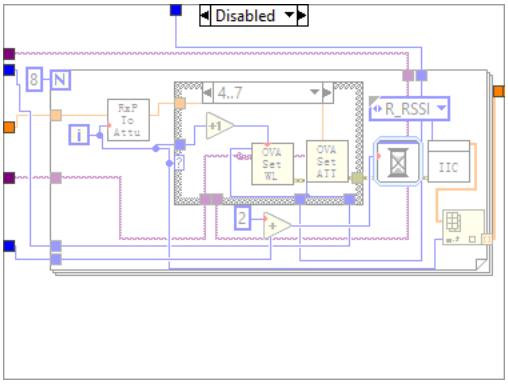

"LC-LR8"
N
OSW Switch CH
DCA Read Power
i



"Keysight N1092"
N
OSW Switch CH
DCA Read Power
IIC
IIC
R_DTXP
R_DTXPCal
i

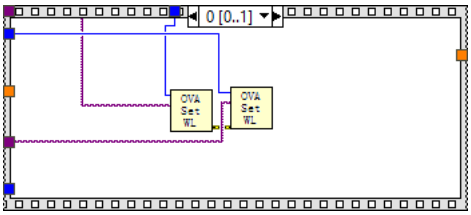

"Rxp"
OVA Type
OVA Visa
OVAType2
OVA Visa2
"Check"
0
-2
-10
ATT Delay(s)

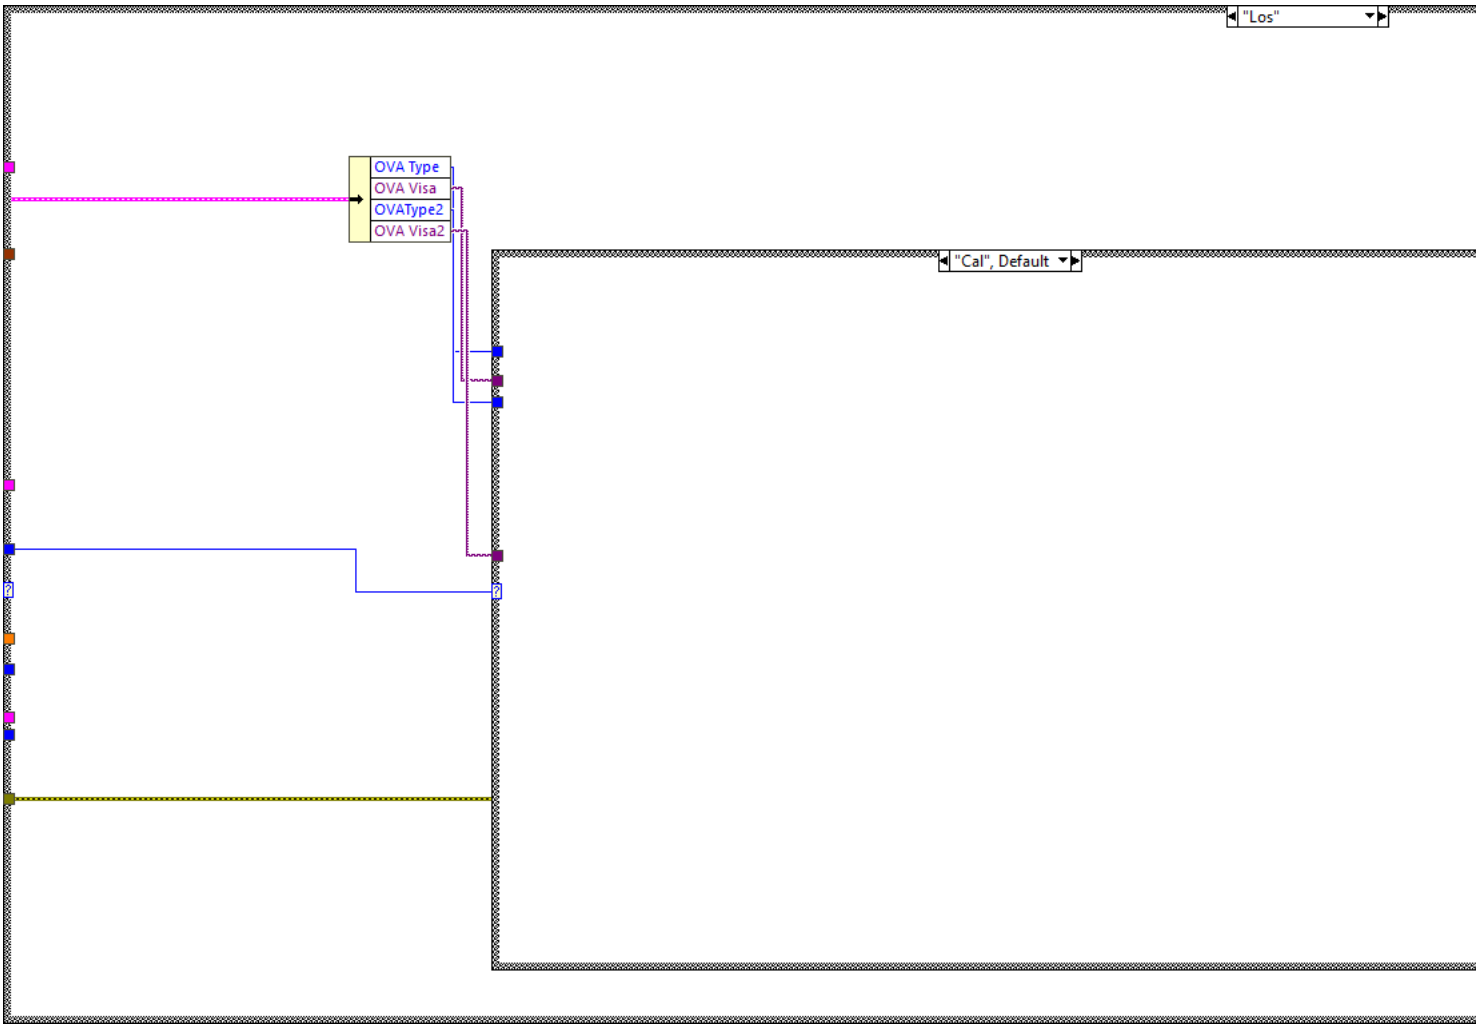

"Cal", Default
MPO-DR8", Default
1 [0..1]
R_RSSI
IIC
RxP To Attu
OVA Set ATT
RXP
RSSI
999
k/10
10000
Linear
CURVE FIT CAL
offset
slope
W_DRXPCal
Slope
Offset

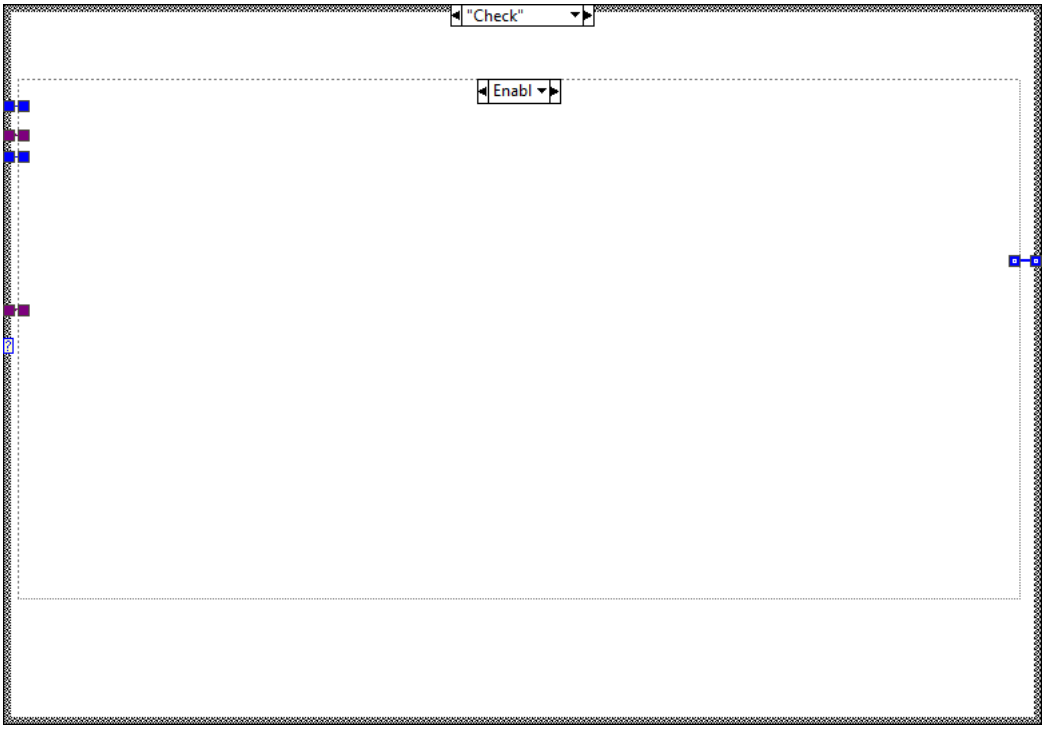

C-2*FR4"
Enabl
R_RSSI
IIC
RxP To Attu
OVA Set ATT
OVA Set WL

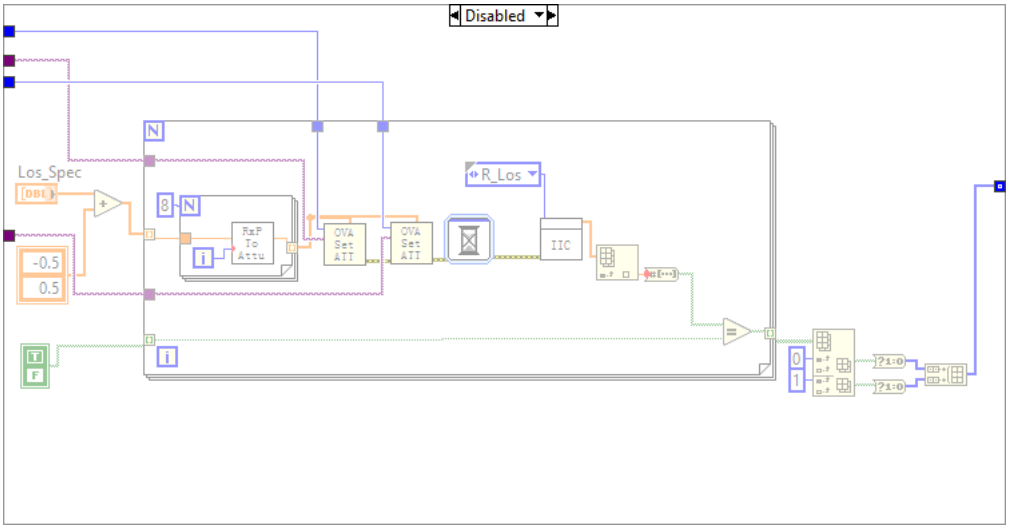

Disabled
4..7
R_RSSI
IIC
RxP To Attu
OVA Set WL
OVA Set ATT


0..3, Default
OVA Set WL
OVA Set ATT


0 [0..1]
OVA Set WL
OVA Set WL


"Los"
OVA Type
OVA Visa
OVAType2
OVA Visa2
"Cal", Default





List of SubVIs and Express VIs with Configuration Information

TM Read Temp.vi

C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\TM Read Temp.vi

Read Temp from Temp Sensor.vi

C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\Read Temp from Temp Sensor.vi

Auto Adjust Vcc.vi

C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\Auto Adjust Vcc.vi

OSW Switch CH.vi

C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\OSW Switch CH.vi

IIC.vi

C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\IIC.vi

I2C_Step.ctl

C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\I2C_Step.ctl

OPM Read Chs Power.vi

C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\OPM Read Chs Power.vi

OVA Set Wavelength.vi

C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\OVA Set Wavelength.vi

CH RxP To Att.vi

C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\CH RxP To Att.vi

DCA Read Power.vi

C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\DCA Read Power.vi

NI_AALBase.lvlib:Mean (DBL).vi

C:\Program Files (x86)\National Instruments\LabVIEW 2025\vi.lib\Analysis\baseanly.llb\Mean (DBL).vi

I2C Read Vcc.vi

C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\I2C Read Vcc.vi

Calulate_Curve Fit Coefficient.vi

C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\Calulate_Curve Fit Coefficient.vi

G_100G.vi

C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\G_100G.vi

subTimeDelay.vi

C:\Program Files (x86)\National Instruments\LabVIEW 2025\vi.lib\express\express execution control\TimeDelayBlock.llb\subTimeDelay.vi

OVA Set Chs Att.vi

C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\OVA Set Chs Att.vi

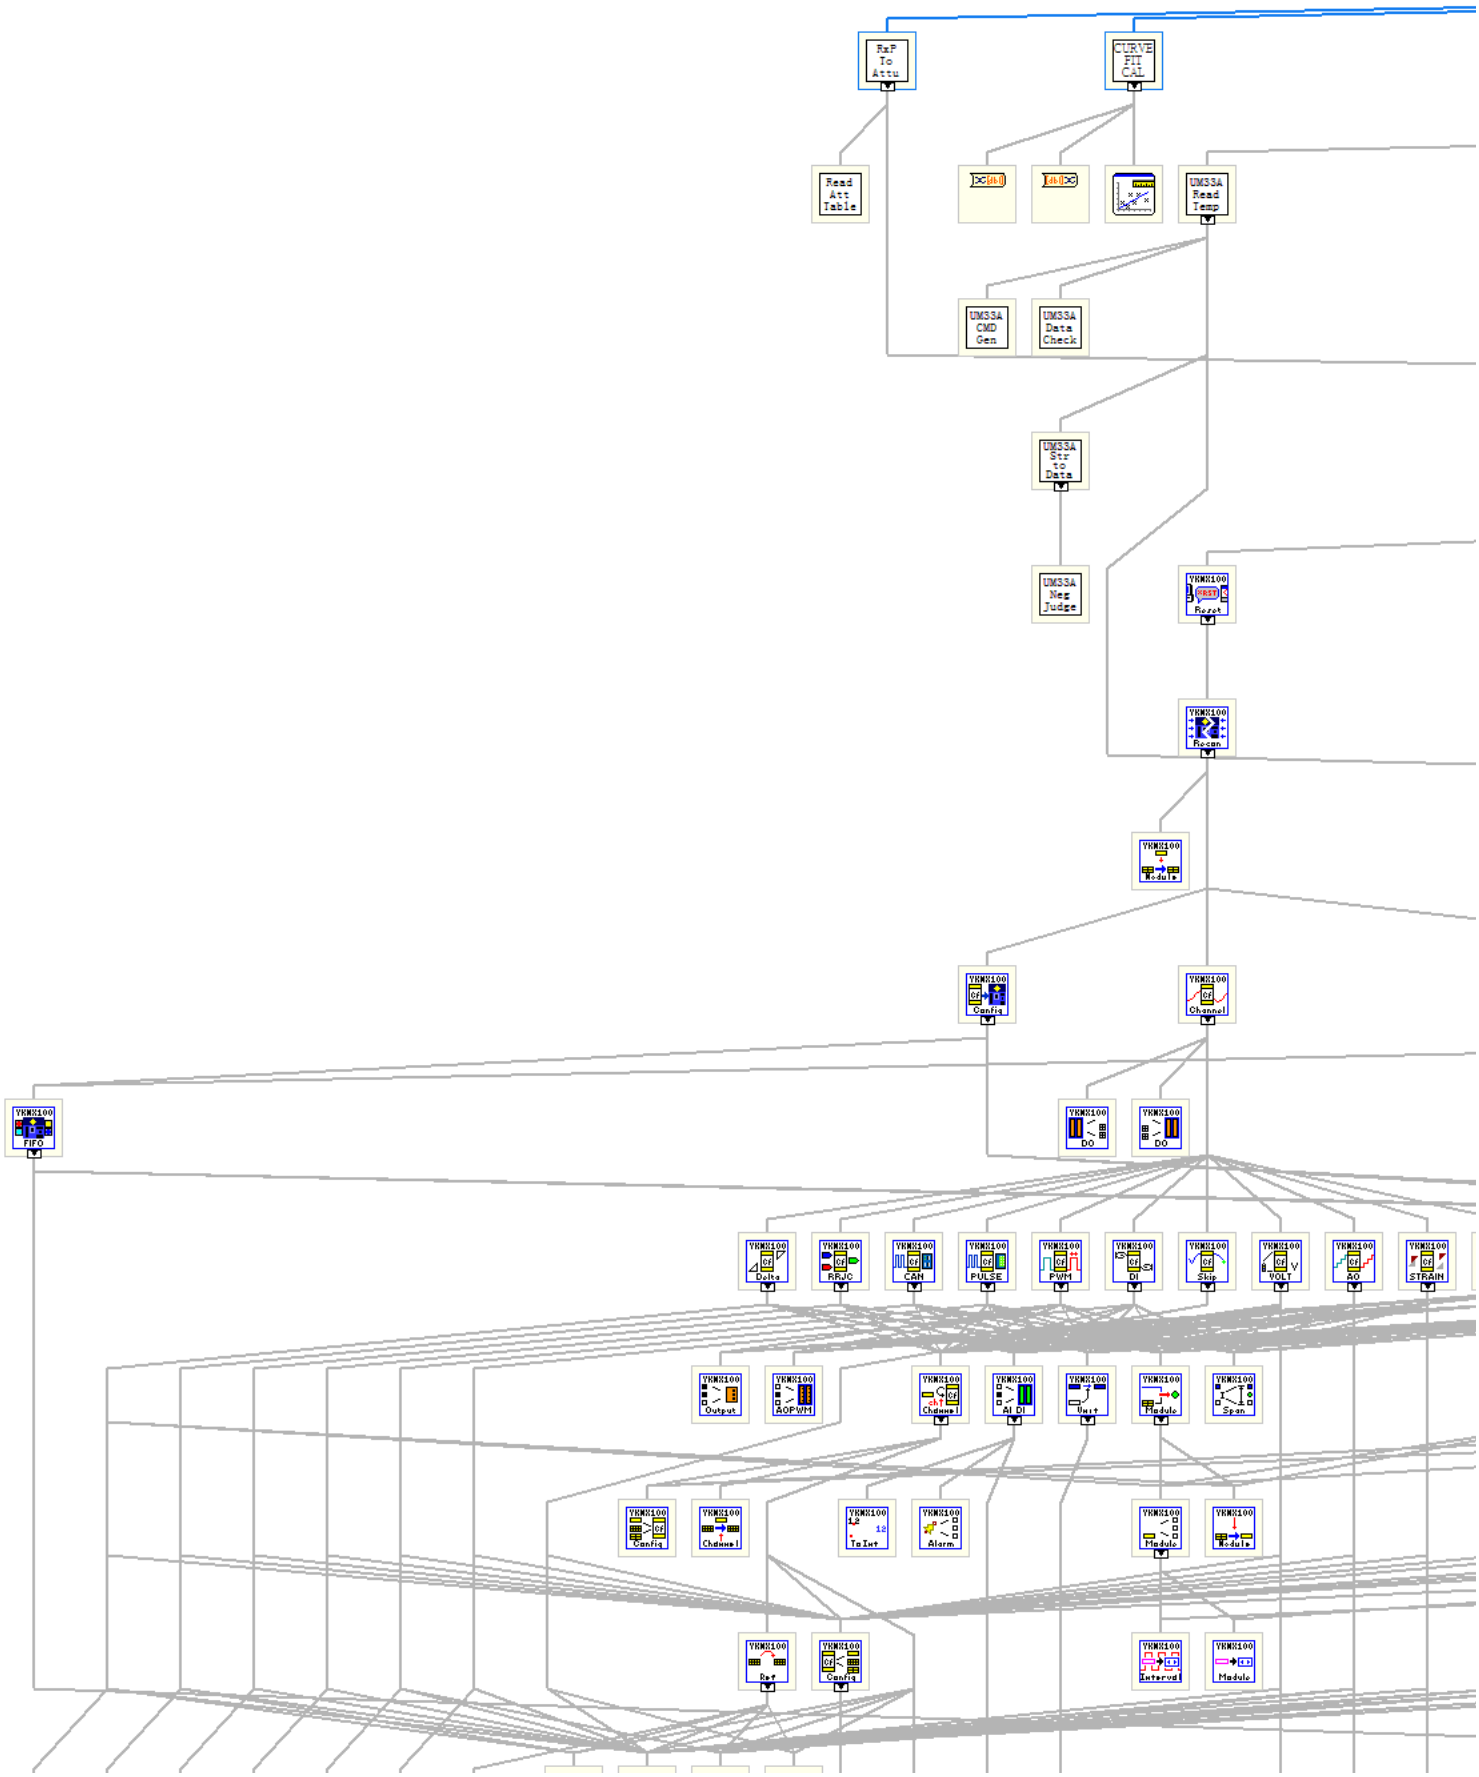
---

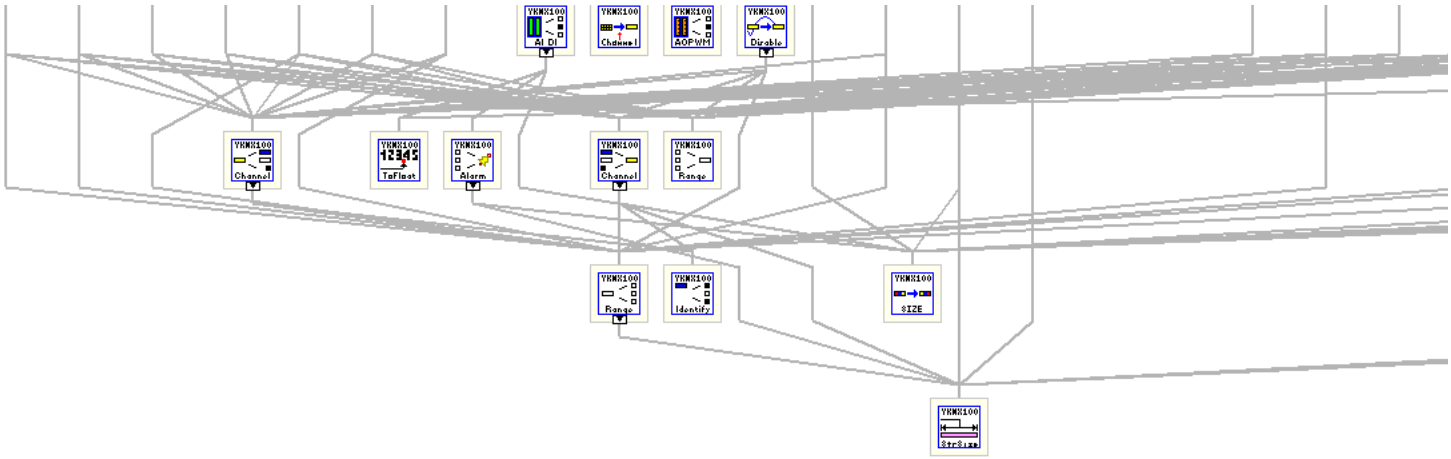
VI Revision History

"DDMI_Cal.vi History"

Current Revision: 175

Position in Hierarchy


RxP To Attu
CURVE FIT CAL
Read Att Table
UM33A Read Temp
UM33A CMD Gen
UM33A Data Check
UM33A Str to Data
UM33A Neg Judge
Reset
Recon
Modulo
Config
Channel
FIFO
DO
DO
Data
RRUC
CAN
PULSE
PWM
DI
Skip
VOLT
AO
STRAIN
Output
AOPWM
Channel
AI DI
Unit
Modulo
Span
Config
Channel
ToInt
Alarm
Modulo
Modulo
Reg
Config
Interval
Modulo




Iconified Cluster Constants



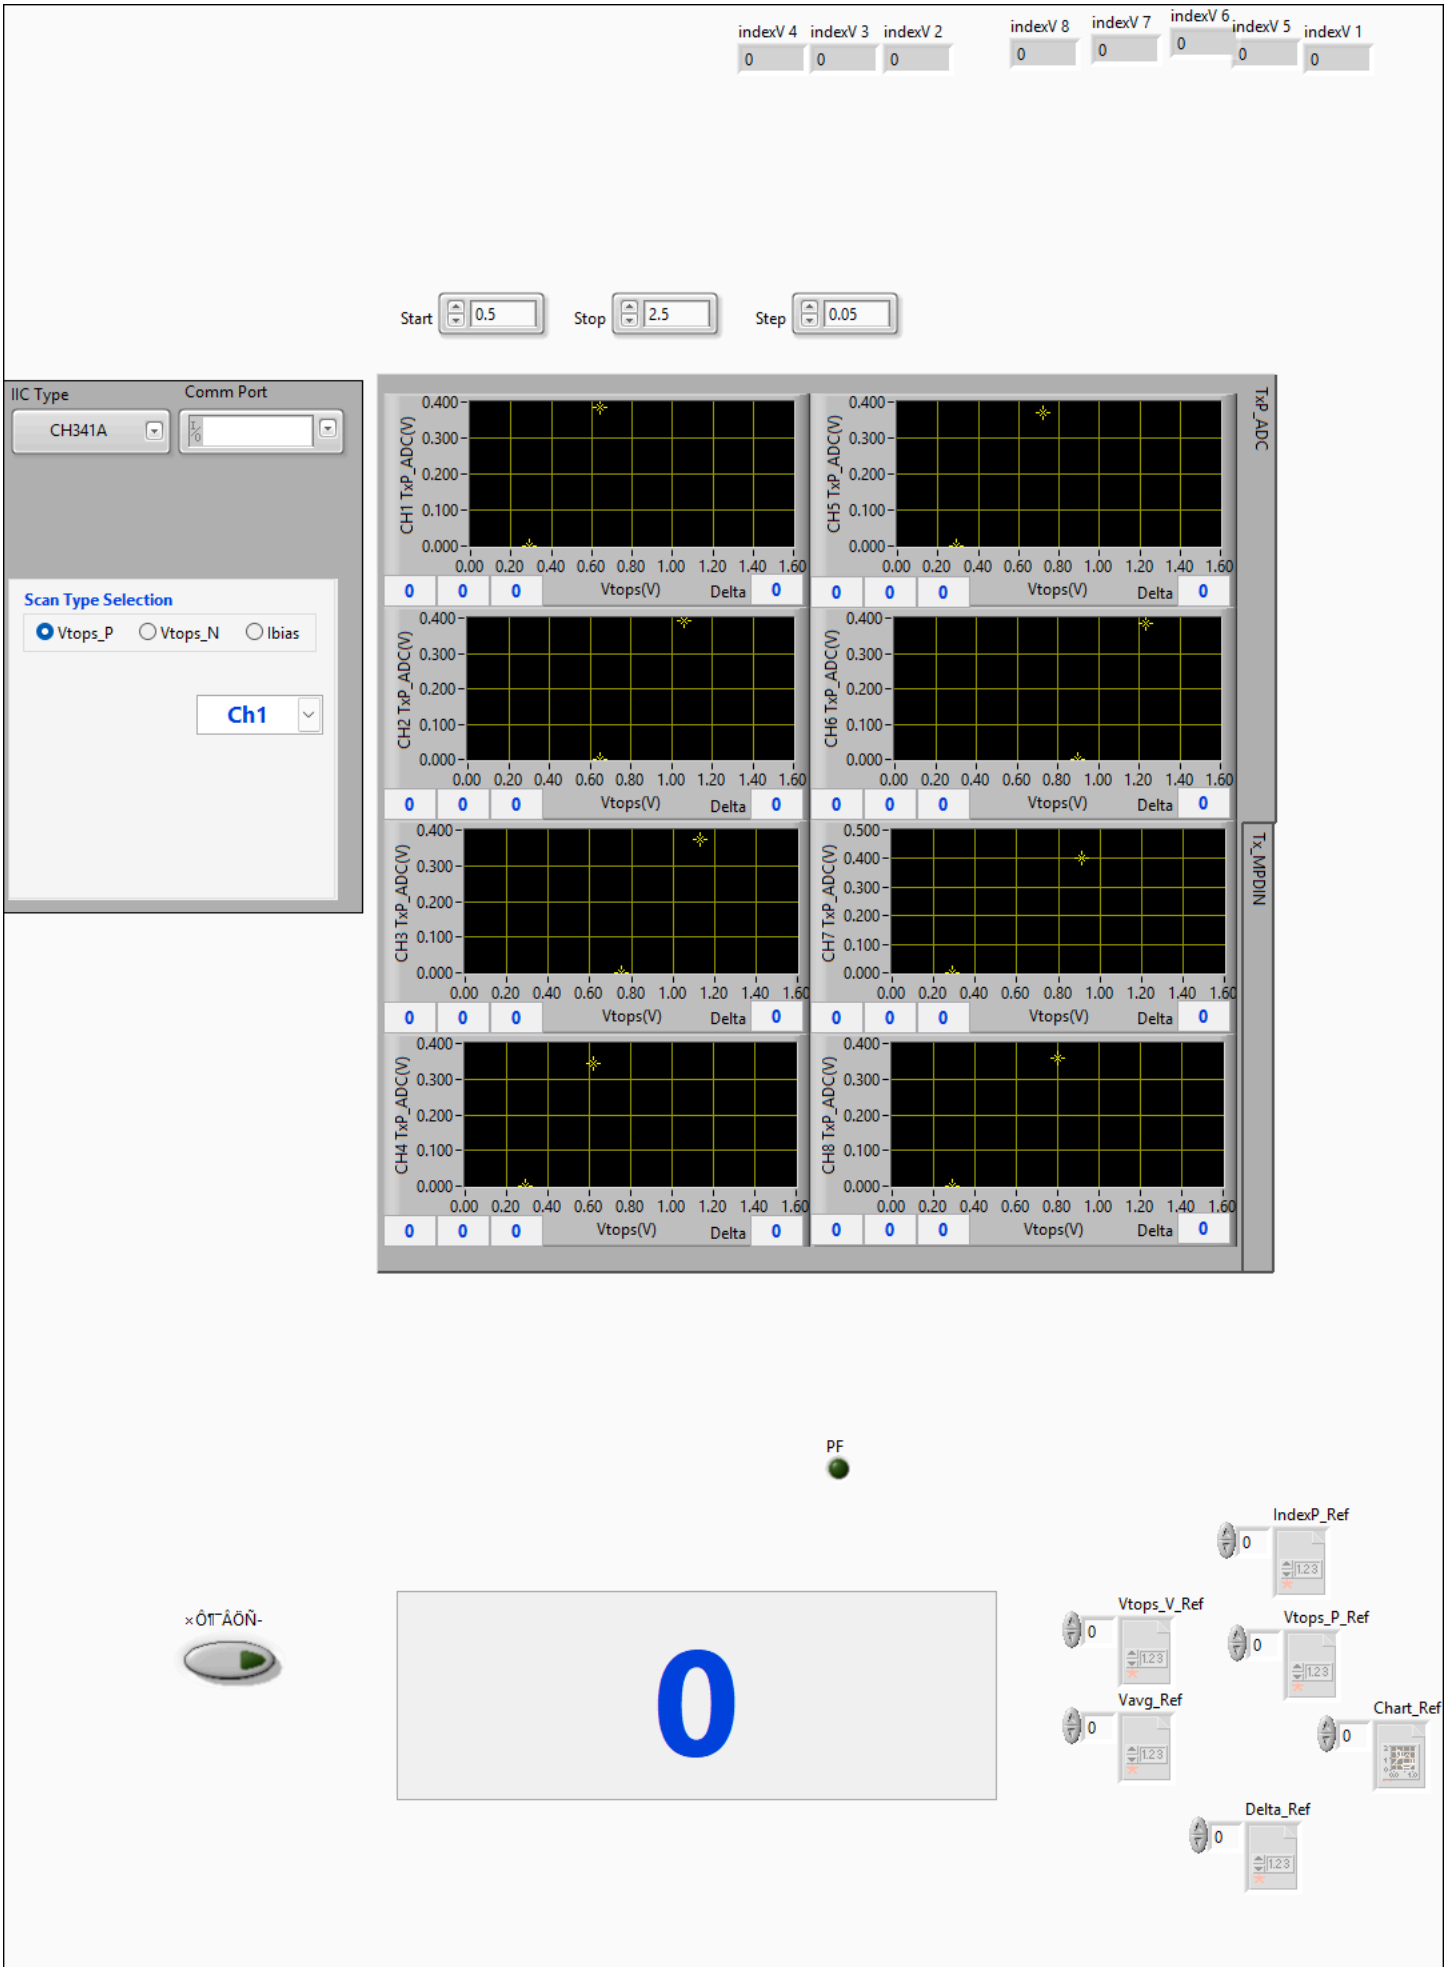


800G SIP Tx MPD Monitor.vi

Connector Pane



Front Panel


indexV 4
indexV 3
indexV 2
indexV 8
indexV 7
indexV 6
indexV 5
indexV 1
Start
0.5
Stop
2.5
Step
0.05
IIC Type
CH341A
Comm Port
Scan Type Selection
Vtops_P
Vtops_N
Ibias
Ch1
CH1 TxP_ADC(V)
CH2 TxP_ADC(V)
CH3 TxP_ADC(V)
CH4 TxP_ADC(V)
CH5 TxP_ADC(V)
CH6 TxP_ADC(V)
CH7 TxP_ADC(V)
CH8 TxP_ADC(V)
Vtops(V)
Delta
TxP_ADC
Tx_MPDIN
PF
×Ô¶¯ÅÄÕÑ-
0
IndexP_Ref
Vtops_V_Ref
Vtops_P_Ref
Vavg_Ref
Chart_Ref
Delta_Ref



Controls and Indicators

- Comm Port[VISA]
- IIC Type
- Channel[Channel]
- 自动轮循[Auto Ch]
- Start[Vtops_Min]
- Stop[Vtops_Max]
- Step[Vtops_Step]
- Tab
- Chart_Tab
- Scan Type Selection[Type]
    - Vtops_P
    - Vtops_N
    - Ibias
- RSSI1[Tx Power]
- RSSI1[TxMON]
- Chart 1
- Chart 2
- Chart 3
- Chart 4
- Vtops_V1
- Vtops_P1
- Vtops_V2
- Vtops_P2
- Vtops_V3
- Vtops_P3
- Vtops_V4
- Vtops_P4
- indexP 1
- indexP 2
- indexP 3
- indexP 4
- Chart 5
- Chart 6
- Chart 7
- Chart 8
- Vavg_1
- Vavg_2
- Vavg_3
- Vavg_4
- Delta[Delta 1]
- Delta[Delta 2]

2

- Delta[Delta 3]
- Delta[Delta 4]
- Vtops_V5
- Vtops_P5

DBL **Vavg_5**
U16 **Delta[Delta 5]**
DBL **Vtops_V6**
DBL **Vtops_P6**
DBL **Vavg_6**
U16 **Delta[Delta 6]**
DBL **Vtops_V7**
DBL **Vtops_P7**
DBL **Vavg_7**
U16 **Delta[Delta 7]**
DBL **Vtops_V8**
DBL **Vtops_P8**
DBL **Vavg_8**
U16 **Delta[Delta 8]**
Vtops_P_Ref

Vtops_P8

Vtops_V_Ref

Vtops_V8

Vavg_Ref

Vavg_8

Delta_Ref

Delta 8

I32 **indexP 5**
I32 **indexP 6**
I32 **indexP 7**
I32 **indexP 8**
IndexP_Ref

index 8

Chart 9
Chart 10
Chart 11
Chart 12
Chart_Ref

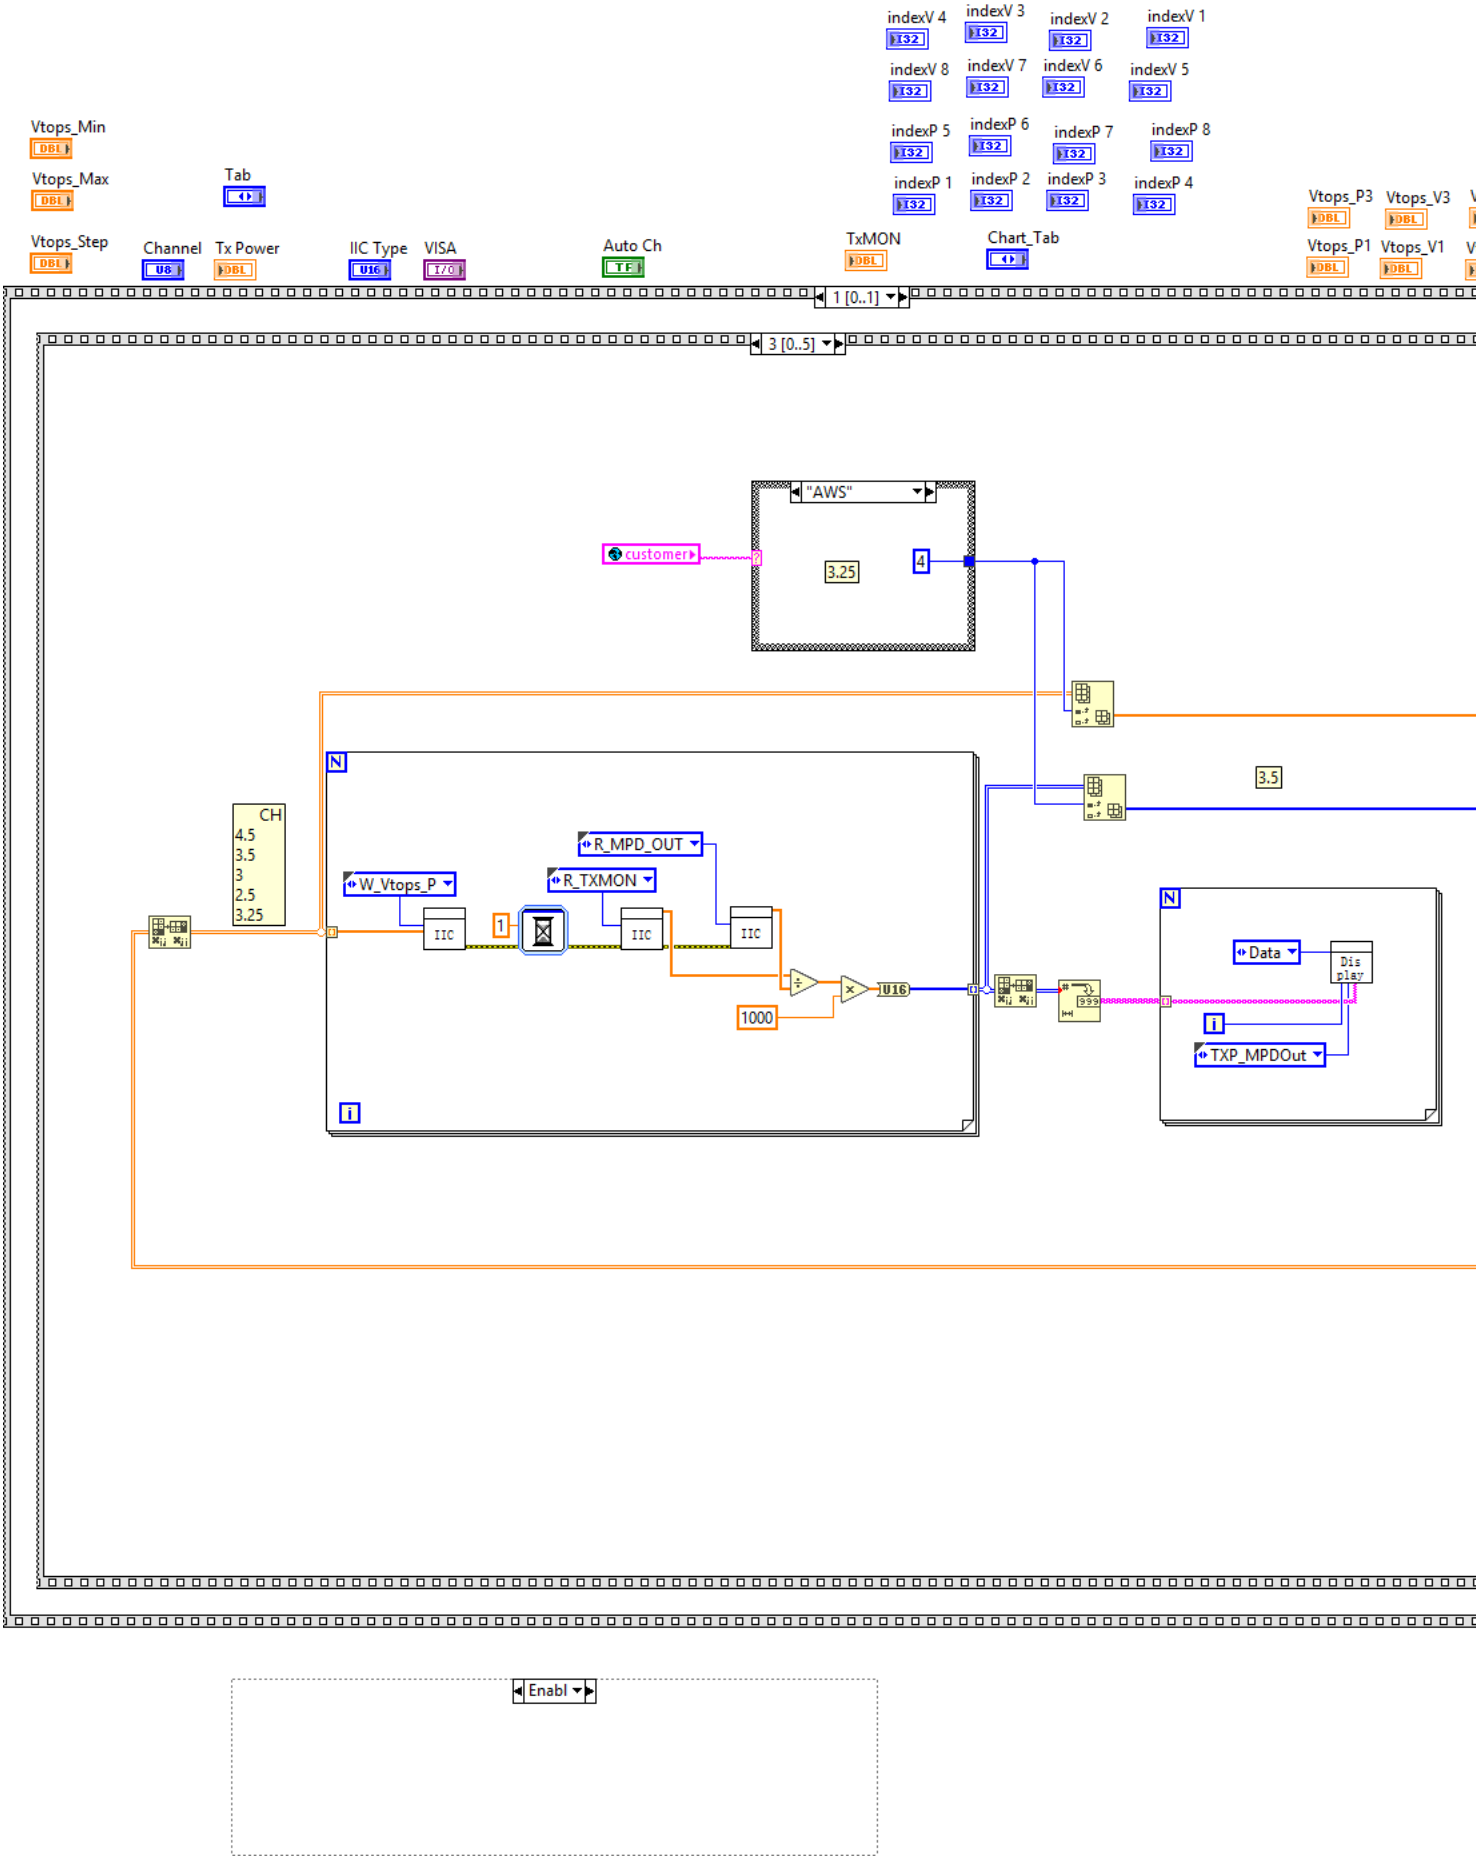
Chart 8

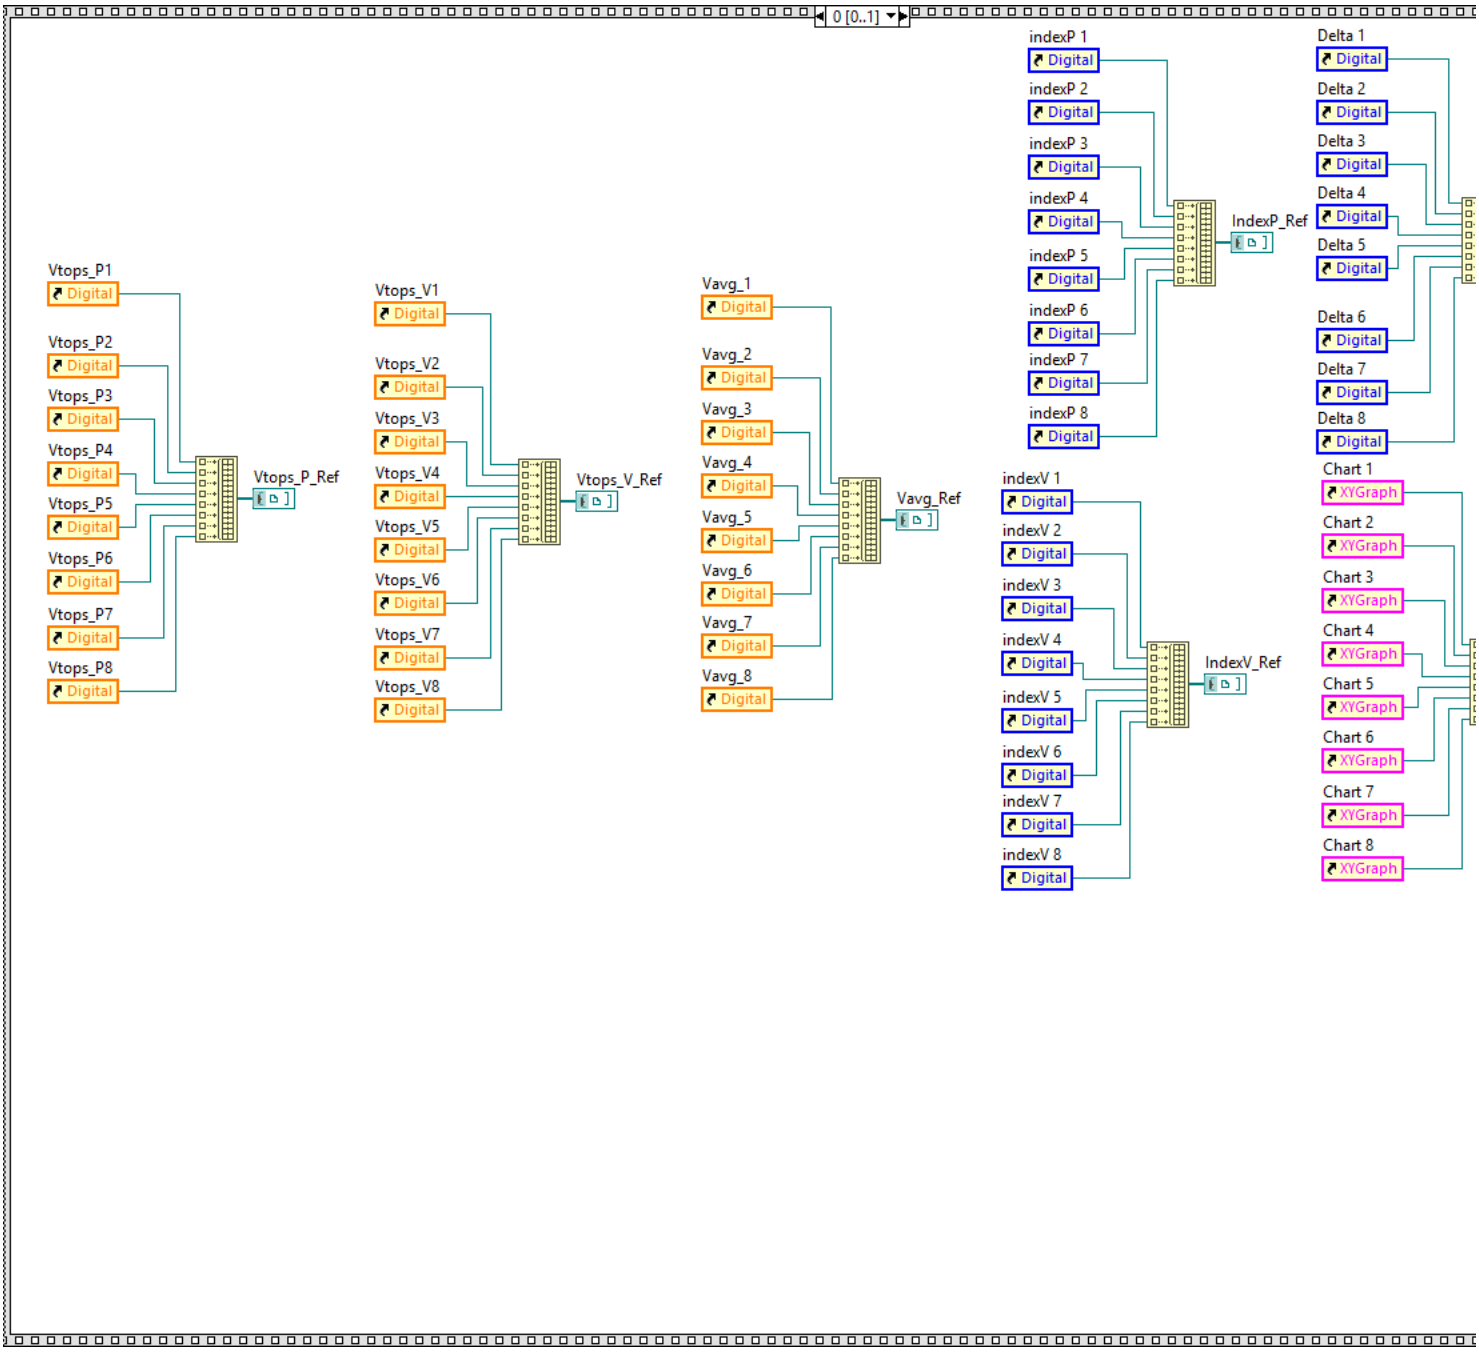
I32 **indexV 1**
I32 **indexV 2**
I32 **indexV 3**
I32 **indexV 4**
I32 **indexV 5**
I32 **indexV 6**
I32 **indexV 7**
I32 **indexV 8**
IndexV_Ref

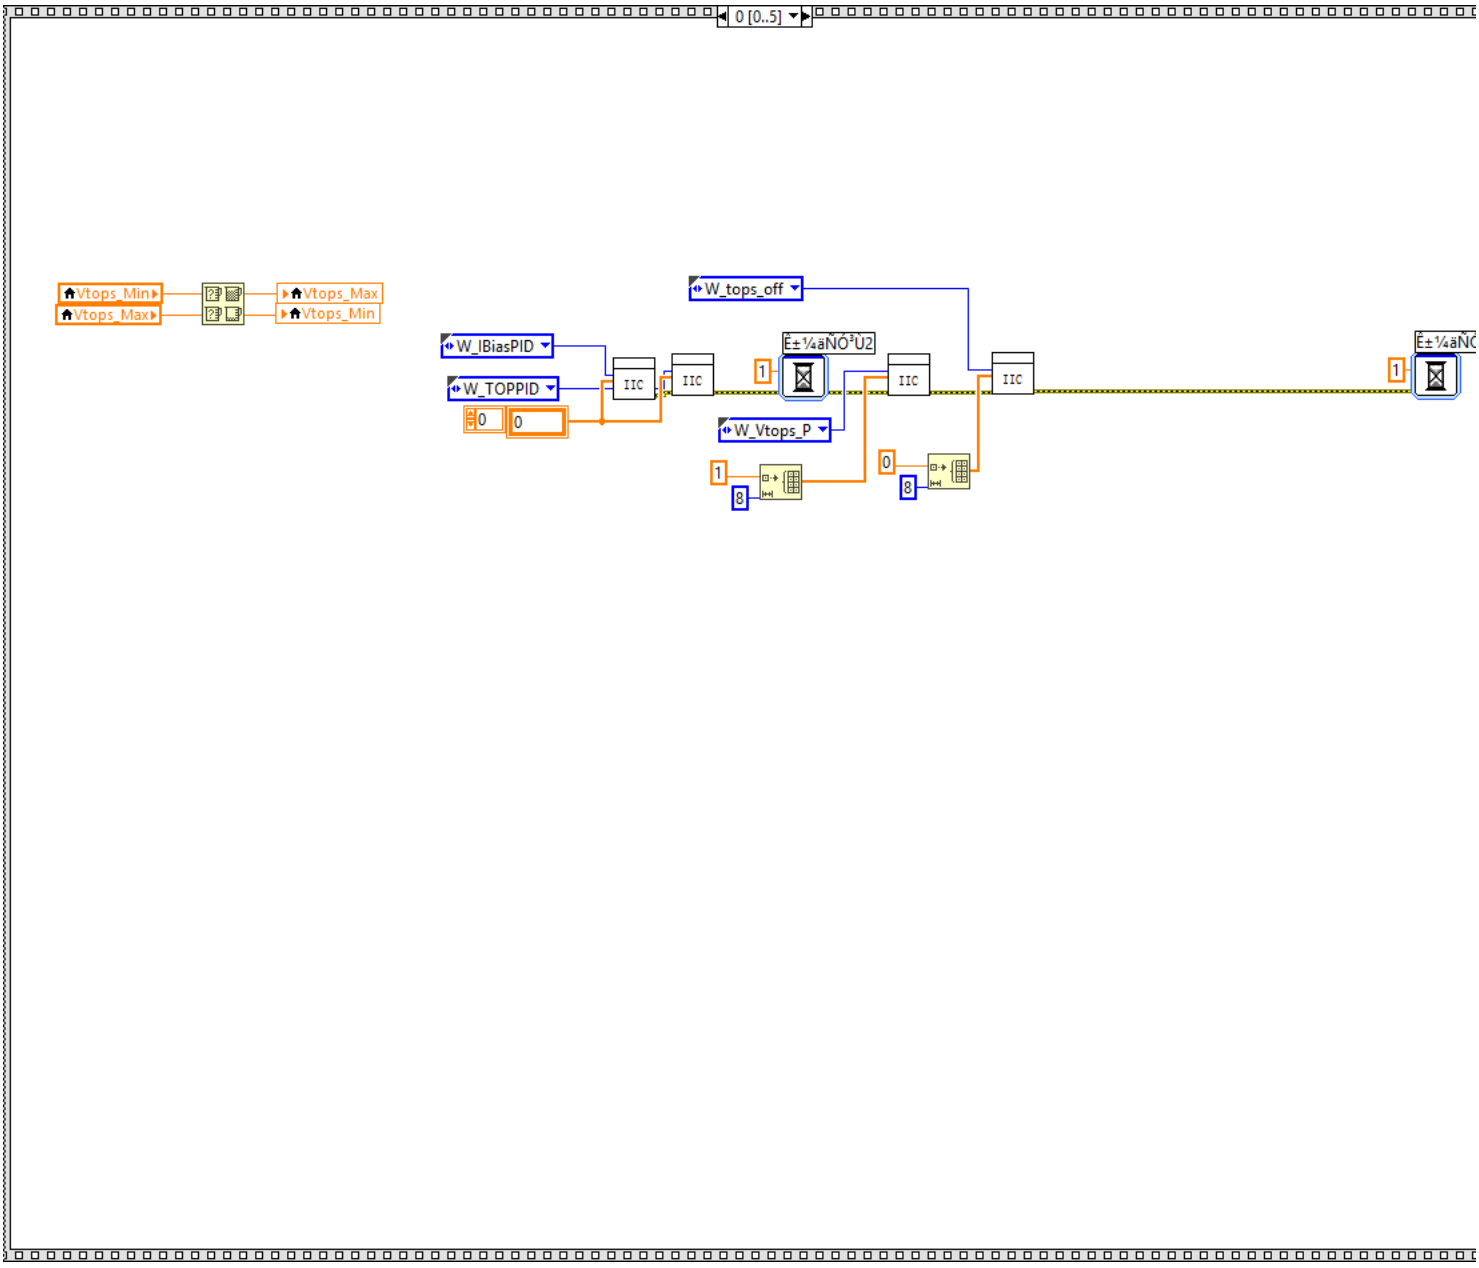
index 8

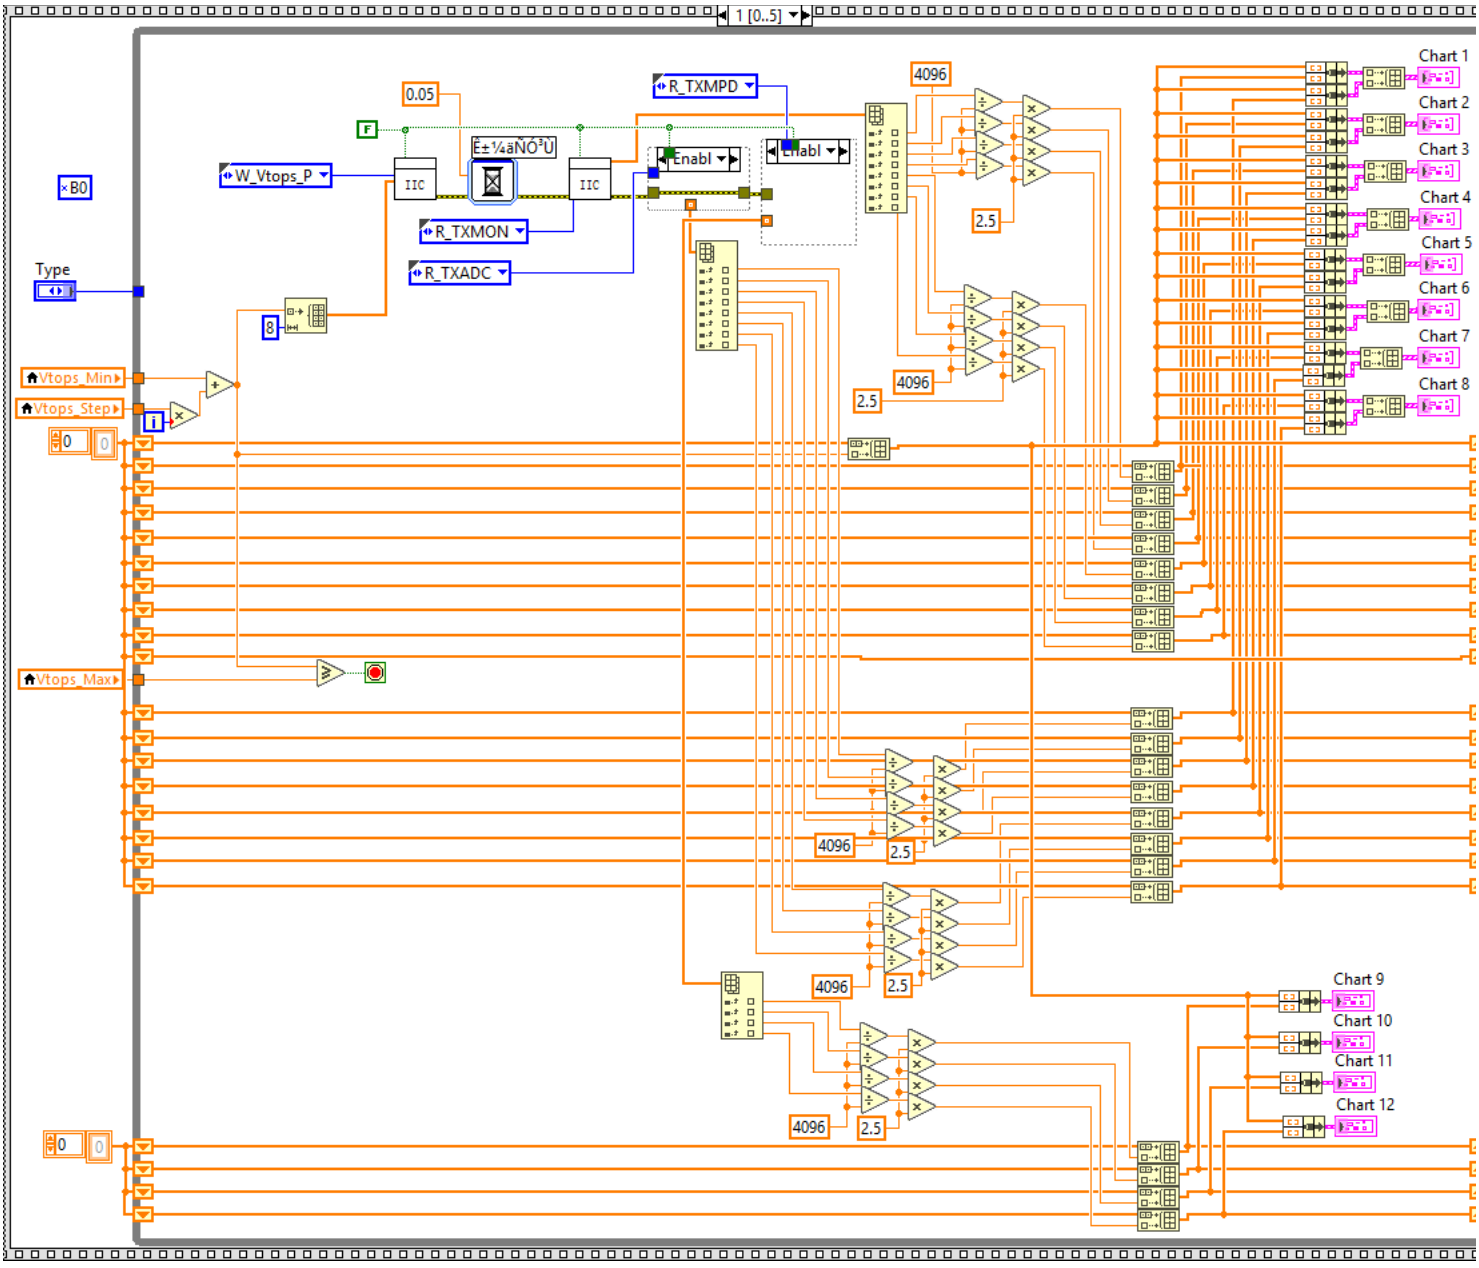
TF **PF**


Block Diagram



indexV 4
indexV 3
indexV 2
indexV 1
indexV 8
indexV 7
indexV 6
indexV 5
indexP 5
indexP 6
indexP 7
indexP 8
indexP 1
indexP 2
indexP 3
indexP 4
Vtops_Min
Vtops_Max
Tab
Vtops_Step
Channel
Tx Power
IIC Type
VISA
Auto Ch
TxMON
Chart_Tab
Vtops_P3
Vtops_V3
Vtops_P1
Vtops_V1
1 [0..1]
3 [0..5]
"AWS"
customer
3.25
4
3.5
CH
4.5
3.5
3
2.5
3.25
W_Vtops_P
R_MPD_OUT
R_TXMON
IIC
1
1000
U16
Data
Dis play
TXP_MPDOut
Enabl

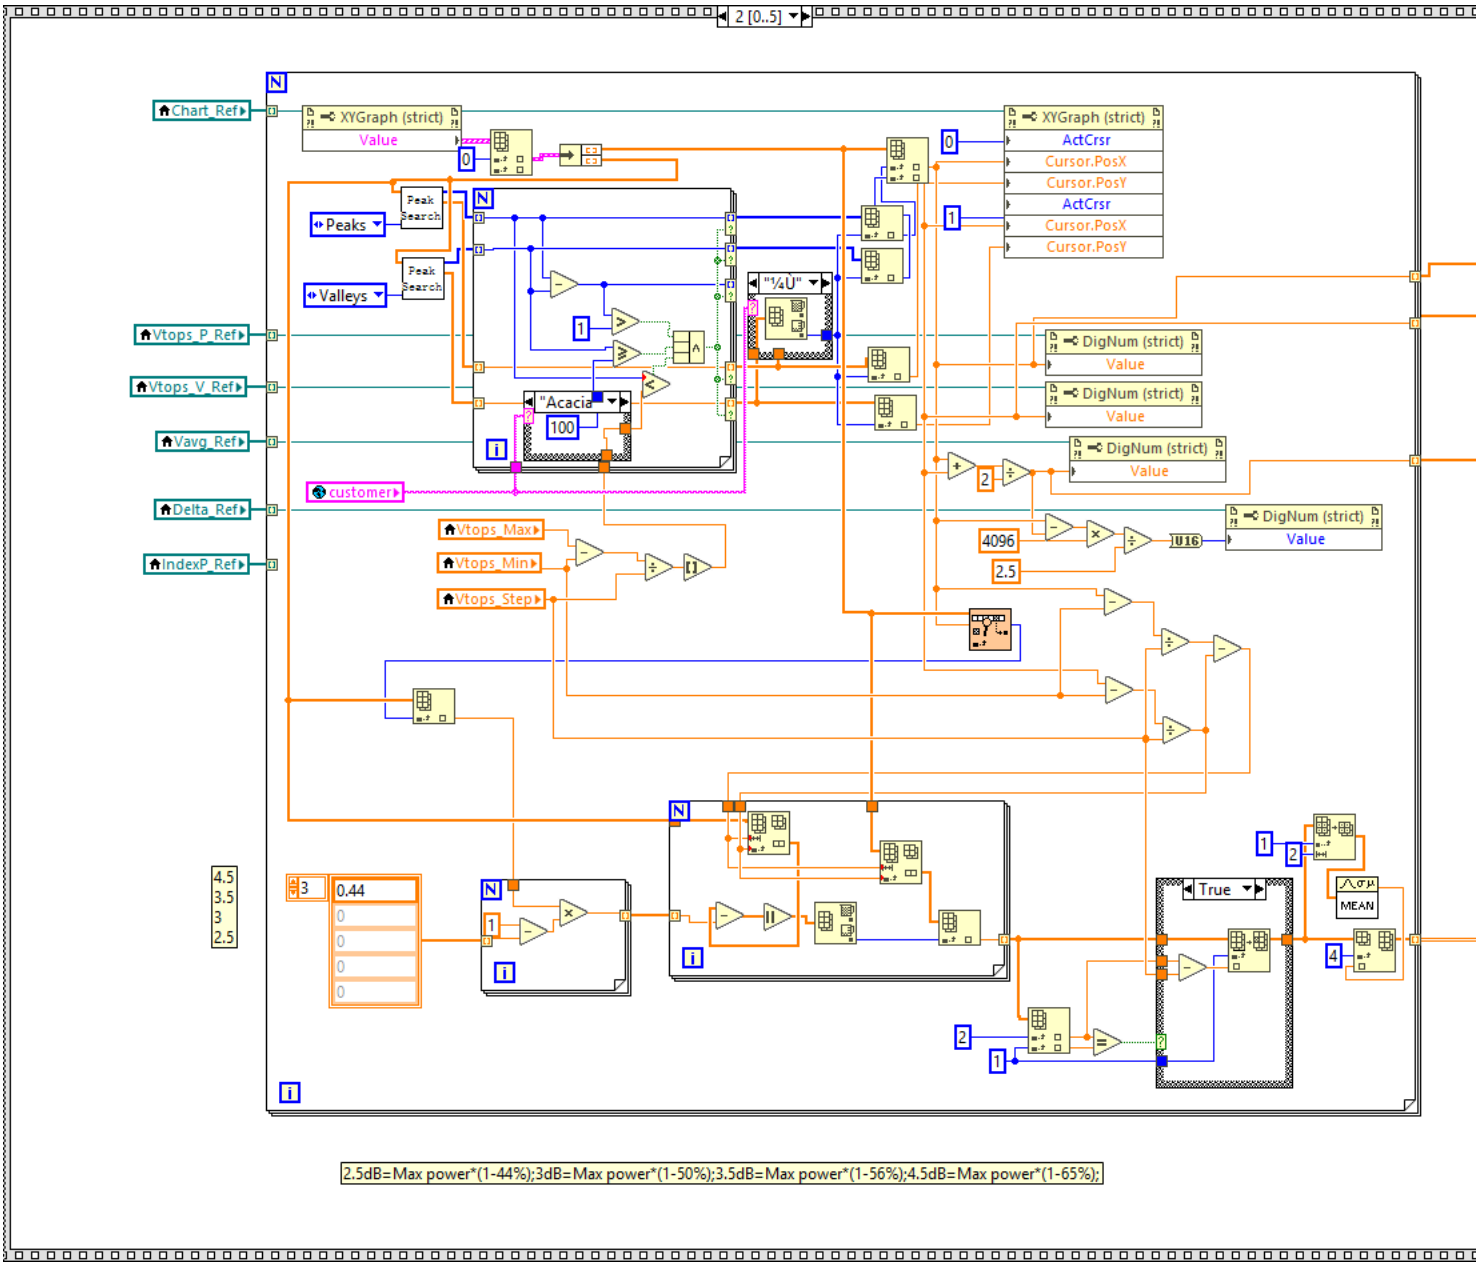

0 [0..1]
Vtops_P1
Vtops_P2
Vtops_P3
Vtops_P4
Vtops_P5
Vtops_P6
Vtops_P7
Vtops_P8
Digital
Vtops_P_Ref
Vtops_V1
Vtops_V2
Vtops_V3
Vtops_V4
Vtops_V5
Vtops_V6
Vtops_V7
Vtops_V8
Vtops_V_Ref
Vavg_1
Vavg_2
Vavg_3
Vavg_4
Vavg_5
Vavg_6
Vavg_7
Vavg_8
Vavg_Ref
indexP 1
indexP 2
indexP 3
indexP 4
indexP 5
indexP 6
indexP 7
indexP 8
IndexP_Ref
indexV 1
indexV 2
indexV 3
indexV 4
indexV 5
indexV 6
indexV 7
indexV 8
IndexV_Ref
Delta 1
Delta 2
Delta 3
Delta 4
Delta 5
Delta 6
Delta 7
Delta 8
Chart 1
Chart 2
Chart 3
Chart 4
Chart 5
Chart 6
Chart 7
Chart 8
XYGraph



0 [0..5]
Vtops_Min
Vtops_Max
Vtops_Max
Vtops_Min
W_tops_off
W_IBiasPID
W_TOPPID
0
0
IIC
IIC
IIC
IIC
W_Vtops_P
1
8
0
8
1
1



1 [0..5]
0.05
F
W_Vtops_P
IIC
R_TXMON
R_TXADC
R_TXMPD
Enabl
Enabl
4096
2.5
Type
B0
8
Vtops_Min
Vtops_Step
Vtops_Max
Chart 1
Chart 2
Chart 3
Chart 4
Chart 5
Chart 6
Chart 7
Chart 8
Chart 9
Chart 10
Chart 11
Chart 12


Disable
IIC



Disable
IIC



2 [0..5]
Chart_Ref
XYGraph (strict)
Value
Peaks
Valleys
Peak Search
Vtops_P_Ref
Vtops_V_Ref
Vavg_Ref
Delta_Ref
IndexP_Ref
customer
"Acacia
100
"¼U"
Vtops_Max
Vtops_Min
Vtops_Step
ActCrsr
Cursor.PosX
Cursor.PosY
DigNum (strict)
Value
4096
2.5
U16
4.5
3.5
3
2.5
0.44
True
MEAN
2.5dB=Max power*(1-44%);3dB=Max power*(1-50%);3.5dB=Max power*(1-56%);4.5dB=Max power*(1-65%);

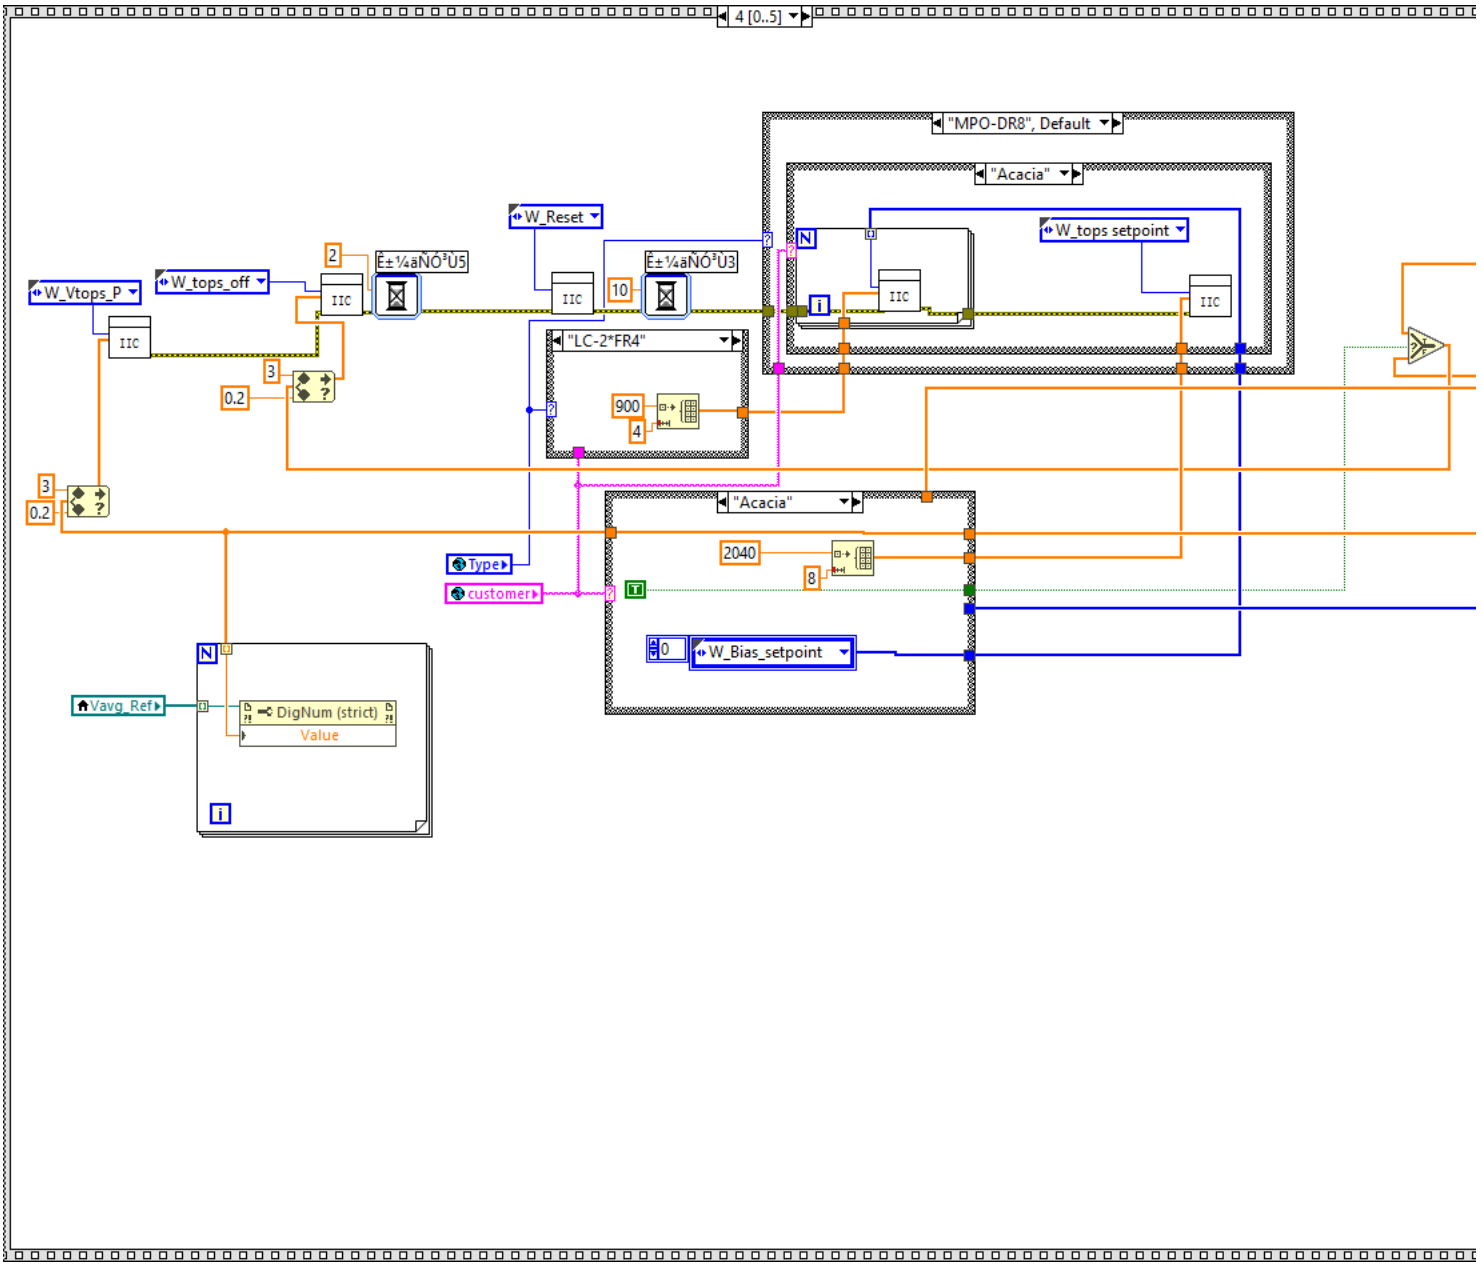

"¼Ù"
20



"AWS"
5



"Acac

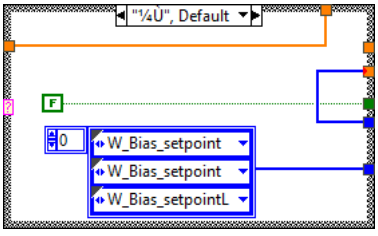

False

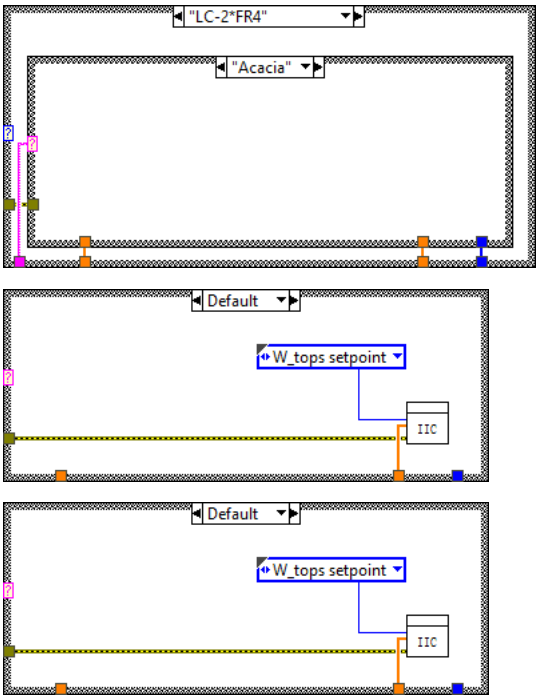

"¼Ù", Default
3.25
4

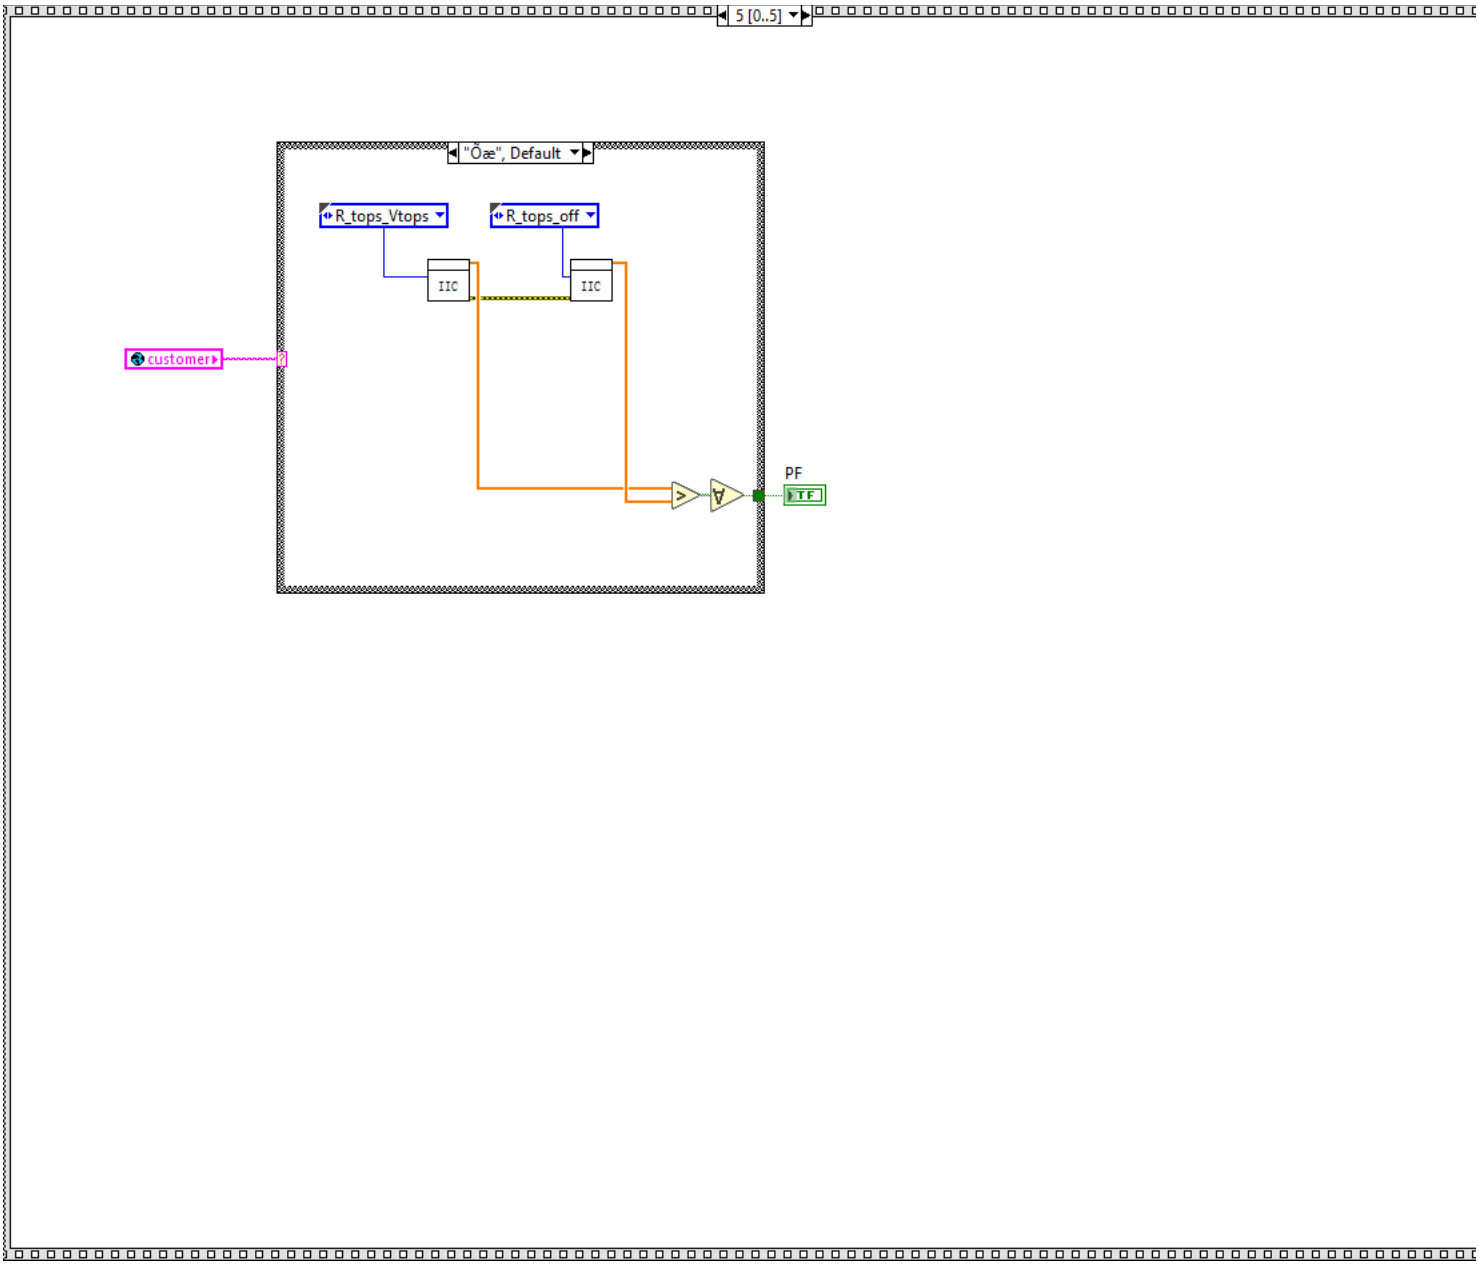

4 [0..5]
"MPO-DR8", Default
"Acacia"
W_tops setpoint
W_Reset
W_Vtops_P
W_tops_off
"LC-2*FR4"
"Acacia"
Type
customer
W_Bias_setpoint
Vavg_Ref
DigNum (strict)
Value

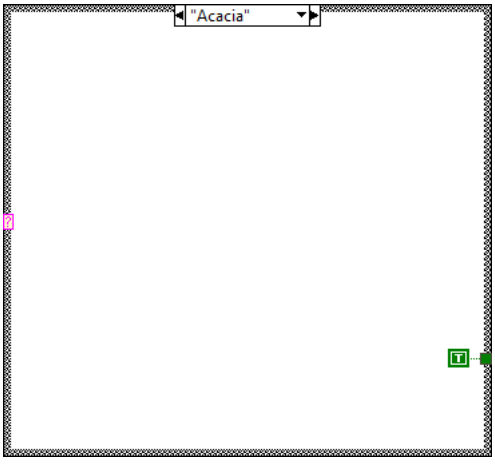

"MPO-DR8", Default
"Acacia"
1500
8

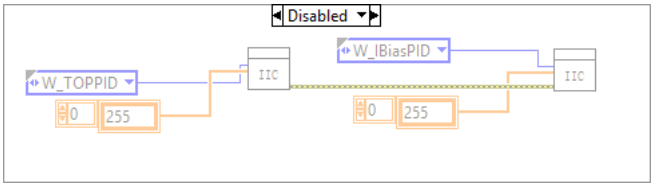

"¼Ù", Defa
320
2


"¼Ù", Default
F
W_Bias_setpoint
W_Bias_setpoint
W_Bias_setpointL


"LC-2*FR4"
"Acacia"
Default
W_tops setpoint
IIC
Default
W_tops setpoint
IIC


5 [0..5]
"Öæ", Default
R_tops_Vtops
R_tops_off
IIC
IIC
customer
PF
TF


"Acacia"
T


Disabled
W_TOPPID
0
255
IIC
W_IBiasPID
0
255
IIC

List of SubVIs and Express VIs with Configuration Information

NI_AALBase.lvlib:Mean (DBL).vi

C:\Program Files (x86)\National Instruments\LabVIEW 2025\vi.lib\Analysis\baseanly.llb\Mean (DBL).vi

NI_AALBase.lvlib:Mean.vi

C:\Program Files (x86)\National Instruments\LabVIEW 2025\vi.lib\Analysis\baseanly.llb\Mean.vi

Display_Step.ctl

C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\Display_Step.ctl

Dispaly.vi

C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\Dispaly.vi

Equal Comparable.lvclass:Equals.vi

C:\Program Files (x86)\National Instruments\LabVIEW 2025\vi.lib\Comparison\Equal\Equal Comparable\Equals.vi

Equal Functor.lvclass:Equals.vi

C:\Program Files (x86)\National Instruments\LabVIEW 2025\vi.lib\Comparison\Equal\Equal Functor\Equals.vi

G_100G.vi

C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\G_100G.vi

subTimeDelay.vi

C:\Program Files (x86)\National Instruments\LabVIEW 2025\vi.lib\express\express execution control\TimeDelayBlock.llb\subTimeDelay.vi

I2C_Step.ctl

C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\I2C_Step.ctl

IIC.vi

C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\IIC.vi

Peak Search.vi

C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\Peak Search.vi

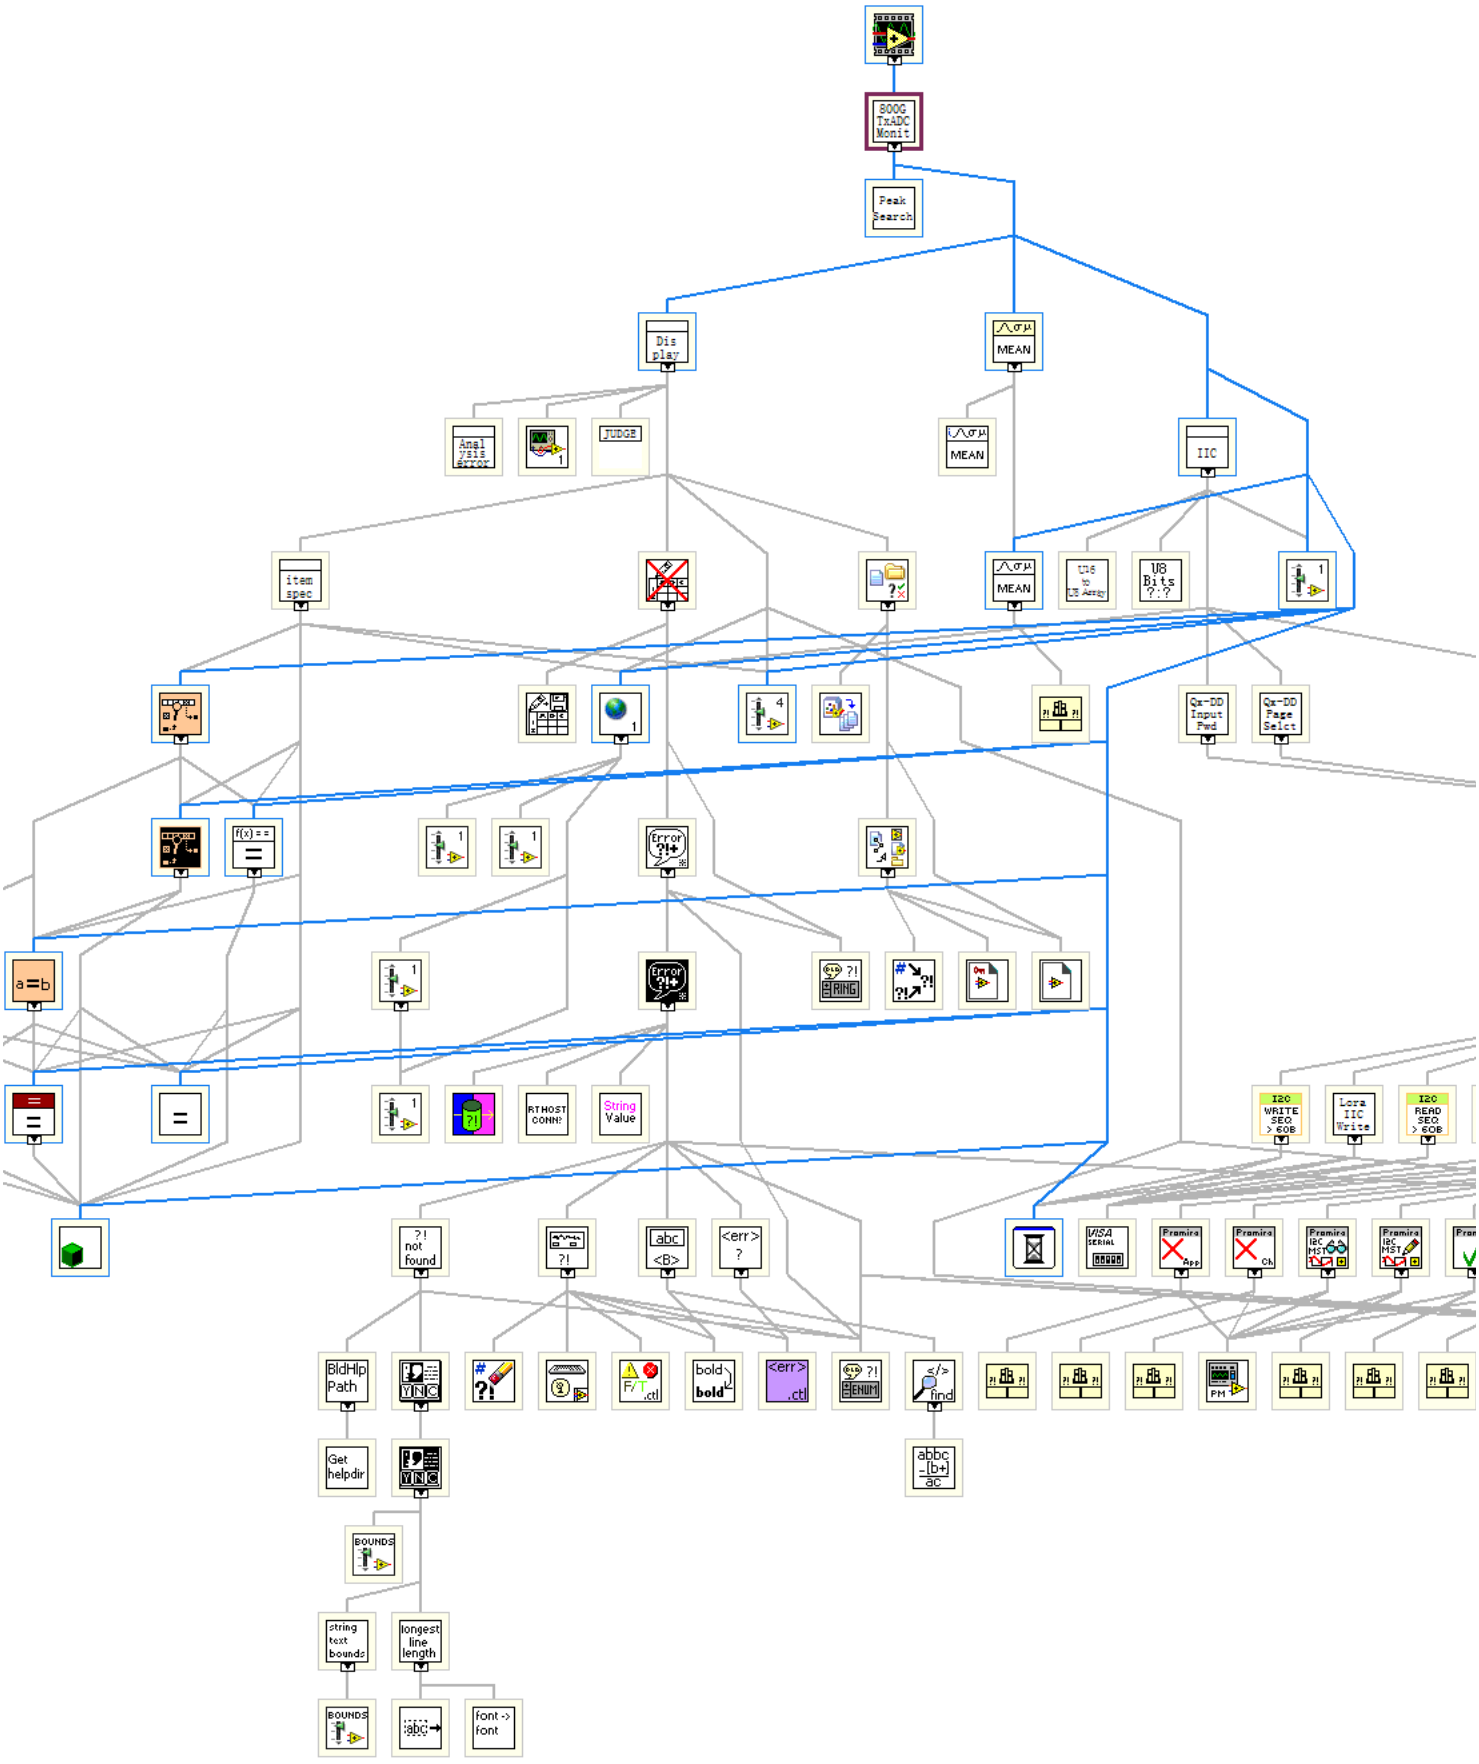
---

VI Revision History

"800G SIP Tx MPD Monitor.vi History"

Current Revision: 358


Position in Hierarchy



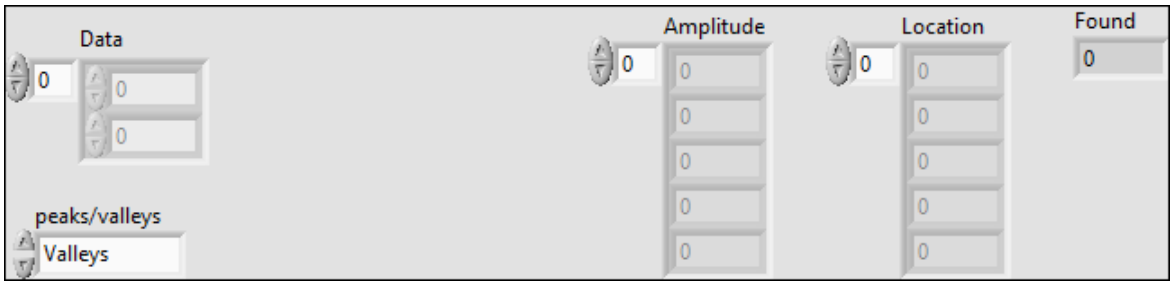
Iconified Cluster Constants

Peak Search.vi

Connector Pane



Front Panel



Controls and Indicators

Data

Numeric

peaks/valleys

Amplitude

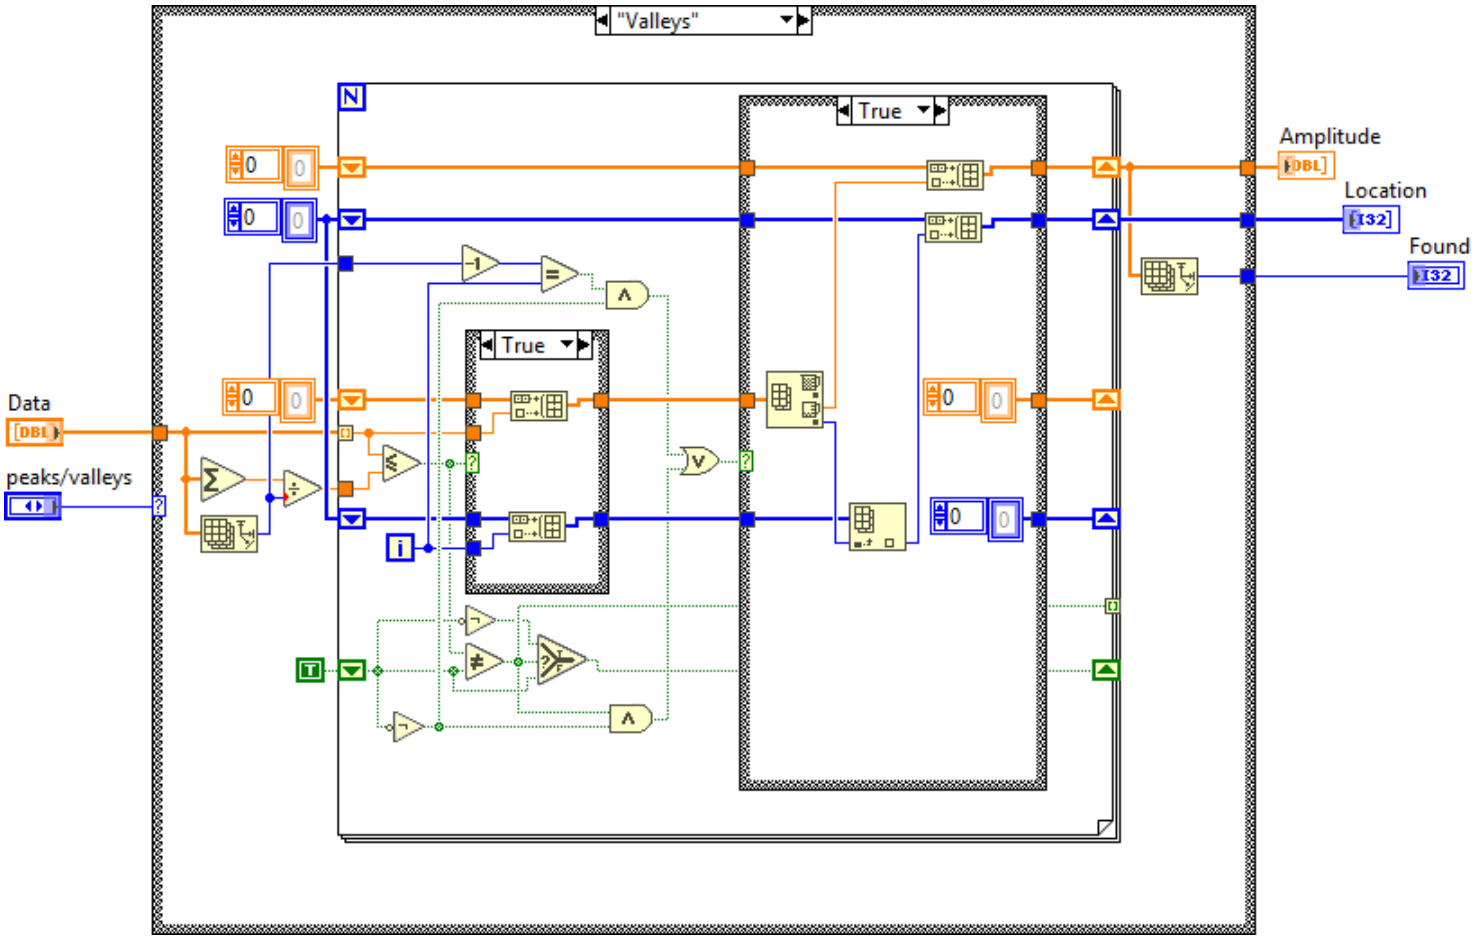
Numeric

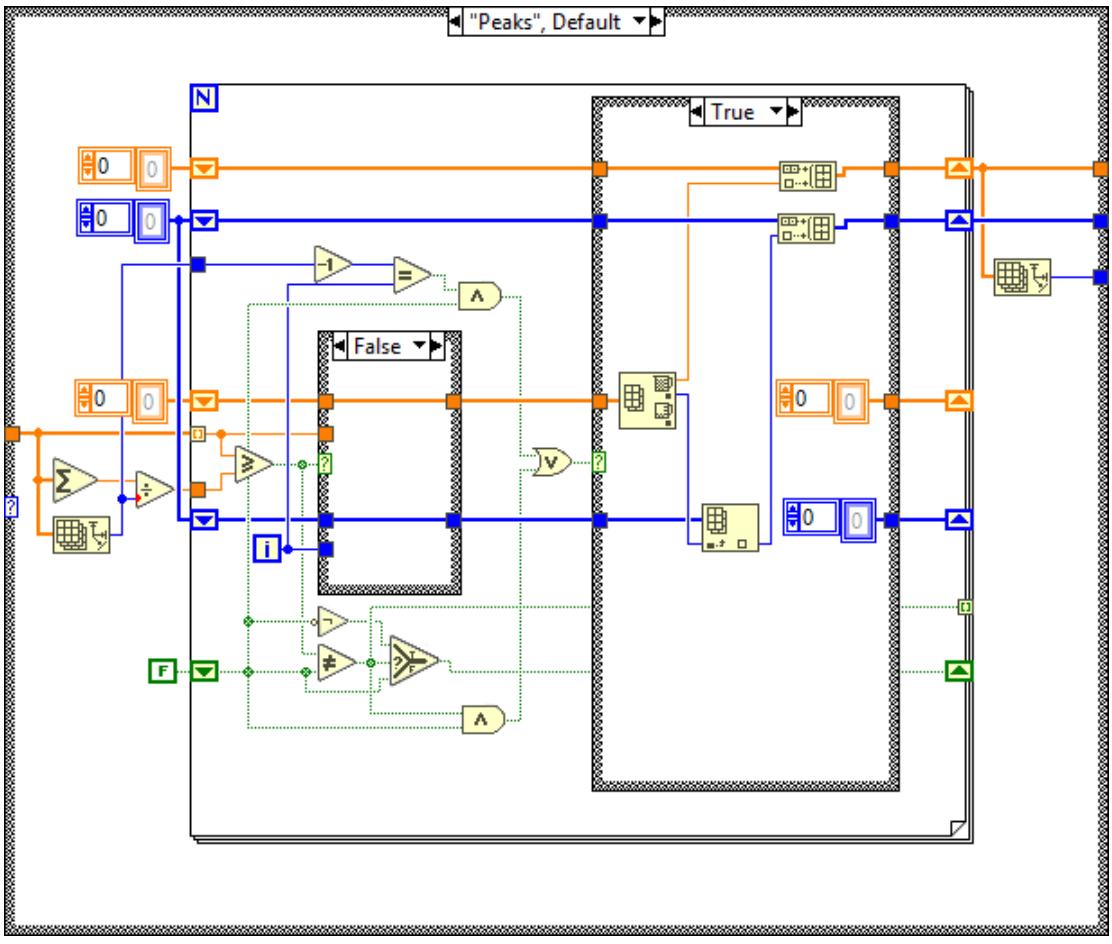
Location


Numeric

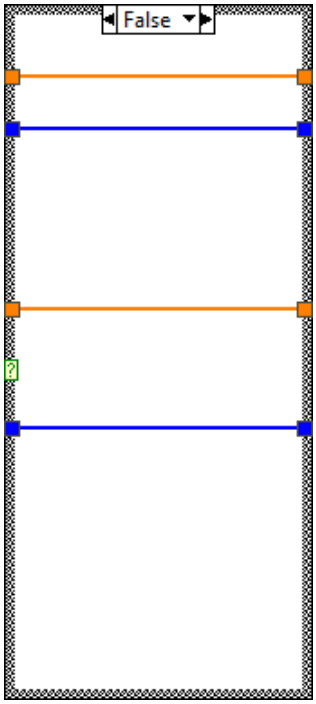
Found


Block Diagram

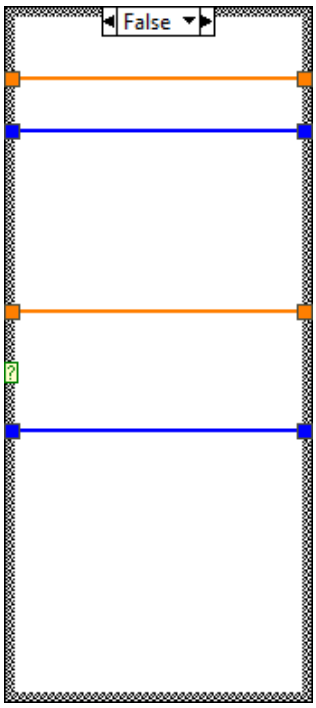

"Valleys"
True
True
Data
peaks/valleys
Amplitude
Location
Found


"Peaks", Default
True
False


True


False


False



List of SubVIs and Express VIs with Configuration Information


---

VI Revision History

"Peak Search.vi History"

Current Revision: 13

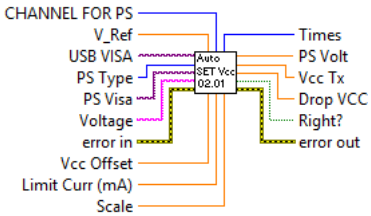
Position in Hierarchy



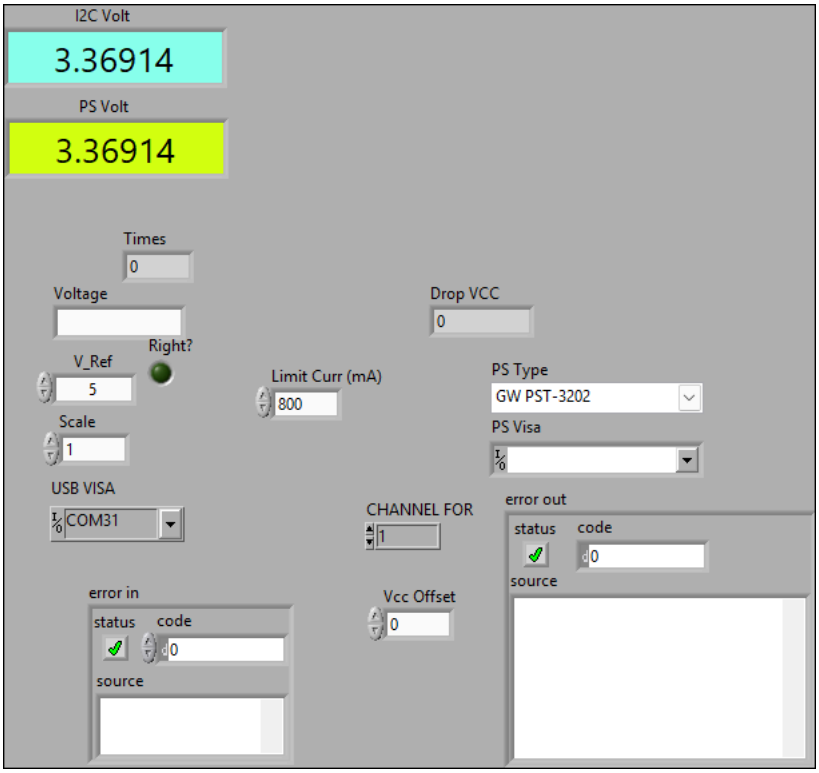
Iconified Cluster Constants

Auto Adjust Vcc.vi

Connector Pane



Front Panel



Controls and Indicators

error in

error in can accept error information wired from VIs previously called. Use this information to decide if any functionality should be bypassed in the event of errors from other VIs.

Right-click the **error in** control on the front panel and select **Explain Error** or **Explain Warning** from the shortcut menu for more information about the error.

status

status is TRUE (X) if an error occurred or FALSE (checkmark) to indicate a warning or that no error occurred.

Right-click the **error in** control on the front panel and select **Explain Error** or **Explain Warning** from the shortcut menu for more information about the error.

code

code is the error or warning code.

Right-click the **error in** control on the front panel and select **Explain Error** or **Explain Warning** from the shortcut menu for more information about the error.

source

source describes the origin of the error or warning.

Right-click the **error in** control on the front panel and select **Explain Error** or **Explain Warning** from the shortcut menu for more information about the error.

CHANNEL FOR PS

The numeric control determines the channel no. that user want to set

Valid Ranges: 1 to 3 (PSS is only 1).

Default Value: 1

Limit Curr (mA)

Voltage

USB VISA

VISA resource name specifies the resource to be opened. This control also specifies the session and class.

PS Visa

[PS Type]

Vcc Offset

V_Ref

Scale

Vcc Tx

error out

error in can accept error information wired from VIs previously called. Use this information to decide if any functionality should be bypassed in the event of errors from other VIs.

Right-click the **error in** control on the front panel and select **Explain Error** or **Explain Warning** from the shortcut menu for more information about the error.

status

status is TRUE (X) if an error occurred or FALSE (checkmark) to indicate a warning or that no error occurred.

Right-click the **error in** control on the front panel and select **Explain Error** or **Explain Warning** from the shortcut menu for more information about the error.

code

code is the error or warning code.

Right-click the **error in** control on the front panel and select **Explain Error** or **Explain Warning** from the shortcut menu for more information about the error.

source

source describes the origin of the error or warning.

Right-click the **error in** control on the front panel and select **Explain Error** or **Explain Warning** from the shortcut menu for more information about the error.

Drop VCC

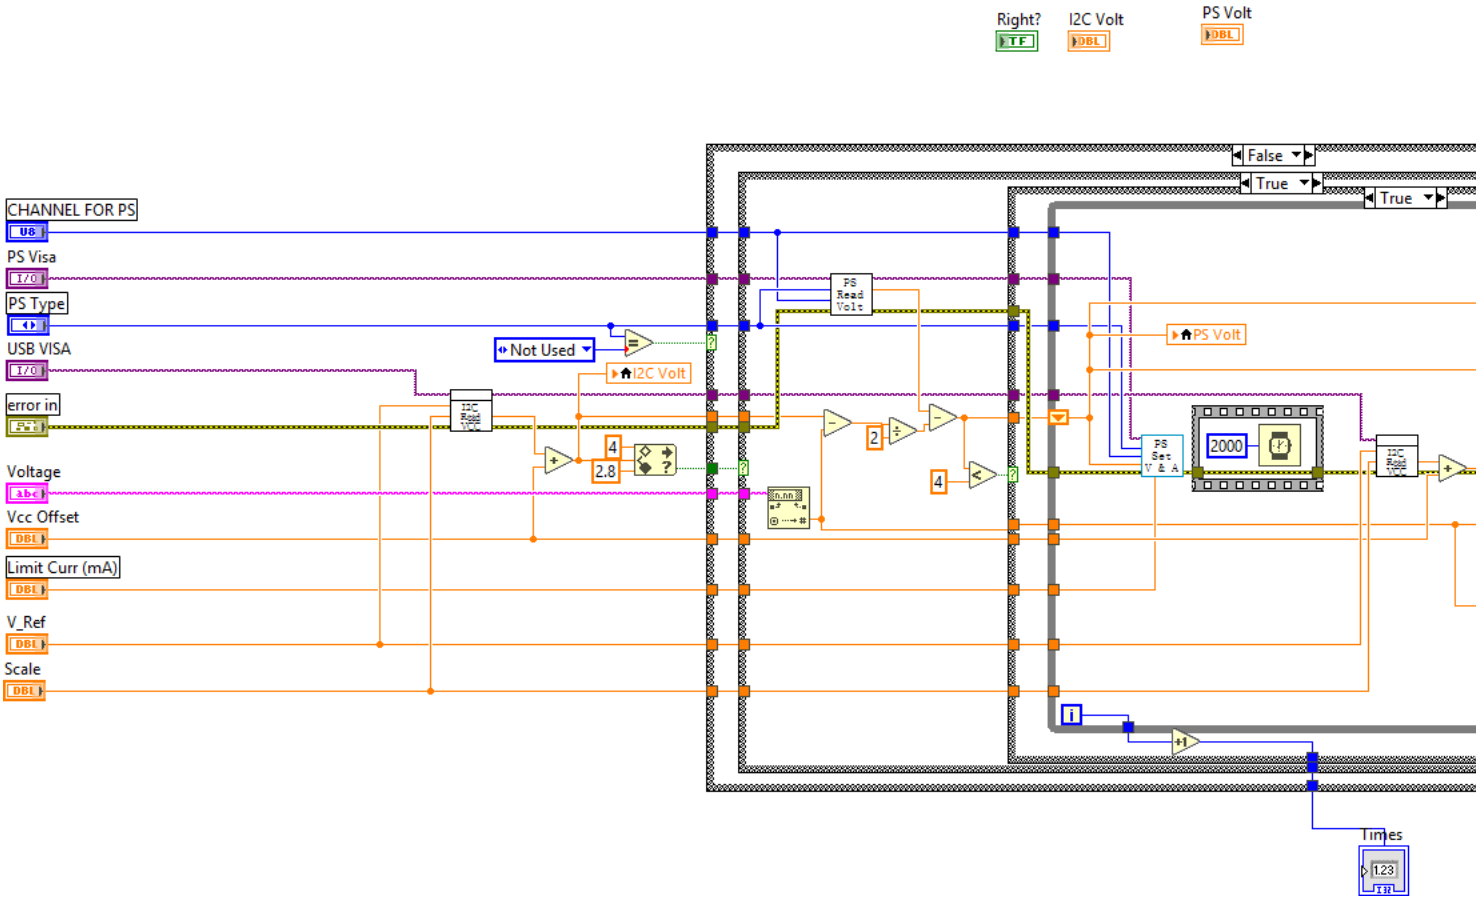
I2C Volt

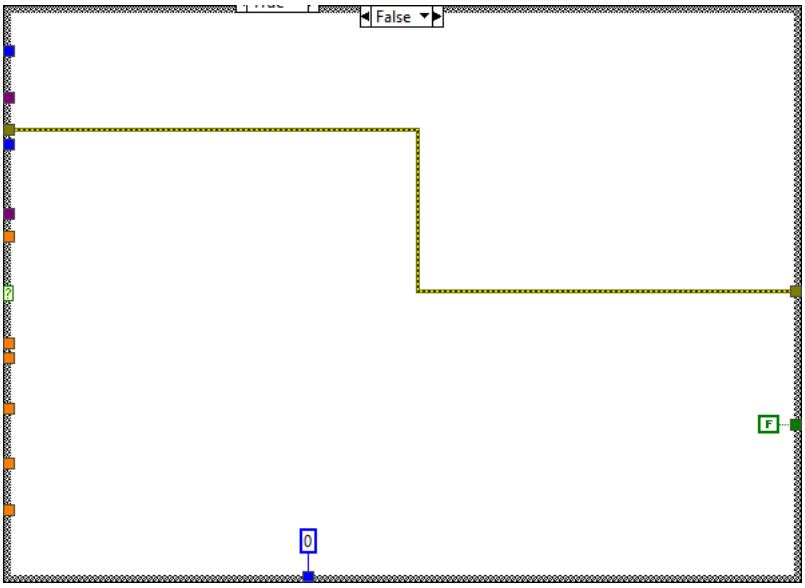
PS Volt

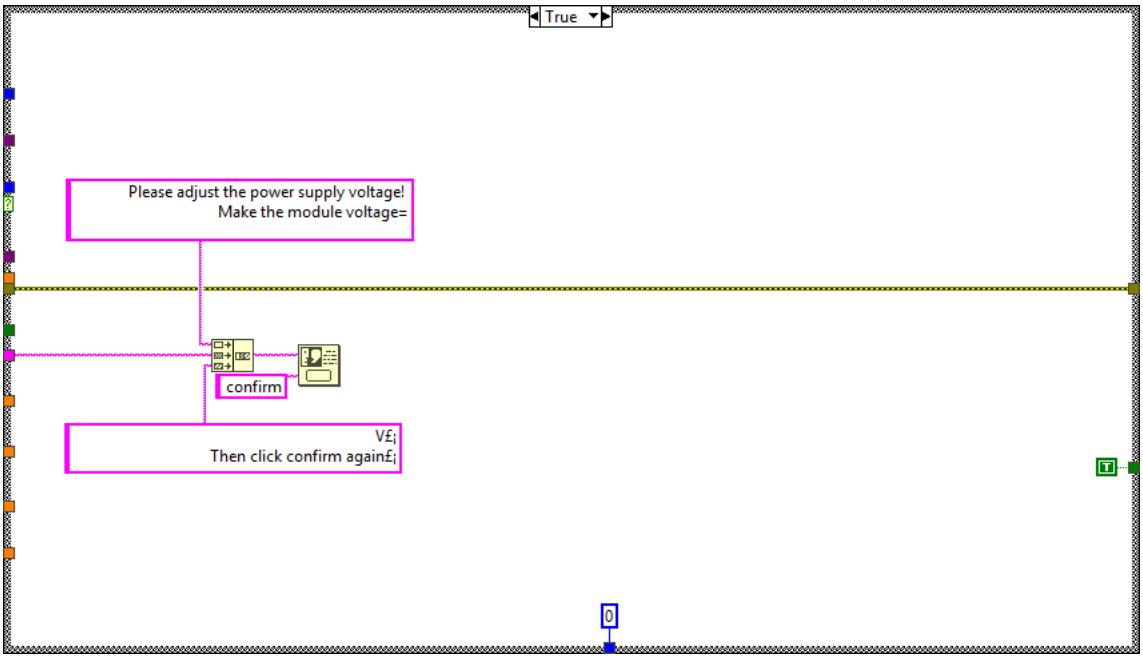
Right?

Times

Block Diagram


Right?
I2C Volt
PS Volt
CHANNEL FOR PS
PS Visa
PS Type
USB VISA
error in
Voltage
Vcc Offset
Limit Curr (mA)
V_Ref
Scale
Not Used
I2C Volt
PS Read Volt
PS Volt
PS Set V & A
2000
Times
False
True
True
True
False
0





List of SubVIs and Express VIs with Configuration Information

PS Read Volt.vi

C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\PS Read Volt.vi

I2C Read Vcc.vi

C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\I2C Read Vcc.vi

PS Set Volt Current.vi

C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\PS Set Volt Current.vi

G_100G.vi

C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\G_100G.vi

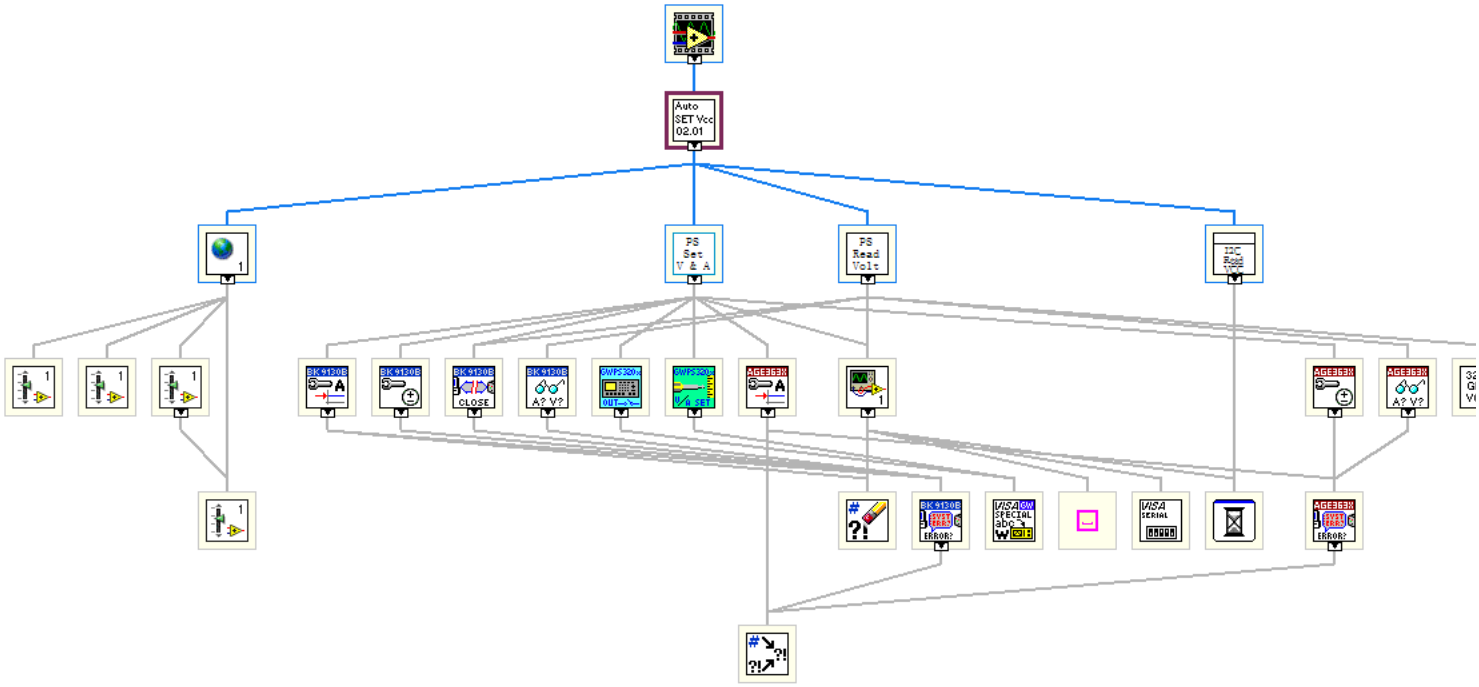
---

VI Revision History

"Auto Adjust Vcc.vi History"

Current Revision: 139

Position in Hierarchy



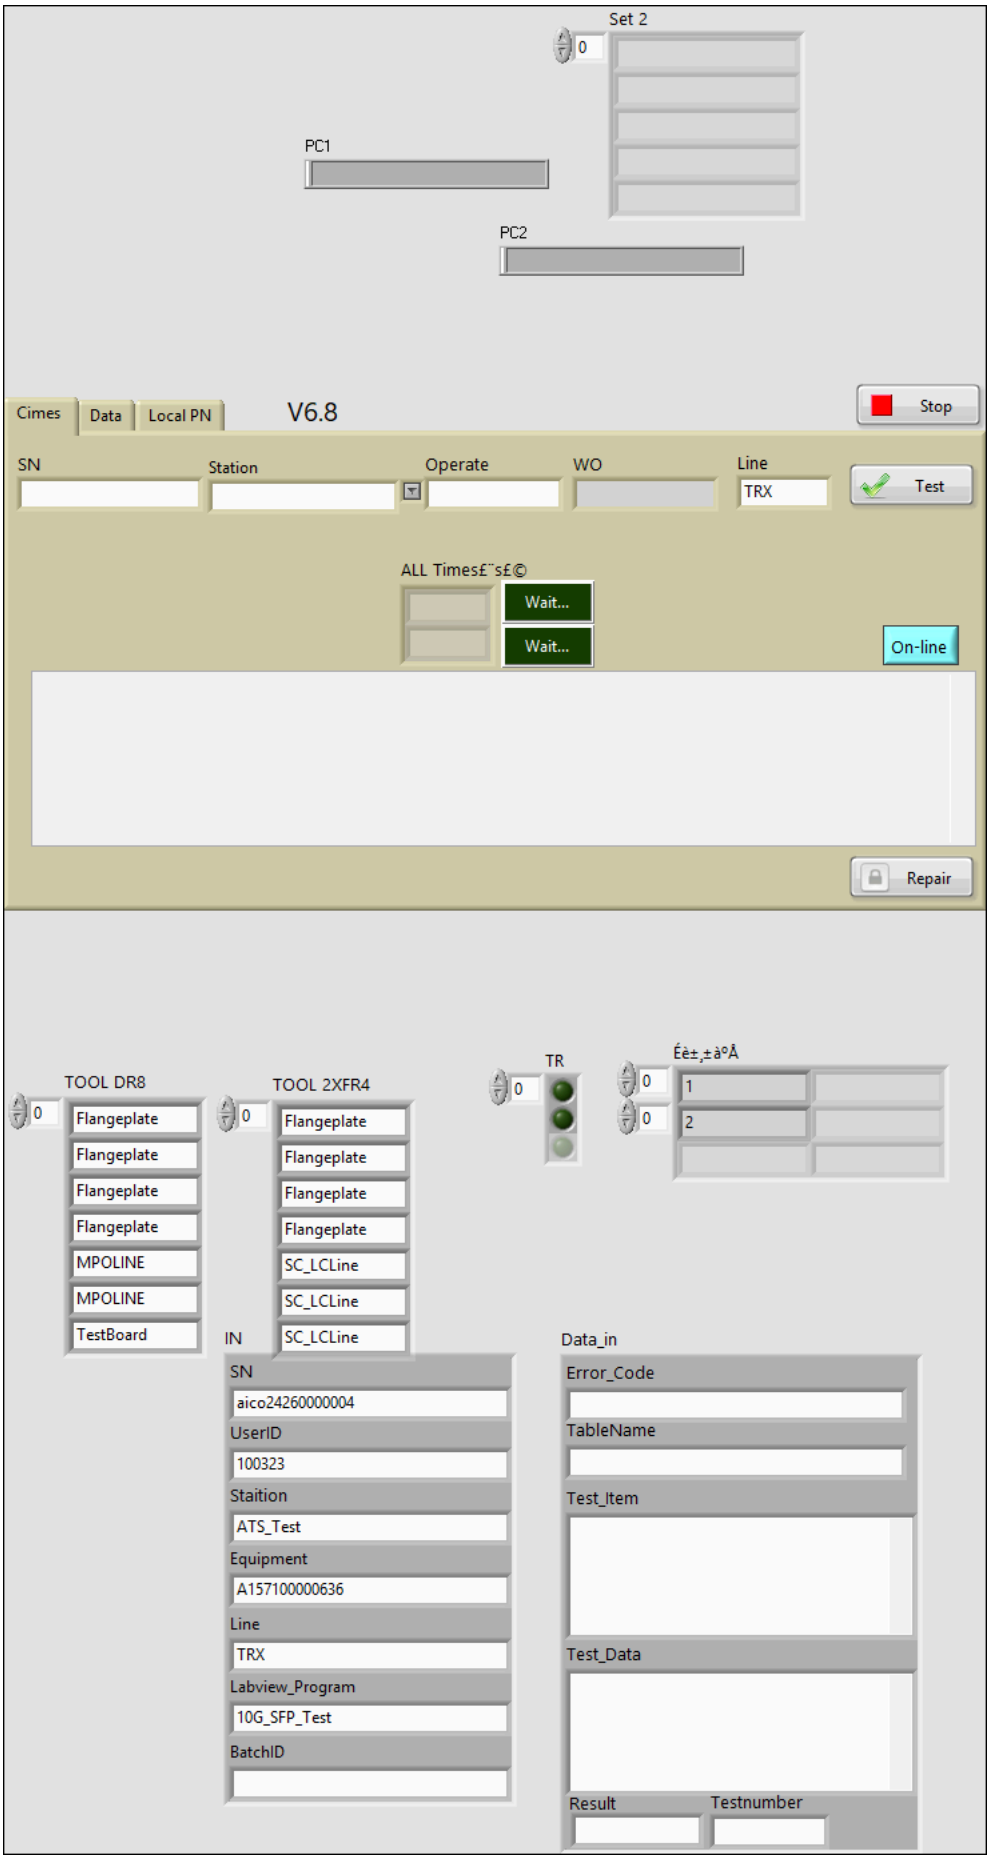
Iconified Cluster Constants

Cimes_Interface.vi

Connector Pane



Front Panel



Controls and Indicators

Check
Tab
stop
Station
SN
Operate
IN

- **SN**
- **UserID**
- **Staition**
- **Equipment**
- **Line**
- **Labview_Program**
- **BatchID**

Line
[L]
Data out Item

- **Data Out**

BatchID
Data_in

- **Test_Item**
- **TableName**
- **Test_Data**
- **Result**
- **Error_Code**
- **Testnumber**

Repair
SN 2
customer
TOOL DR8

- **字符串**

TOOL 2XFR4

- **字符串**

DUT Type
PC1

String/Binary data is the data of Windows registry type String or Binary.

WO
Display 2
Test_VI
Test_Title
data out

-

Program
State[State]
Test_Title 2
Test_VI 2
Set 2

- **Date**

in

- **Operate**

data out 2

ALL Times（s）

ALL Time(S)

State[State 2]

PC2

String/Binary data is the data of Windows registry type String or Binary.

TR

Result

设备编号

DR8 PN

Acacia PN

AWS PN

Test Item

TableName

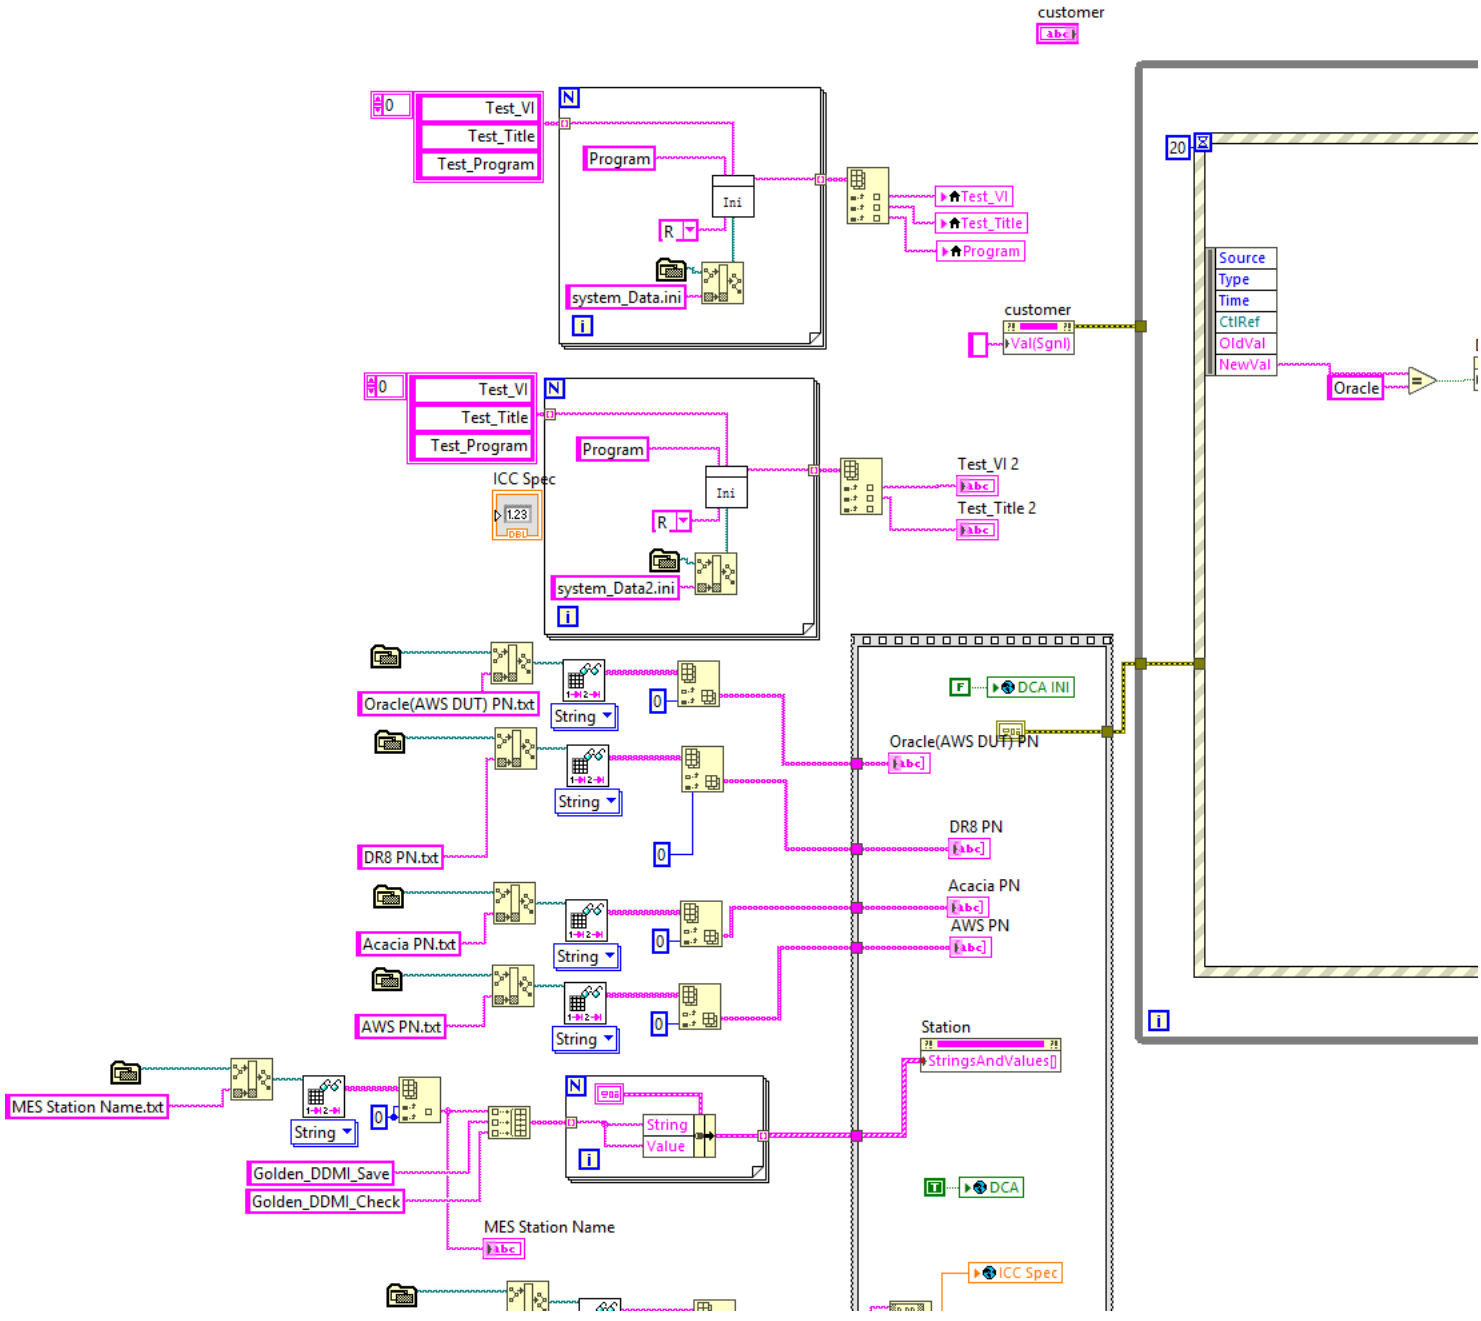
MES Station Name

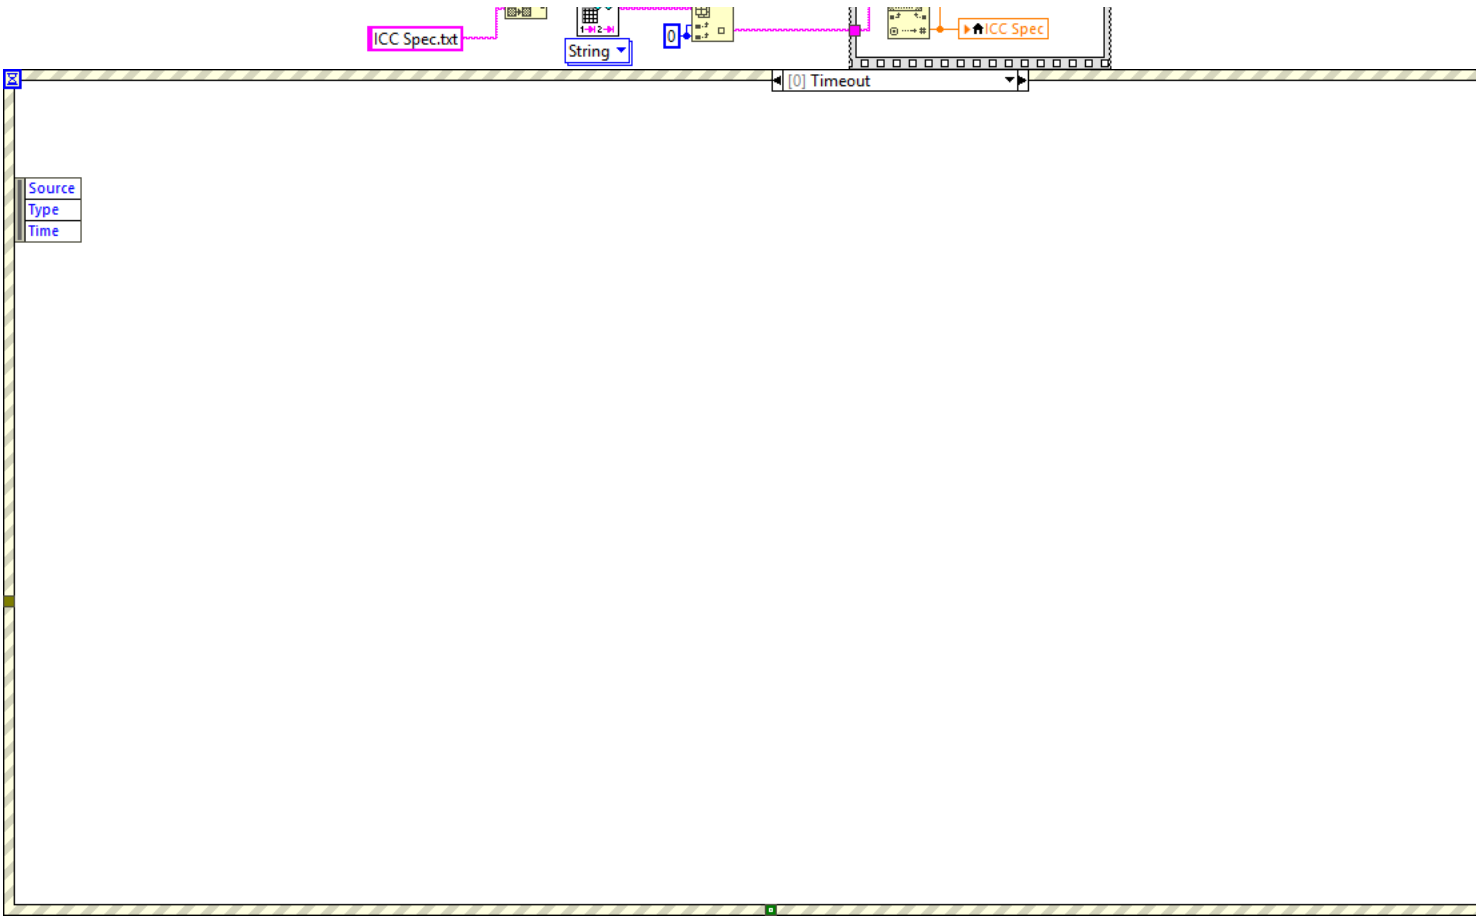
ICC Spec

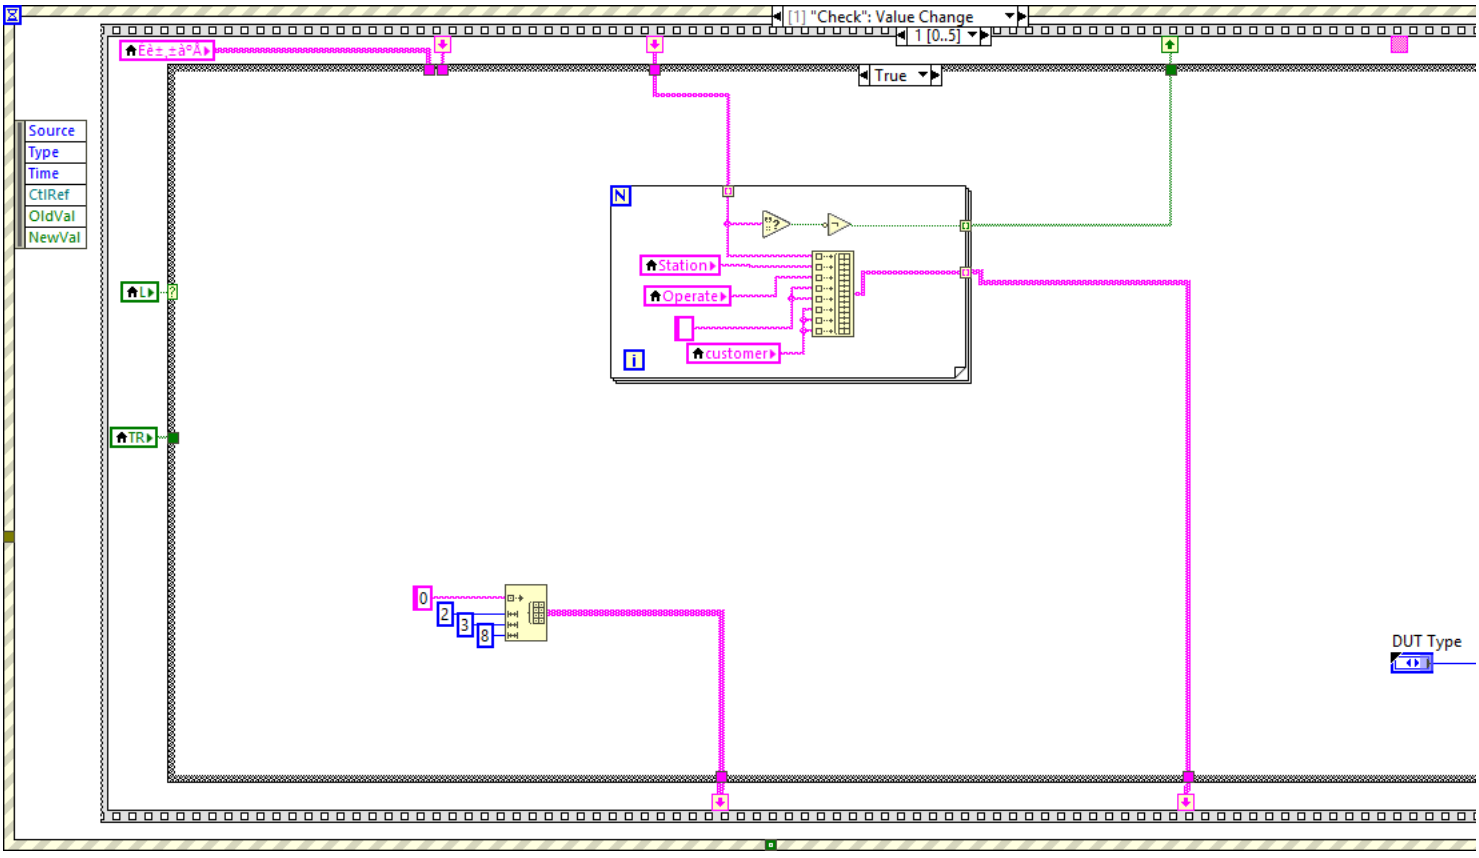
Oracle(AWS DUT) PN

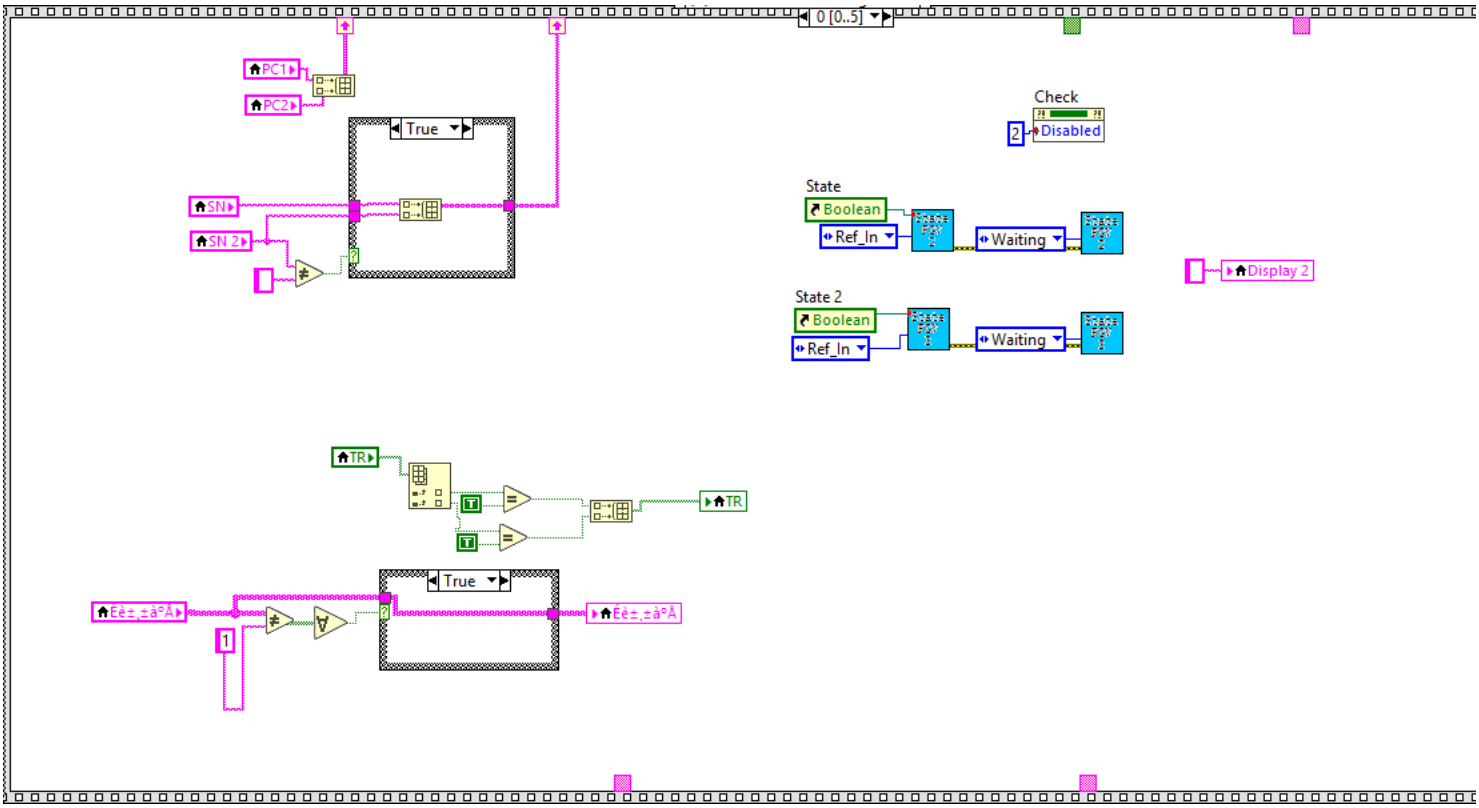
Block Diagram


2025.7.15-----1.0
1¡¢800G SIP Tx MPD Monitor2.vi£º×Ì°ó W Vtops°ÍW tops offÍÀÍÞÓÉ0.5¸ÄÍ³0.2
2025.7.21--------1.1
1¡¢DDMI°ÍFinal GS Check£ºdTXPÓÉ+-0.8¸ÄÍ³+-0.5£»dRXPÓÉ+-1¸ÄÍ³+-0.6£»dVCCÓÉ+-1¸ÄÍ³+-0.033///////
¸úTWËµµÄ¸Ä¶¨£¬ÒÔÍÂµÄ»¹Î´Ëµ
2¡¢Station¼°²âÊÔÁ÷³ÌÖ¸¼ÓFinal test LT£¬Final test HT
2025.7.23------------4.1
1¡¢Item Test:DisableÔÚDCA ChannelÍ³2Ê±Ôö¼ÓPower²»Í³-100~-20Ê±ÕØ¶ÁÒ»Î
2025.8.1---------4.2
1¡¢Final GS Check£ºdVCCÓÉ+-0.033¸ÄÍ³+-0.08//Õâ¸öÒÑËµ
2025.8.5------------4.3
1¡¢DCA³öÊ¼»¯TDECQÐ-ÒéÉèÖÃÓÉ802.3bs¸ÄÍ³802.3cd//Õâ¸öÒÑËµ
2025.8.6---------------4.4
1¡¢Step to Item.vi£ºDDMI_RXPÕÐRX Slope¹æ¸ñÓÉ5-25¸ÄÍ³5-30
2¡¢VCC£ºµ÷µçÑ¹º óÔö¼ÓÃÐ¶ÁICCÊÇ·ñ´óÓÚ2£¬ÊÇ¼ÌÐø·ñÔò½áÊø²âÊÔ
3¡¢Set Temp£º¸ßµÍÎÂÆøÁ÷ÌÅÍÈ¸ÄÍ³Ç°Åæ°åÉè¶¨
2025.8.7---------------4.5
1¡¢Stop£ºATS LTÔö¼Ó³¤Ã«ÍóÉèÖÃAir ÎÂ¶È¸ù¾ÝÀàÐÍ¶¨
2¡¢Rework£º½µµÍÎÂÓÉÐÍ-5¸ÄÍ³AirÃ£Ê½
3¡¢AWS 2xFR4 TXP¹æ¸ñÓÉ0-3¸ÄÍ³0-3.3
4¡¢AWS RT Temp Offset ÓÉ-20~20¸ÄÍ³-20~-6
LT Temp Offset ÓÉ-20~20¸ÄÍ³-5~5
HT Temp Offset ÓÉ-20~20¸ÄÍ³-10~2
5¡¢ATS Óö¼Ó3ÌÂÍÂ¶È²»¹ý½øÐÐÐ£×¼¼°¦ÄÜ
6¡¢4.8E-6 TDECQ²»¹ýÓØÉ¢£¬×Ü¹²É¨Ãè3Î
--------------------4.8
7¡¢Ôö¼ÓFInal TestµÍÎÂÊ±WG3039¹â¿ª¹ØµÄµ¥¨µÀ²âÊÔ
7¡¢Auto Adjust VCC£ºÑÓÊ±ÓÉ1s¸ÄÍ³2s
7¡¢Ë¡ÎùAWS I2C vcc¹æ¸ñ3.28-3.32 HT3.45-3.49
8¡¢FR4 AWS SFN¹¦ ãÉÏÞÓÉ 6 ¸ÄÍ³ 5.5




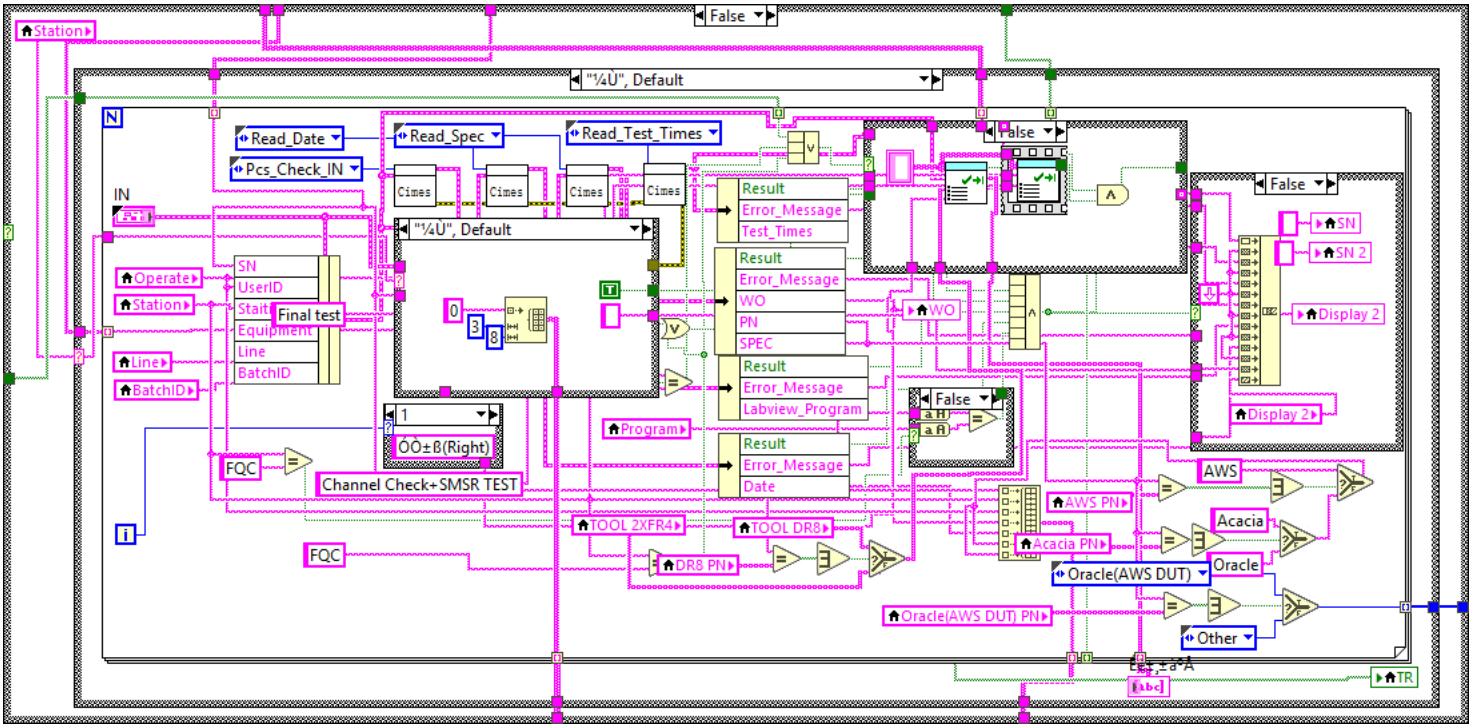

ICC Spec.txt
String
0
ICC Spec
[0] Timeout
Source
Type
Time



[1] "Check": Value Change
1 [0..5]
True
Source
Type
Time
CtlRef
OldVal
NewVal
Station
Operate
customer
TR
0
2
3
8
DUT Type



0 [0..5]
PC1
PC2
True
SN
SN 2
Check
2
Disabled
State
Boolean
Ref_In
Waiting
Display 2
State 2
Boolean
Ref_In
Waiting
TR
TR
True
Ëè±,±à°Á
Ëè±,±à°Á
1



False



False
1
2
1



Station
False
"¼Ù", Default
N
Read_Date
Read_Spec
Read_Test_Times
Pcs_Check_IN
IN
Cimes
Cimes
Cimes
Cimes
"¼Ù", Default
Result
Error_Message
Test_Times
Result
Error_Message
WO
PN
SPEC
Result
Error_Message
Labview_Program
Result
Error_Message
Date
Operate
Station
Line
BatchID
SN
UserID
Stait
Final test
Equipment
Line
BatchID
0
3
8
1
ÖÖ±ß(Right)
Channel Check+SMSR TEST
FQC
FQC
i
Program
TOOL 2XFR4
TOOL DR8
DR8 PN
WO
False
False
SN
SN 2
Display 2
Display 2
AWS
AWS PN
Acacia
Acacia PN
Oracle
Oracle(AWS DUT)
Oracle(AWS DUT) PN
Other
Ëè±,±à°Á
abc
TR



True

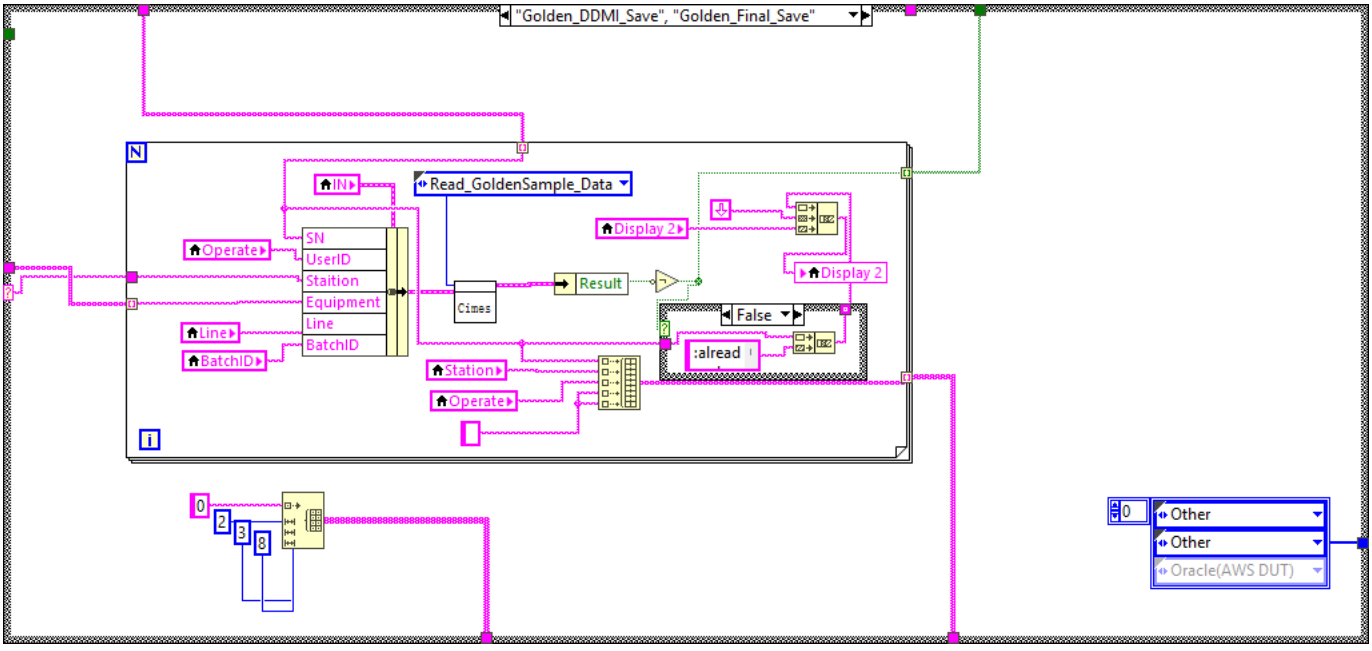

True



True
False
TOOL
Cimes
Error_Message
Result

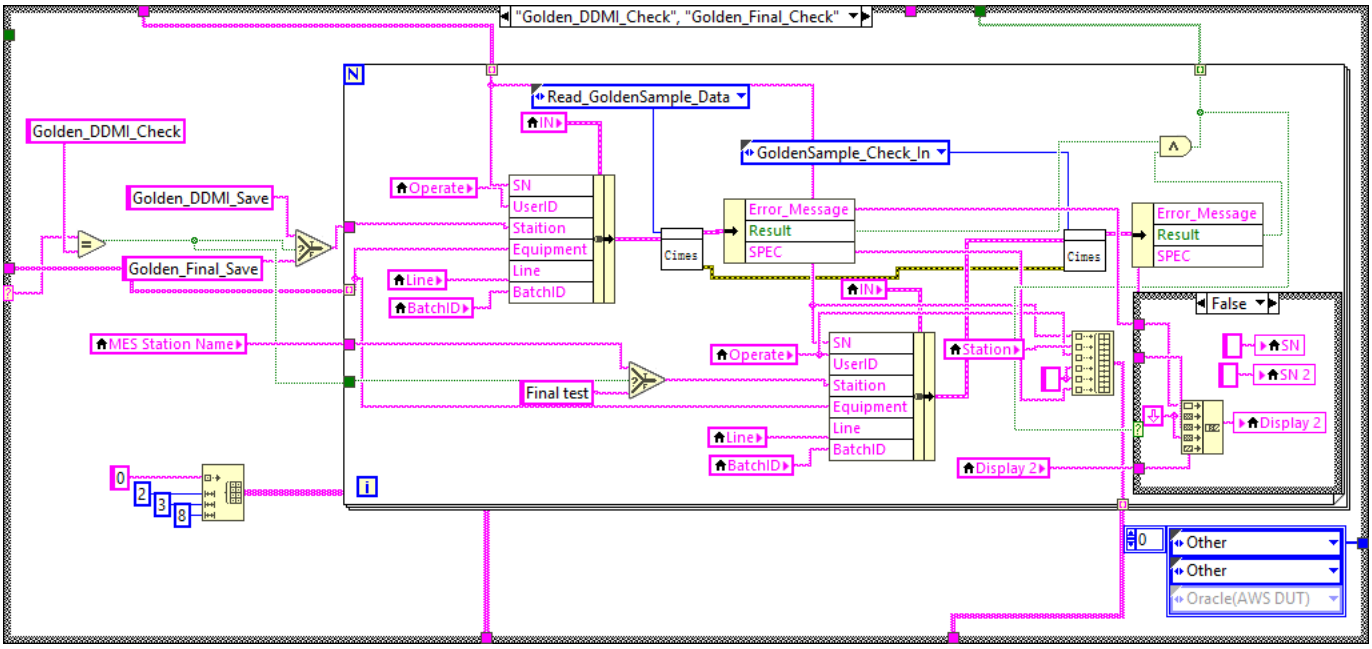

True



0, Default
×ó±ß(Light)

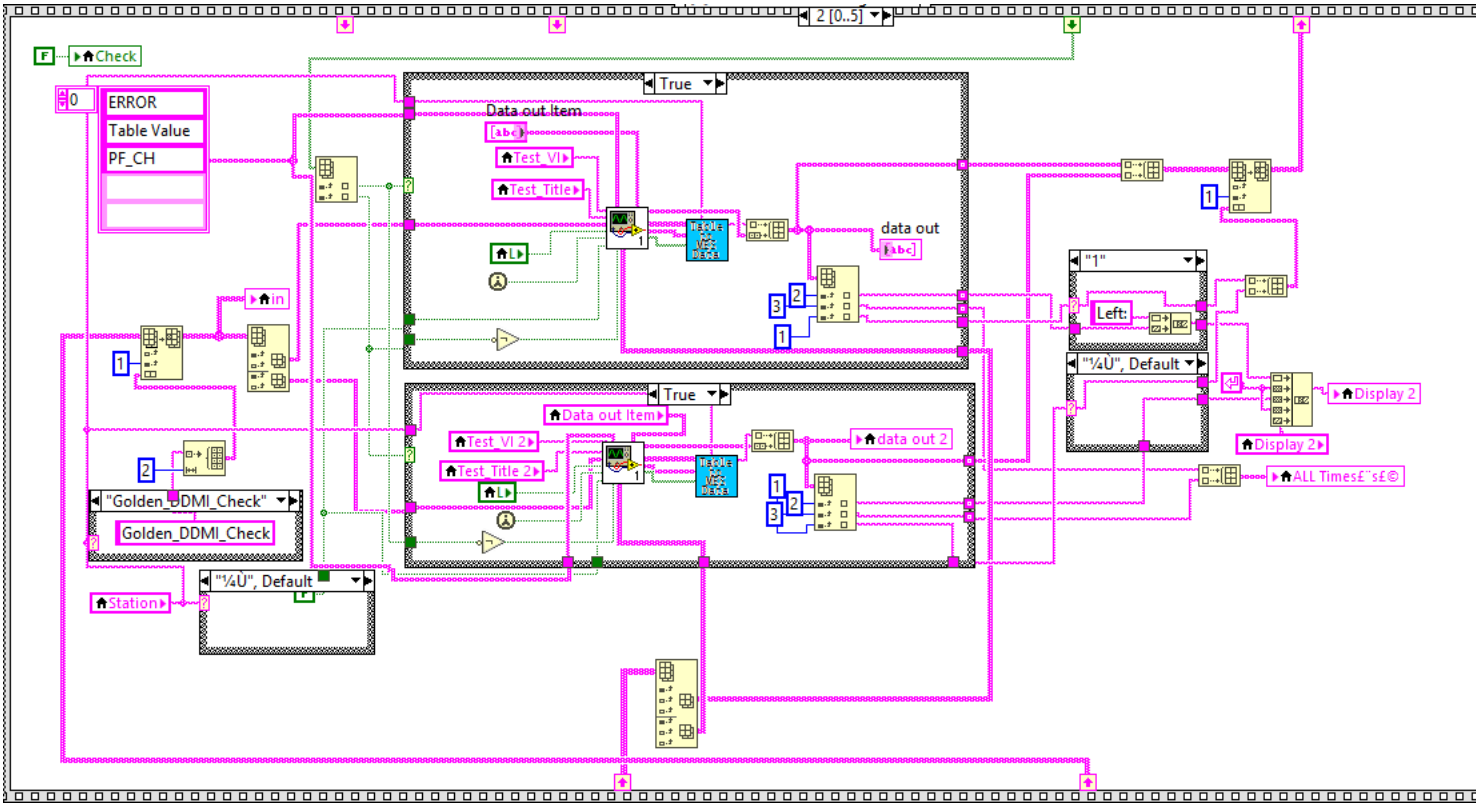

"Final test HT", "Final test LT"
Read_T
Result
Error_Message
SN
Staition
Cimes
2
LD_Temp

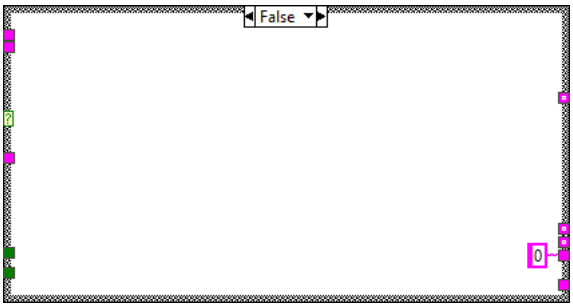

"Golden_DDMI_Save", "Golden_Final_Save"
IN
Read_GoldenSample_Data
Operate
SN
UserID
Staition
Equipment
Line
BatchID
Line
BatchID
Cimes
Result
Display 2
Display 2
False
:alread
Station
Operate
0
2
3
8
0
Other
Other
Oracle(AWS DUT)

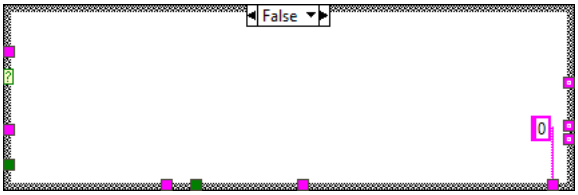

True



"Golden_DDMI_Check", "Golden_Final_Check"
Golden_DDMI_Check
Golden_DDMI_Save
Golden_Final_Save
MES Station Name
Read_GoldenSample_Data
IN
Operate
SN
UserID
Staition
Equipment
Line
BatchID
Cimes
Error_Message
Result
SPEC
GoldenSample_Check_In
Final test
Station
Display 2
SN 2
False
Other
Oracle(AWS DUT)



True



2 [0..5]
Check
ERROR
Table Value
PF_CH
True
Data out Item
Test_VI
Test_Title
data out
Left:
"¼U", Default
Data out Item
Test_VI 2
Test_Title 2
data out 2
Display 2
ALL Times£¨s£©
"Golden_DDMI_Check"
Golden_DDMI_Check
Station



False
0



False
0

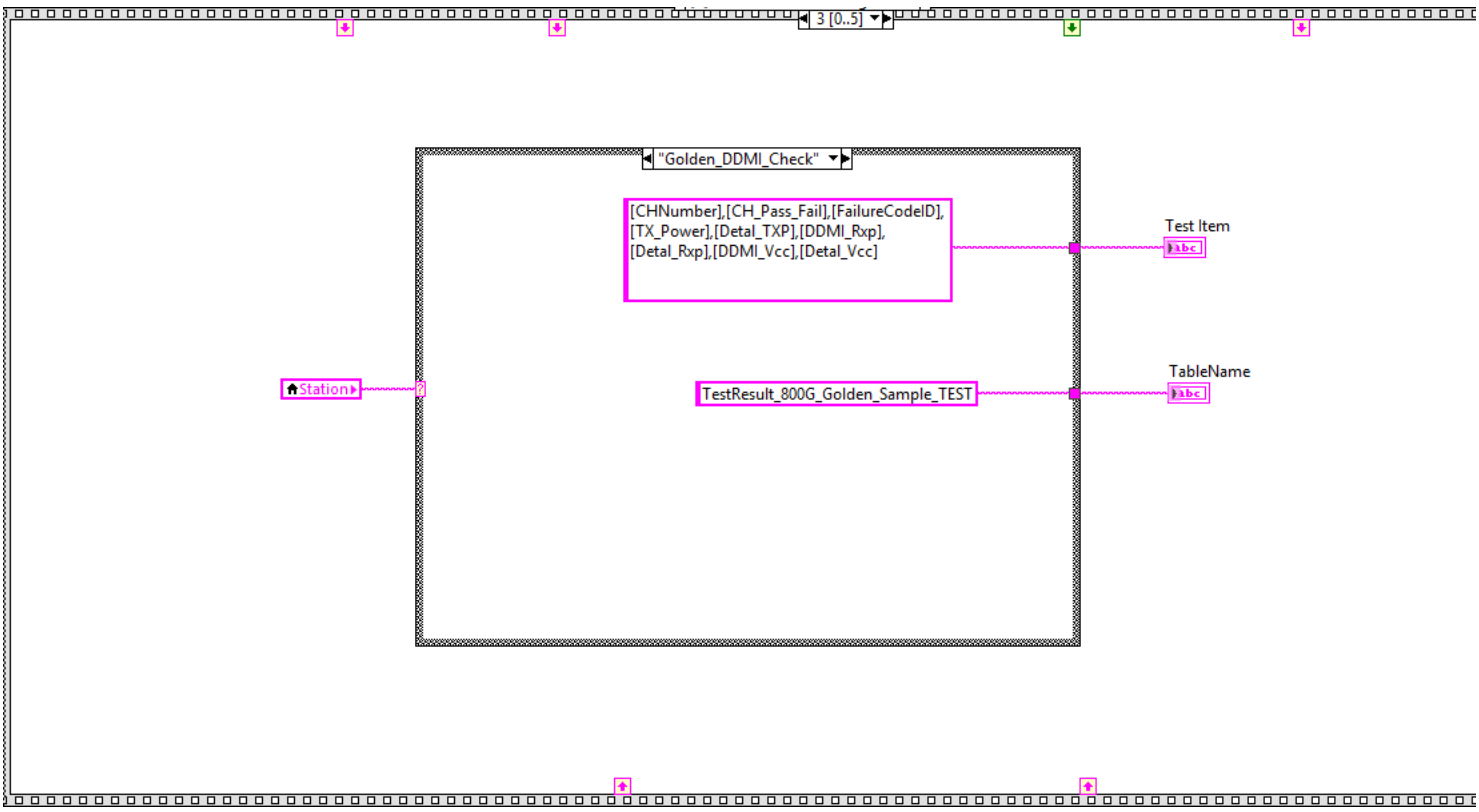

"¼Ù", Defaul

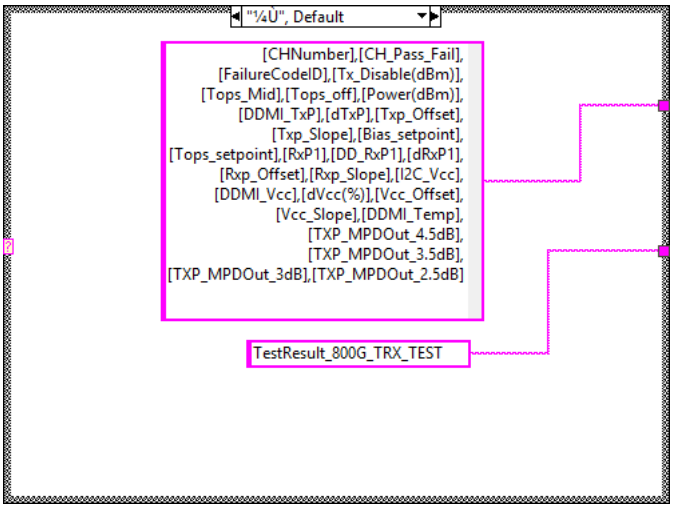

"1"
Right:

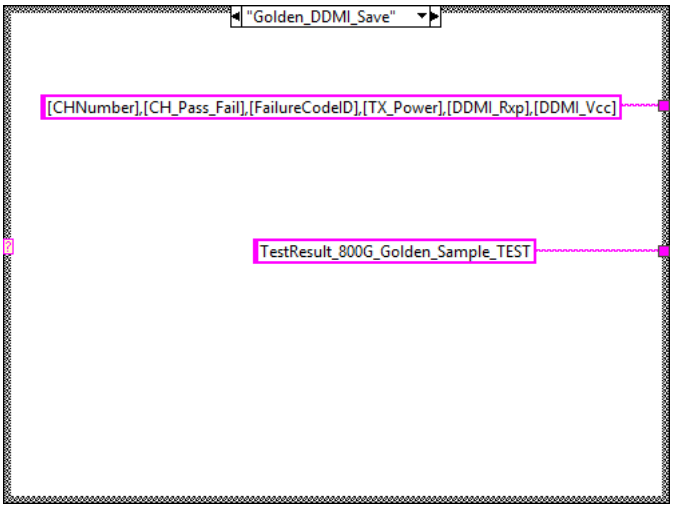

"Golden_DDMI_Ch

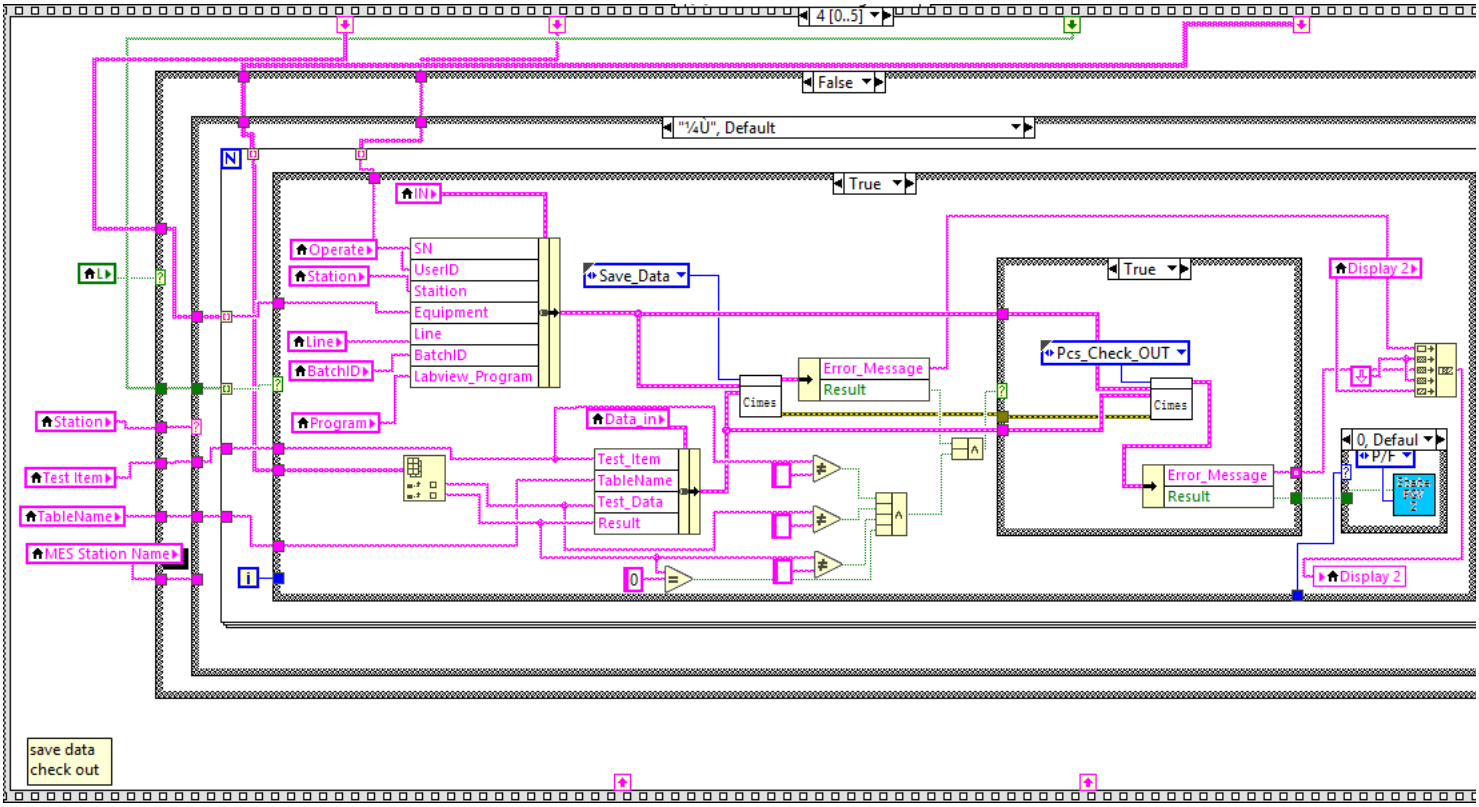

"¼Ù", Default
DDMI Cal

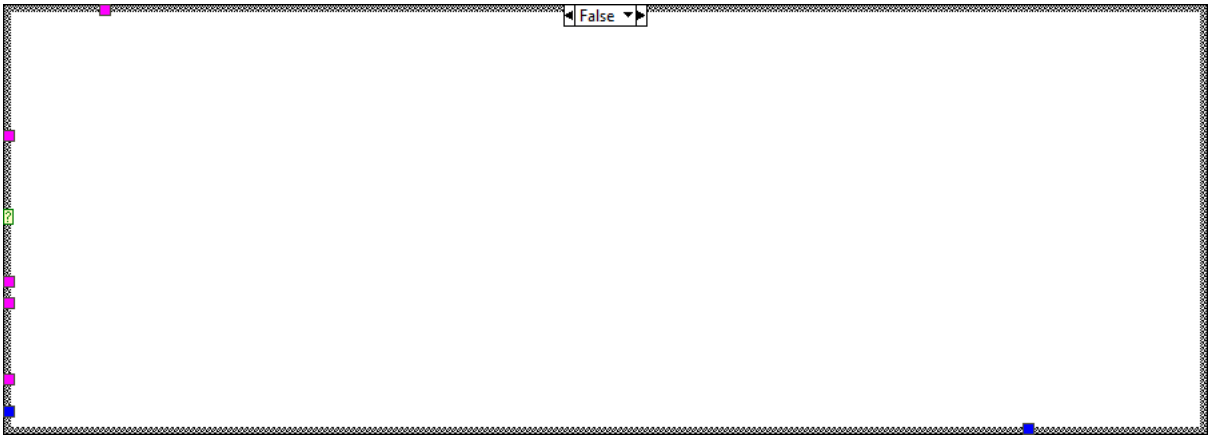

"Golden_DDMI_Save"
Golden_DDMI_Save



3 [0..5]
"Golden_DDMI_Check"
[CHNumber],[CH_Pass_Fail],[FailureCodeID],
[TX_Power],[Detal_TXP],[DDMI_Rxp],
[Detal_Rxp],[DDMI_Vcc],[Detal_Vcc]
Test Item
Station
TestResult_800G_Golden_Sample_TEST
TableName



"¼Ù", Default
[CHNumber],[CH_Pass_Fail],
[FailureCodeID],[Tx_Disable(dBm)],
[Tops_Mid],[Tops_off],[Power(dBm)],
[DDMI_TxP],[dTxP],[Txp_Offset],
[Txp_Slope],[Bias_setpoint],
[Tops_setpoint],[RxP1],[DD_RxP1],[dRxP1],
[Rxp_Offset],[Rxp_Slope],[I2C_Vcc],
[DDMI_Vcc],[dVcc(%)],[Vcc_Offset],
[Vcc_Slope],[DDMI_Temp],
[TXP_MPDOut_4.5dB],
[TXP_MPDOut_3.5dB],
[TXP_MPDOut_3dB],[TXP_MPDOut_2.5dB]
TestResult_800G_TRX_TEST

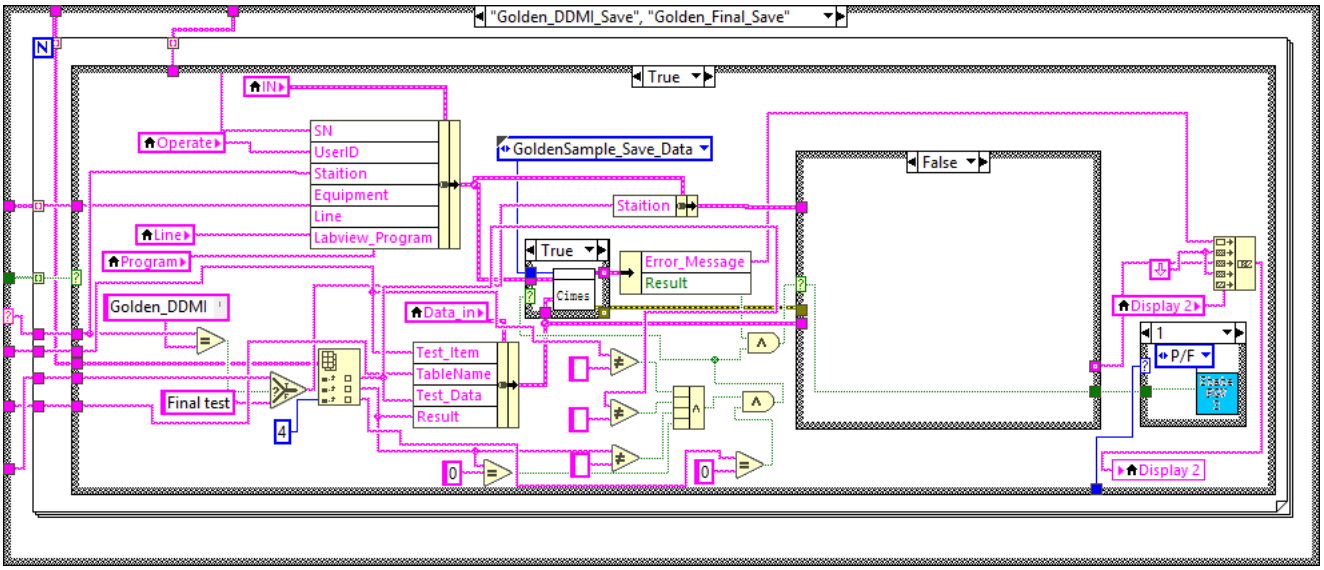

"Golden_DDMI_Save"
[CHNumber],[CH_Pass_Fail],[FailureCodeID],[TX_Power],[DDMI_Rxp],[DDMI_Vcc]
TestResult_800G_Golden_Sample_TEST

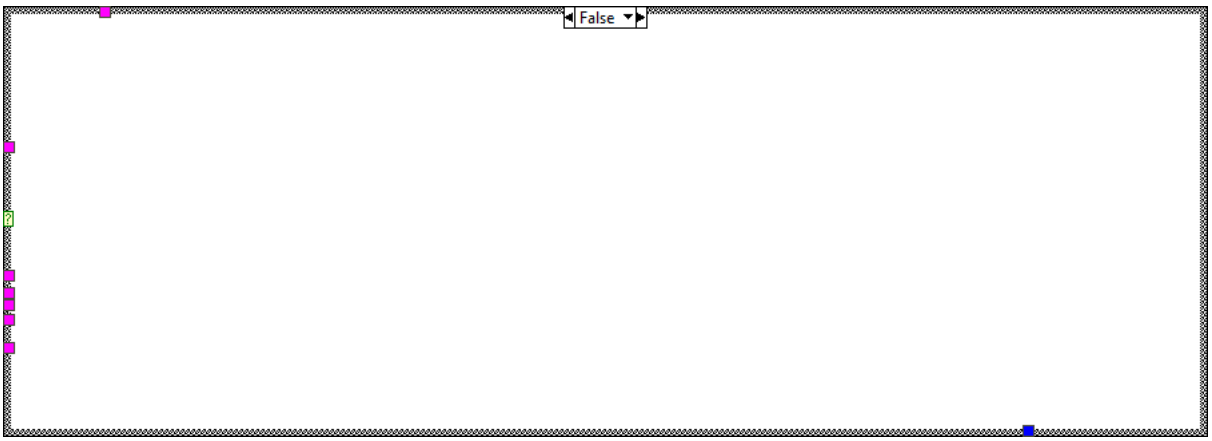

4 [0..5]
False
"¼Ù", Default
True
IN
Operate
Station
Line
BatchID
Program
SN
UserID
Staition
Equipment
Line
BatchID
Labview_Program
Save_Data
Data_In
Test_Item
TableName
Test_Data
Result
Cimes
Error_Message
Result
True
Pcs_Check_OUT
Cimes
Error_Message
Result
Display 2
0, Defaul
P/F
Display 2
L
Station
Test Item
TableName
MES Station Name
i
0
save data
check out



False



False



1
P/F


"Golden_DDMI_Save", "Golden_Final_Save"
N
True
IN
Operate
SN
UserID
Staition
Equipment
Line
Labview_Program
GoldenSample_Save_Data
Staition
Line
Program
Golden_DDMI
Final test
4
Data_in
Test_Item
TableName
Test_Data
Result
True
Cimes
Error_Message
Result
0
0
False
Display 2
1
P/F
Display 2

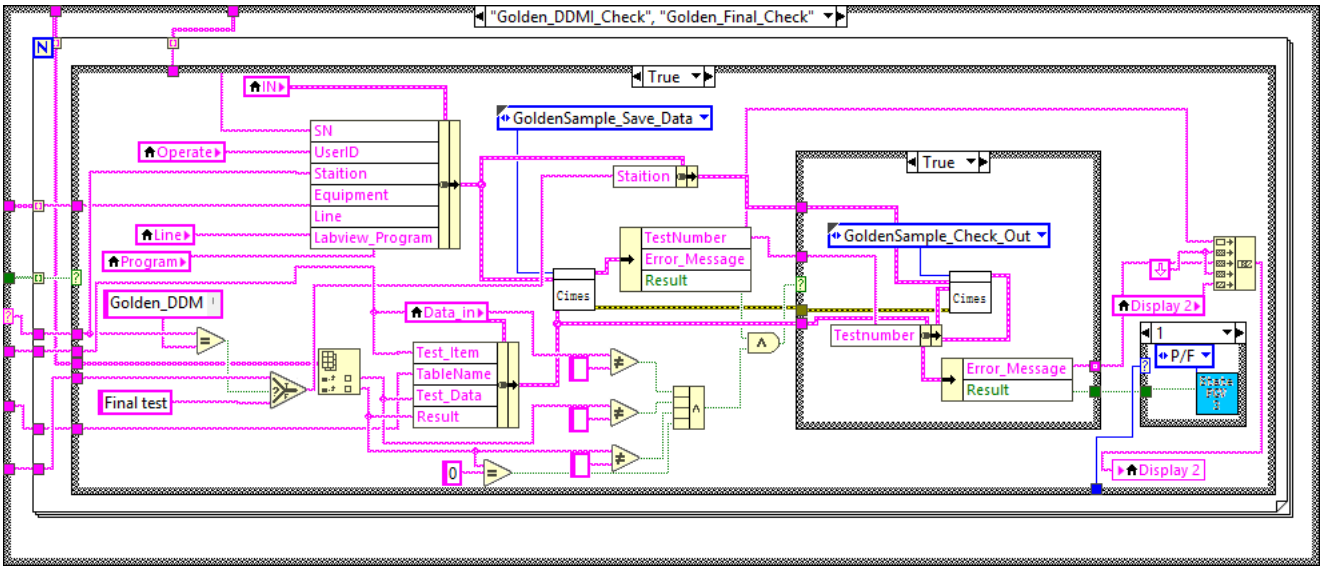

False

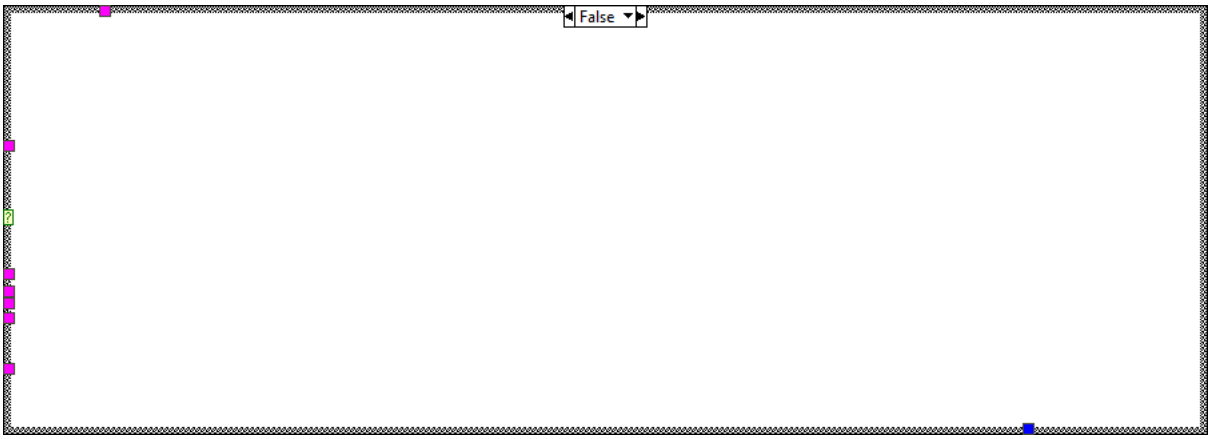

True
½ûÖ
GoldenSample_Check_Out
Cimes
Error_Message
Result



Enabled



0, Defaul
P/F

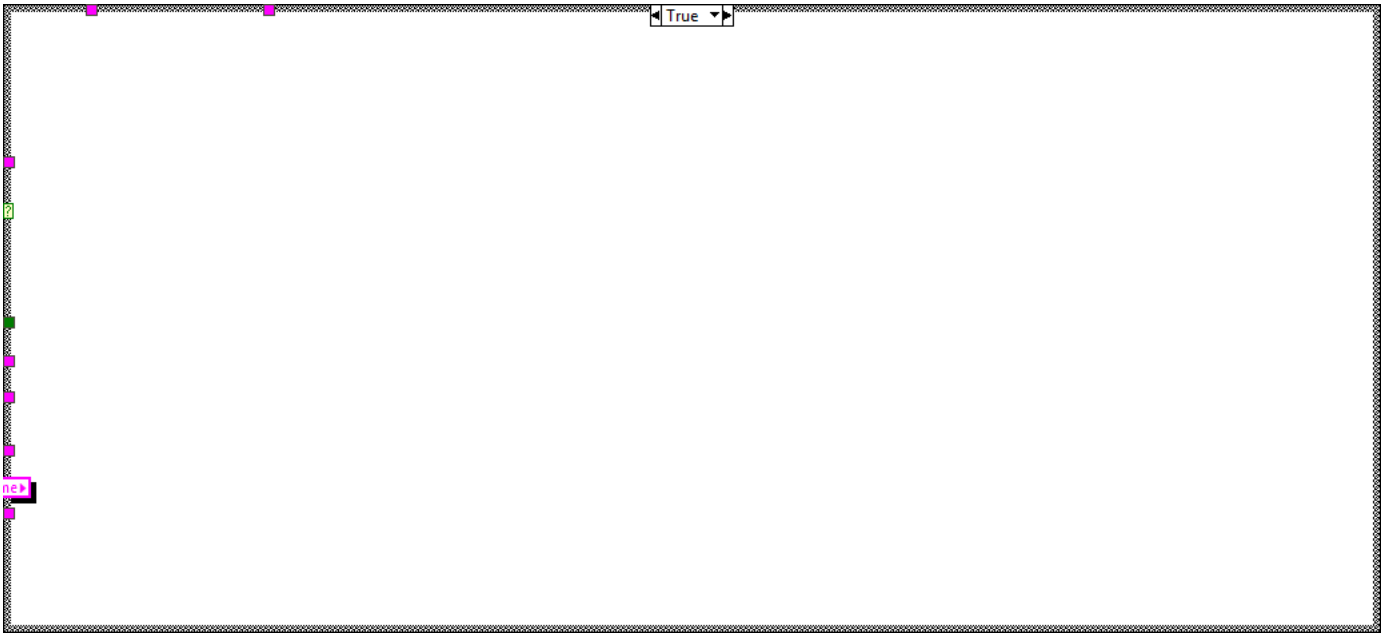

False

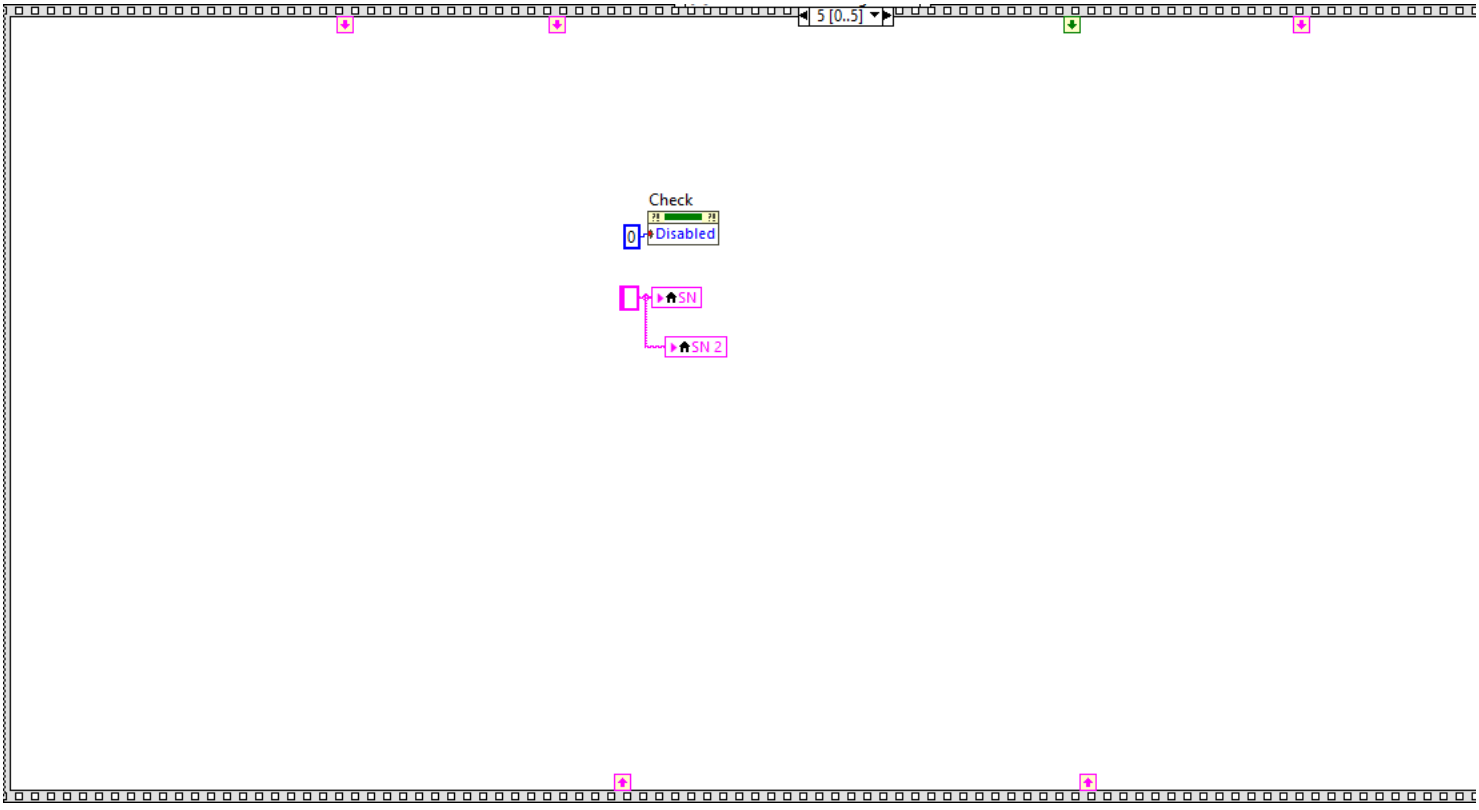

"Golden_DDMI_Check", "Golden_Final_Check"
N
True
IN
SN
UserID
Staition
Equipment
Line
Labview_Program
Operate
Line
Program
Golden_DDM
Final test
GoldenSample_Save_Data
Staition
Data_in
Test_Item
TableName
Test_Data
Result
0
Cimes
TestNumber
Error_Message
Result
True
GoldenSample_Check_Out
Cimes
Testnumber
Error_Message
Result
Display 2
1
P/F
Display 2

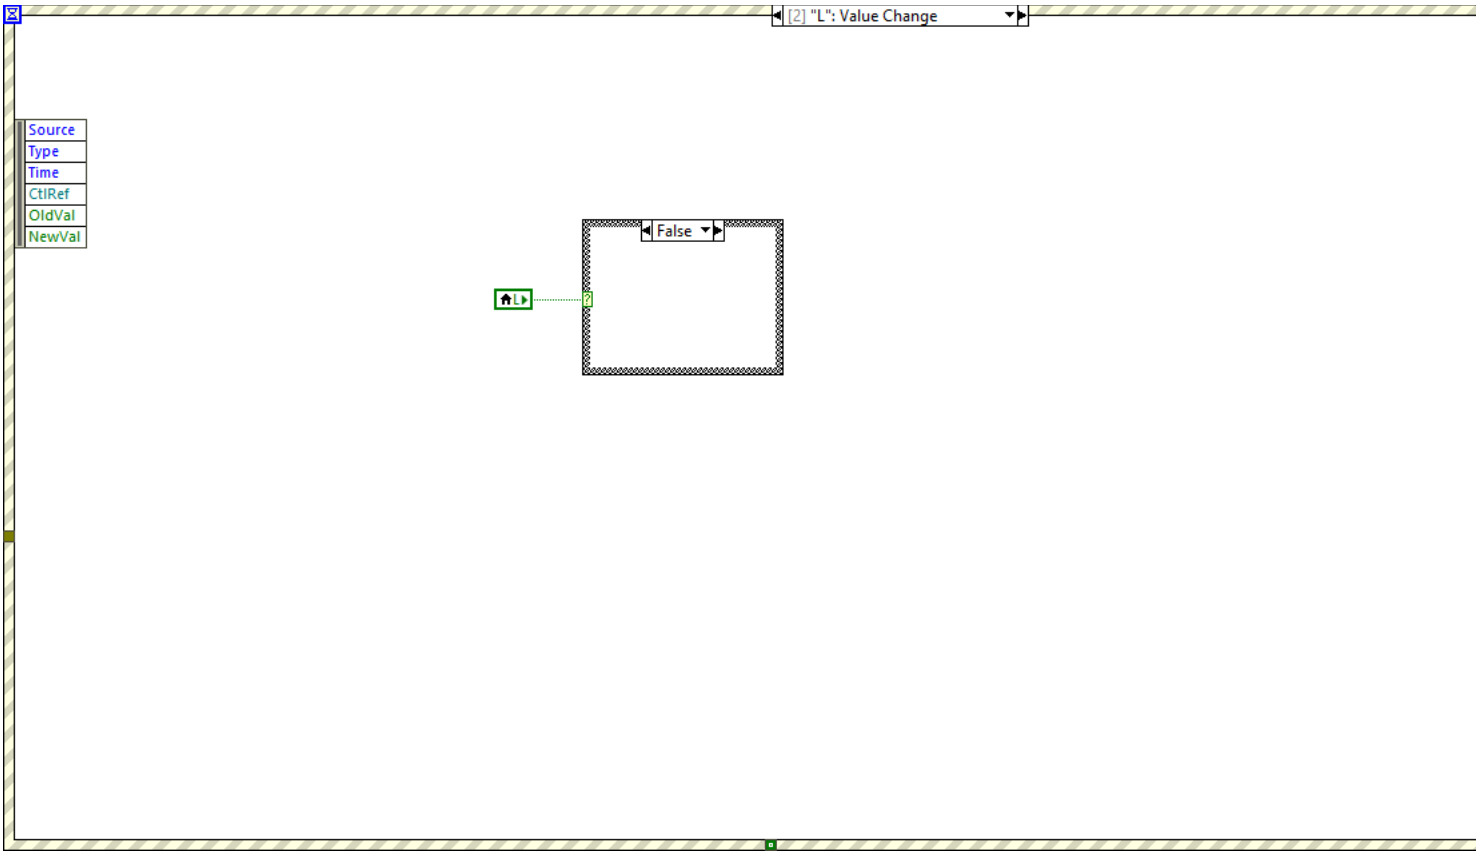

False



False

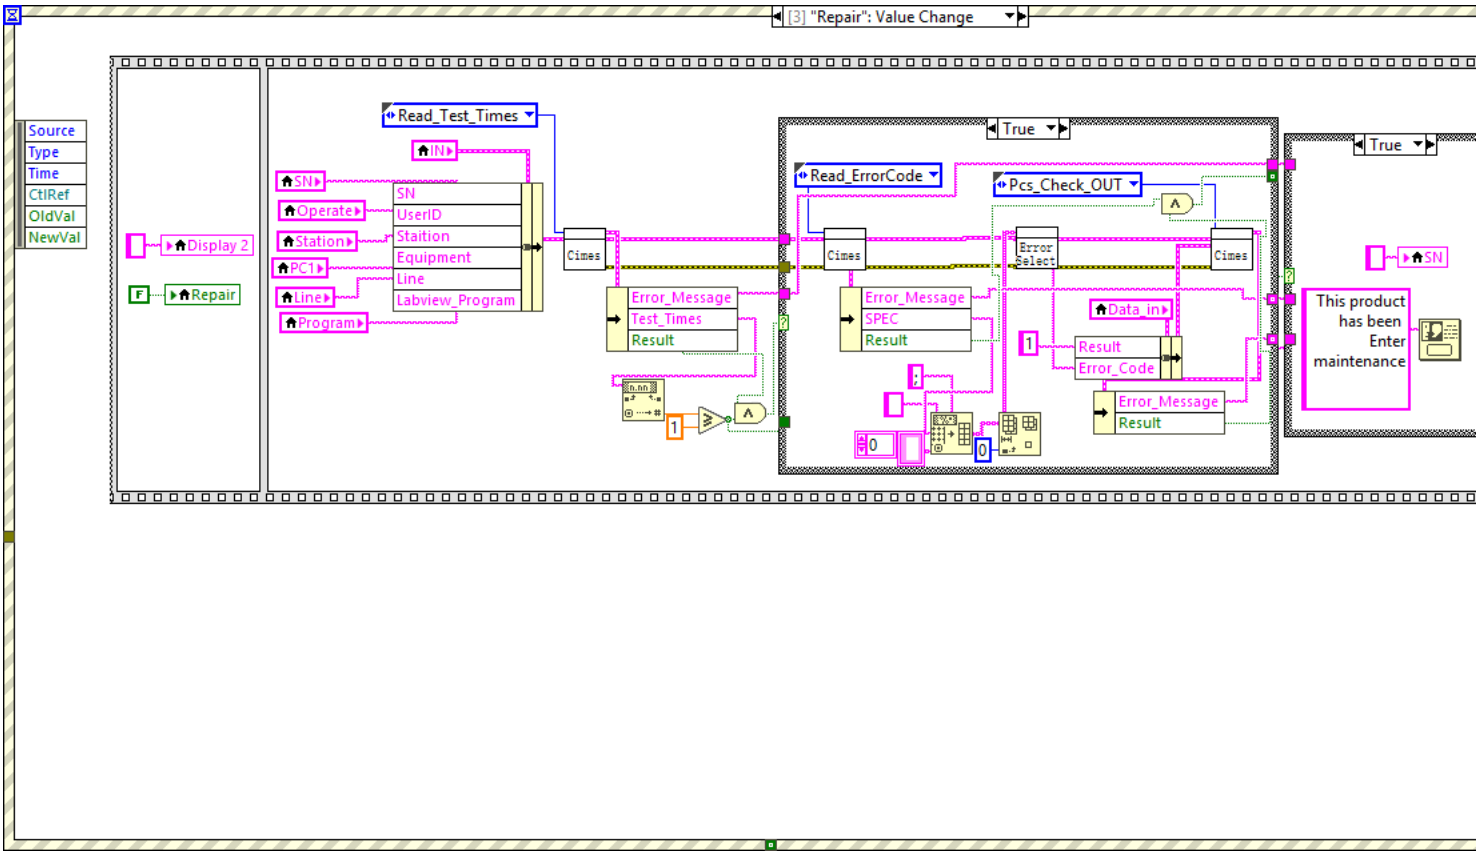

0, Defaul
P/F

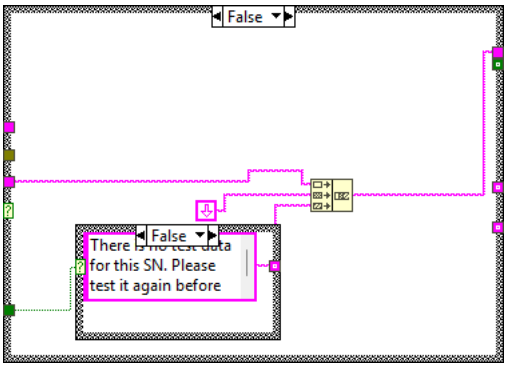

True



5 [0..5]
Check
Disabled
SN
SN 2



[2] "L": Value Change
Source
Type
Time
CtlRef
OldVal
NewVal
False
L

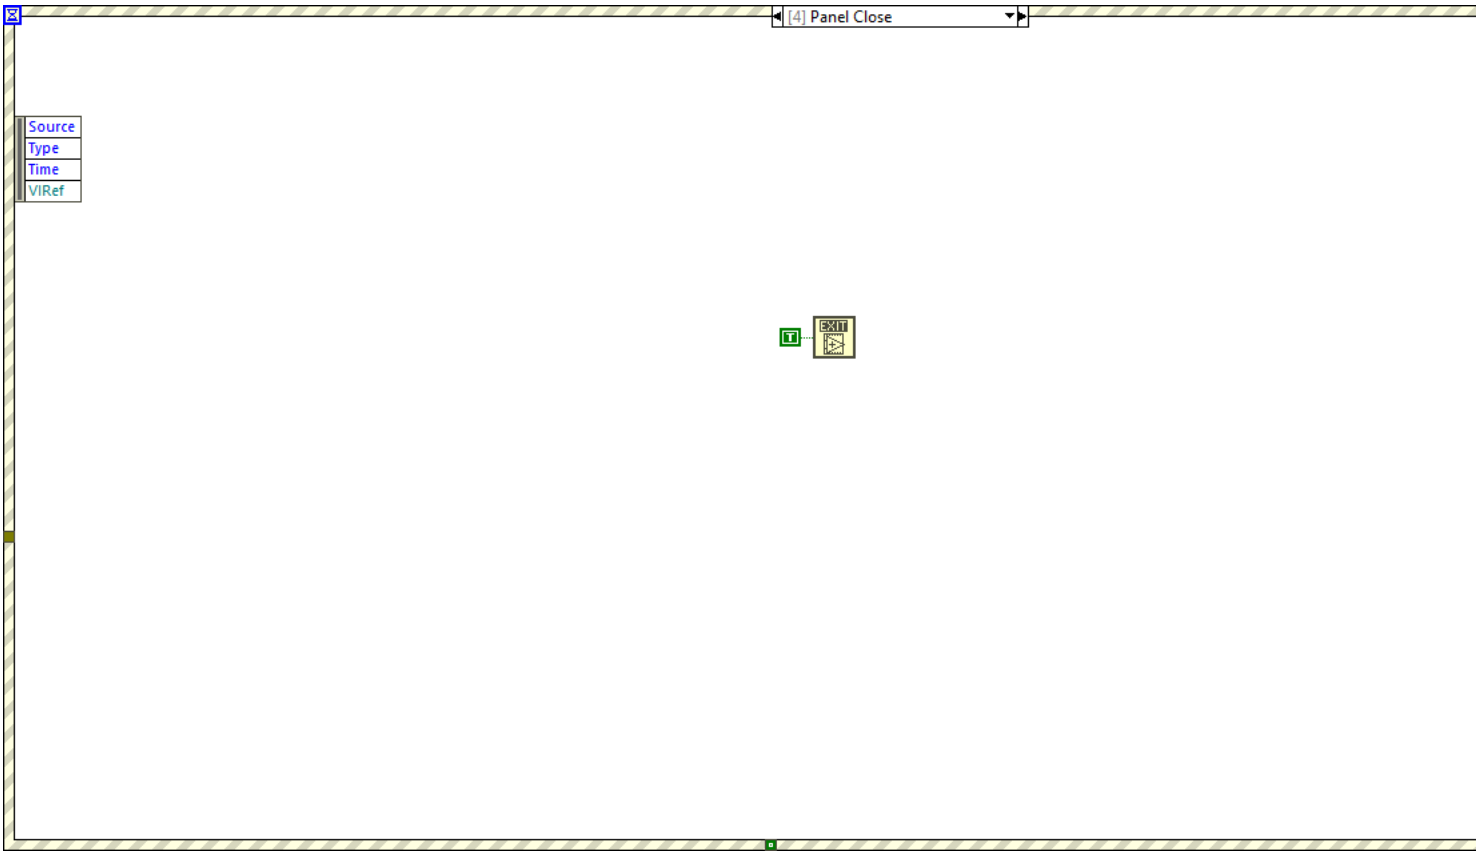

True
L

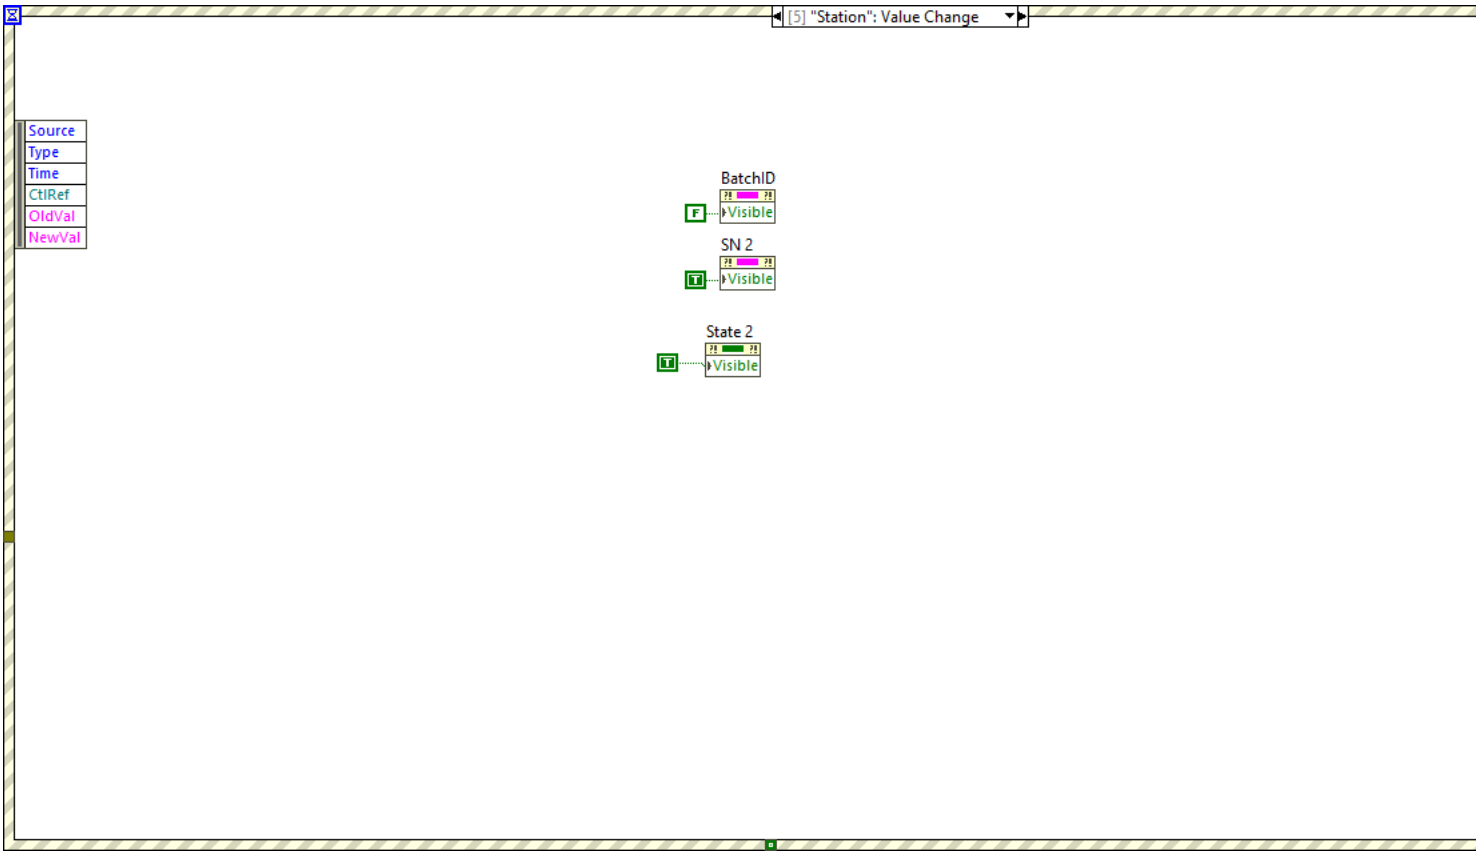

[3] "Repair": Value Change
Source
Type
Time
CtlRef
OldVal
NewVal
Display 2
Repair
Read_Test_Times
IN
SN
Operate
Station
PC1
Line
Program
SN
UserID
Staition
Equipment
Line
Labview_Program
Cimes
Error_Message
Test_Times
Result
True
Read_ErrorCode
Pcs_Check_OUT
Cimes
Error_Message
SPEC
Result
Error Select
Cimes
Data_in
Result
Error_Code
Error_Message
Result
True
SN
This product has been Enter maintenance

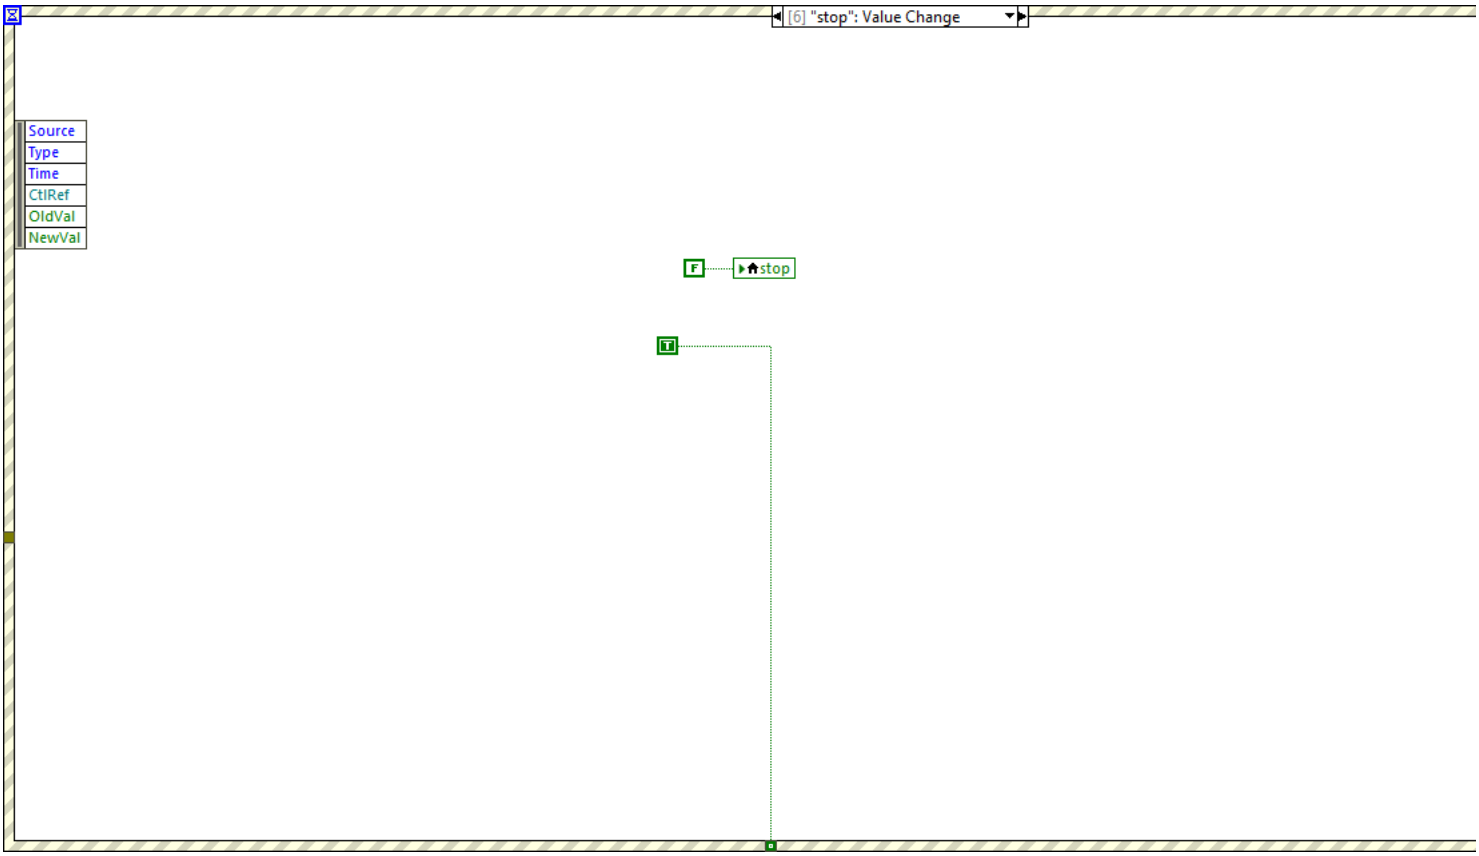

False
False
There is no test data for this SN. Please test it again before

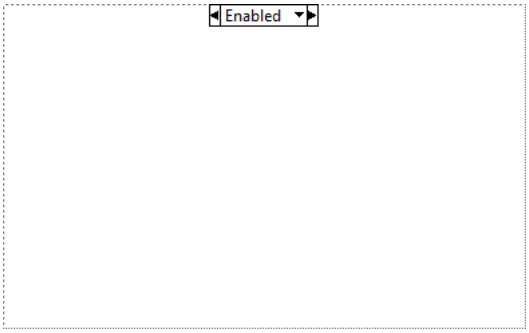

True


False
SN
Display 2


[4] Panel Close
Source
Type
Time
VIRef
EXIT


[5] "Station": Value Change
Source
Type
Time
CtlRef
OldVal
NewVal
BatchID
Visible
SN 2
Visible
State 2
Visible


[6] "stop": Value Change
Source
Type
Time
CtlRef
OldVal
NewVal
stop



List of SubVIs and Express VIs with Configuration Information

Data_in.ctl

C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\Data_in.ctl

Cimes_All.vi

C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\Cimes_All.vi

G_100G.vi

C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\G_100G.vi

DUT Type.ctl

C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\DUT Type.ctl

Read Delimited Spreadsheet.vi

C:\Program Files (x86)\National Instruments\LabVIEW 2025\vi.lib\Utility\file.llb\Read Delimited Spreadsheet.vi

PSM4_State_FGV_C.vi

C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\PSM4_State_FGV_C.vi

read Computer Name2.vi

C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\read Computer Name2.vi

Read Delimited Spreadsheet (string).vi

C:\Program Files (x86)\National Instruments\LabVIEW 2025\vi.lib\Utility\file.llb\Read Delimited Spreadsheet (string).vi

PSM4_State_FGV_C2.vi

C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\PSM4_State_FGV_C2.vi

RT Test MES Data Processing.vi

C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\RT Test MES Data Processing.vi

Check_Device .vi

C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\Check_Device .vi

Application Directory.vi

C:\Program Files (x86)\National Instruments\LabVIEW 2025\vi.lib\Utility\file.llb\Application Directory.vi

W R ini File.vi

C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\W R ini File.vi

ErrorCodeSelecte.vi

C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\ErrorCodeSelecte.vi

Write Password.vi

C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\Write Password.vi

Call VI2.vi

C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\Call VI2.vi

Call VI.vi

C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\Call VI.vi

Table Value to MES Data.vi

C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\Table Value to MES Data.vi

Step.ctl

C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\Step.ctl

IN.ctl

C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\IN.ctl

Check_TOOL.vi

C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\Check_TOOL.vi

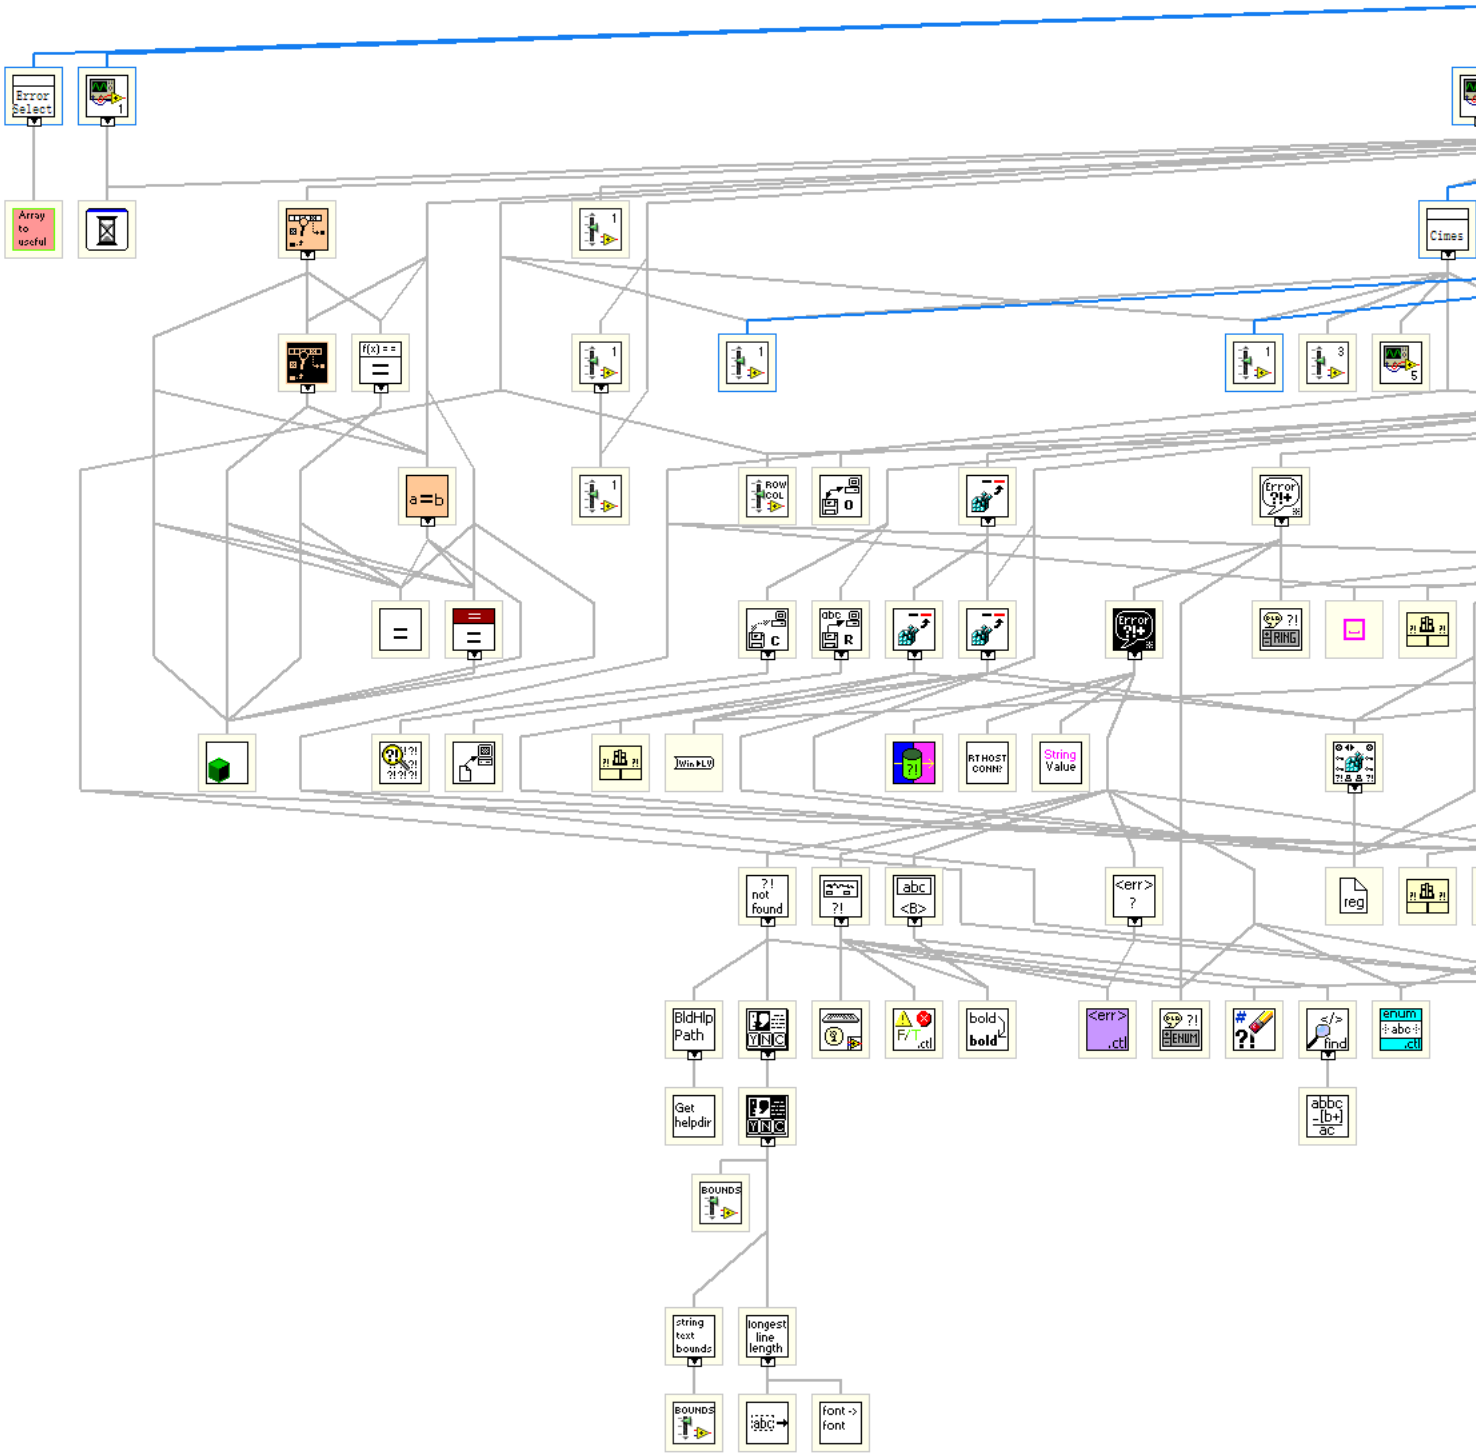
---

VI Revision History

"Cimes_Interface.vi History"

Current Revision: 397

Position in Hierarchy




Iconified Cluster Constants



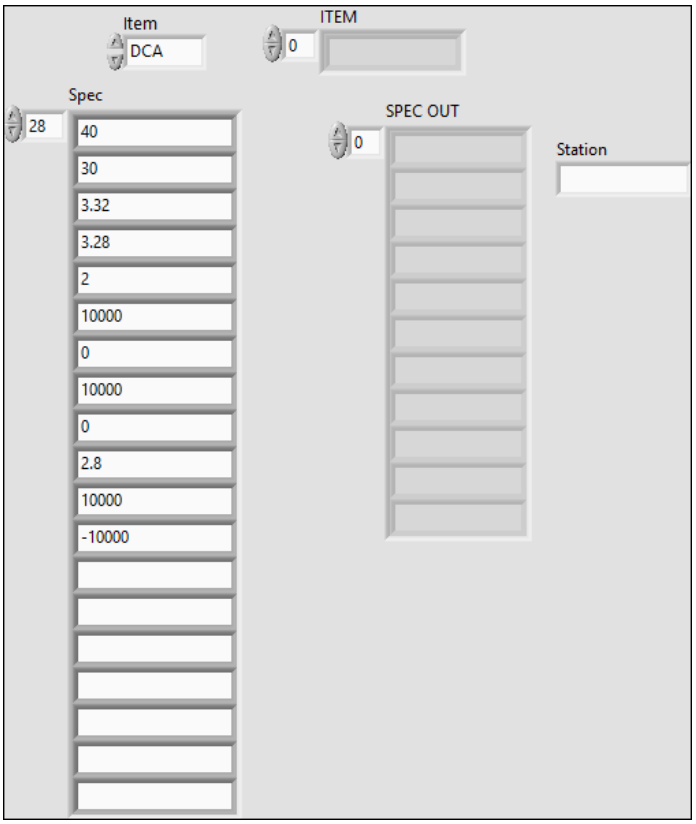
8

Step_To_Item.vi

Connector Pane



Front Panel



Controls and Indicators

Item
Spec

- **字符串**

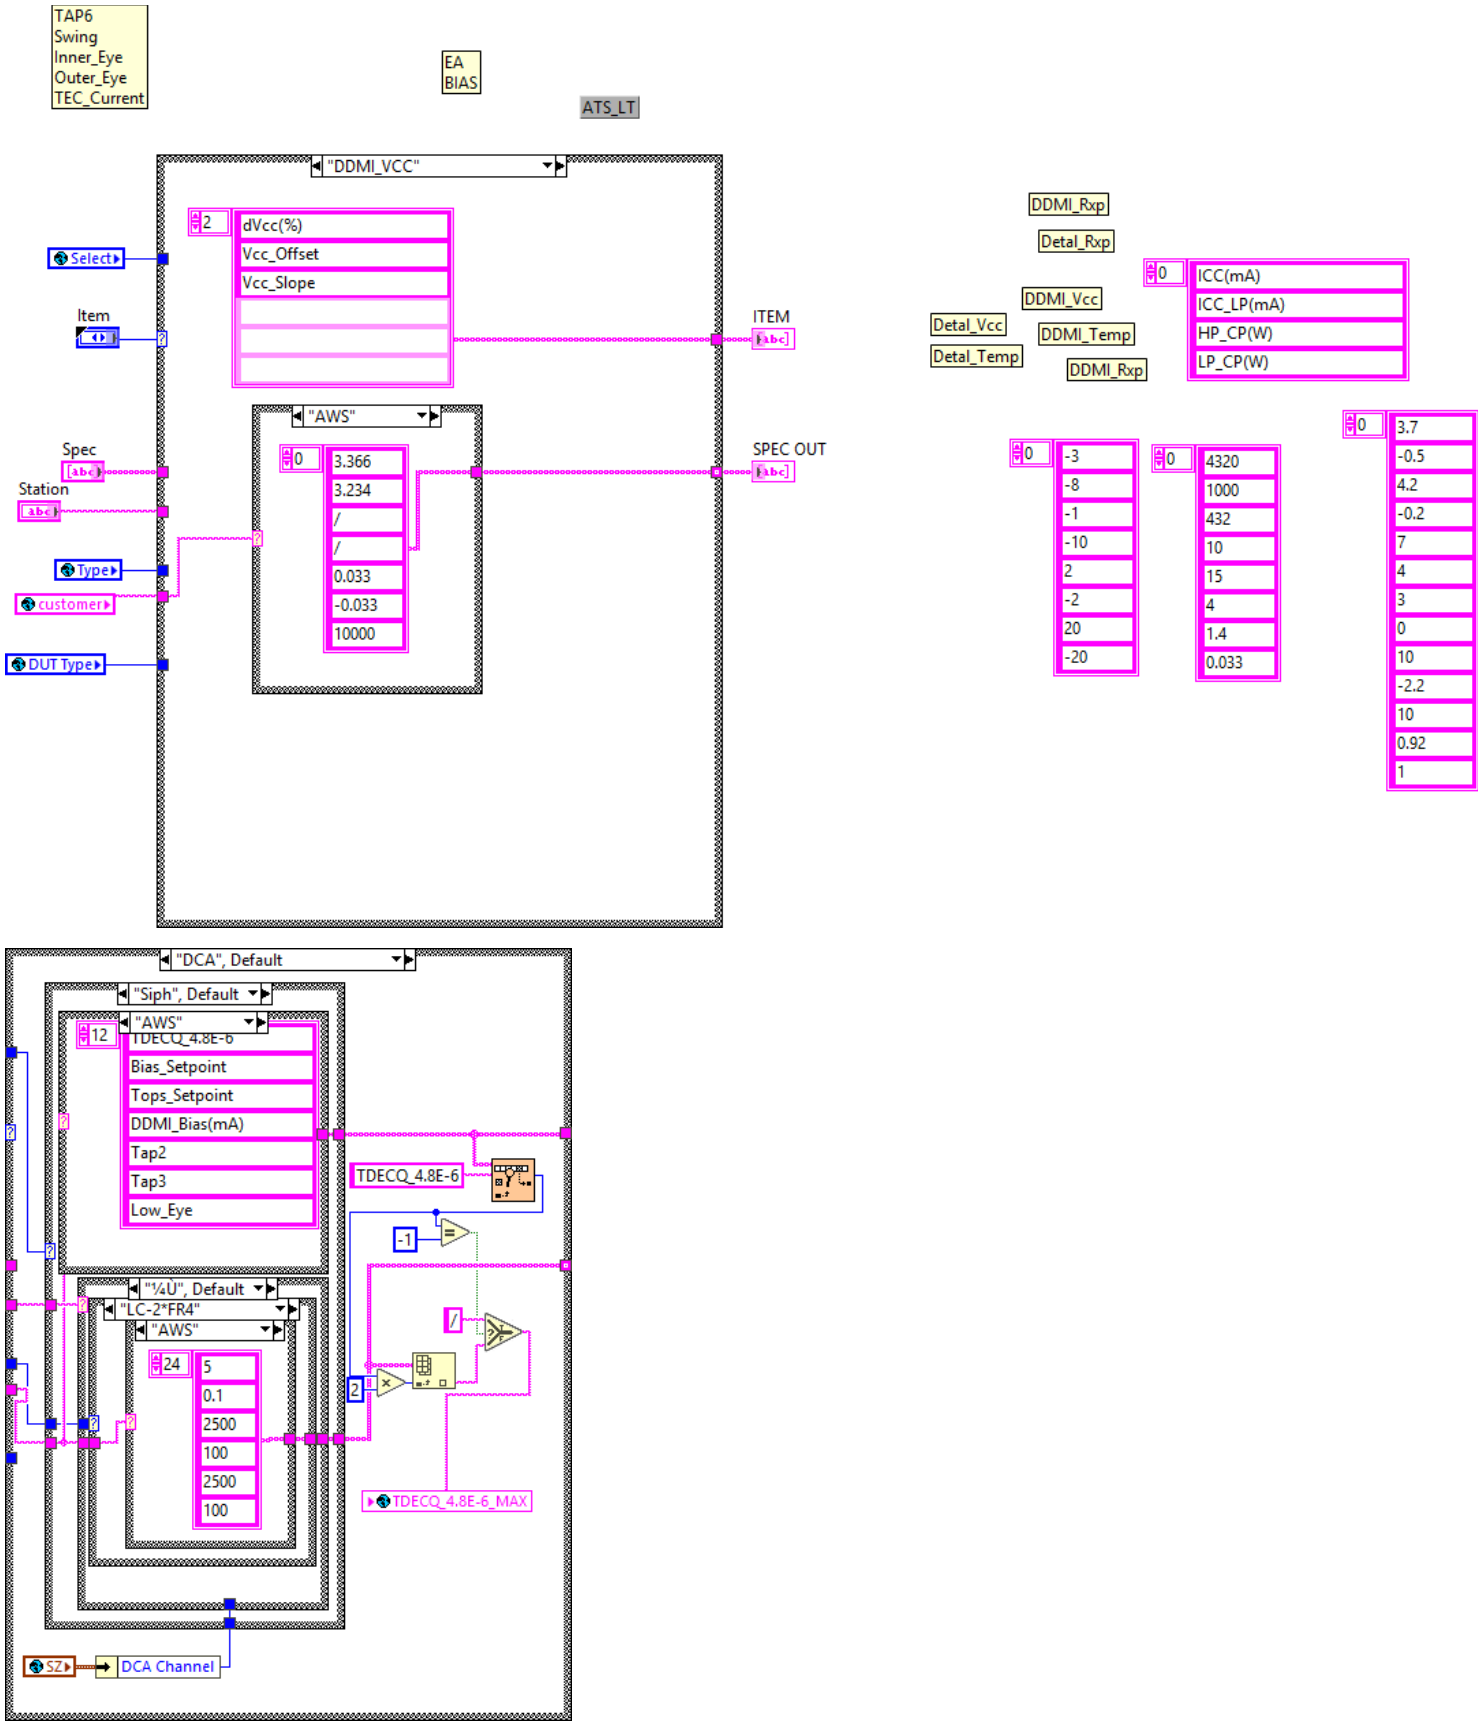
Station
ITEM


-


SPEC OUT


- **字符串**


Block Diagram



TAP6
Swing
Inner_Eye
Outer_Eye
TEC_Current
EA
BIAS
ATS_LT
"DDMI_VCC"
2
dVcc(%)
Vcc_Offset
Vcc_Slope
Select
Item
Spec
Station
Type
customer
DUT Type
ITEM
SPEC OUT
"AWS"
0
3.366
3.234
/
/
0.033
-0.033
10000
DDMI_Rxp
Detal_Rxp
DDMI_Vcc
Detal_Vcc
DDMI_Temp
Detal_Temp
DDMI_Rxp
0
ICC(mA)
ICC_LP(mA)
HP_CP(W)
LP_CP(W)
0
-3
-8
-1
-10
2
-2
20
-20
0
4320
1000
432
10
15
4
1.4
0.033
0
3.7
-0.5
4.2
-0.2
7
4
3
0
10
-2.2
10
0.92
1
"DCA", Default
"Siph", Default
"AWS"
12
TDECQ_4.8E-6
Bias_Setpoint
Tops_Setpoint
DDMI_Bias(mA)
Tap2
Tap3
Low_Eye
TDECQ_4.8E-6
-1
"¼U", Default
"LC-2*FR4"
"AWS"
24
5
0.1
2500
100
2500
100
2
/
TDECQ_4.8E-6_MAX
SZ
DCA Channel



"¼U", Default
11
Undershoot
Bias_Setpoint
Tops_Setpoint
DDMI_Bias(mA)



"Acacia"
12
Bias_Setpoint
Tops_Setpoint
DDMI_Bias(mA)
HT_OA
RT_OA
LT_OA



"¼U", Default
24
2500
100
2500
100
130
20



"MPO-DR8", Default
"¼U", Default
24
2500
100
2500
100
87.5



"AWS"
24
5
0.1
2500
100
2500



"Acacia"
9
-1.2
10
0
1
-1



"ATS_HT"
"LC-2*FR4"
"¼U", Default
24
2500
0
2500
100
130
20



"AWS"
24
5
0.1
2500
100
2500
100



"MPO-DR8", Default
"Acacia"
9
-1.2
10
0
1
-1



"¼Ù", Default
24
2500
0
2500
100
87.5



"AWS"
24
5
0.1
2500
100
2500



"ATS_LT"
"MPO-DR8", Default
"¼Ù", Default
24
2500
0
2500
100
87.5



"LC-2*FR4"
"¼U", Default
24
2500
0
2500
100
130
20

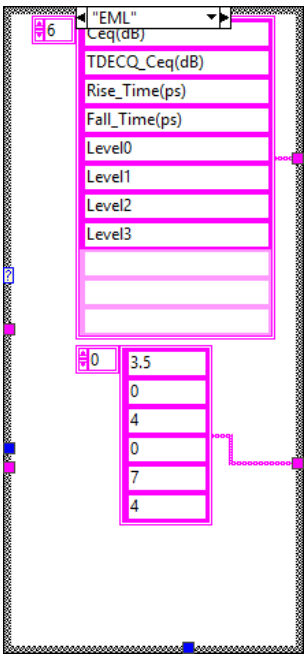

"AWS"
1, Default
0.1
2500
100
2500
100

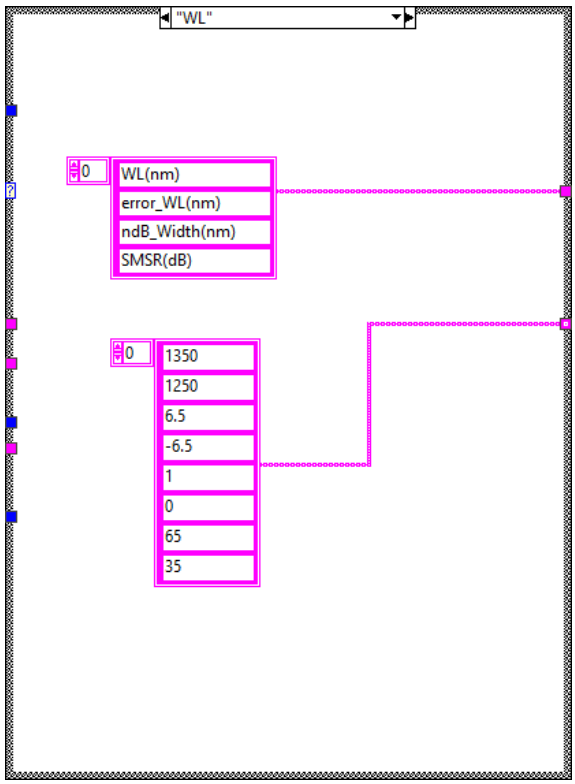

2
/
2500
100
2500
100

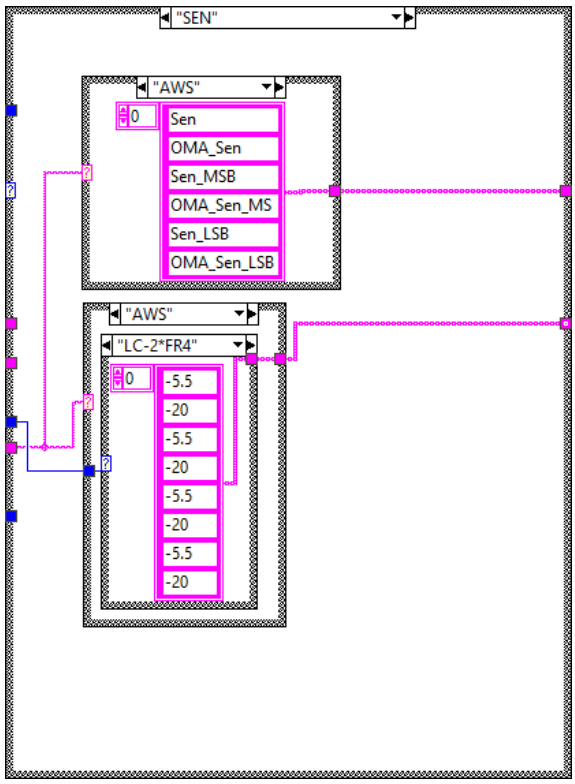

"AWS"
0.1
15
0.1
/
/



0, Default
15
0.1
4.5
0.1
2500



"Acacia"
9
-1.2
10
0
1
-1



6
"EML"
TDECQ_Ceq(dB)
Rise_Time(ps)
Fall_Time(ps)
Level0
Level1
Level2
Level3
0
3.5
0
4
0
7
4



"WL"
0
WL(nm)
error_WL(nm)
ndB_Width(nm)
SMSR(dB)
0
1350
1250
6.5
-6.5
1
0
65
35

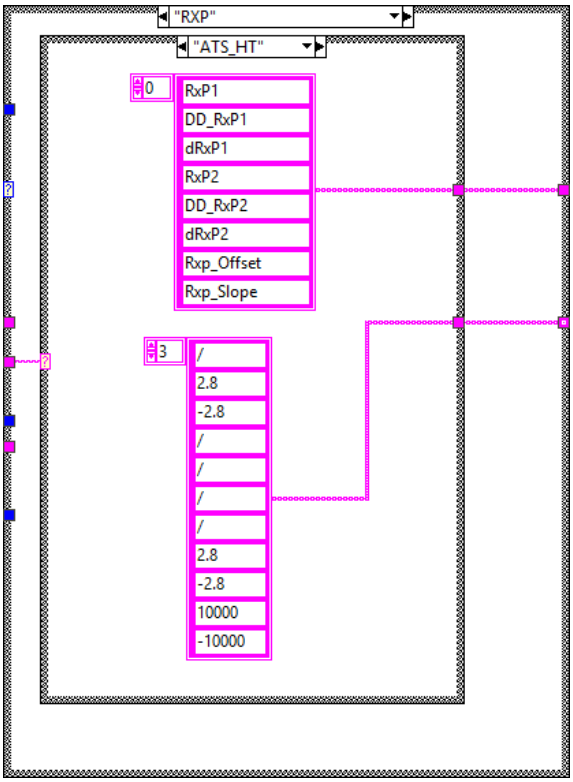

"SEN"
"AWS"
0
Sen
OMA_Sen
Sen_MSB
OMA_Sen_MS
Sen_LSB
OMA_Sen_LSB
"AWS"
"LC-2*FR4"
0
-5.5
-20
-5.5
-20
-5.5
-20
-5.5
-20

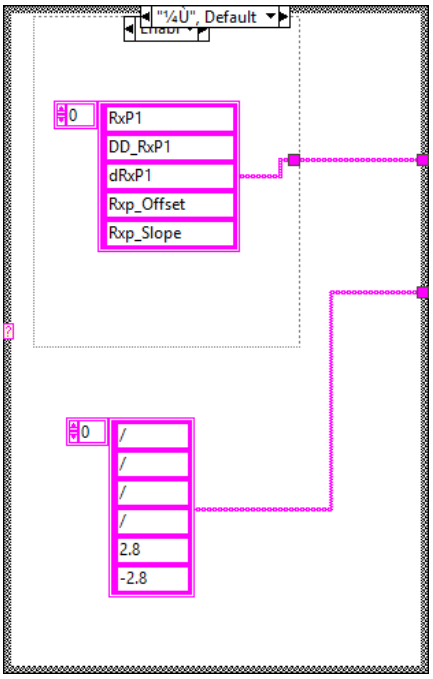

"¼Ù", Default
0
-8
-20
-8
-20



"MPO-DR8", D
0
-6
-20
-6
-20
-6
-20
-6
-20

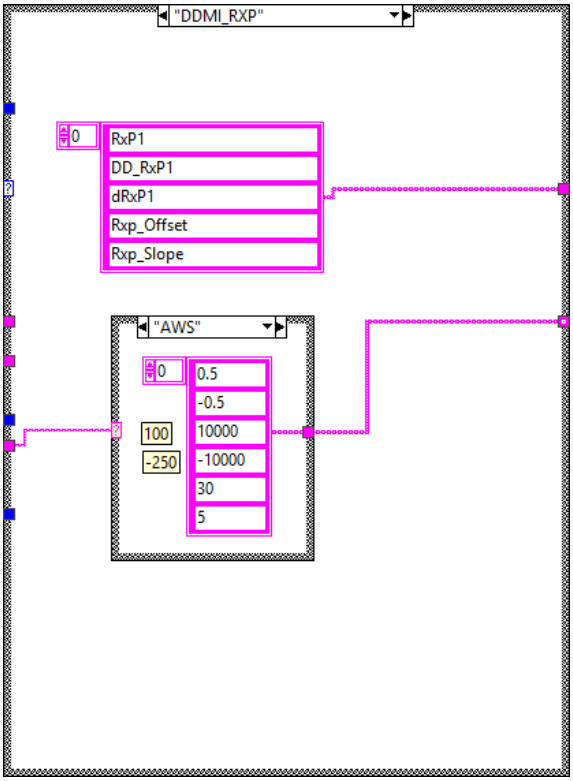

"Acacia"
0
-3.9
-20
-3.9
-20



"¼U", Default
0
Sen
OMA_Sen

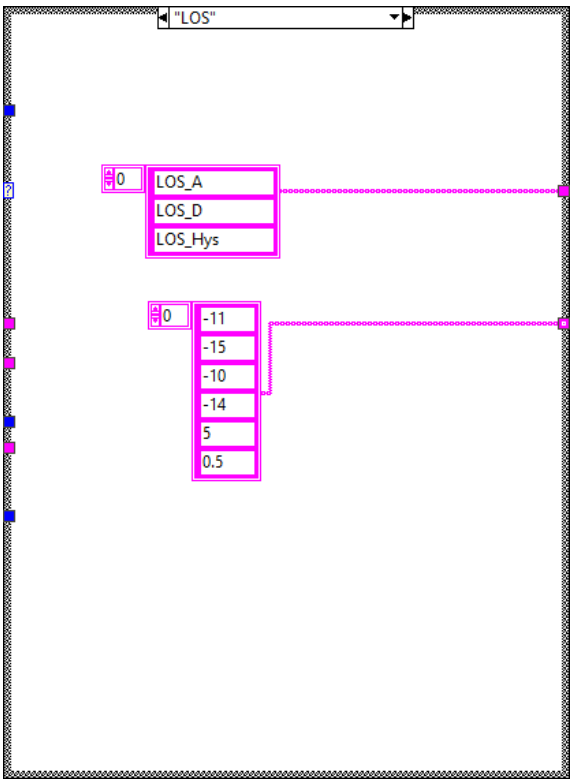

"RXP"
"ATS_HT"
0
RxP1
DD_RxP1
dRxP1
RxP2
DD_RxP2
dRxP2
Rxp_Offset
Rxp_Slope
3
/
2.8
-2.8
/
/
/
/
2.8
-2.8
10000
-10000

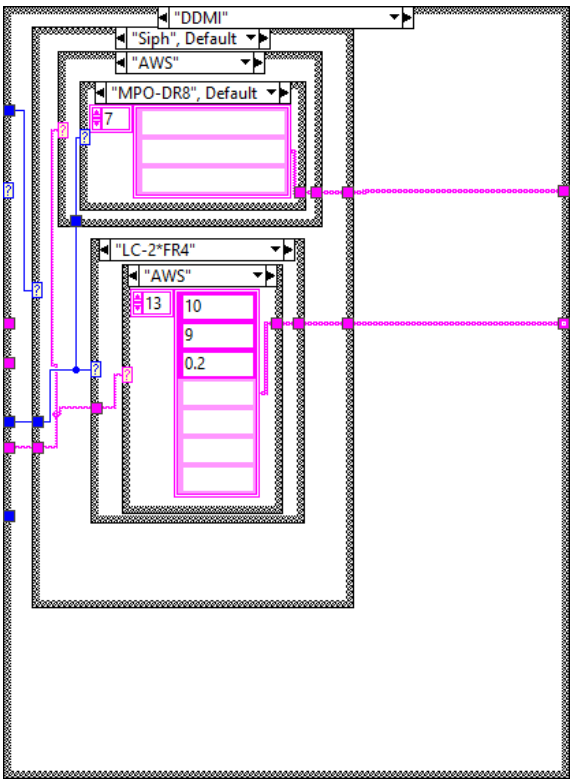

"¼U", Default
Enabl
0
RxP1
DD_RxP1
dRxP1
Rxp_Offset
Rxp_Slope
0
/
/
/
/
2.8
-2.8



Disabled
0
RxP1
DD_RxP1
dRxP1
RxP2
DD_RxP2
dRxP2
RxP3
DD_RxP3
dRxP3



"DDMI_RXP"
0
RxP1
DD_RxP1
dRxP1
Rxp_Offset
Rxp_Slope
"AWS"
0
0.5
-0.5
10000
-10000
30
5
100
-250



"¼Ù", Default
0
0.5
-0.5
10000
-10000
1000
-1000



"LOS"
0
LOS_A
LOS_D
LOS_Hys
0
-11
-15
-10
-14
5
0.5

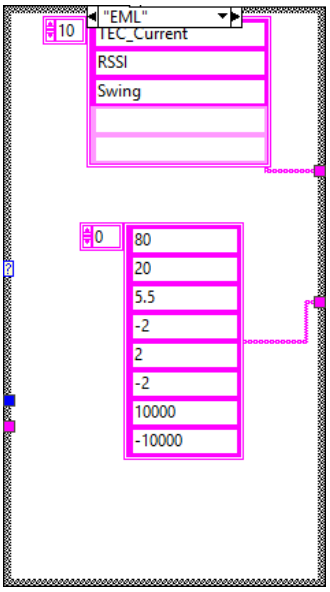

"DDMI"
"Siph", Default
"AWS"
"MPO-DR8", Default
7
"LC-2*FR4"
"AWS"
13
10
9
0.2

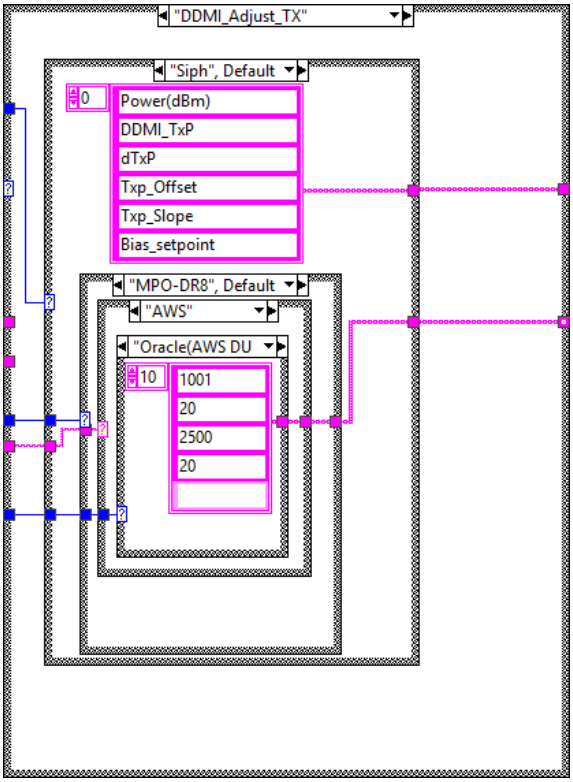

"¼Ù", Default
0
/
/
2.8
-2.8
10000
-10000
1000

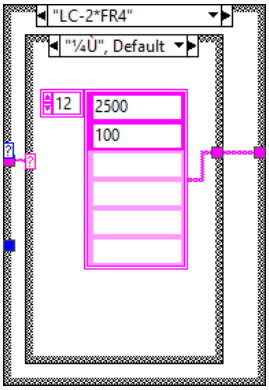

"MPO-DR8", Default
0
/
/
2.8
-2.8
10000
-10000
1000



"¼Ù", Default
6
RSSI



"LC-2*FR4"
6
RSSI
TX_Total_AOP



10
"EML"
TEC_Current
RSSI
Swing
0
80
20
5.5
-2
2
-2
10000
-10000



"DDMI_Adjust_TX"
"Siph", Default
0
Power(dBm)
DDMI_TxP
dTxP
Txp_Offset
Txp_Slope
Bias_setpoint
"MPO-DR8", Default
"AWS"
"Oracle(AWS DU
10
1001
20
2500
20

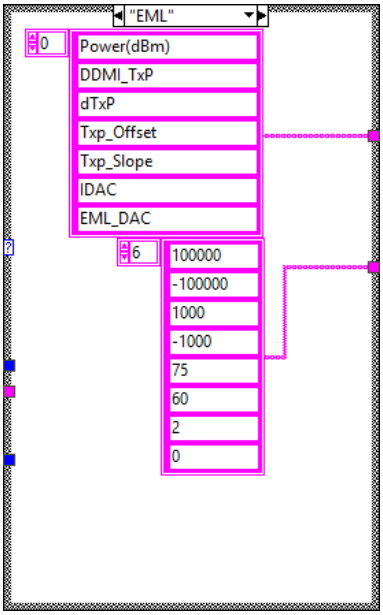

"LC-2*FR4"
"¼Ù", Default
12
2500
100

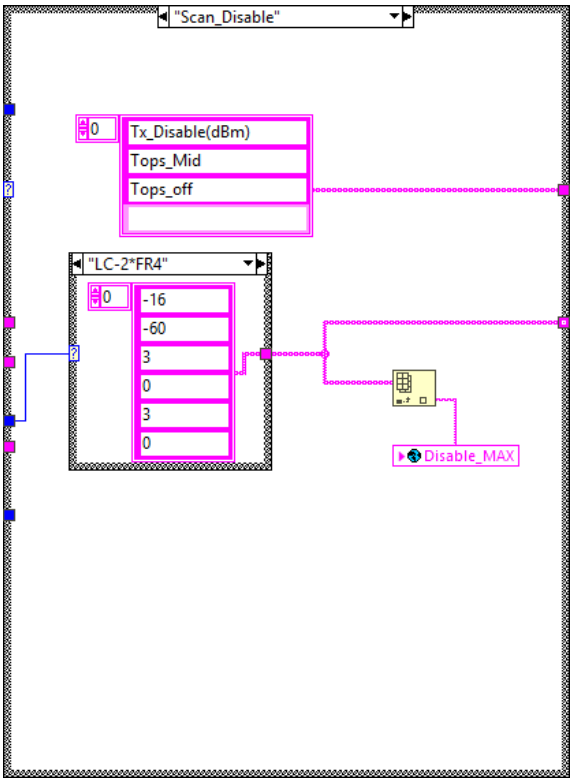

"AWS"
0
10000
-3.3
10000
-3.8
0.5
-0.5
10000
-10000



"¼Ù", Default
0
4
-2.9
4.5
-3.4
0.5
-0.5
10000
-10000

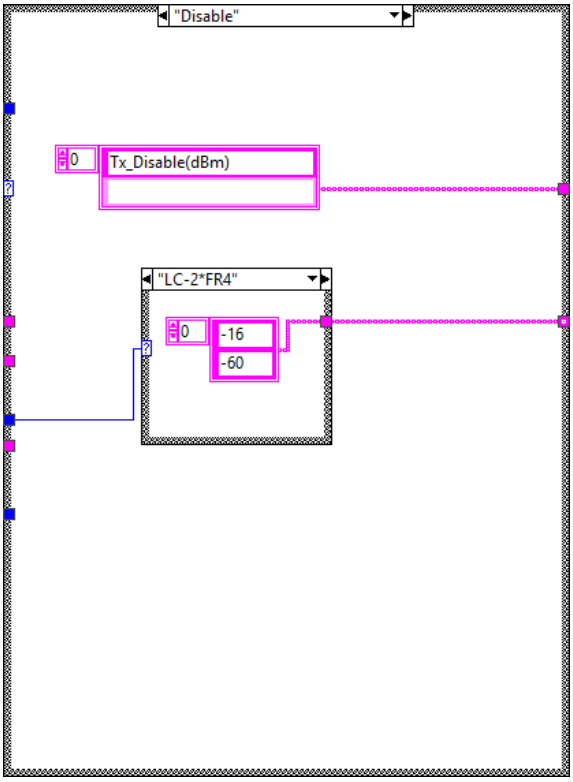

"Other", Default
0
10000
-2.4
10000
-2.9
0.5



"Acacia"
0
4
-2.9
4.5
-3.4
0.5
-0.5
10000
-10000

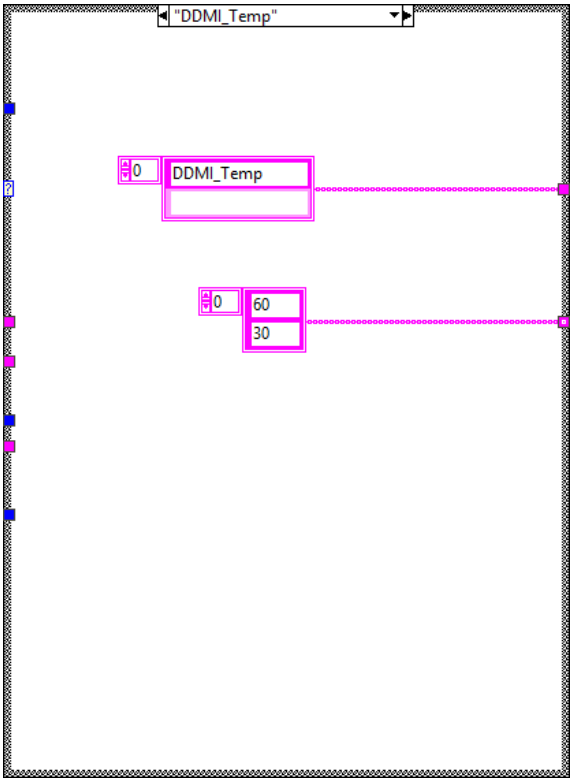

"EML"
0
Power(dBm)
DDMI_TxP
dTxP
Txp_Offset
Txp_Slope
IDAC
EML_DAC
6
100000
-100000
1000
-1000
75
60
2
0

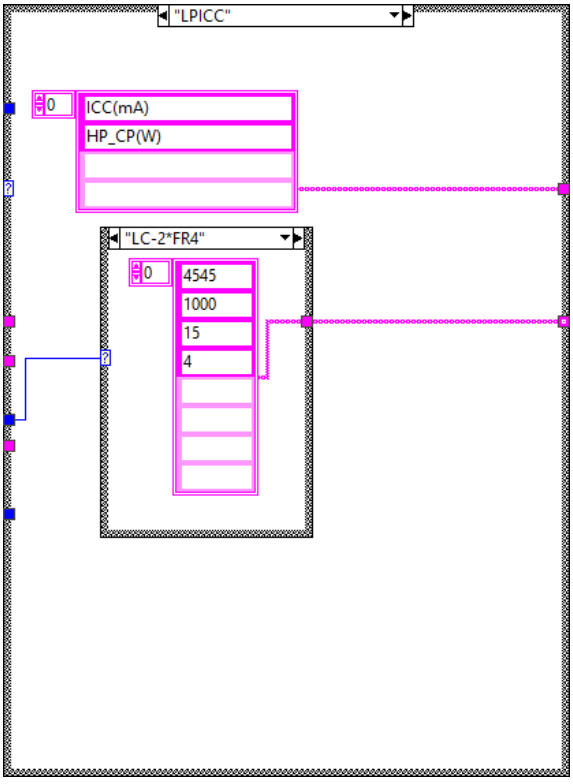

"Scan_Disable"
0
Tx_Disable(dBm)
Tops_Mid
Tops_off
"LC-2*FR4"
0
-16
-60
3
0
3
0
Disable_MAX



"MPO-DR8", Default
0
-15
-60
3
0
3
0

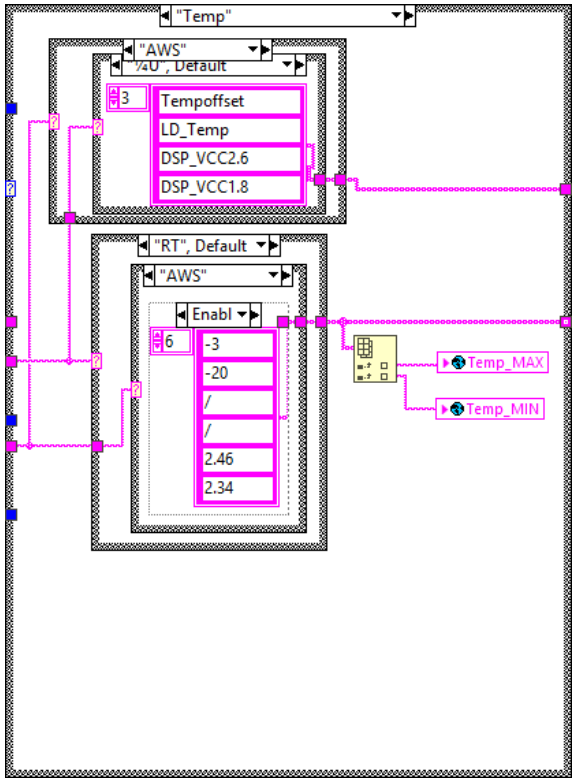

"Disable"
0
Tx_Disable(dBm)
"LC-2*FR4"
0
-16
-60



"MPO-DR8", Default
0
-15
-60



"DDMI_Temp"
0
DDMI_Temp
0
60
30



"LPICC"
0
ICC(mA)
HP_CP(W)
"LC-2*FR4"
0
4545
1000
15
4



"MPO-DR8", Default
0
4400
1000
14.5
4



"Temp"
"AWS"
"¼Ù", Default
3
Tempoffset
LD_Temp
DSP_VCC2.6
DSP_VCC1.8
"RT", Default
"AWS"
Enabl
6
-3
-20
/
/
2.46
2.34
Temp_MAX
Temp_MIN



"¼Ù", Default
0
40
30
/
/
2.8
-2.8
20
-20



Disabled
21
42
48
38
45
36



"ATS_LT"
"AWS"
Enabl
6
5
-5
/
/
/
/



"¼Ù", Default
0
0
-5
/
/
2.8
-2.8
20
-20



Disabled
0
0
-4
/
/
2.8
-2.8



"ATS_HT"
"AWS"
Enabl
6
2
-10
/
/
/
/



"¼Ù", Default
0
75
70
/
/
2.8
-2.8
20
-20



Disabled
0
74
70
/
/
2.8
-2.8



"LT"
"AWS"
5
-2.8
20
-20
/
/



"¼Ù", Default
4
2.8
-2.8
20
-20

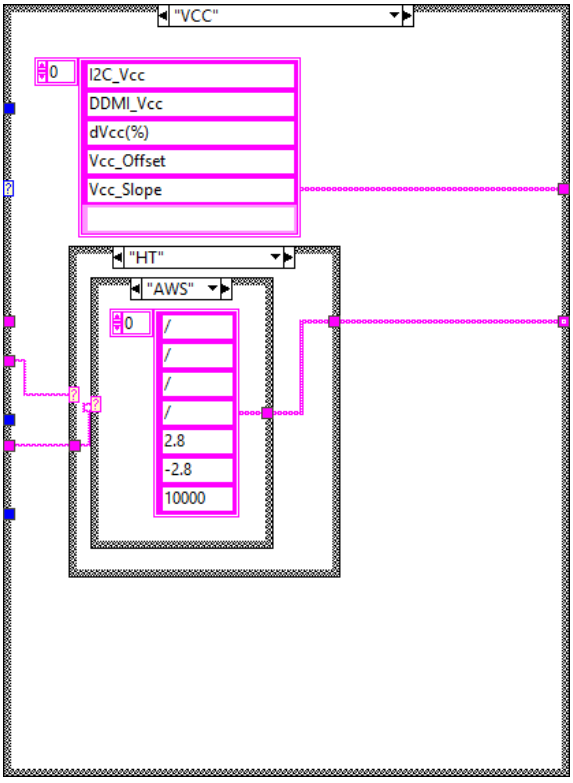

"HT"
"AWS"
5
-2.5
20
-20
/
/



"¼Ù", Default
-2.5
20
-20



"¼Ù", Default
"¼Ù", Default
0
Case_Temp
DDMI_Temp
dTemp



"ATS_HT", "ATS_LT"
3
Tempoffset
Mode_hopping

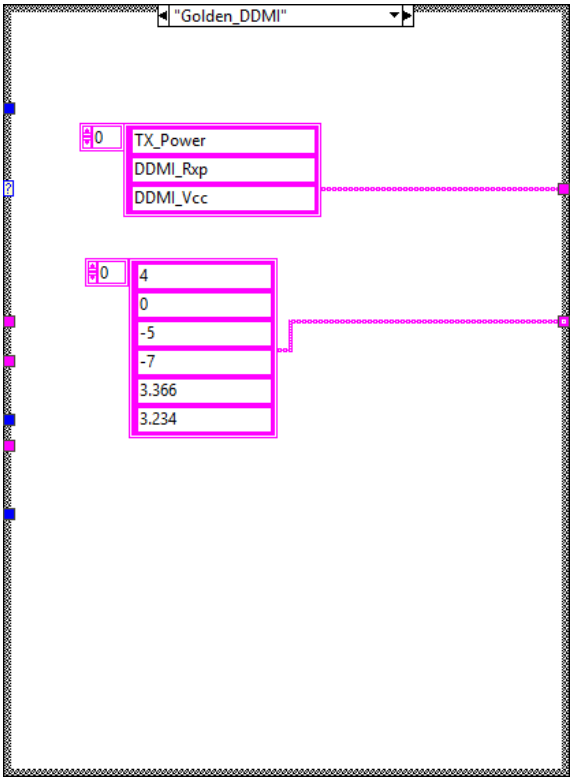

5
Mode_hopping
Mode_hopping2
DSP_VCC2.6
DSP_VCC1.8

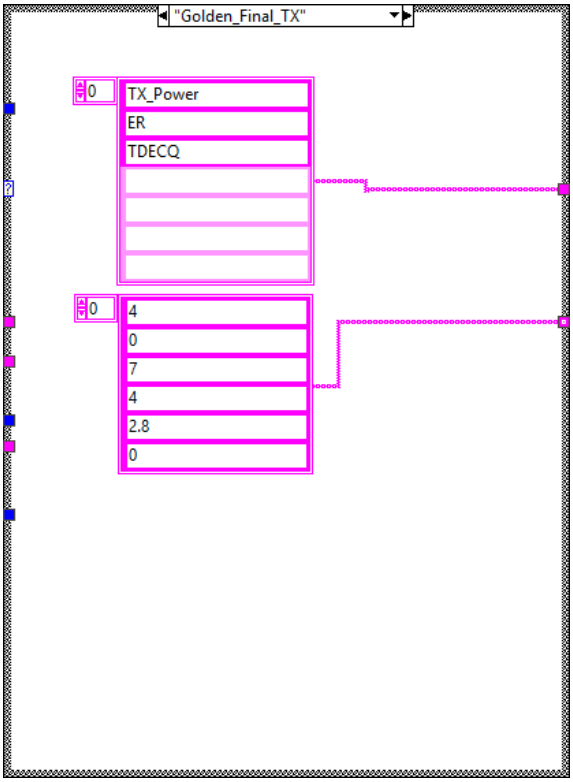

"VCC"
0
I2C_Vcc
DDMI_Vcc
dVcc(%)
Vcc_Offset
Vcc_Slope
"HT"
"AWS"
0
/
/
/
/
2.8
-2.8
10000

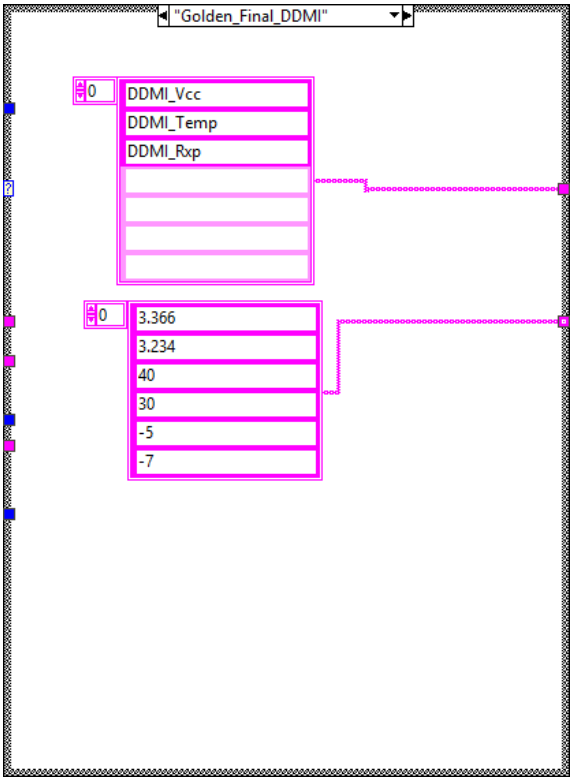

"LT", "RT", Default
"AWS"
0
/
/
/
/
0.0924
-0.0924
10000

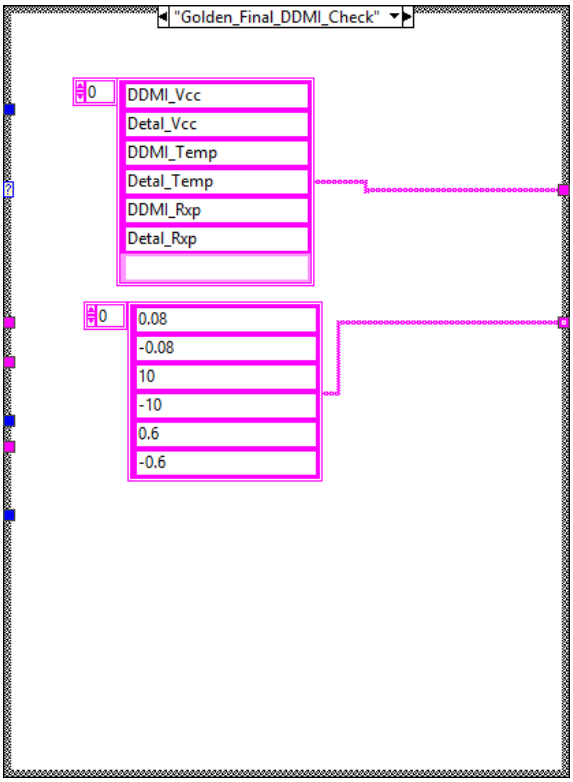

"¼Ù", Default
0
3.32
3.28
/
/
2.8
-2.8
10000

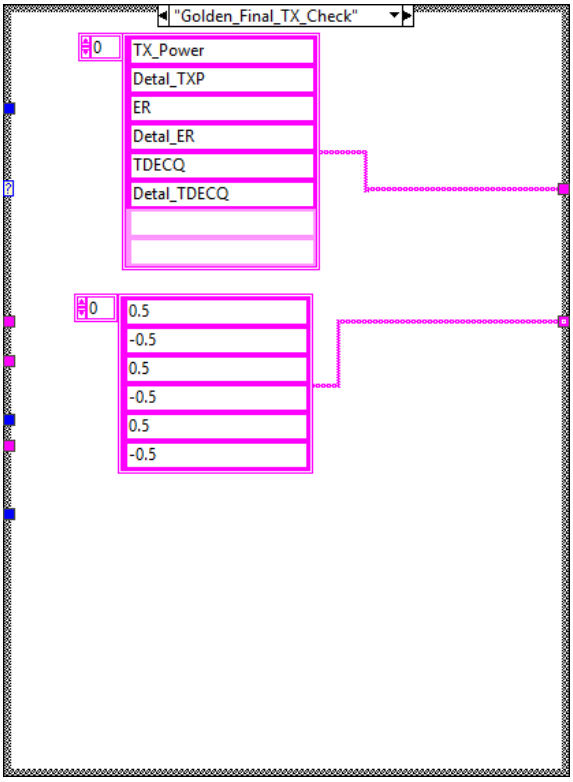

Default
0
3.49
3.45
/
/
2.8
-2.8
10000

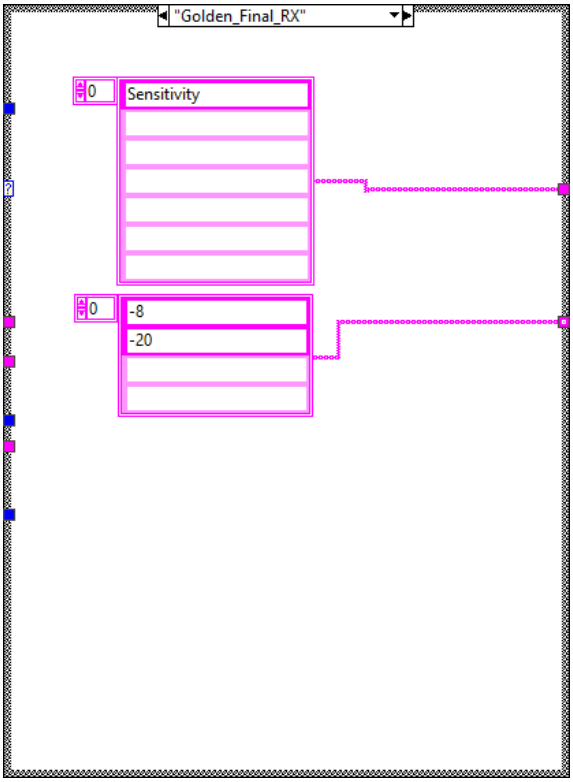

"Golden_DDMI"
0
TX_Power
DDMI_Rxp
DDMI_Vcc
0
4
0
-5
-7
3.366
3.234

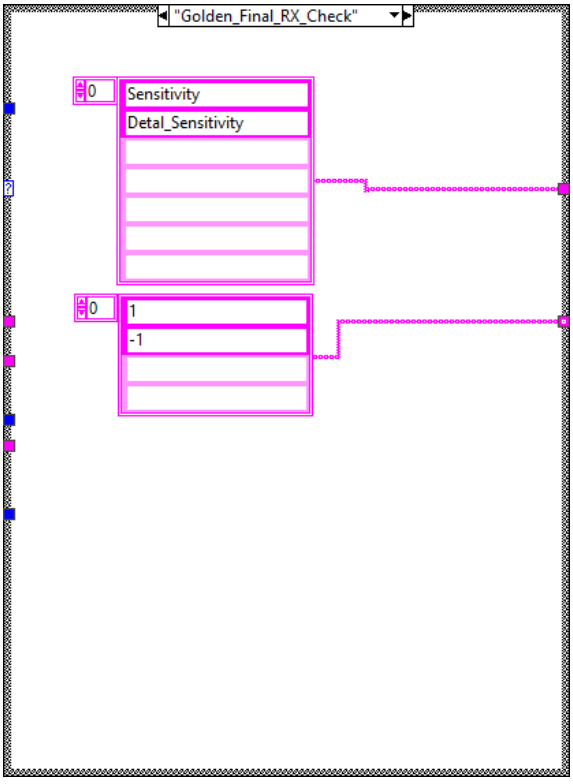

"Golden_Final_TX"
0
TX_Power
ER
TDECQ
0
4
0
7
4
2.8
0

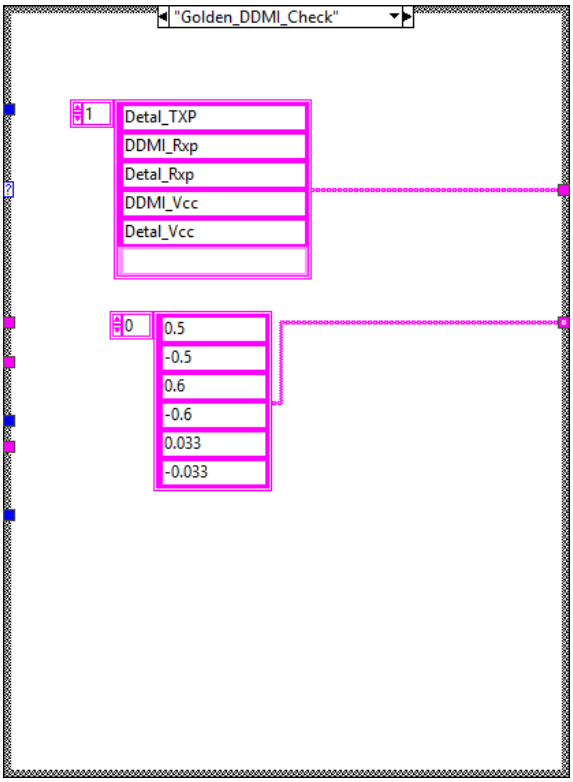

"Golden_Final_DDMI"
0
DDMI_Vcc
DDMI_Temp
DDMI_Rxp
0
3.366
3.234
40
30
-5
-7



"Golden_Final_DDMI_Check"
0
DDMI_Vcc
Detal_Vcc
DDMI_Temp
Detal_Temp
DDMI_Rxp
Detal_Rxp
0
0.08
-0.08
10
-10
0.6
-0.6

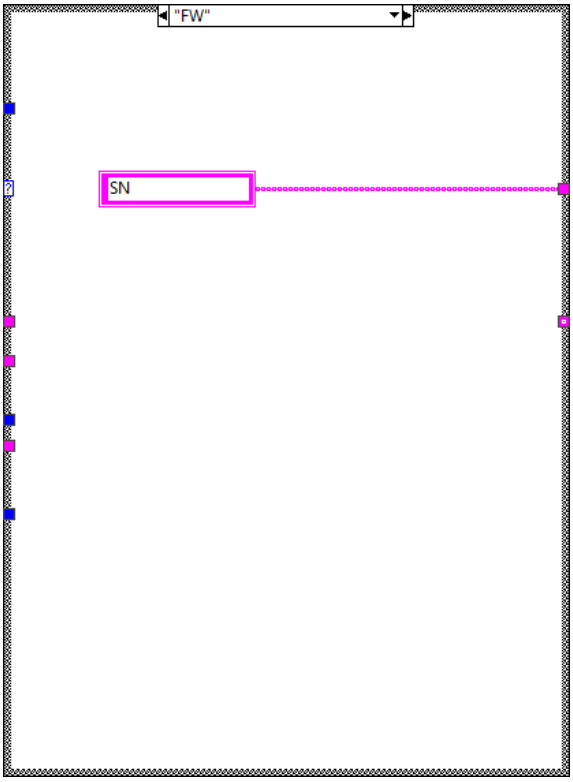

"Golden_Final_TX_Check"
0
TX_Power
Detal_TXP
ER
Detal_ER
TDECQ
Detal_TDECQ
0
0.5
-0.5
0.5
-0.5
0.5
-0.5

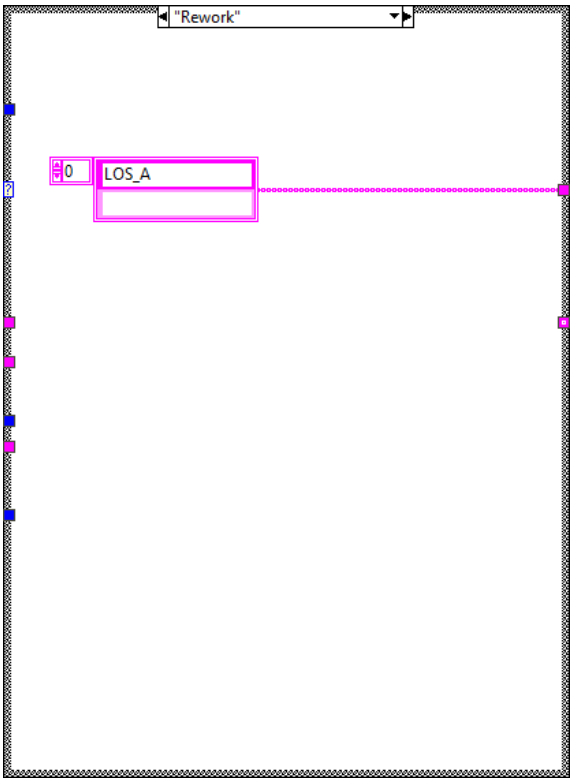

"Golden_Final_RX"
0
Sensitivity
0
-8
-20

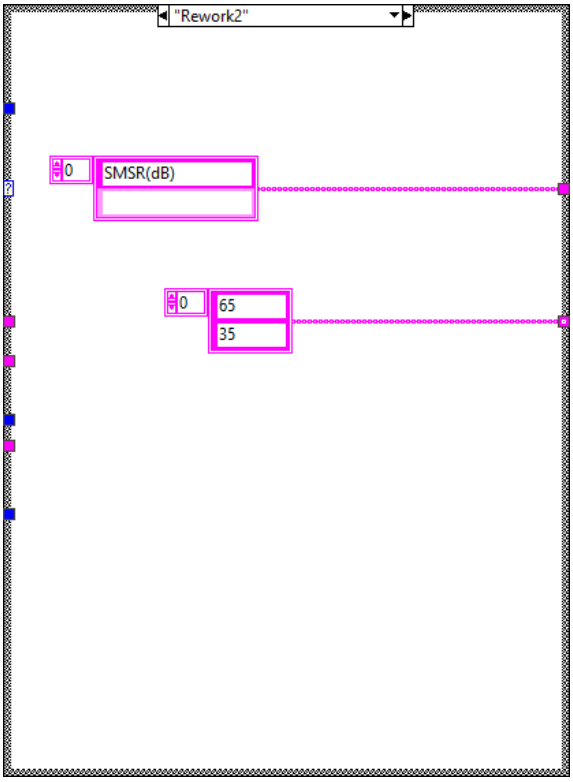

"Golden_Final_RX_Check"
0
Sensitivity
Detal_Sensitivity
0
1
-1

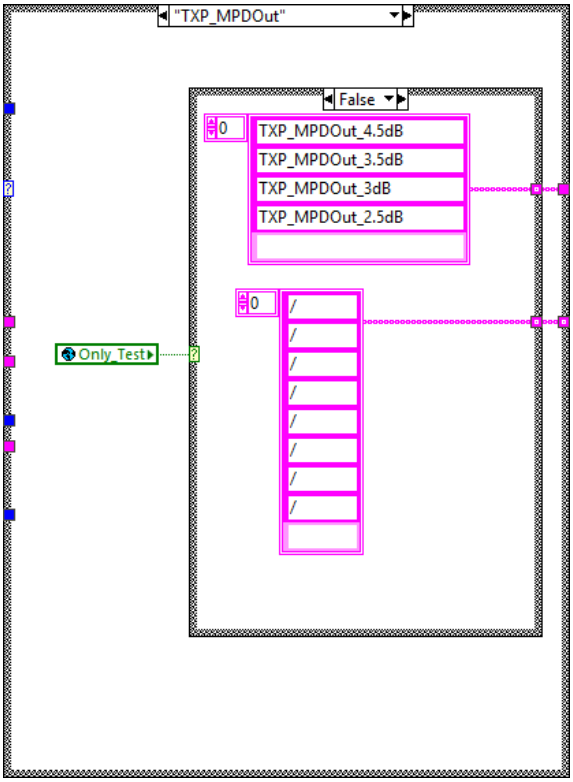

"Golden_DDMI_Check"
1
Detal_TXP
DDMI_Rxp
Detal_Rxp
DDMI_Vcc
Detal_Vcc
0
0.5
-0.5
0.6
-0.6
0.033
-0.033

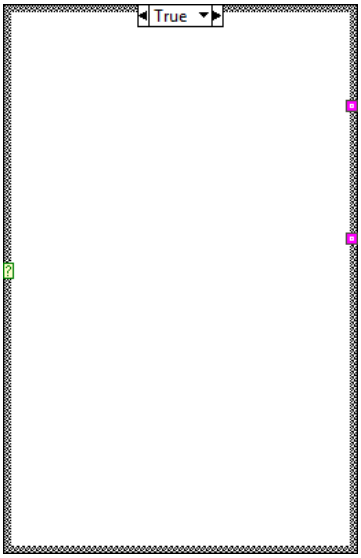

"¼U", Default
0
3.366
3.234
/
/
1
-1
10000


"FW"
SN


"Rework"
0
LOS_A


"Rework2"
0
SMSR(dB)
0
65
35





List of SubVIs and Express VIs with Configuration Information

Display_Step.ctl

C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\Display_Step.ctl

Equal Comparable.lvclass:Equals.vi

C:\Program Files (x86)\National Instruments\LabVIEW 2025\vi.lib\Comparison\Equal\Equal Comparable\Equals.vi

G_100G.vi

C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\G_100G.vi

Equal Functor.lvclass:Equals.vi

C:\Program Files (x86)\National Instruments\LabVIEW 2025\vi.lib\Comparison\Equal\Equal Functor\Equals.vi

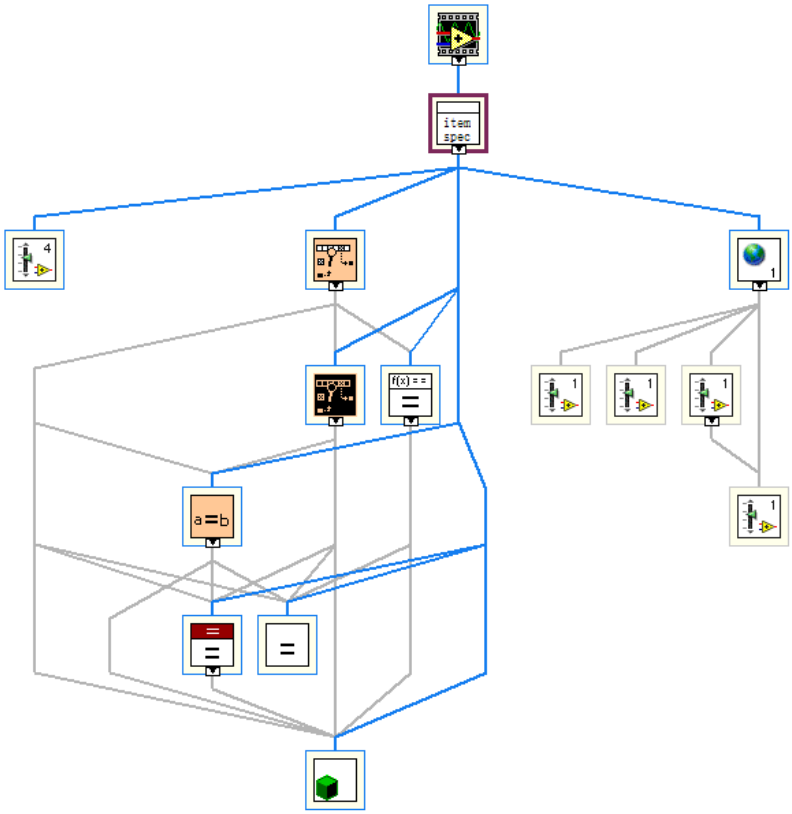
---

VI Revision History

"Step_To_Item.vi History"

Current Revision: 284

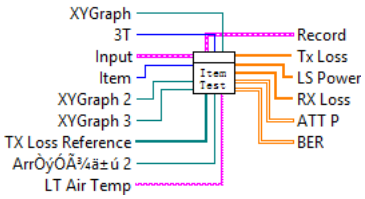
Position in Hierarchy



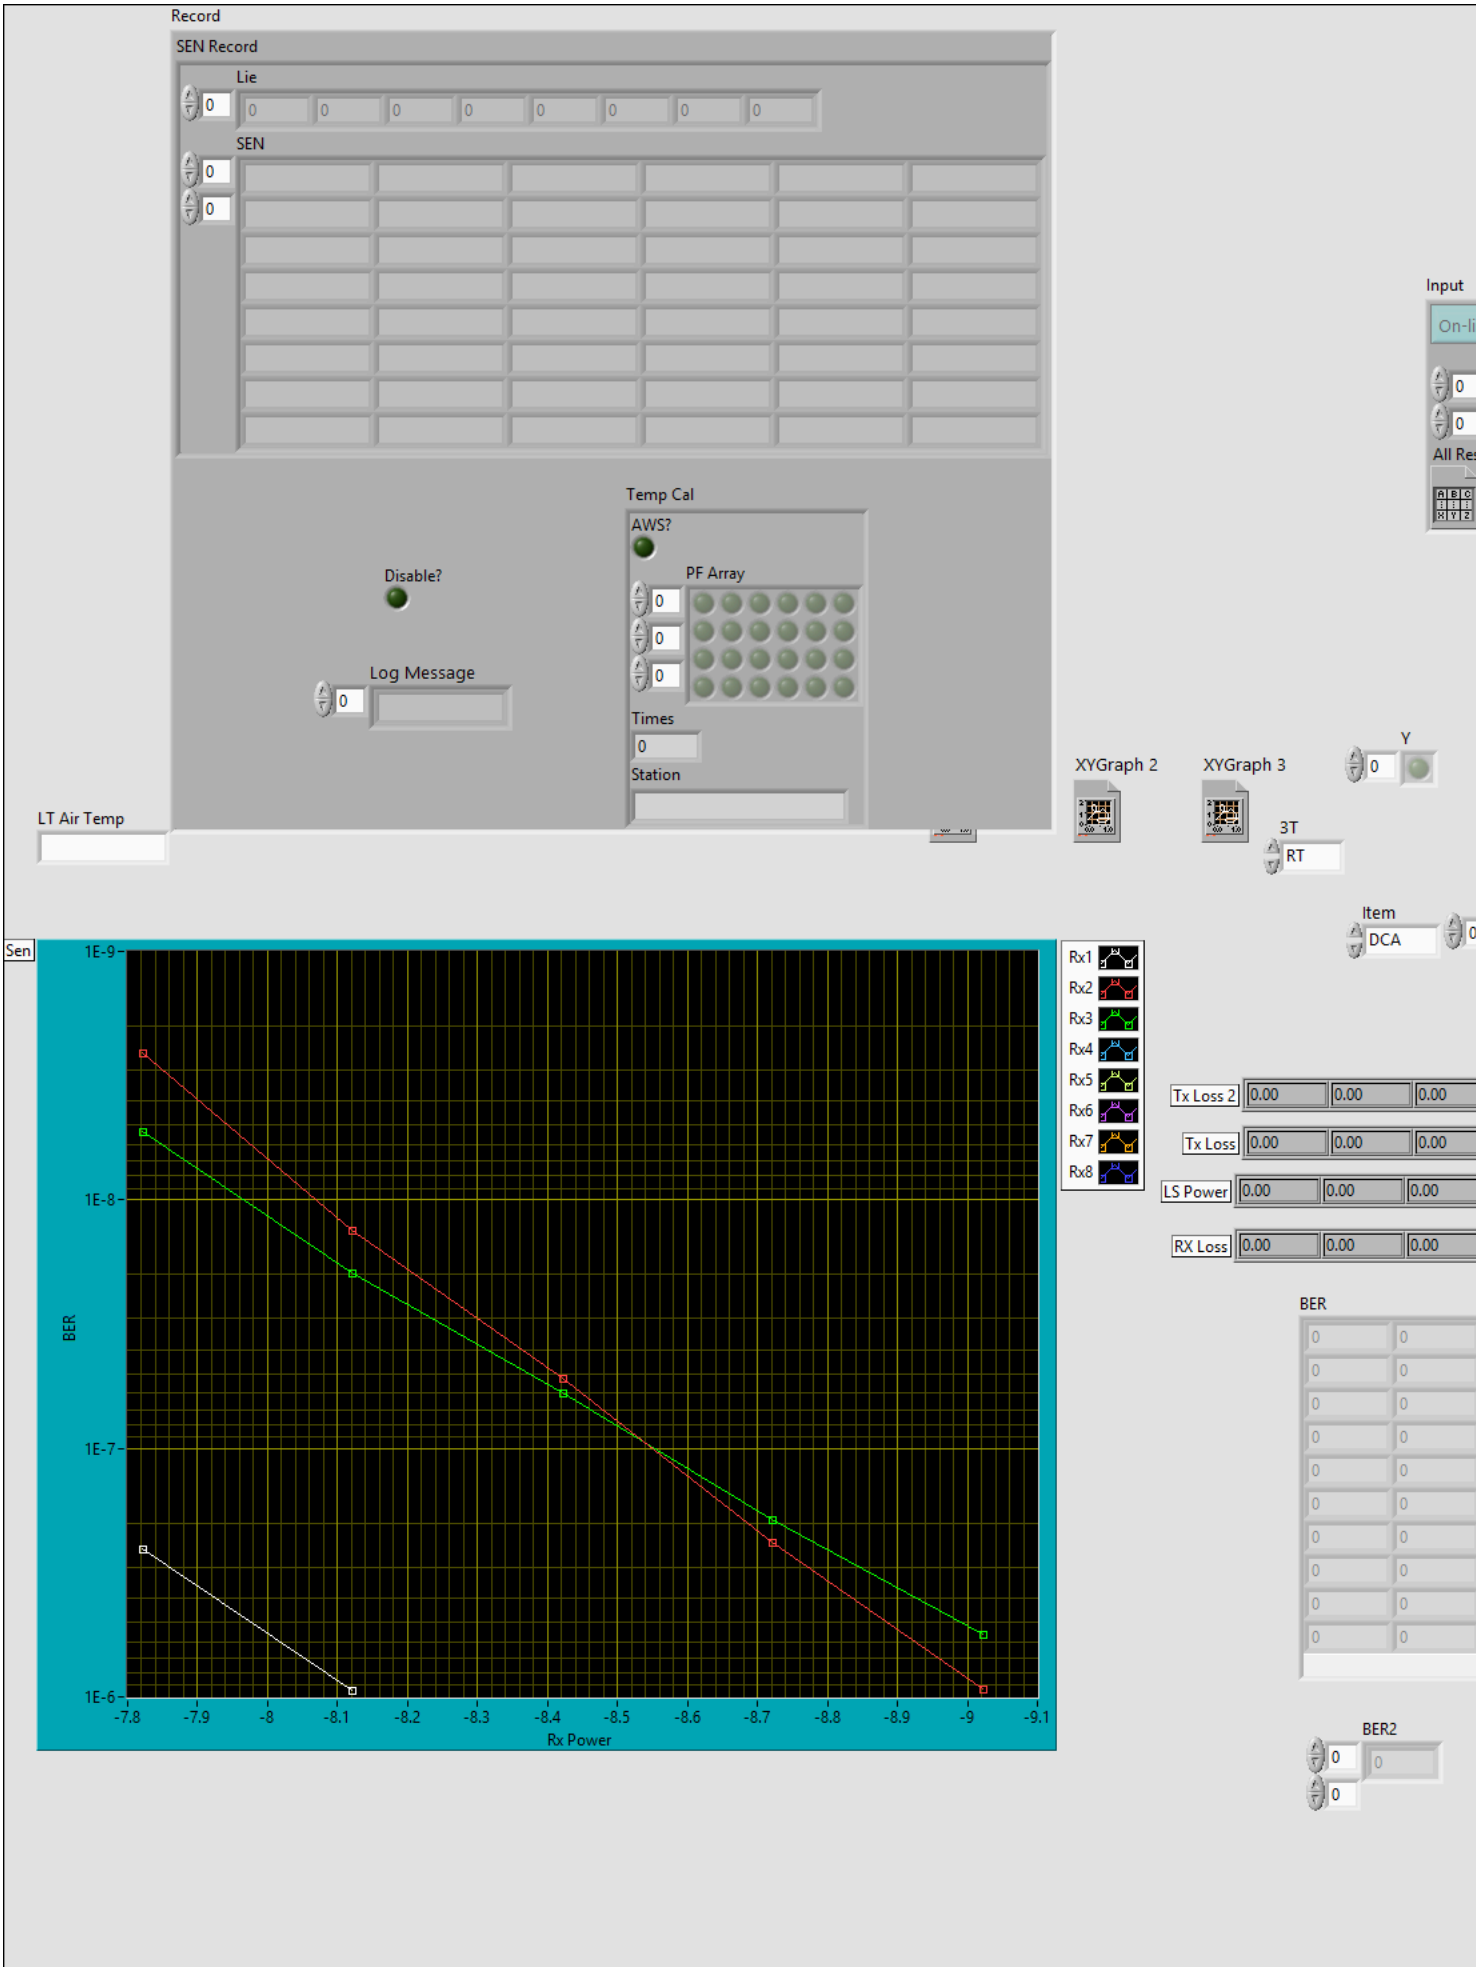
Iconified Cluster Constants

Item_Test.vi

Connector Pane



Front Panel


Record
SEN Record
Lie
SEN
Input
Temp Cal
AWS?
PF Array
Disable?
Log Message
Times
Station
LT Air Temp
XYGraph 2
XYGraph 3
Y
3T
RT
Item
DCA
Sen
1E-9
1E-8
1E-7
1E-6
BER
-7.8
-7.9
-8
-8.1
-8.2
-8.3
-8.4
-8.5
-8.6
-8.7
-8.8
-8.9
-9
-9.1
Rx Power
Rx1
Rx2
Rx3
Rx4
Rx5
Rx6
Rx7
Rx8
Tx Loss 2
Tx Loss
LS Power
RX Loss
BER
BER2

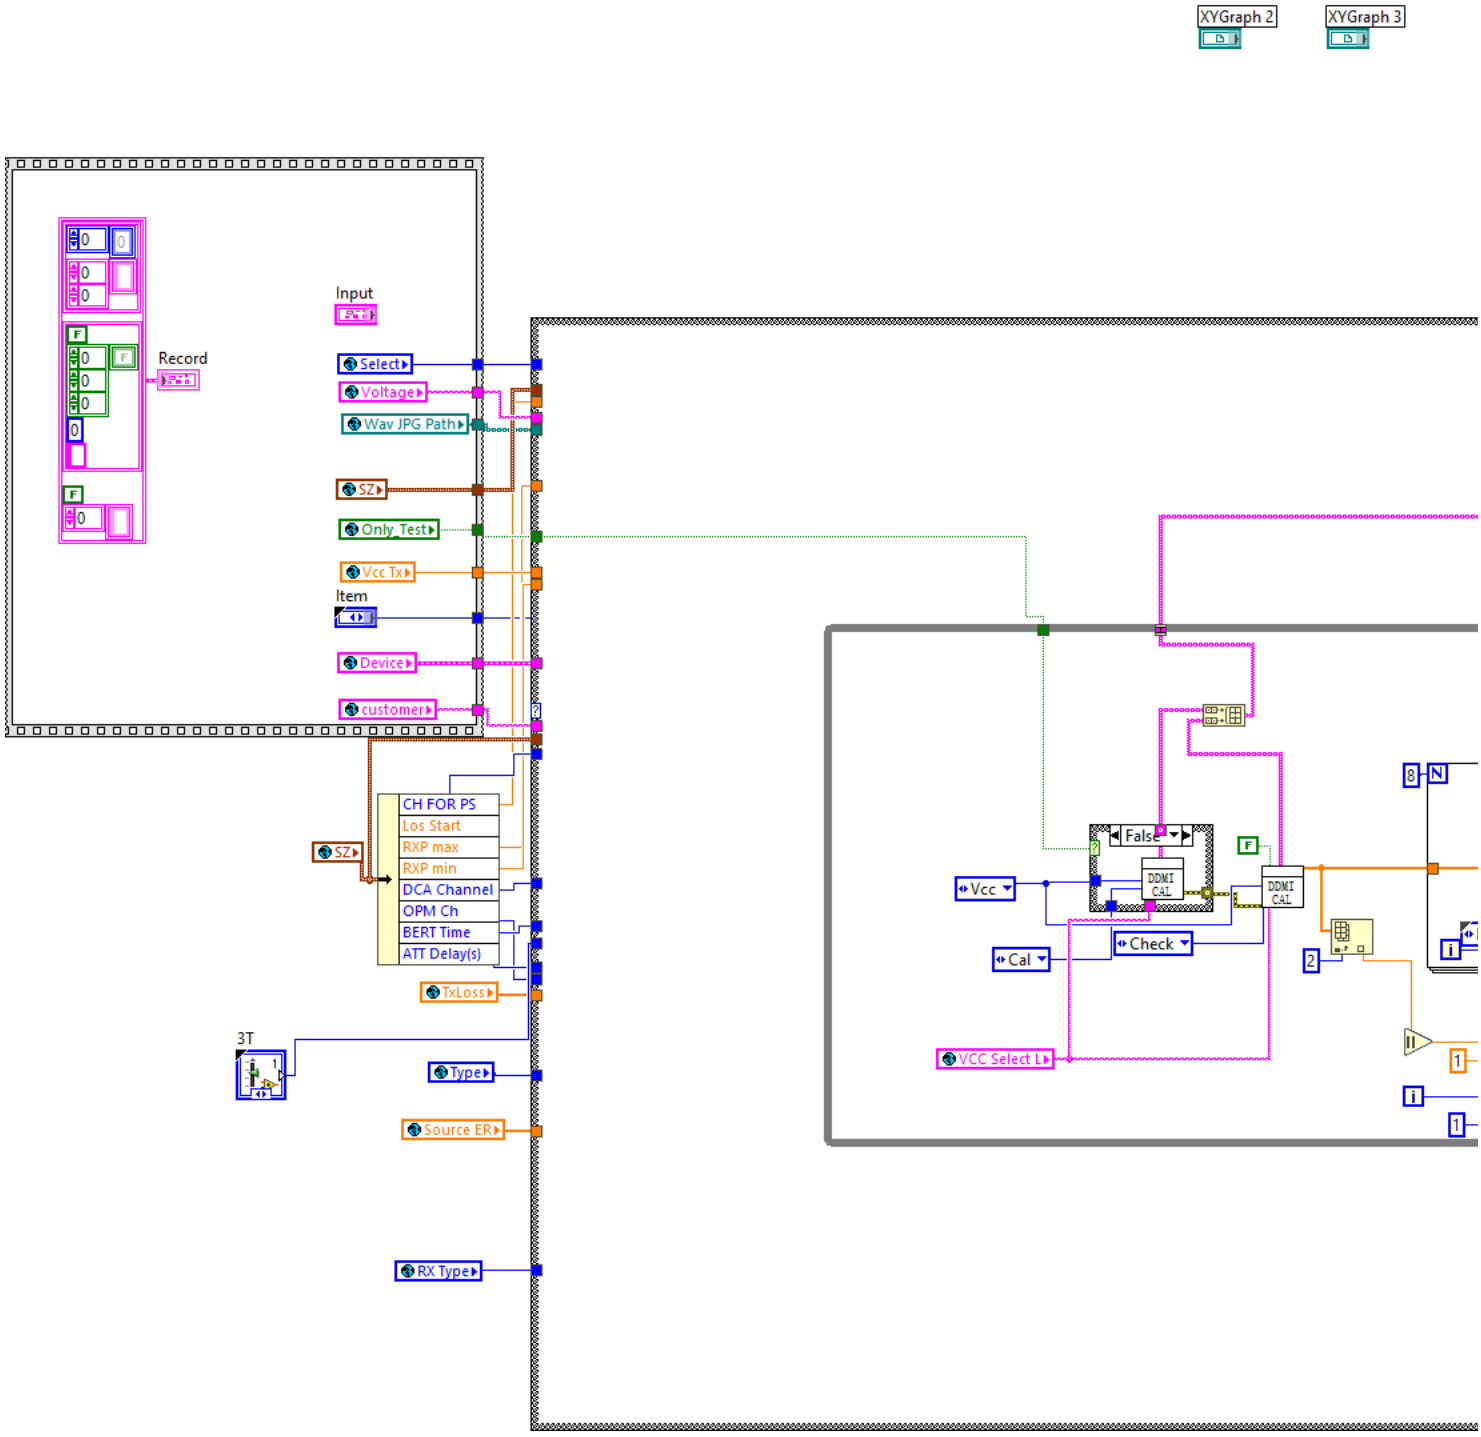


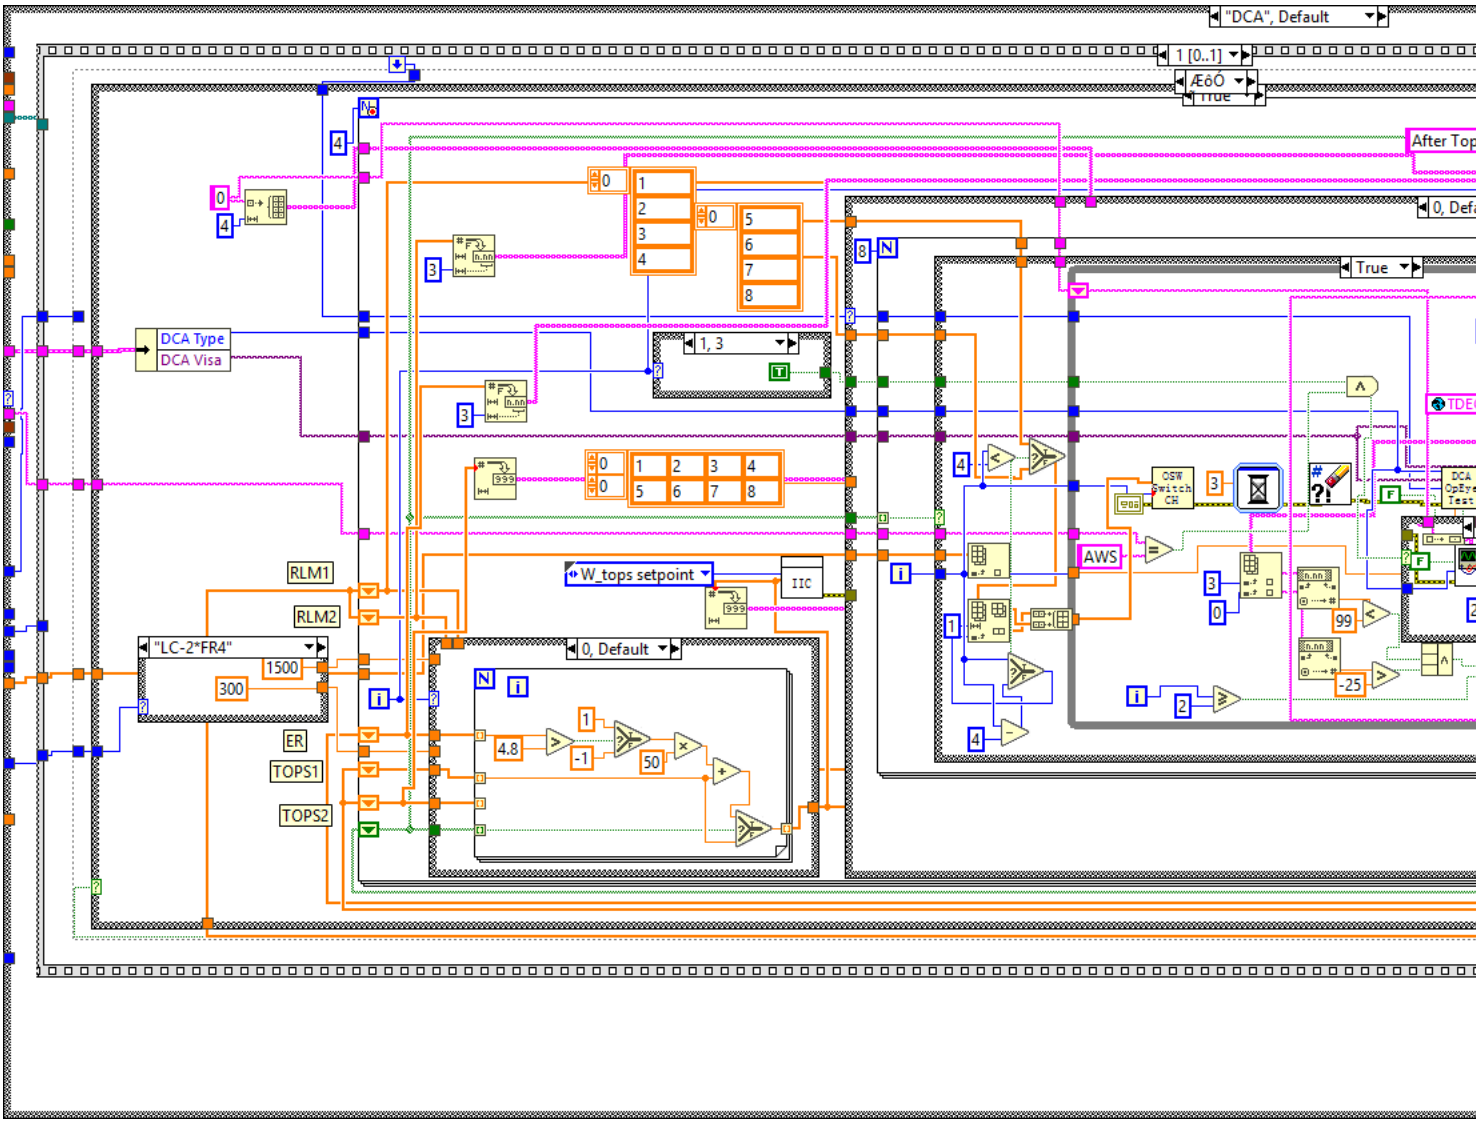
Controls and Indicators

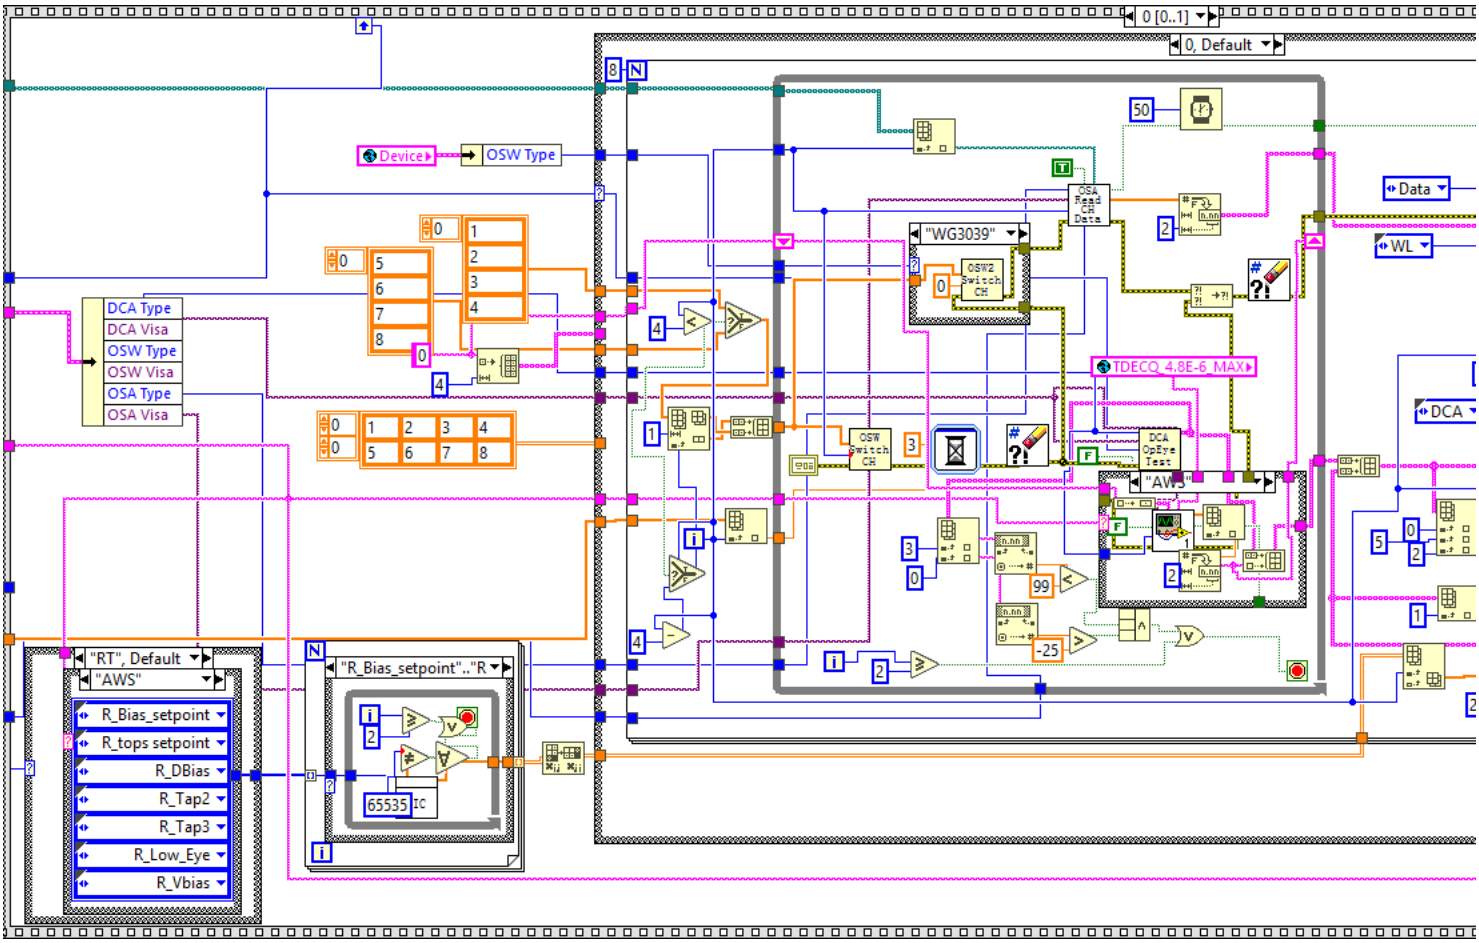
- Item
- XYGraph
- Arr引用句柄 2
- XYGraph 2
- XYGraph 3
- LT Air Temp
- Input
  - Start Test[L]
  - FInal Test Data
    -
  - All Result 2
- TX Loss Reference
  - Arr引用句柄
- 3T
- Tx Loss[Tx Loss]
  - Tx Loss
- RX Loss[RX Loss]
  - Tx Loss
- LS Power[LS Power]
  - Tx Loss
- Sen[Sen]
- BER[BER]
  -
- ATT P2[ATT P2]
  -


- ATT P[RxPow]
  -
- ATT P[ATT P]
  -
- X
  -
- Y
  - Power(dBm)
- Disable2
  - Power(dBm)
- off
  -
- BER2
  - ER
- BER3
  - ER
- Record
  - SEN Record
    - Lie
      - COL
    - SEN
      -
  - Temp Cal
    - AWS?
    - PF Array
      -
    - Times
    - Station
  - Disable?
  - Log Message
    -
- Tx Loss[Tx Loss 2]
  - Tx Loss


Block Diagram



XYGraph 2
XYGraph 3
Input
Record
Select
Voltage
Wav JPG Path
SZ
Only_Test
Vcc Tx
Item
Device
customer
CH FOR PS
Los Start
RXP max
RXP min
DCA Channel
OPM Ch
BERT Time
ATT Delay(s)
TxLoss
3T
Type
Source ER
RX Type
Vcc
Cal
Check
VCC Select L
DDMI CAL
DDMI CAL
Fals



"DCA", Default
1 [0..1]
Æ6Ó
True
After Top
0, Defa
True
DCA Type
DCA Visa
1, 3
W_tops setpoint
IIC
RLM1
RLM2
"LC-2*FR4"
1500
300
ER
TOPS1
TOPS2
0, Default
4.8
50
AWS
OSW Switch CH
99
-25



0 [0..1]
0, Default
Device
OSW Type
DCA Type
DCA Visa
OSW Type
OSW Visa
OSA Type
OSA Visa
"WG3039"
TDECQ_4.8E-6_MAX
Data
WL
DCA
"RT", Default
"AWS"
R_Bias_setpoint
R_tops setpoint
R_DBias
R_Tap2
R_Tap3
R_Low_Eye
R_Vbias
"R_Bias_setpoint".."R
65535



"¼Ù", Default
R_Bias_s
R_tops
R_DBias



"Acacia"
R_Bias_se
R_tops
R_DBias
R_HT_O
R_RT_OA
R_LT_OA



"ATS LT"
"AWS"
R_Bias_setpointLT
R_tops setpoint
R_DBias
R_Tap2
R_Tap3
R_Low_Eye
R_Vbias



"¼Ù", Default
R_Bias_s
R_tops
R_DBias



"Acacia"
R_Bias_se
R_tops
R_DBias
R_HT_O
R_RT_OA
R_LT_OA



"ATS HT"
"AWS"
R_Bias_setpointHT
R_tops setpoint
R_DBias
R_Tap2
R_Tap3
R_Low_Eye
R_Vbias



"¼Ù", Default
R_Bias_s
R_tops
R_DBias



"Acacia"
R_Bias_se
R_tops
R_DBias
R_HT_O
R_RT_OA
R_LT_OA



"HT"
R_Bias_setpointHT
R_tops setpoint
R_DBias

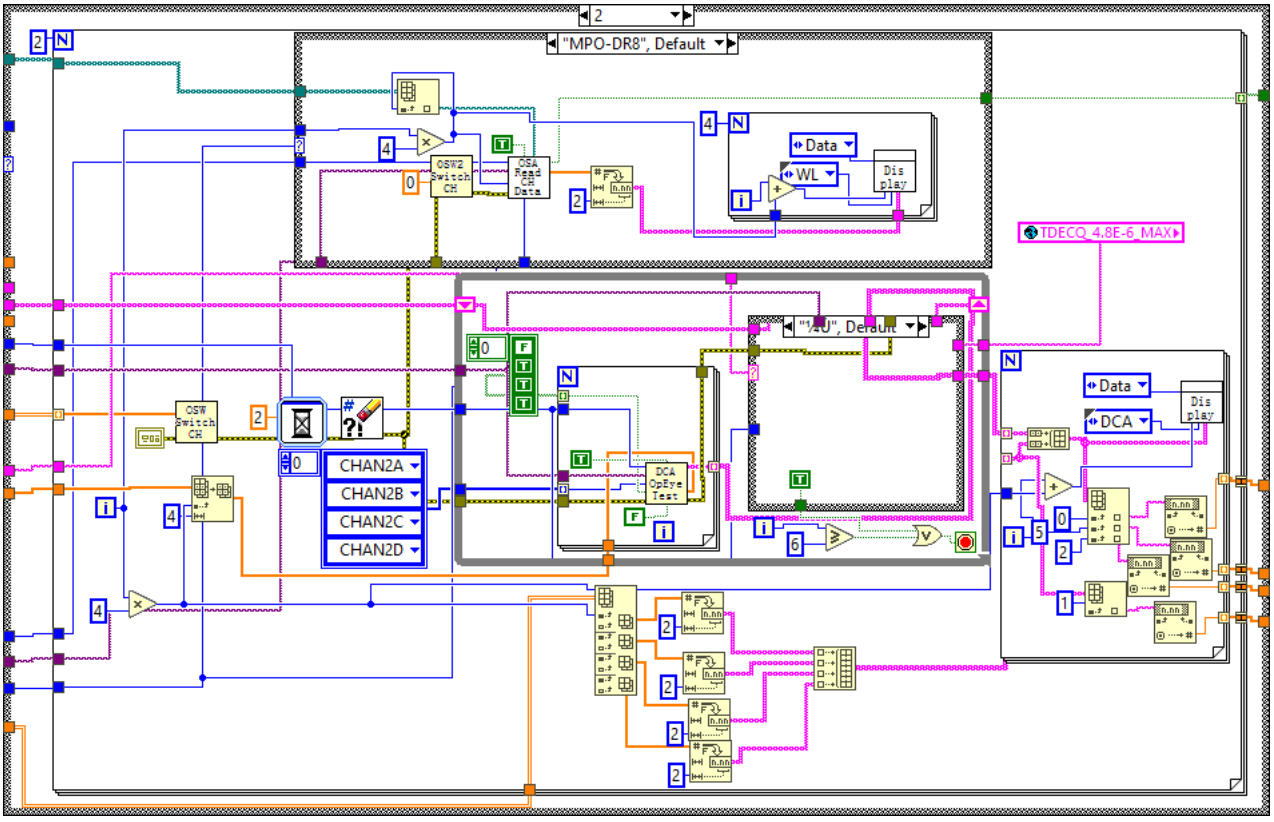

"LT"
R_Bias_setpointLT
R_tops setpoint
R_DBias

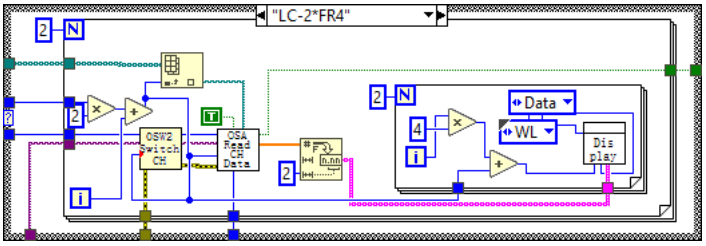

"R_TempADC", Defa
IIC



"R_HT_OA".."R_LT_
IIC

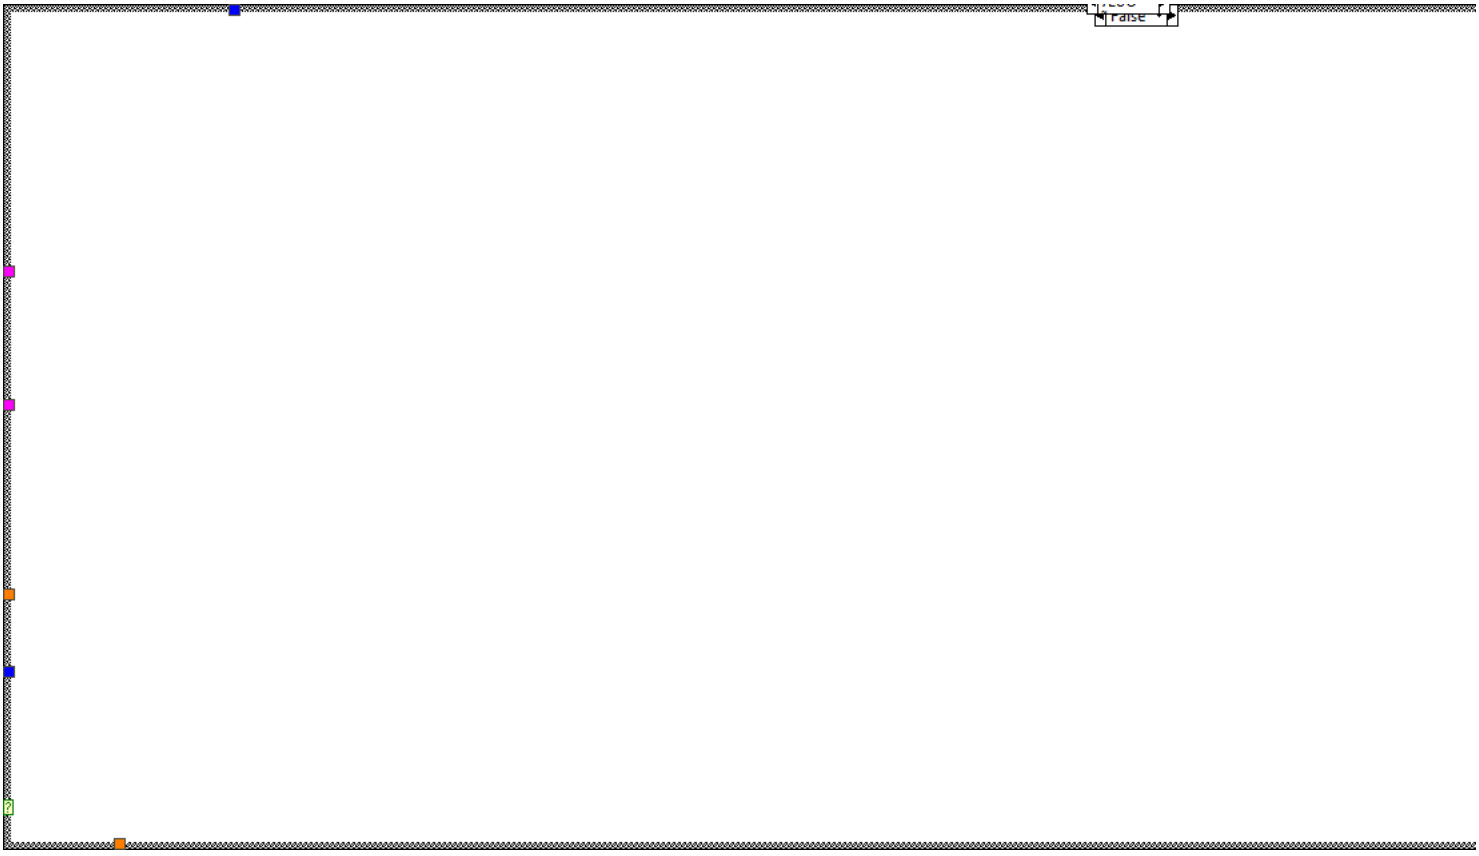

"¼U", Default

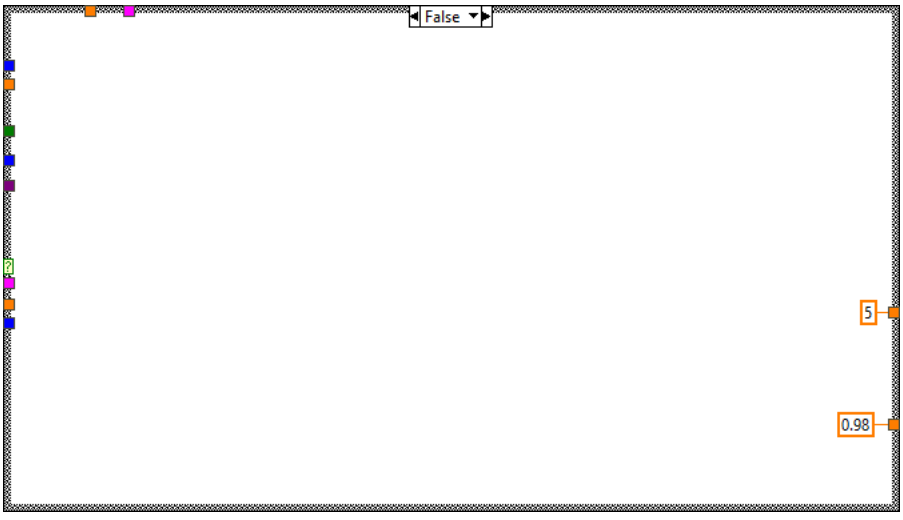

"Not Used



2
"MPO-DR8", Default
Data
WL
Dis play
OSW2 Switch CH
OSA Read CH Data
TDECQ_4.8E-6_MAX
"¼U", Default
OSW Switch CH
CHAN2A
CHAN2B
CHAN2C
CHAN2D
DCA OpEye Test
DCA

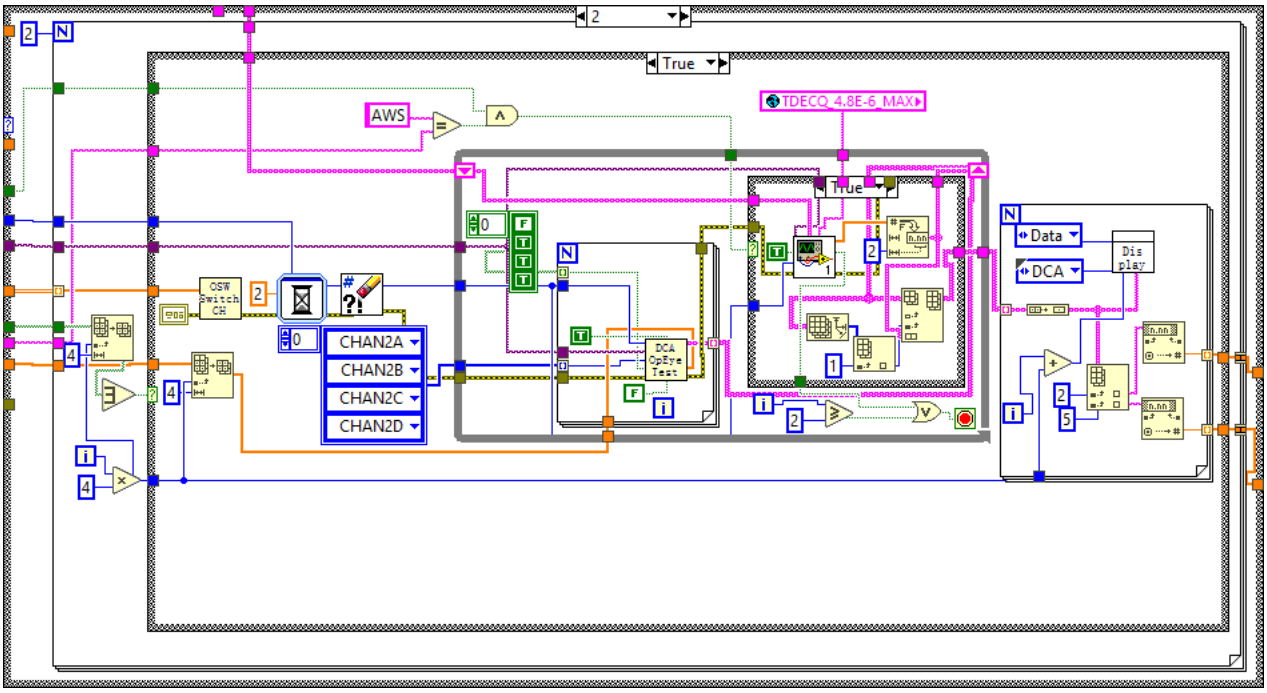

"LC-2*FR4"
Data
WL
Dis play
OSW2 Switch CH
OSA Read CH Data

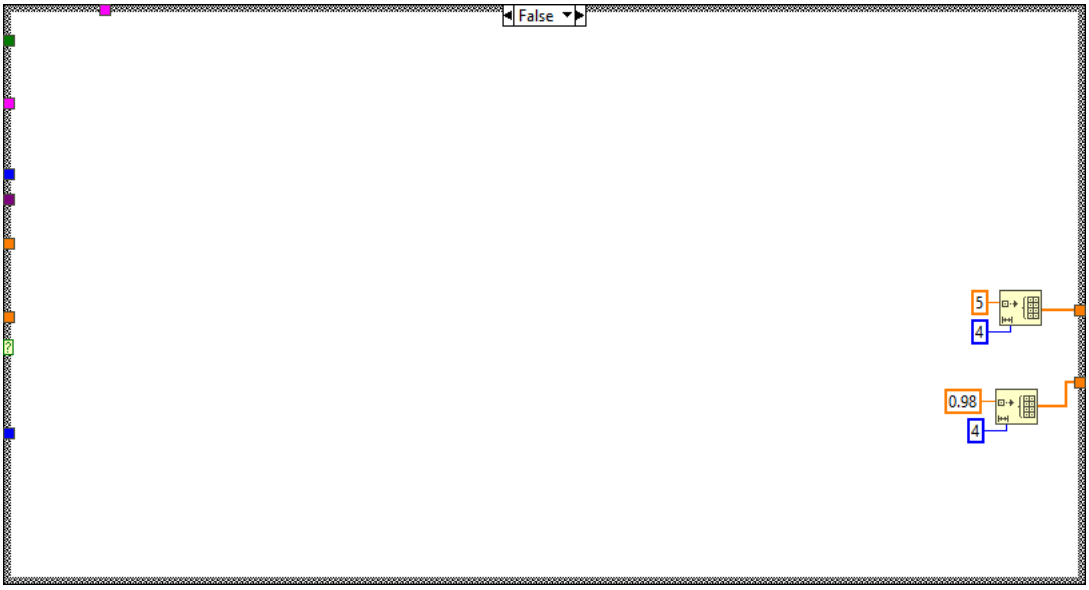

"AWS"
2
1
1



False

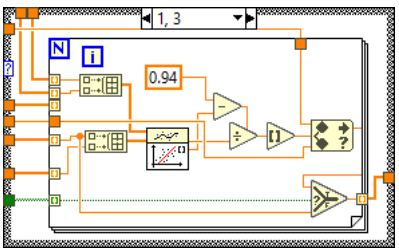

False
5
0.98



False



2
True
AWS
TDECQ_4.8E-6_MAX
True
OSW Switch CH
CHAN2A
CHAN2B
CHAN2C
CHAN2D
DCA OpEye Test
Data
DCA
Dis play



False
5
4
0.98
4



False

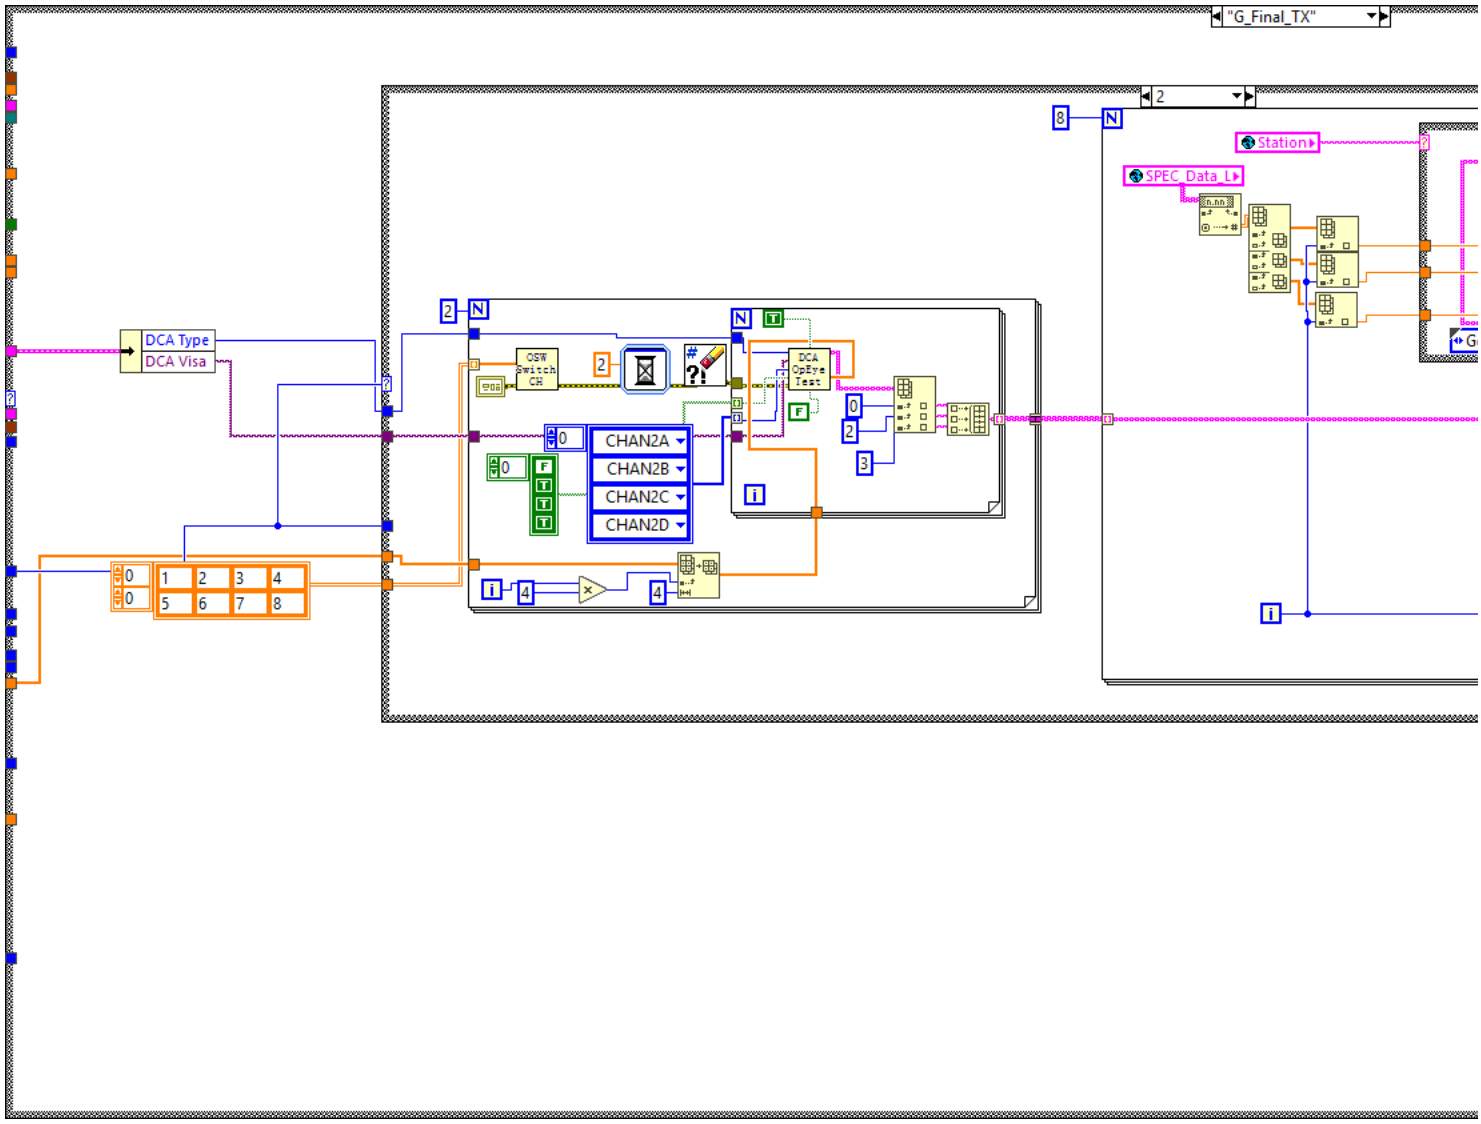

1, 3
0.94

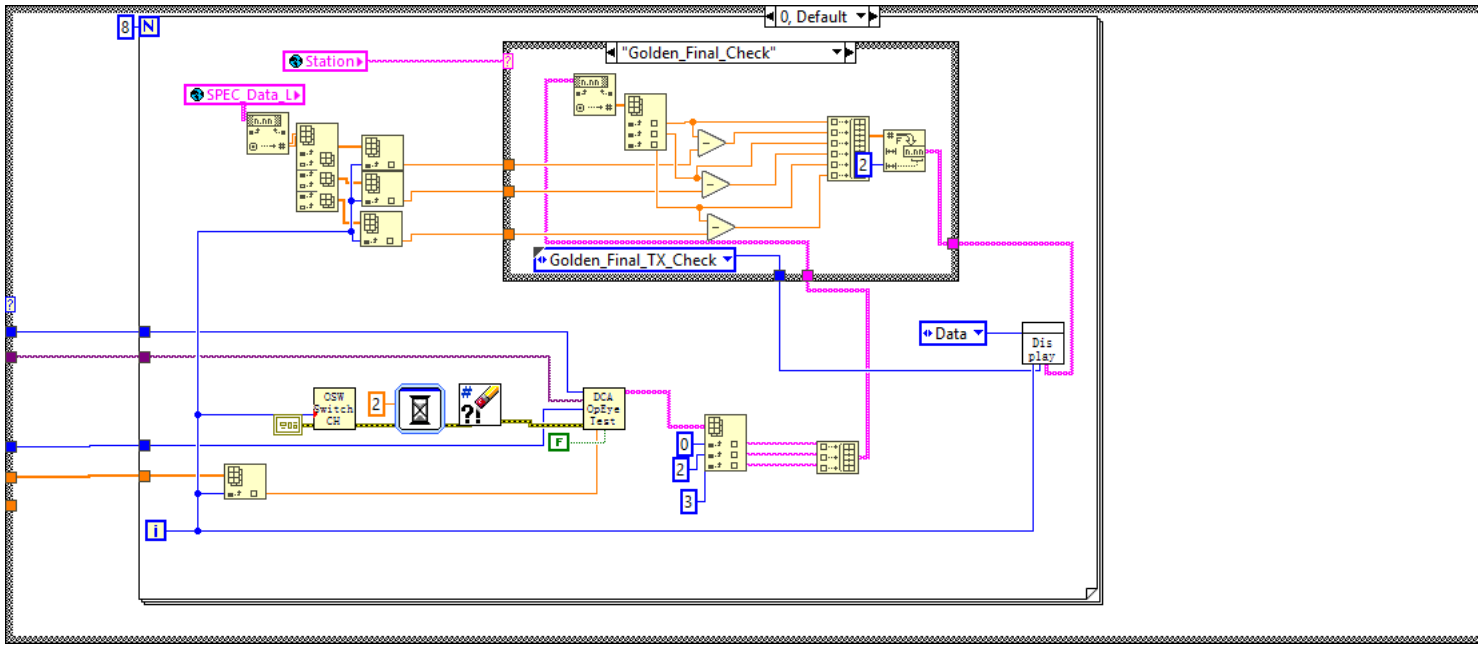

0, Default

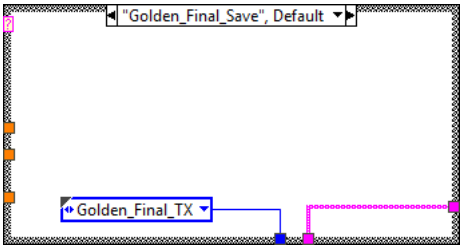

1, 3
0.94

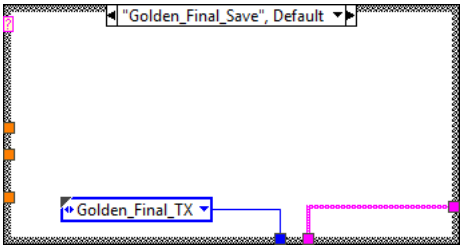

"MPO-DR8", Default
1100
500

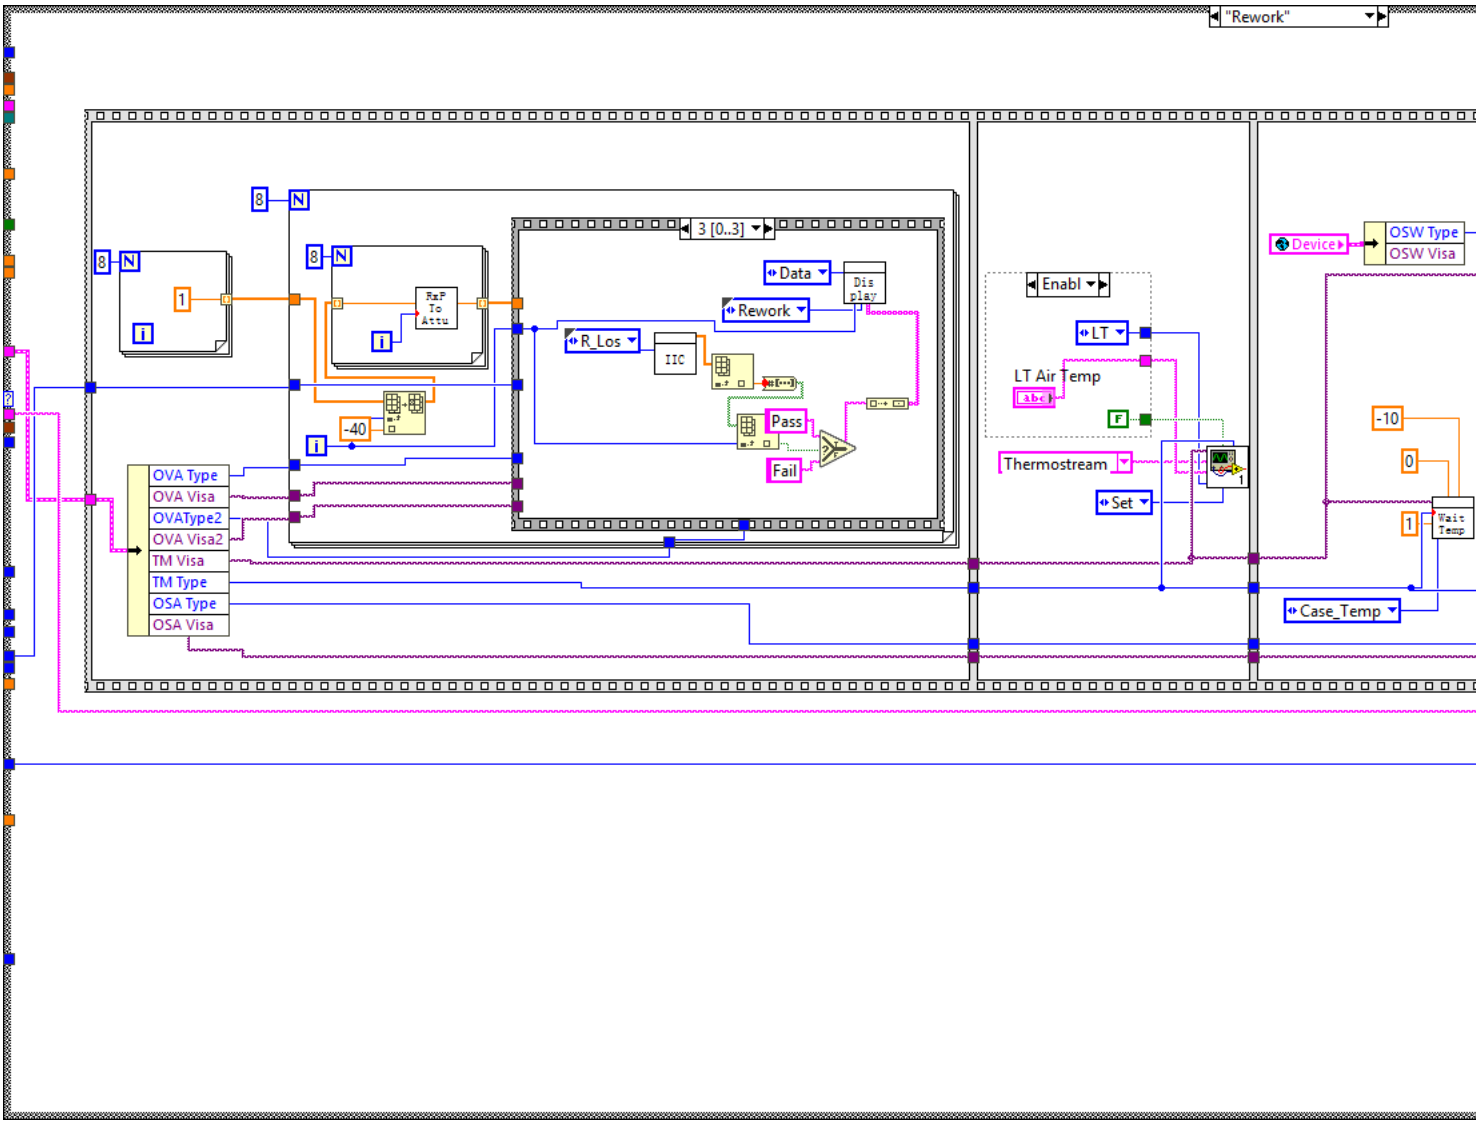

Disabled

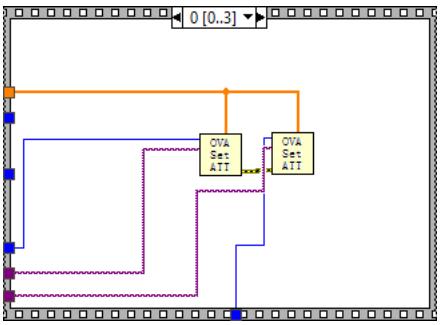

"G_Final_TX"
2
Station
SPEC_Data_L
DCA Type
DCA Visa
OSW Switch CH
DCA OpEye Test
CHAN2A
CHAN2B
CHAN2C
CHAN2D

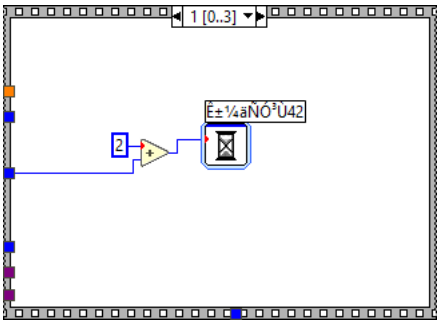

0, Default
Station
SPEC_Data_L
"Golden_Final_Check"
Golden_Final_TX_Check
Data
Display
OSW Switch CH
DCA OpEye Test

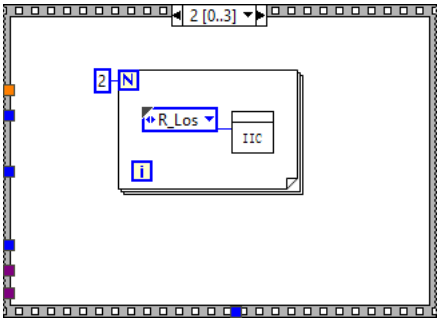

"Golden_Final_Save", Default
Golden_Final_TX



"Golden_Final_Save", Default
Golden_Final_TX



"Rework"
3 [0..3]
Data
Display
Rework
R_Los
IIC
Pass
Fail
RxP To Attu
-40
OVA Type
OVA Visa
OVAType2
OVA Visa2
TM Visa
TM Type
OSA Type
OSA Visa
Enabl
LT
LT Air Temp
F
Thermostream
Set
Device
OSW Type
OSW Visa
-10
0
1
Wait Temp
Case_Temp



0 [0..3]
OVA Set ATT
OVA Set ATT



1 [0..3]
2

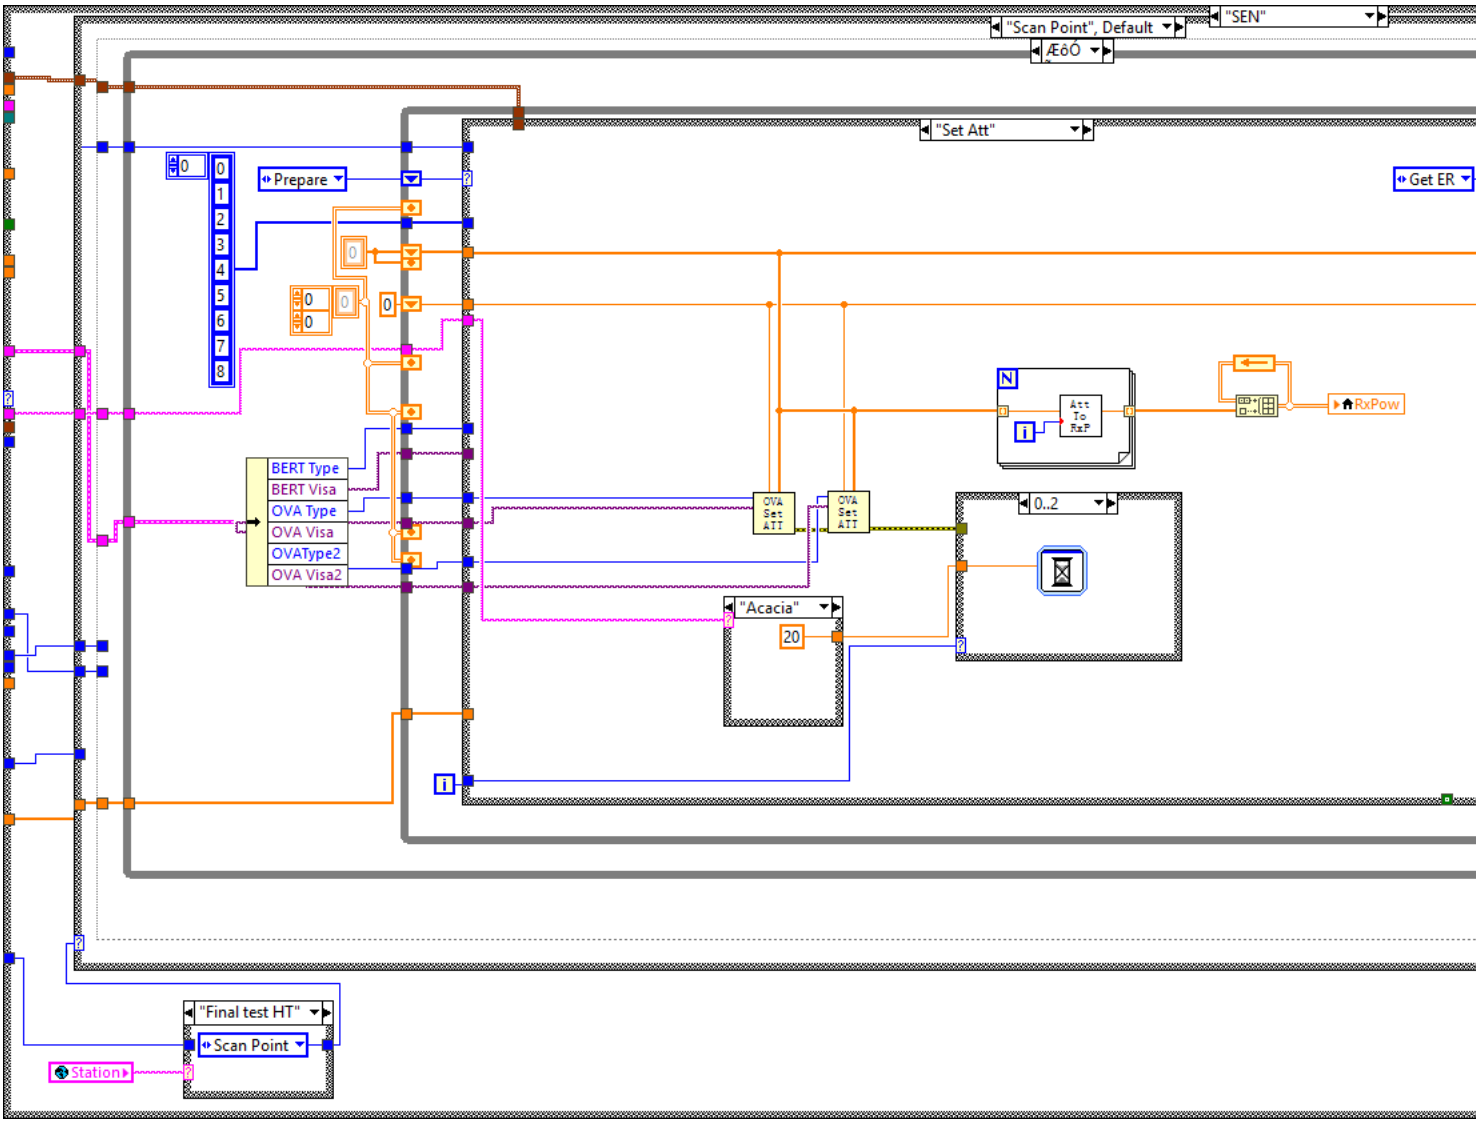

2 [0..3]
2
N
R_Los
IIC
i

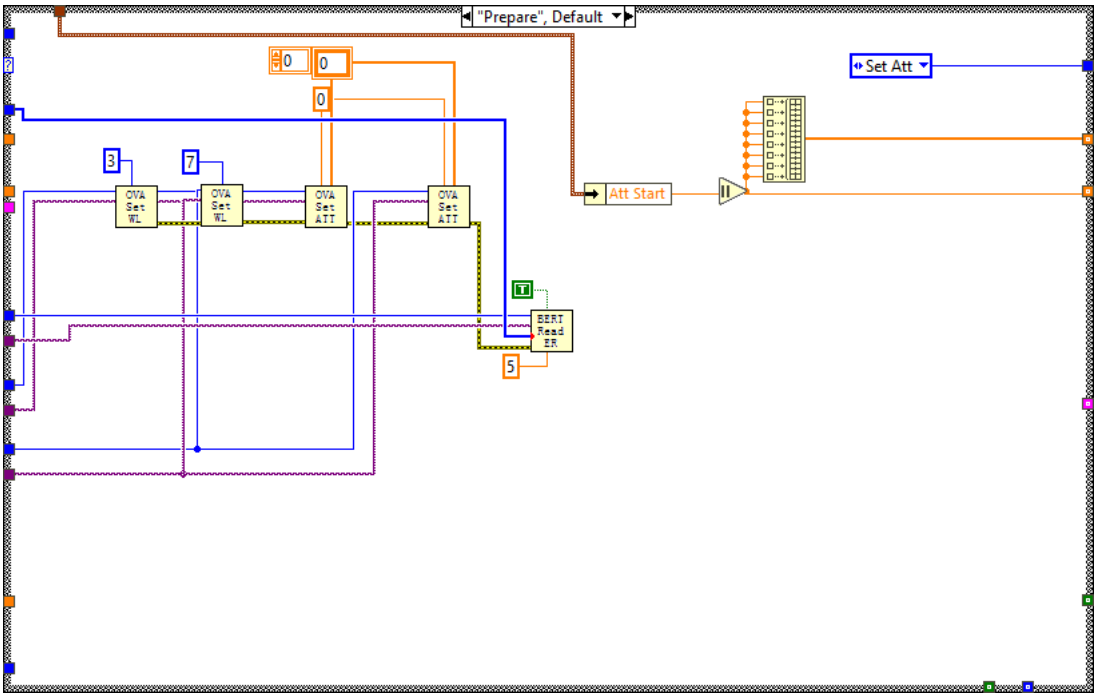

Disabled
LT
-5



"Not Used", Default
OSW Switch CH



"Not Used", Default


"AWS"
LT
15

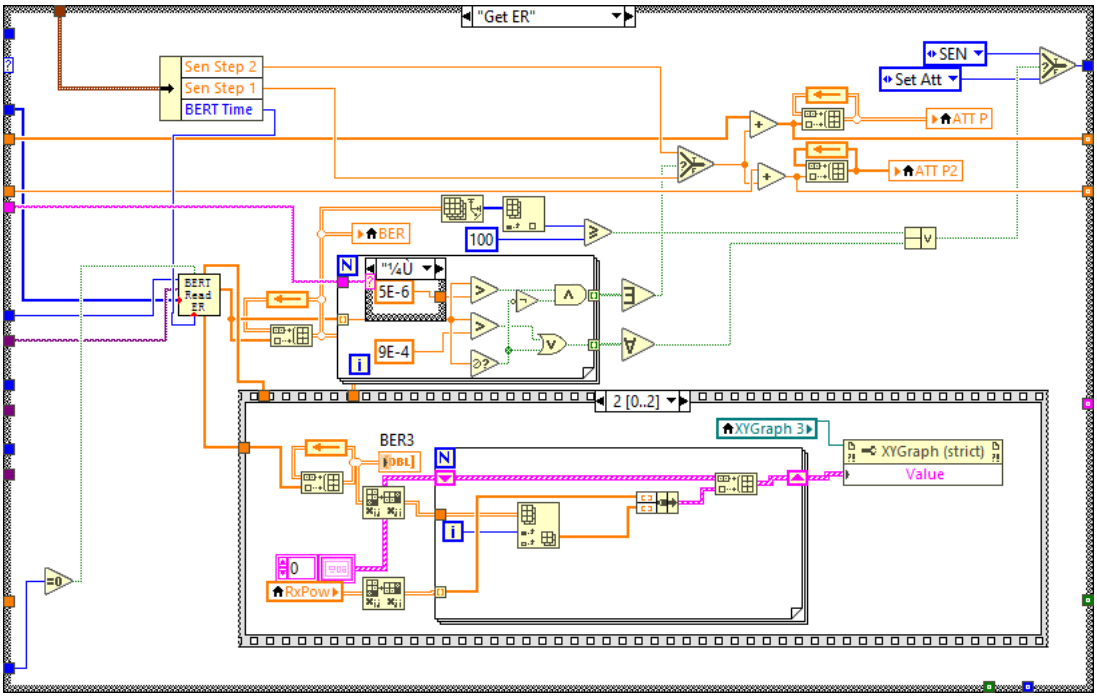

"Scan Point", Default
"SEN"
ÆóÒ
"Set Att"
Get ER
Prepare
BERT Type
BERT Visa
OVA Type
OVA Visa
OVAType2
OVA Visa2
OVA Set ATT
Att To RxP
RxPow
0..2
"Acacia"
20
"Final test HT"
Scan Point
Station


"Prepare", Default
Set Att
Att Start
OVA Set WL
OVA Set ATT
BERT Read ER

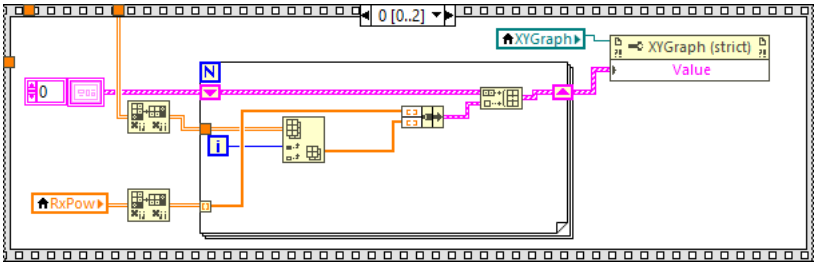

Default

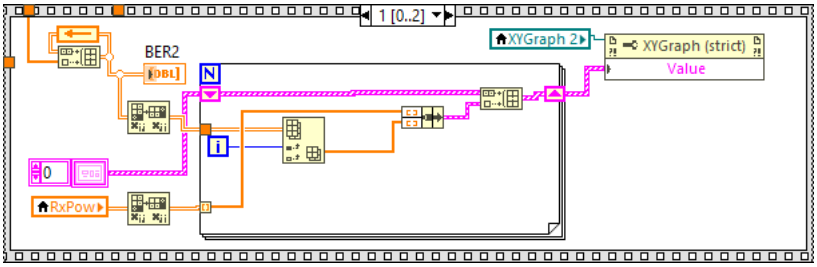

"¼U", Def
3

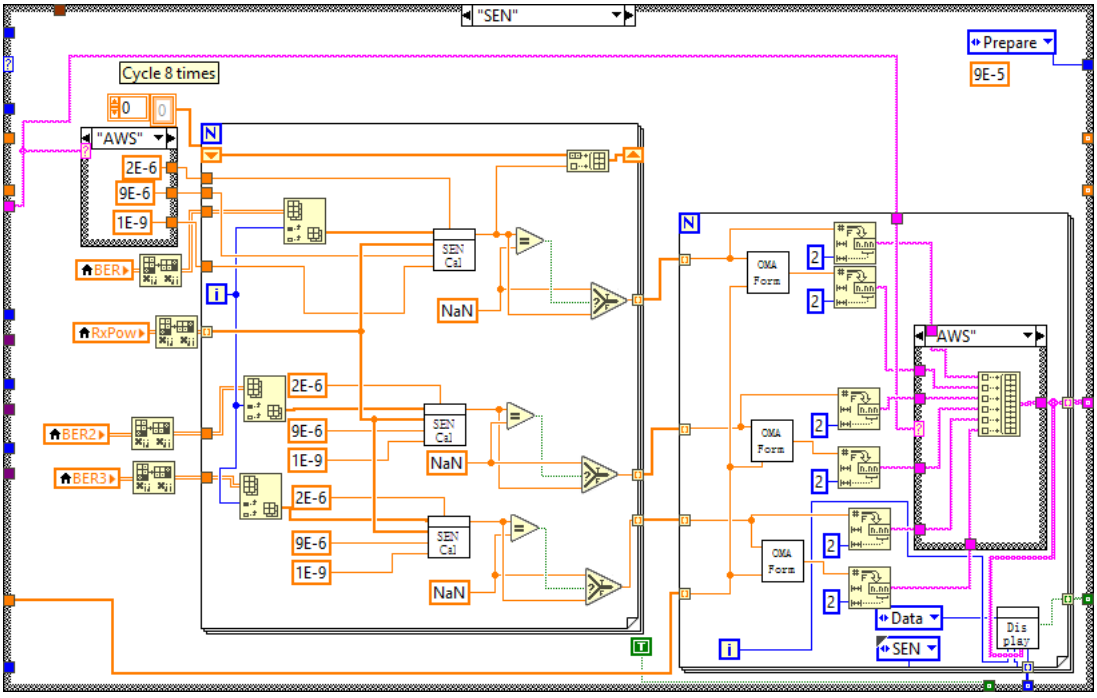

"AWS"
3



"Get ER"
Sen Step 2
Sen Step 1
BERT Time
SEN
Set Att
ATT P
ATT P2
BER
100
"¼U
5E-6
9E-4
BERT Read ER
2 [0..2]
XYGraph 3
BER3
XYGraph (strict)
Value
0
RxPow
=0



"AW
5E-7



0 [0..2]
XYGraph
XYGraph (strict)
Value
0
RxPow

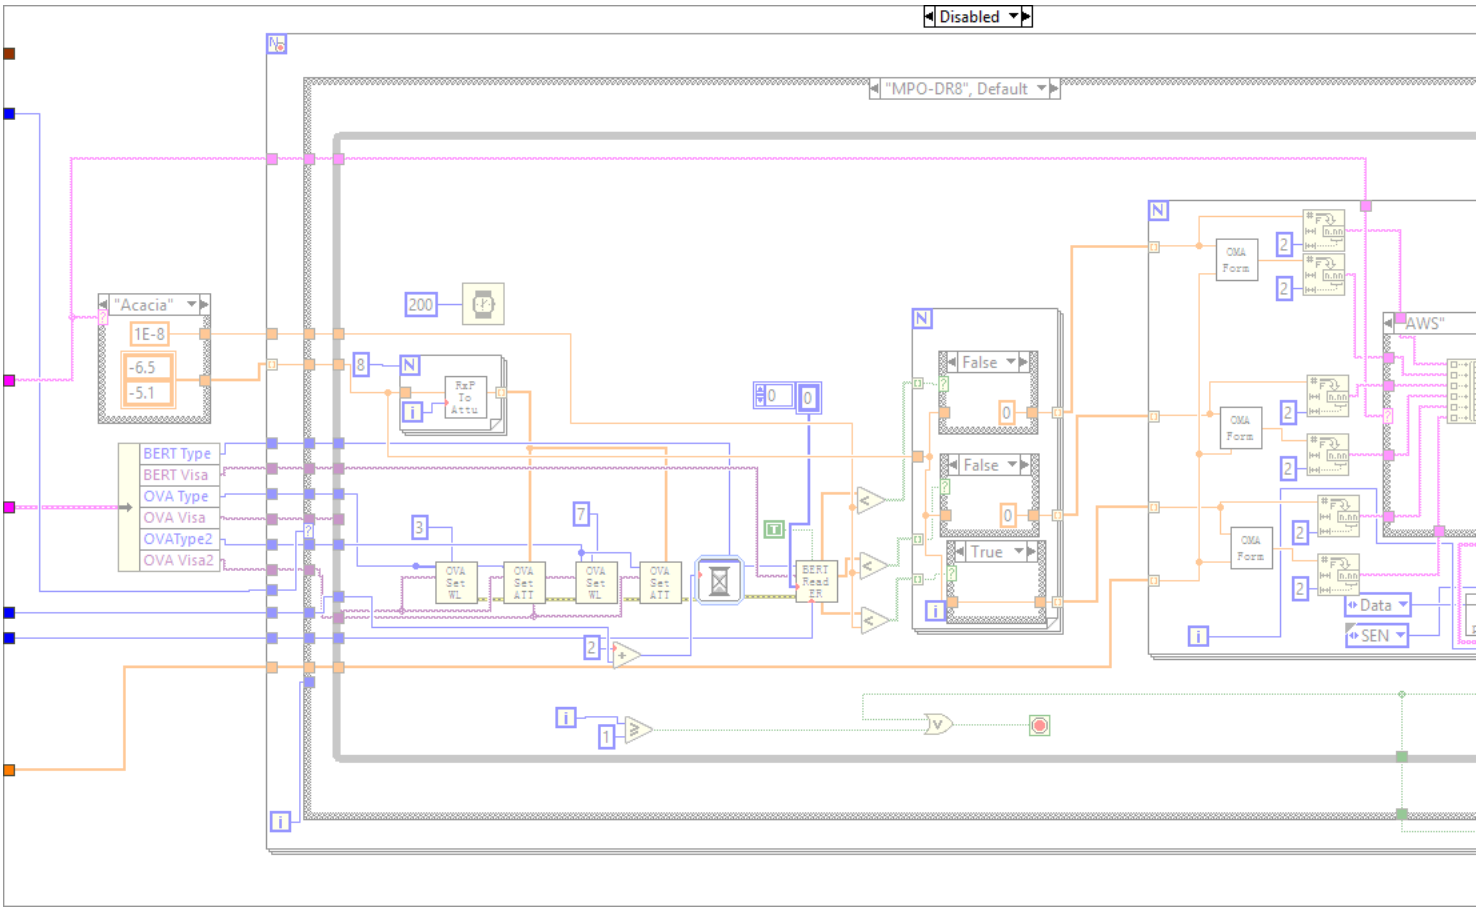

1 [0..2]
XYGraph 2
XYGraph (strict)
Value
BER2
0
RxPow

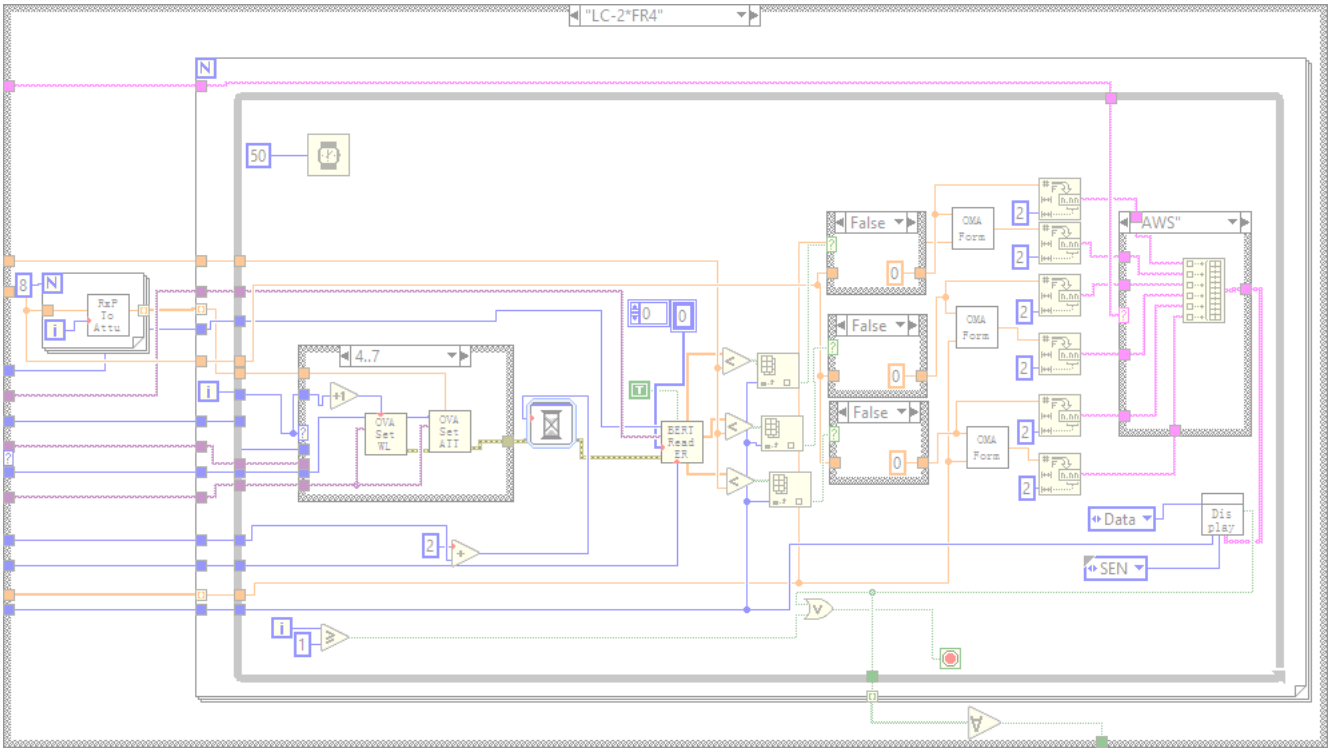

"SEN"
Prepare
9E-5
Cycle 8 times
"AWS"
2E-6
9E-6
1E-9
BER
RxPow
BER2
BER3
SEN Cal
NaN
OMA Form
AWS"
Data
SEN
Dis play



¼Ù", Defau



"¼Ù",
0.00024
9E-4
1E-6



"Acacia
1E-8
9E-4
1E-6



Disabled
"MPO-DR8", Default
"Acacia"
1E-8
-6.5
-5.1
200
RxP To Attu
BERT Type
BERT Visa
OVA Type
OVA Visa
OVAType2
OVA Visa2
OVA Set WL
OVA Set ATT
BERT Read ER
False
True
OMA Form
AWS"
Data
SEN



"LC-2*FR4"
50
RxP To Attu
4..7
OVA Set WL
OVA Set ATT
BERT Read ER
False
OMA Form
AWS"
Data
Dis play
SEN



0..3, Default
OVA Set WL
OVA Set ATT



¼Ù", Defau



True



True



True



¼Ù", Defau

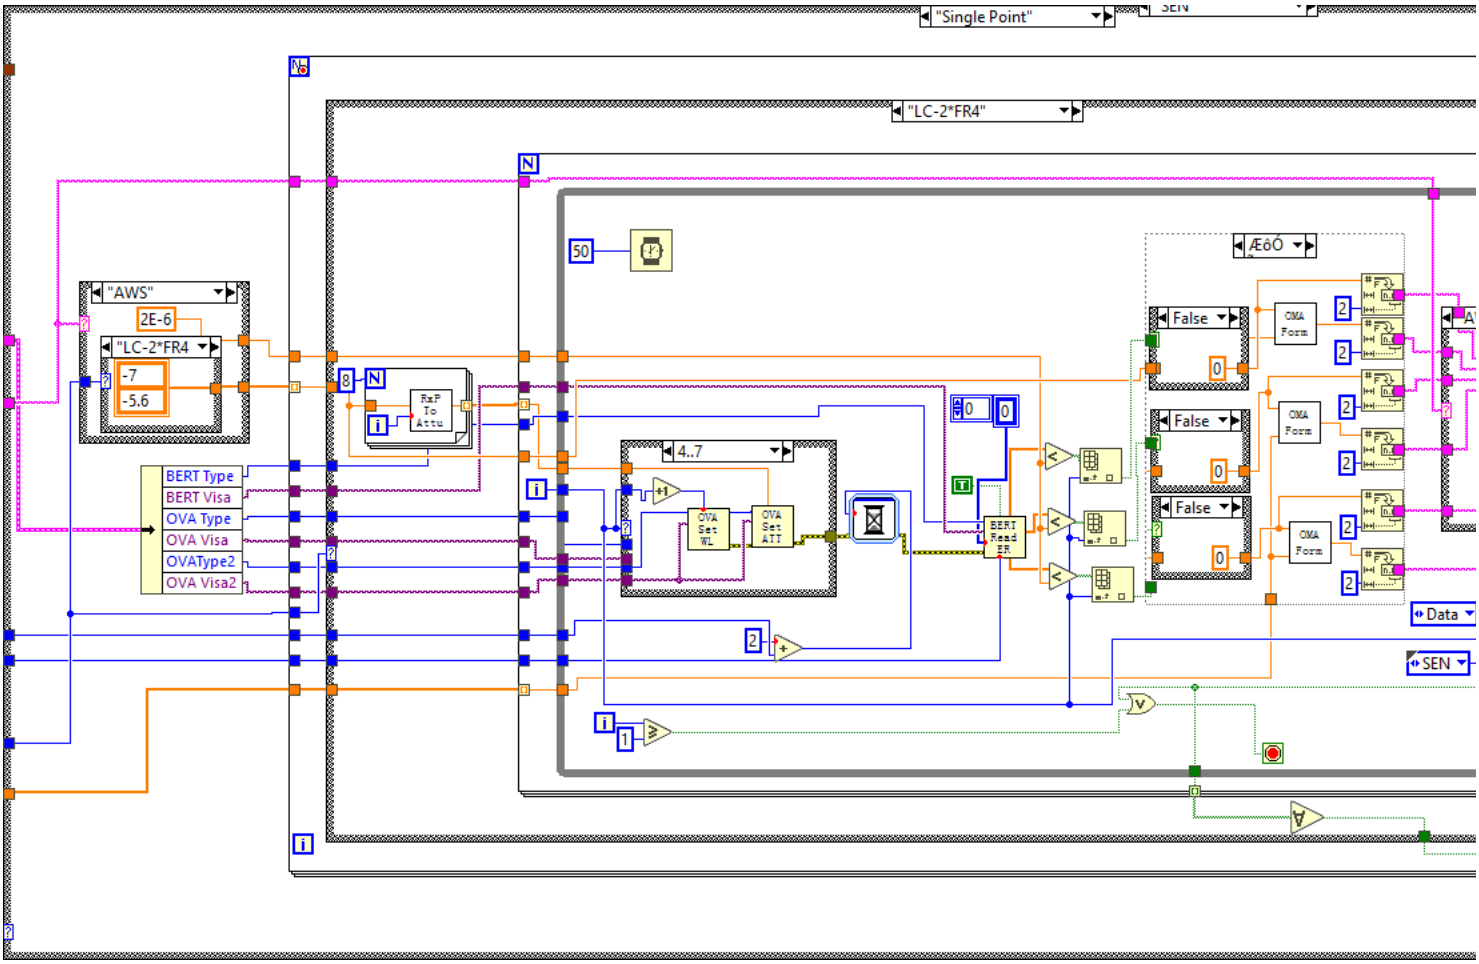

True



True



False
0



"¼Ù", De
0.00024
-9.5
-8.1



"AWS"
2E-6
-7.5
-6.1



"Single Point"
"LC-2*FR4"
"AWS"
2E-6
"LC-2*FR4
-7
-5.6
BERT Type
BERT Visa
OVA Type
OVA Visa
OVAType2
OVA Visa2
RxP To Attu
50
4..7
OVA Set WL
OVA Set ATT
BERT Read ER
ÆóÓ
False
False
False
OMA Form
OMA Form
OMA Form
Data
SEN

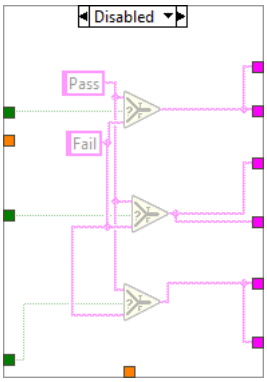

0..3, Default
OVA Set WL
OVA Set ATT

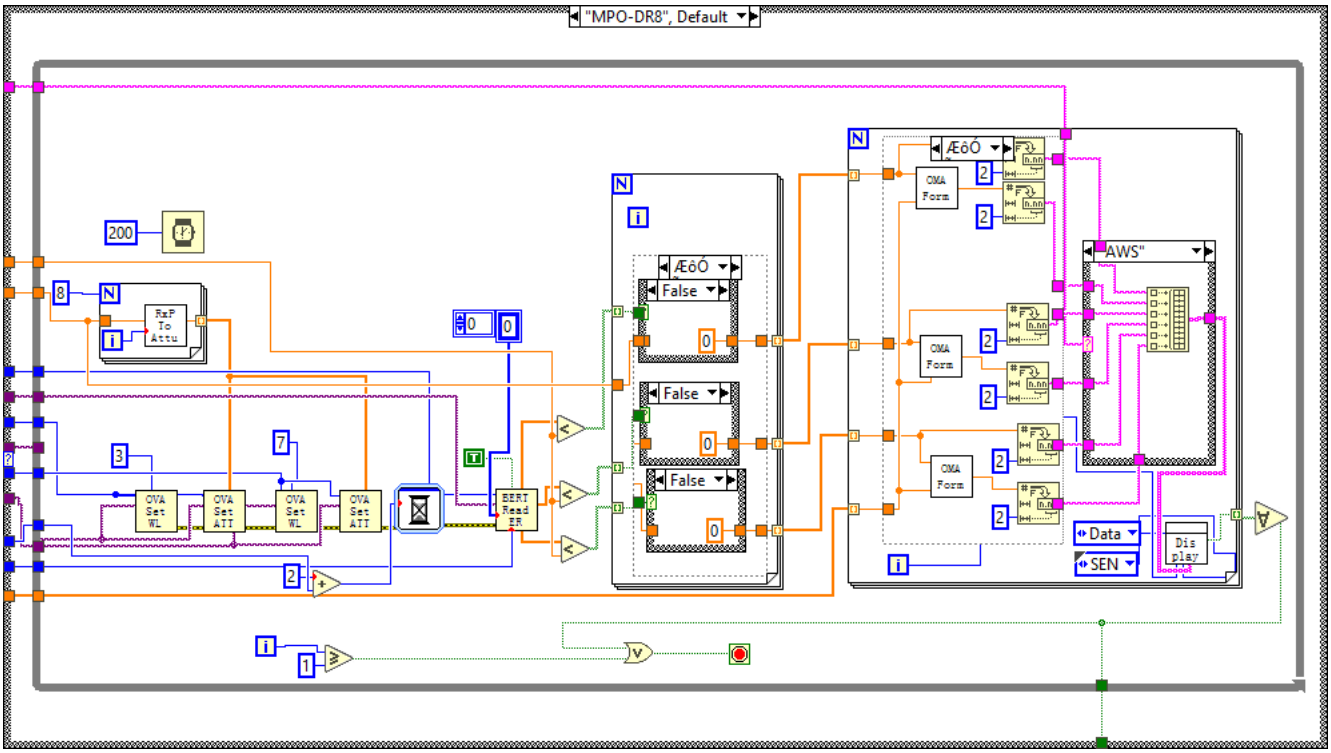

¼Ù", Defau



True

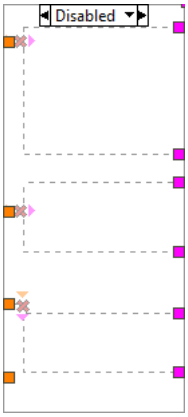

True



True



Disabled
Pass
Fail



"MPO-DR8", Default
200
8
RxP To Attu
3
7
2
1
0
OVA Set WL
OVA Set ATT
BERT Read ER
False
ÆôÓ
OMA Form
AWS"
Data
SEN
Dis play



¼Ù", Defau



Disabled



True



True



True

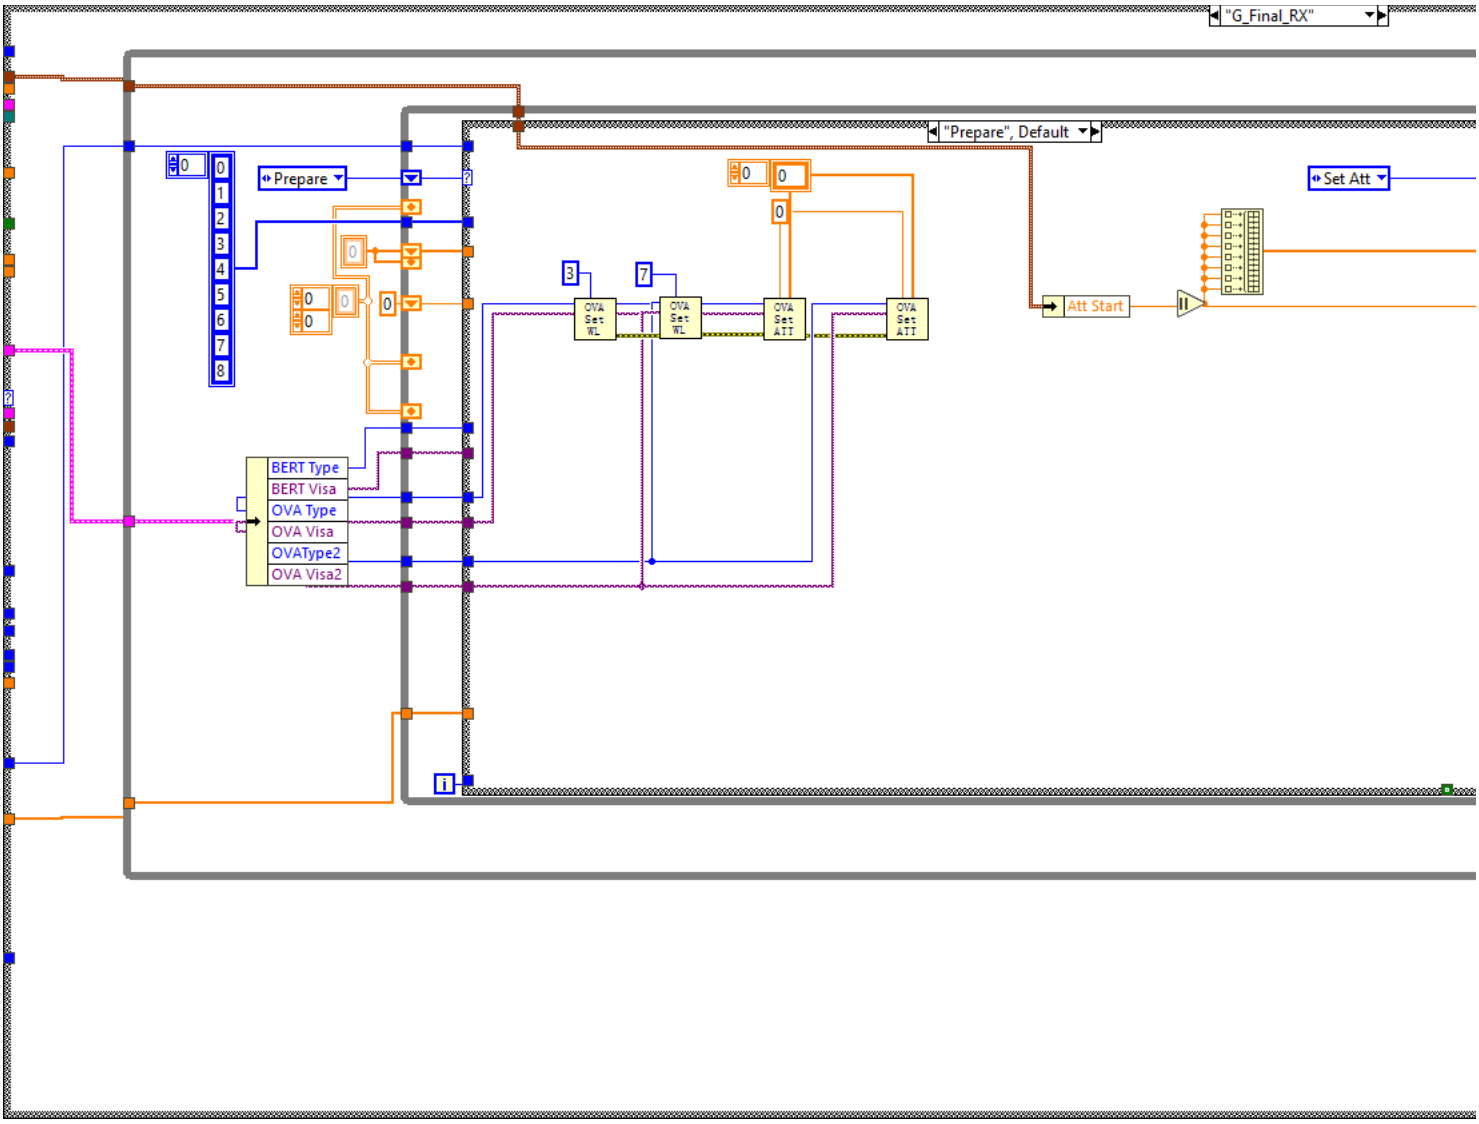

Disabled
Pass
Fail

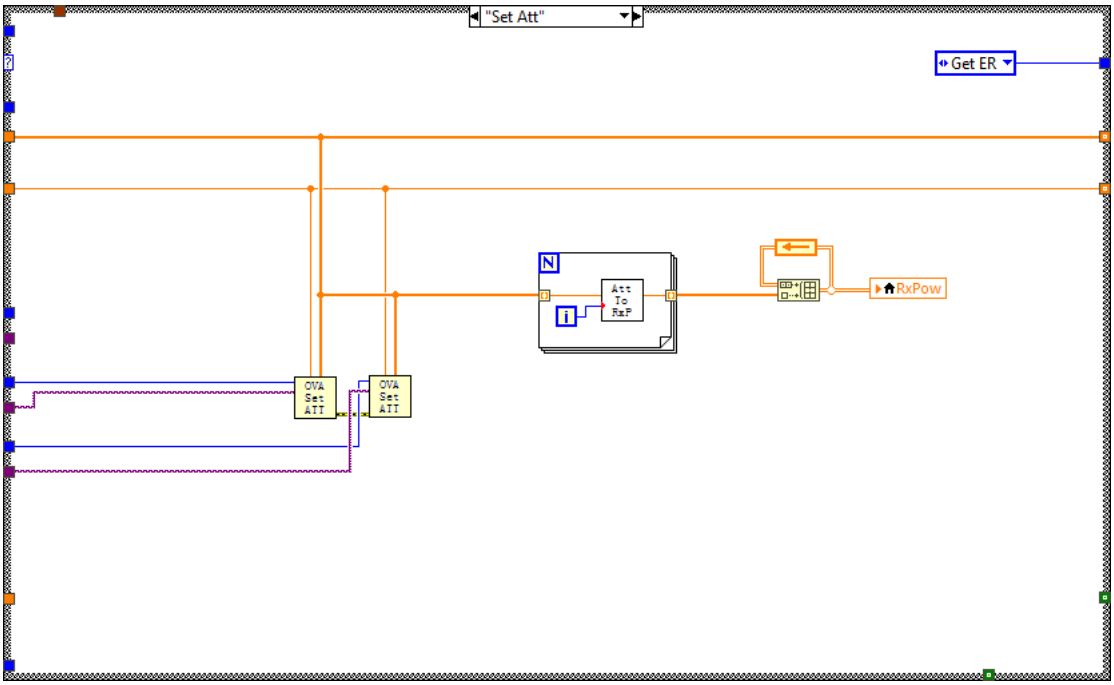

"¼Ù", Default
0.00024
-9.5
-8.1

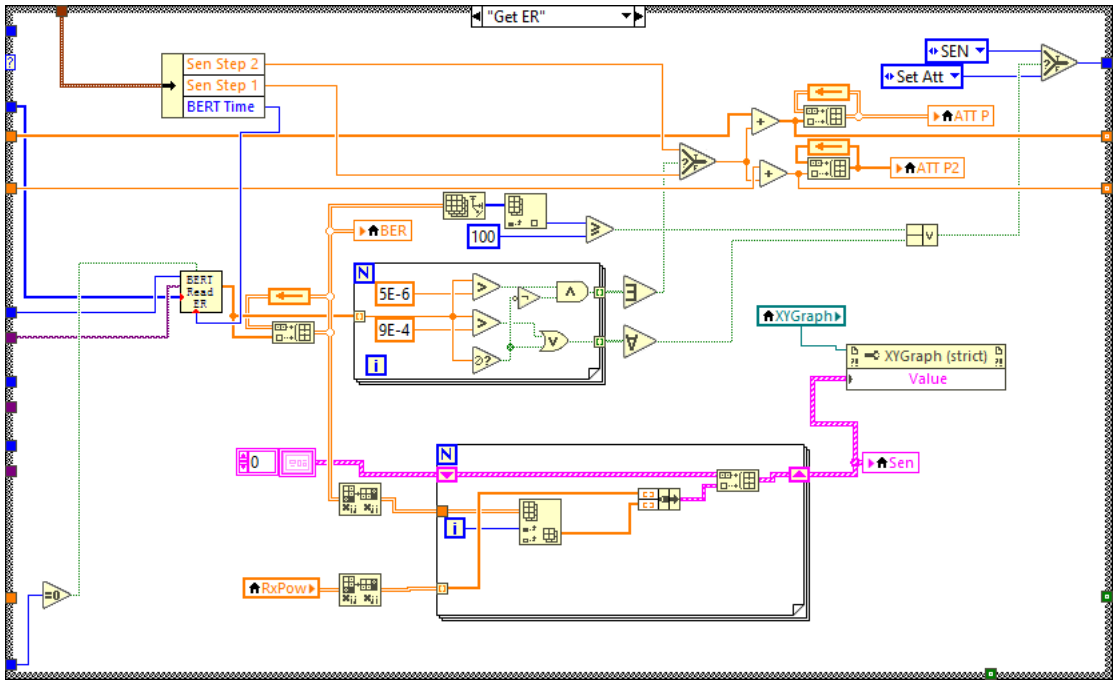

"MPO-DR8
-7.5
-6.1

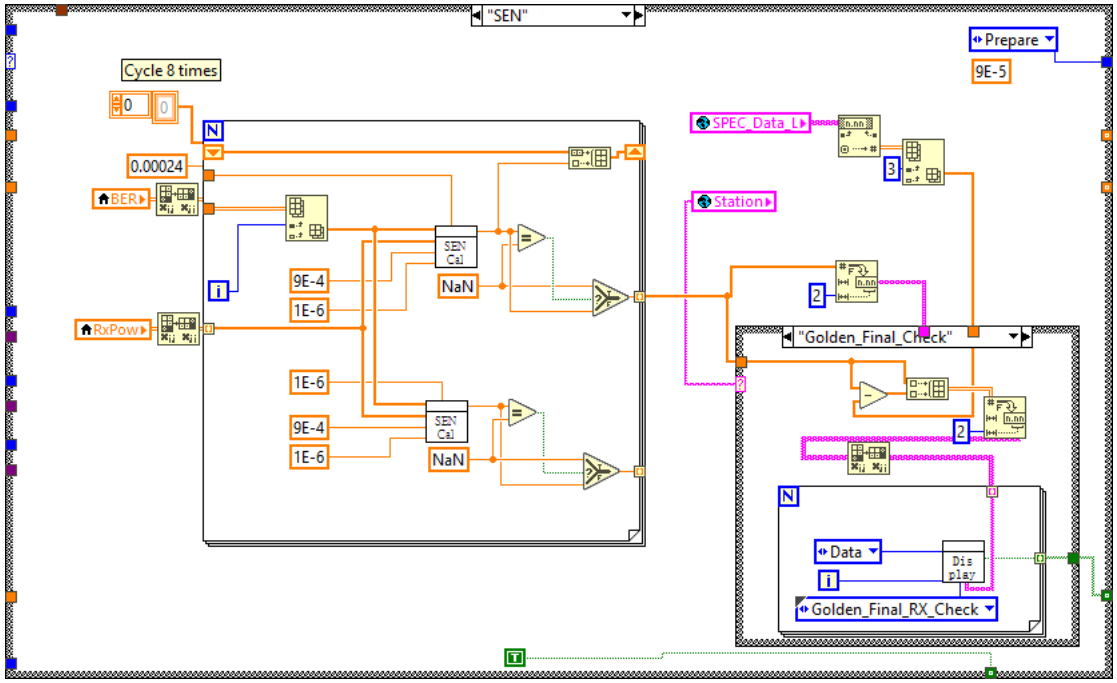

"Acacia"
1E-8
-6.5
-5.1

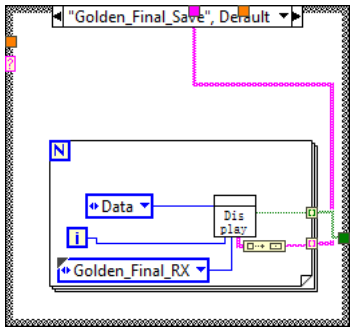

"¼Ù", Default

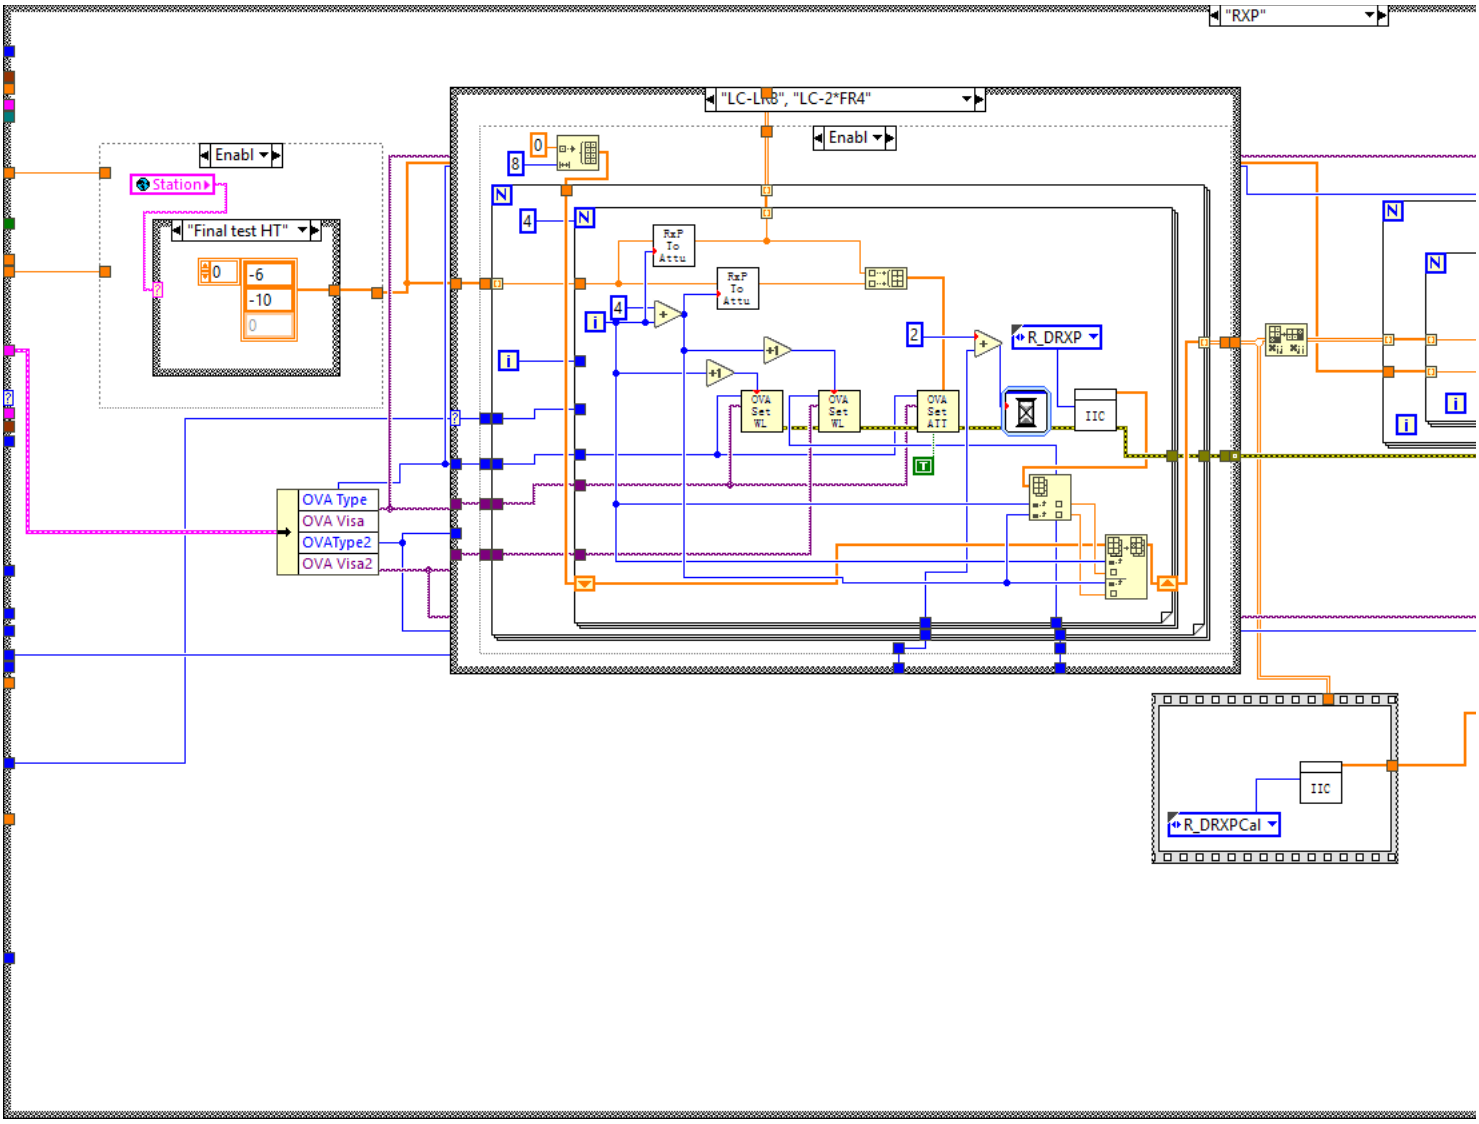

"G_Final_RX"
"Prepare", Default
Prepare
Set Att
Att Start
BERT Type
BERT Visa
OVA Type
OVA Visa
OVAType2
OVA Visa2
OVA Set WL
OVA Set ATT

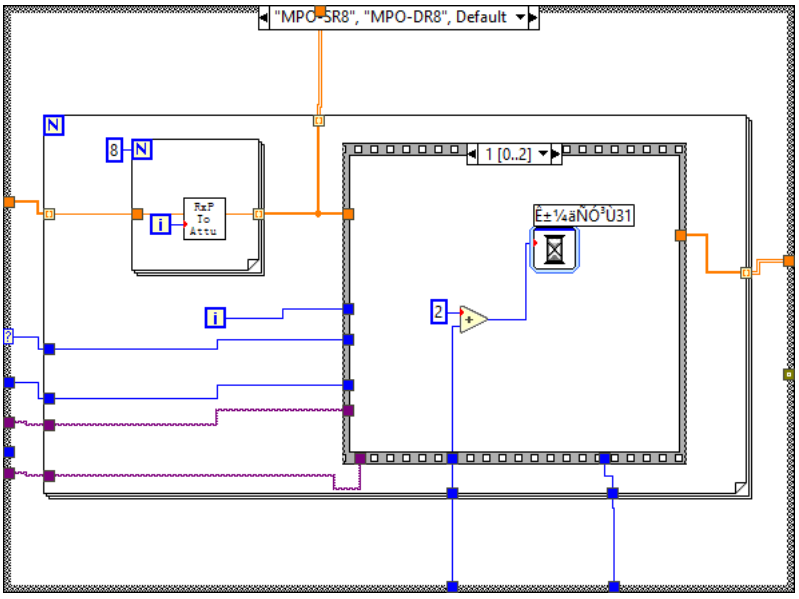

"Set Att"
Get ER
Att To RxP
RxPow
OVA Set ATT

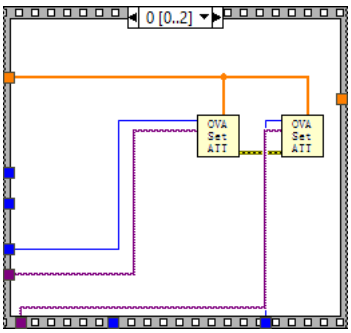

"Get ER"
Sen Step 2
Sen Step 1
BERT Time
SEN
Set Att
ATT P
ATT P2
BER
100
BERT Read ER
5E-6
9E-4
XYGraph
XYGraph (strict)
Value
Sen
0
RxPow
=0

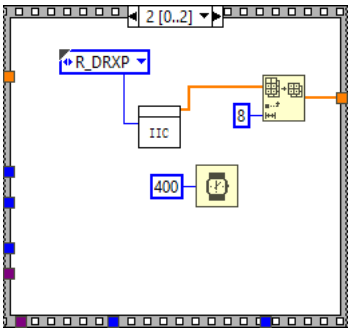

"SEN"
Prepare
9E-5
Cycle 8 times
0.00024
BER
RxPow
SEN Cal
NaN
9E-4
1E-6
SPEC_Data_L
Station
"Golden_Final_Check"
Data
Display
Golden_Final_RX_Check

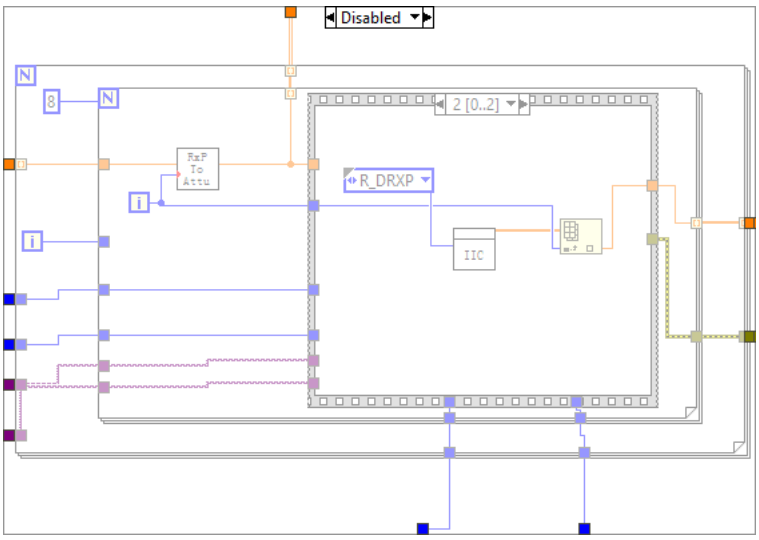

"Golden_Final_Save", Default
Data
Display
Golden_Final_RX

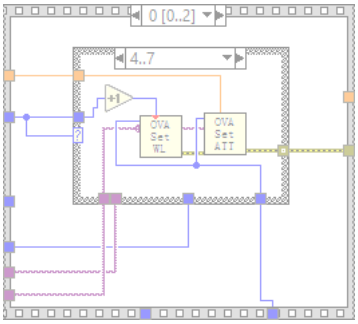

"RXP"
"LC-LR8", "LC-2*FR4"
Enabl
Station
"Final test HT"
0
-6
-10
0
OVA Type
OVA Visa
OVAType2
OVA Visa2
RxP To Attu
OVA Set WL
OVA Set ATT
R_DRXP
IIC
R_DRXPCal



"MPO-SR8", "MPO-DR8", Default
1 [0..2]
RxP To Attu

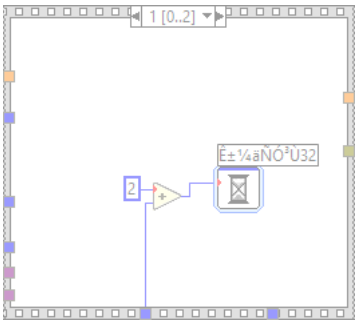

0 [0..2]
OVA Set ATT
OVA Set ATT



2 [0..2]
R_DRXP
IIC
8
400



Disabled
N
8
N
FxP To Attu
i
i
2 [0..2]
R_DRXP
IIC

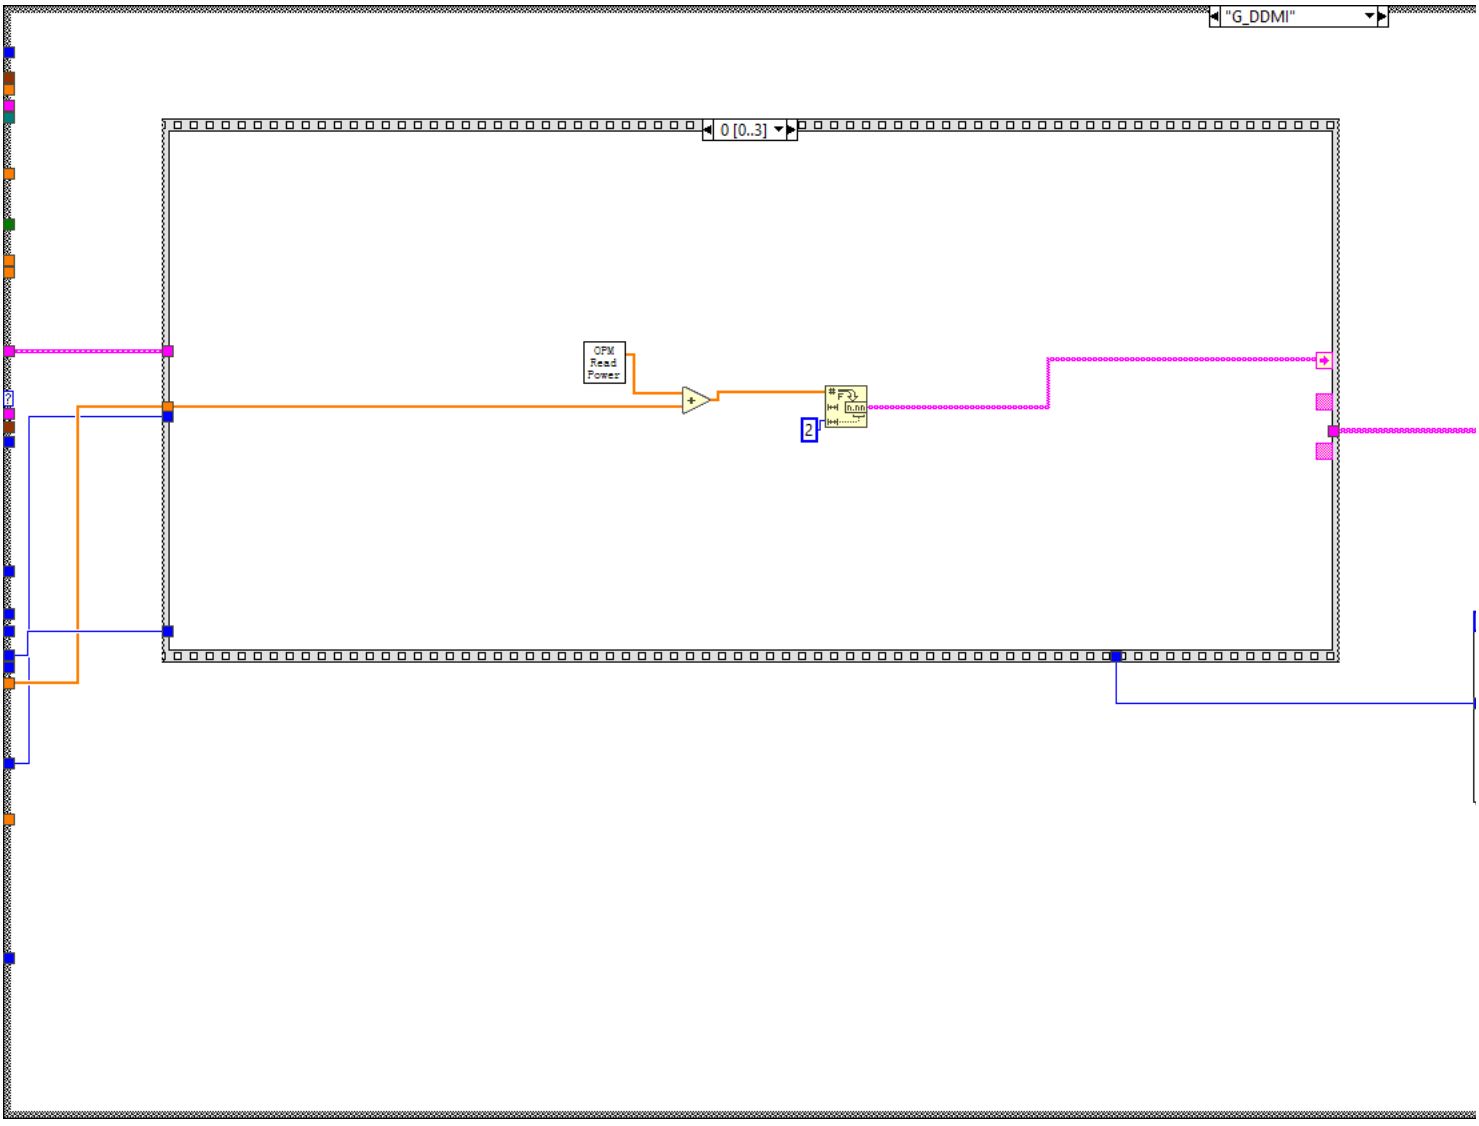

0 [0..2]
4..7
+1
OVA Set WL
OVA Set ATT

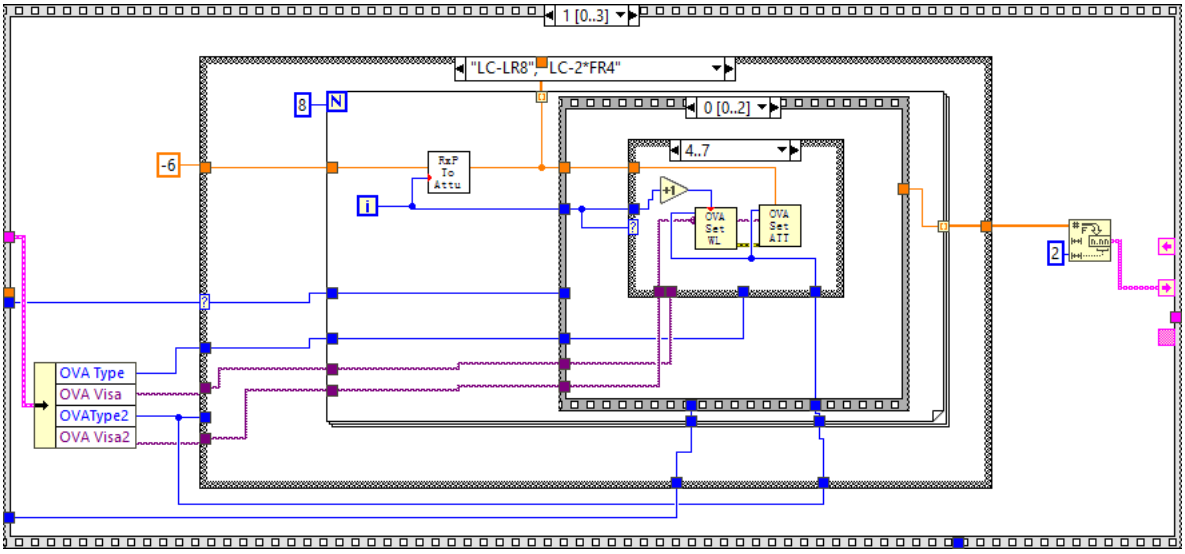

0..3, Default
+1
OVA Set WL
OVA Set ATT

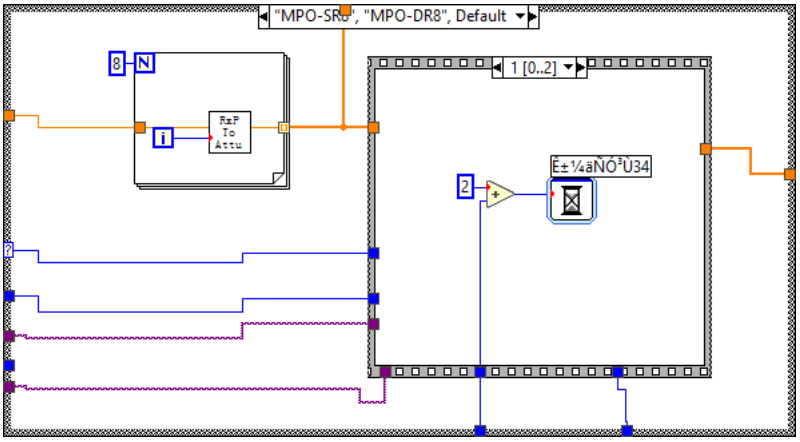

1 [0..2]
É±¼äNÓ³Ù32
2

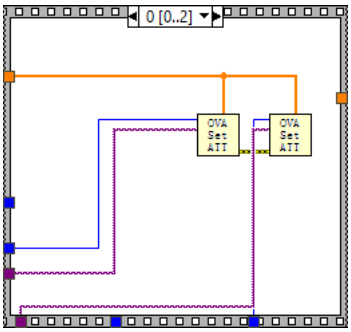

Disabled
4

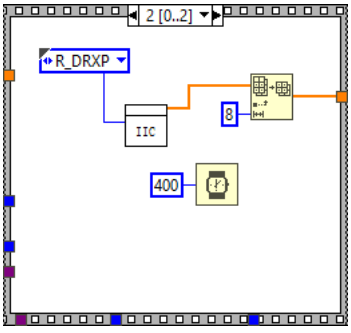

"¼Ù", Default
-6



"G_DDMI"
0 [0..3]
OPM Read Power
2

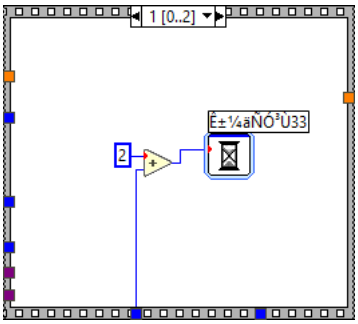

1 [0..3]
"LC-LR8", LC-2*FR4"
8
N
0 [0..2]
4..7
-6
RxP To Attu
i
+1
OVA Set WL
OVA Set ATT
2
OVA Type
OVA Visa
OVAType2
OVA Visa2

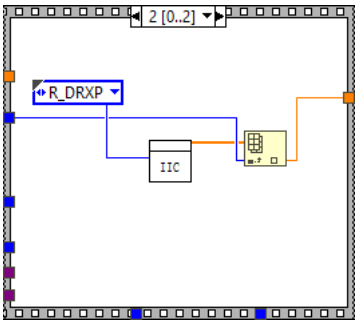

"MPO-SRo", "MPO-DR8", Default
8
N
RxP To Attu
i
1 [0..2]
2
É±¼áÑÓ³U34

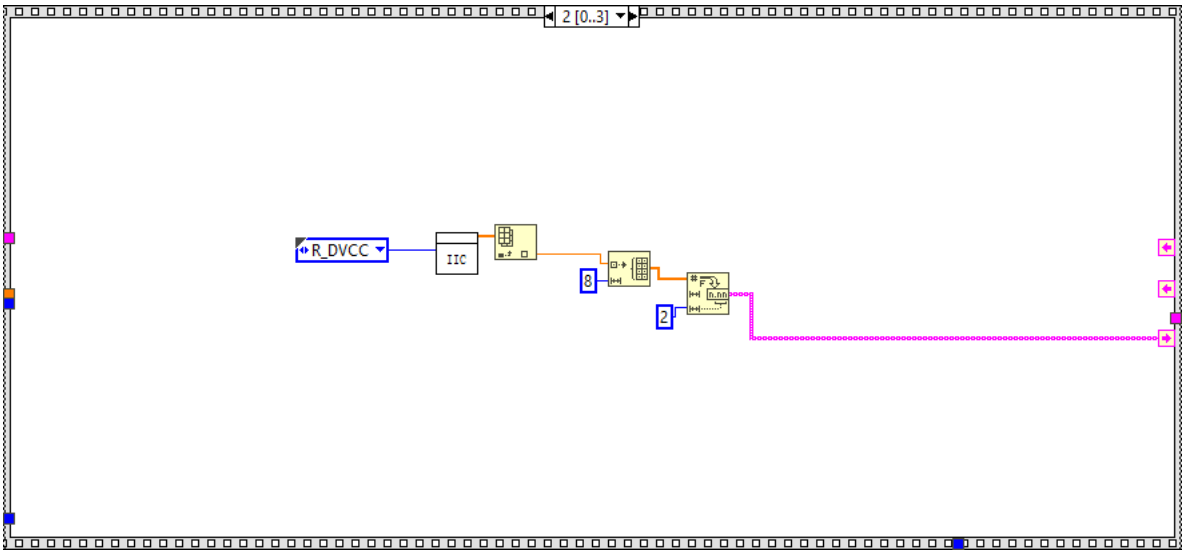

0 [0..2]
OVA Set ATT
OVA Set ATT

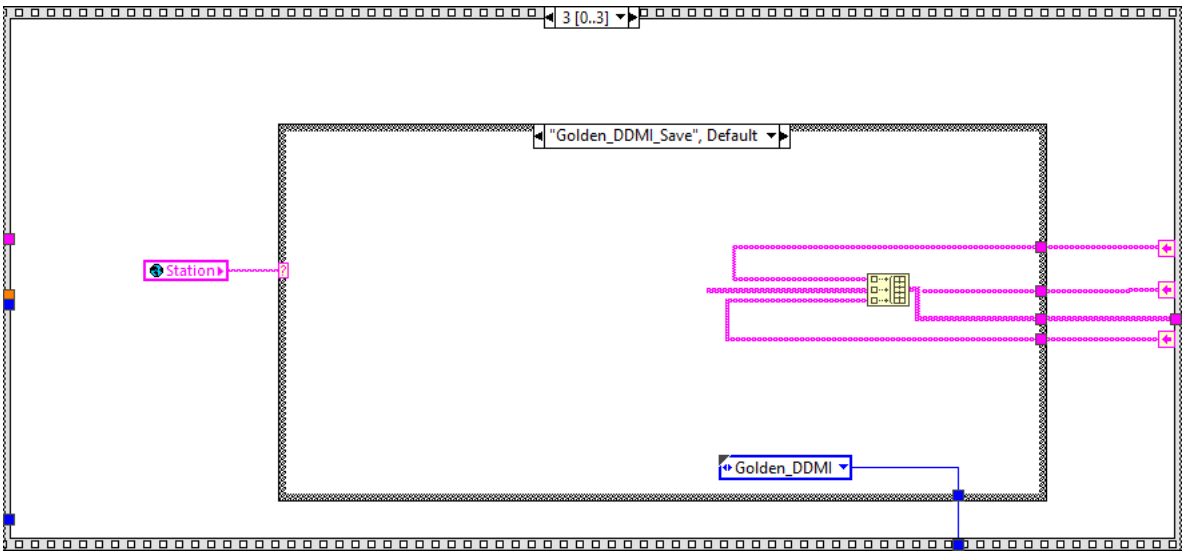

2 [0..2]
R_DRXP
IIC
8
400

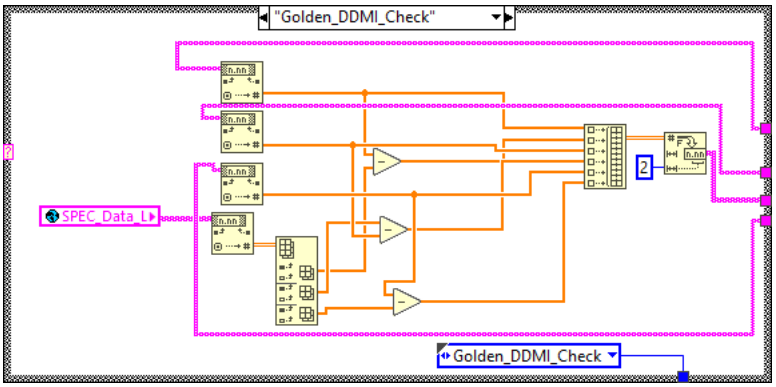

0..3, Default
+1
OVA Set WL
OVA Set ATT

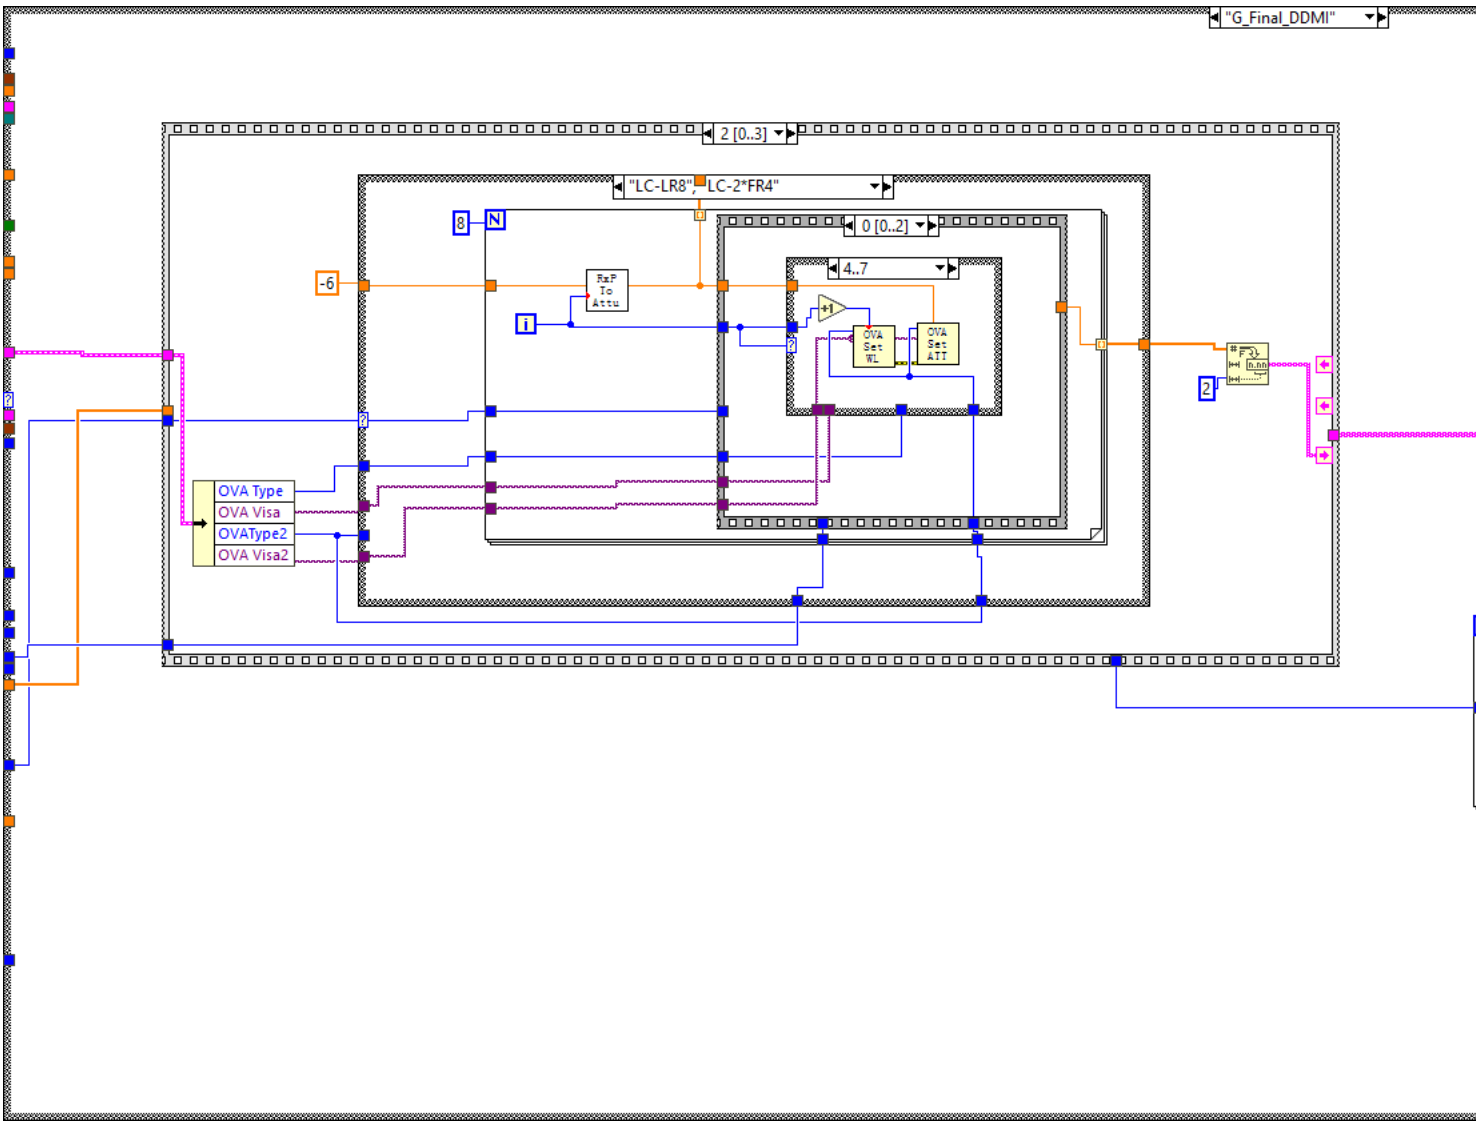

1 [0..2]
Ë±¼aÑÓ³Ù33
2

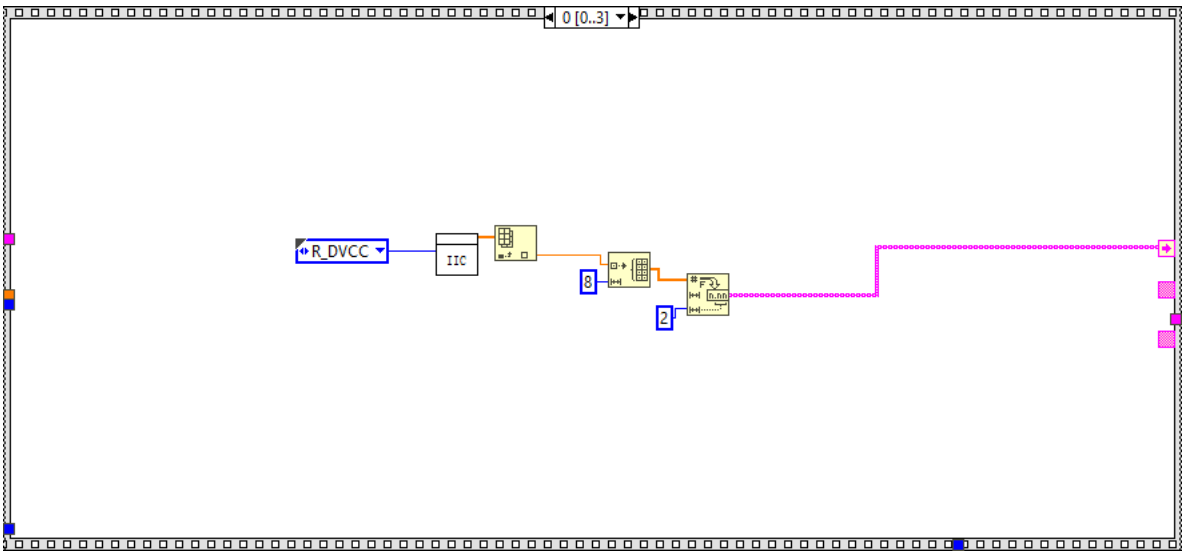

2 [0..2]
R_DRXP
IIC

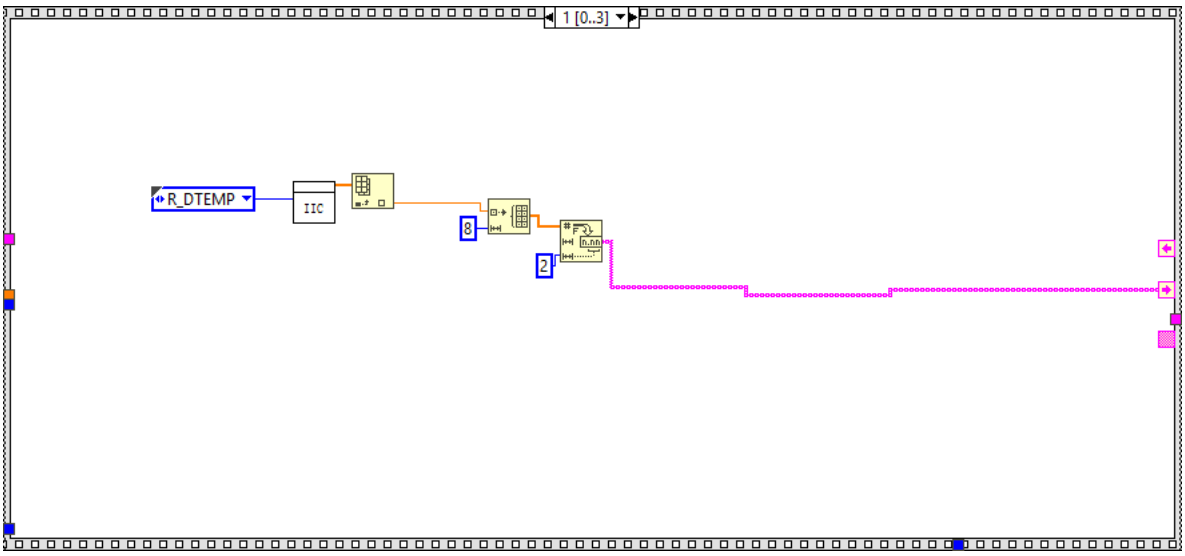

2 [0..3]
R_DVCC
IIC
8
2

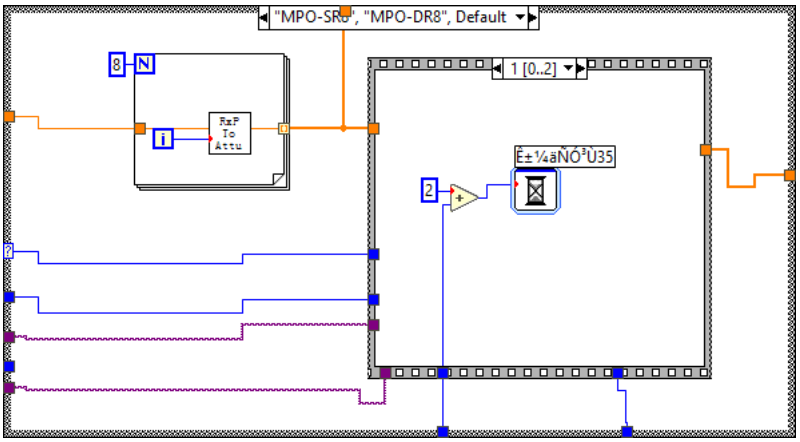

3 [0..3]
"Golden_DDMI_Save", Default
Station
Golden_DDMI

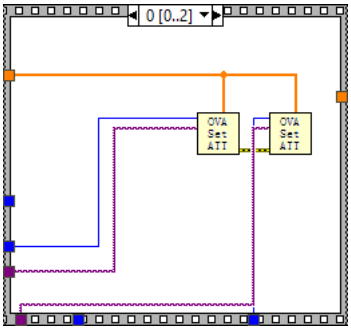

"Golden_DDMI_Check"
SPEC_Data_L
2
Golden_DDMI_Check

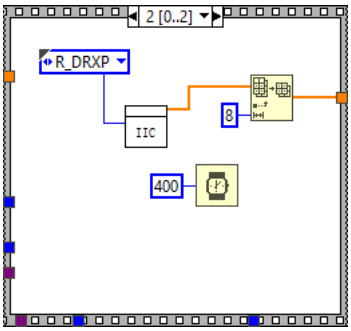

"G_Final_DDMI"
2 [0..3]
"LC-LR8","LC-2*FR4"
8
N
0 [0..2]
4..7
-6
RxP To Attn
i
+1
OVA Set WL
OVA Set ATT
2
OVA Type
OVA Visa
OVAType2
OVA Visa2



0 [0..3]
R_DVCC
IIC
8
2

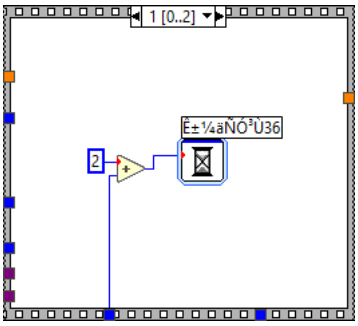

1 [0..3]
R_DTEMP
IIC
8
2

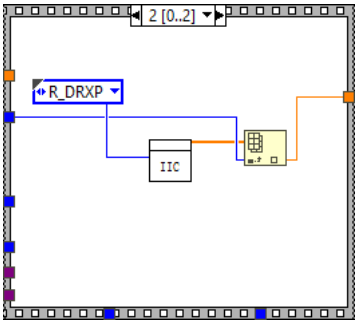

"MPO-SR8", "MPO-DR8", Default
8
N
i
RxP To Attu
1 [0..2]
2
+

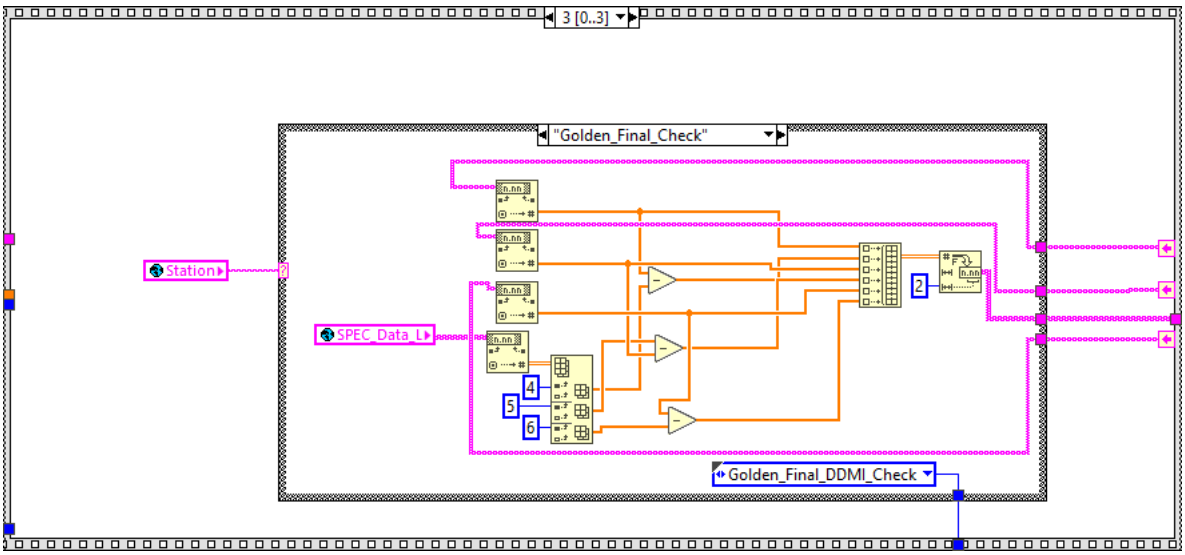

0 [0..2]
OVA Set ATT
OVA Get ATT

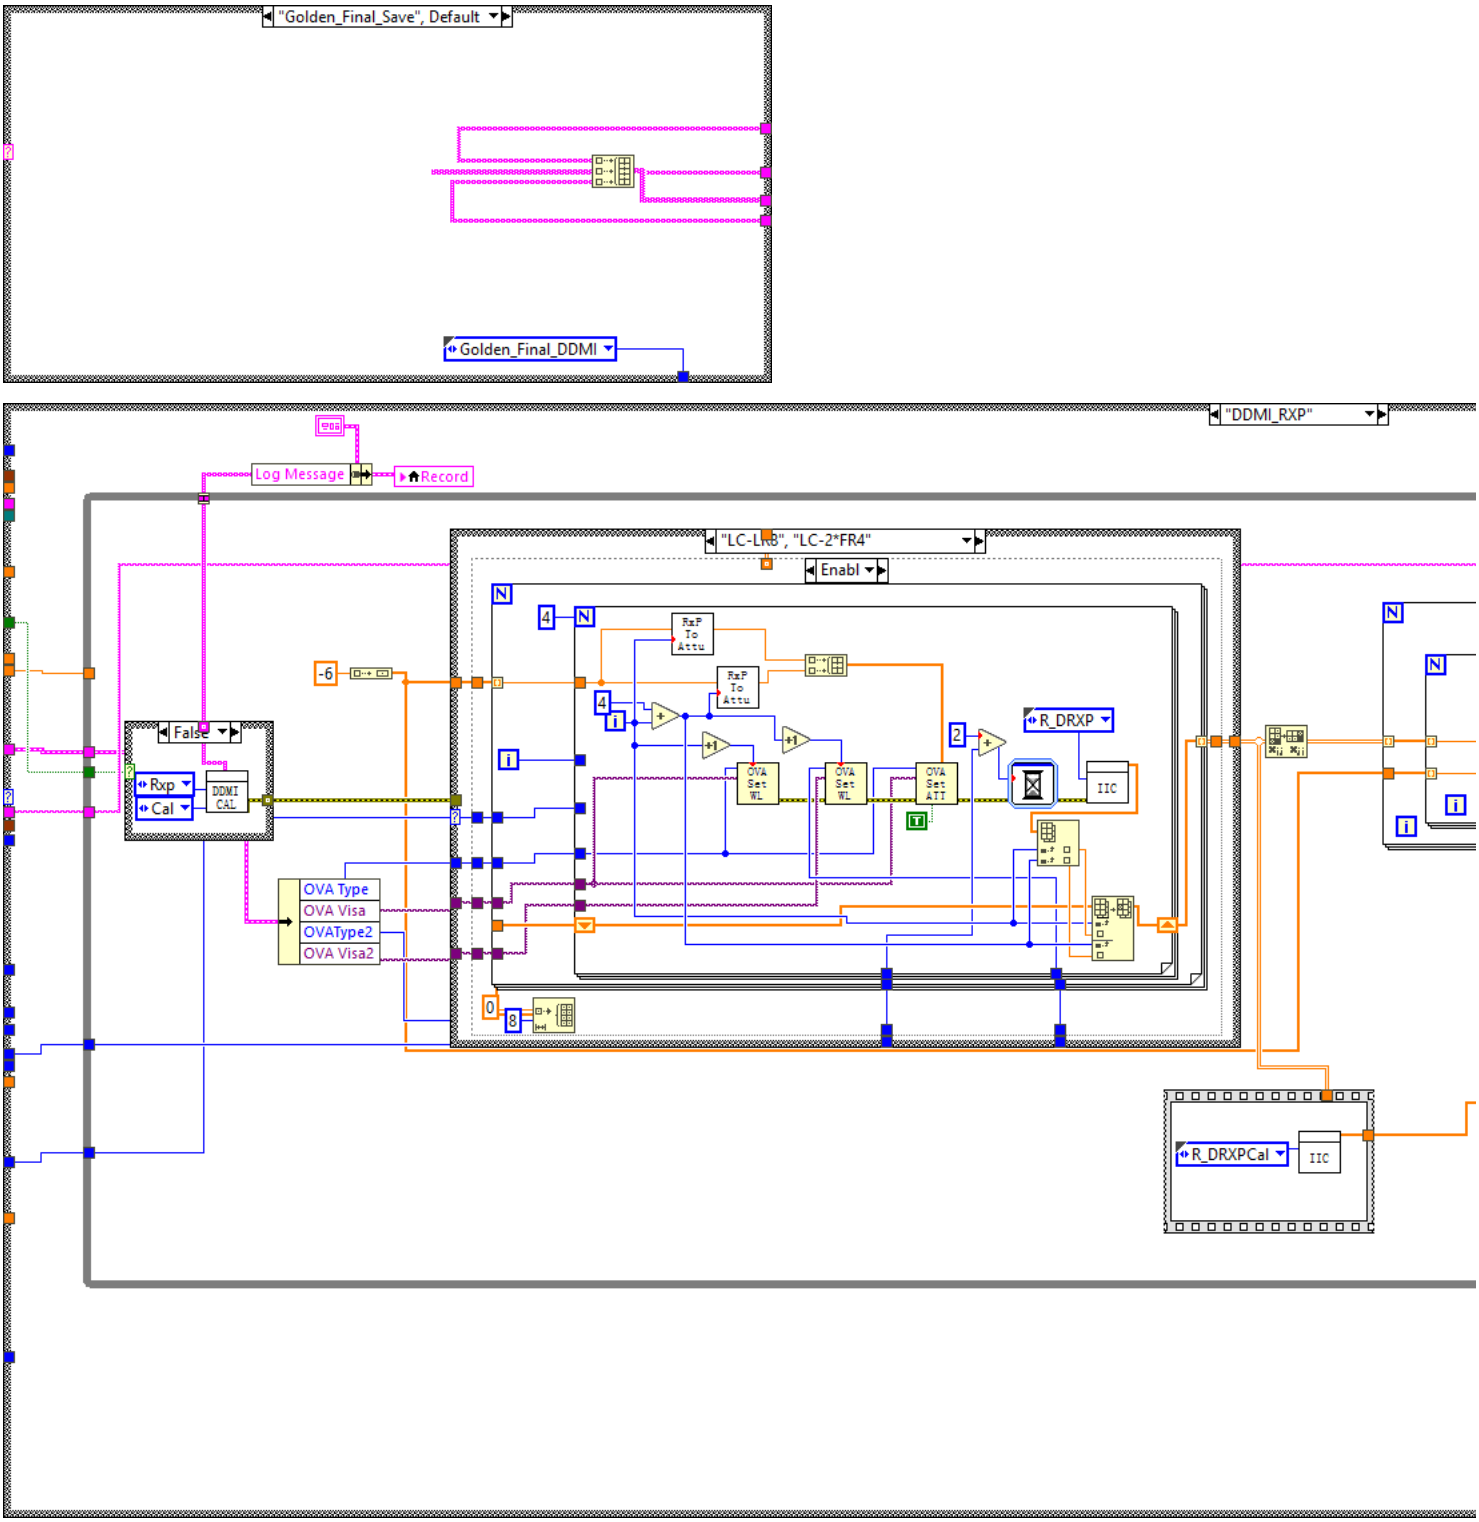

2 [0..2]
R_DRXP
IIC
8
400

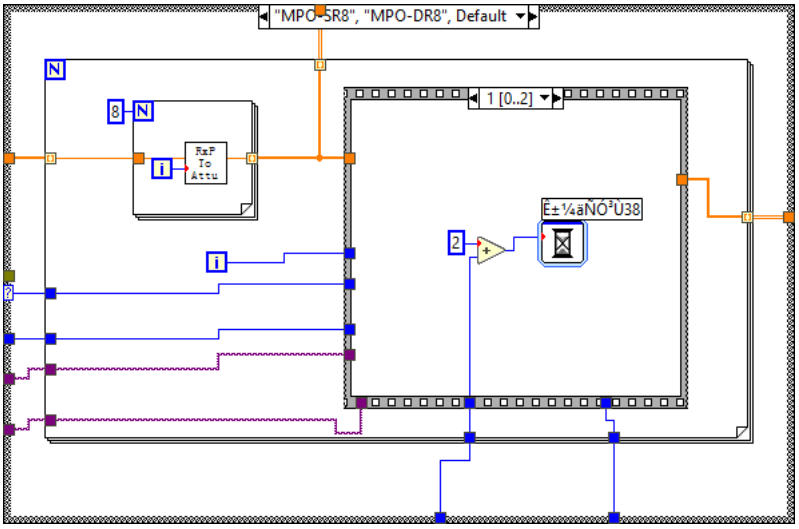

0..3, Default
+1
OVA Set WL
OVA Set ATT

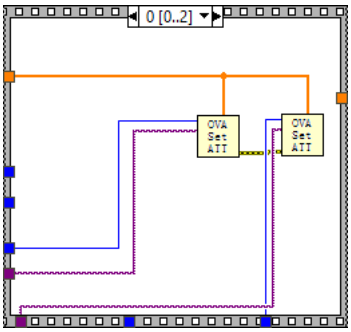

1 [0..2]
Ê±¼äÑÓ³Ú36
2

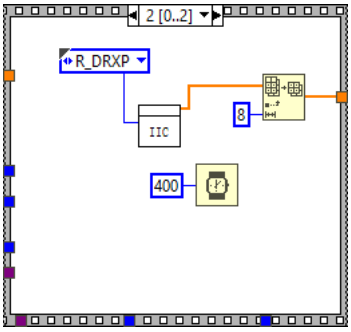

2 [0..2]
R_DRXP
IIC

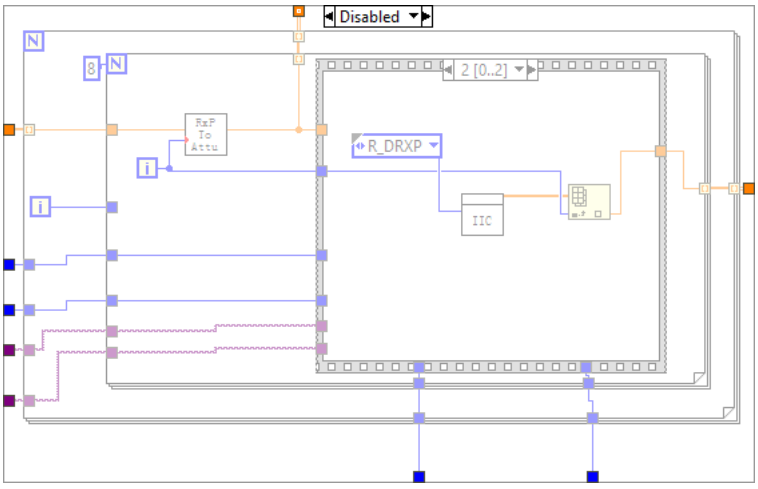

3 [0..3]
"Golden_Final_Check"
Station
SPEC_Data_L
n.nn
2
4
5
6
Golden_Final_DDMI_Check

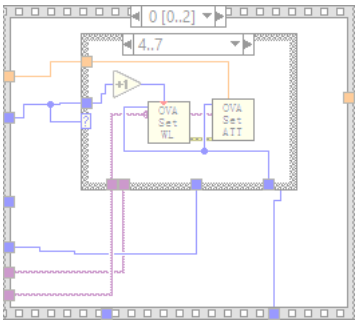

"Golden_Final_Save", Default
Golden_Final_DDMI
"DDMI_RXP"
Log Message
Record
"LC-LRB", "LC-2*FR4"
Enabl
False
Rxp
Cal
DDMI CAL
-6
OVA Type
OVA Visa
OVAType2
OVA Visa2
RxP To Attu
OVA Set WL
OVA Set ATT
R_DRXP
IIC
R_DRXPCal



"MPO-SR8", "MPO-DR8", Default
N
8
N
RxP To Attu
i
1 [0..2]
i
2
2
É±¼äÑÓ³U38

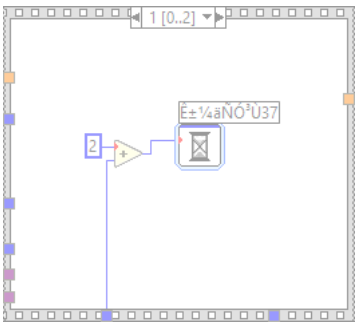

0 [0..2]
OVA Set ATT
OVA Set ATT

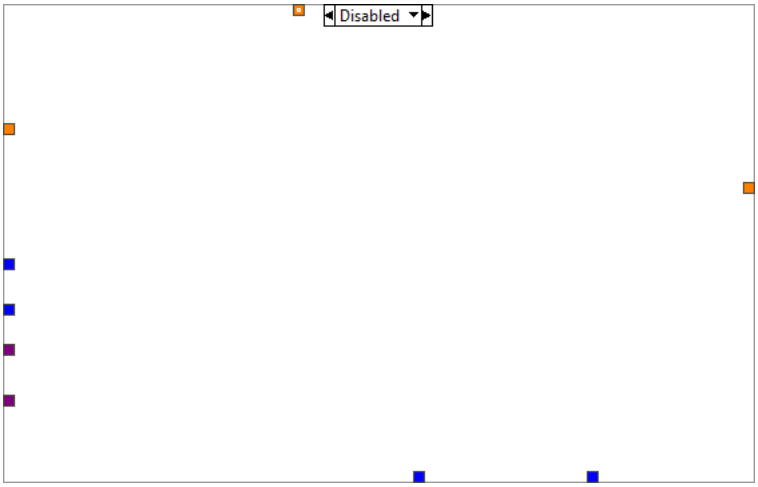

2 [0..2]
R_DRXP
IIC
8
400



Disabled
N
8
N
RxP To Attu
i
i
2 [0..2]
R_DRXP
IIC



0 [0..2]
4..7
OVA Set WL
OVA Set ATT

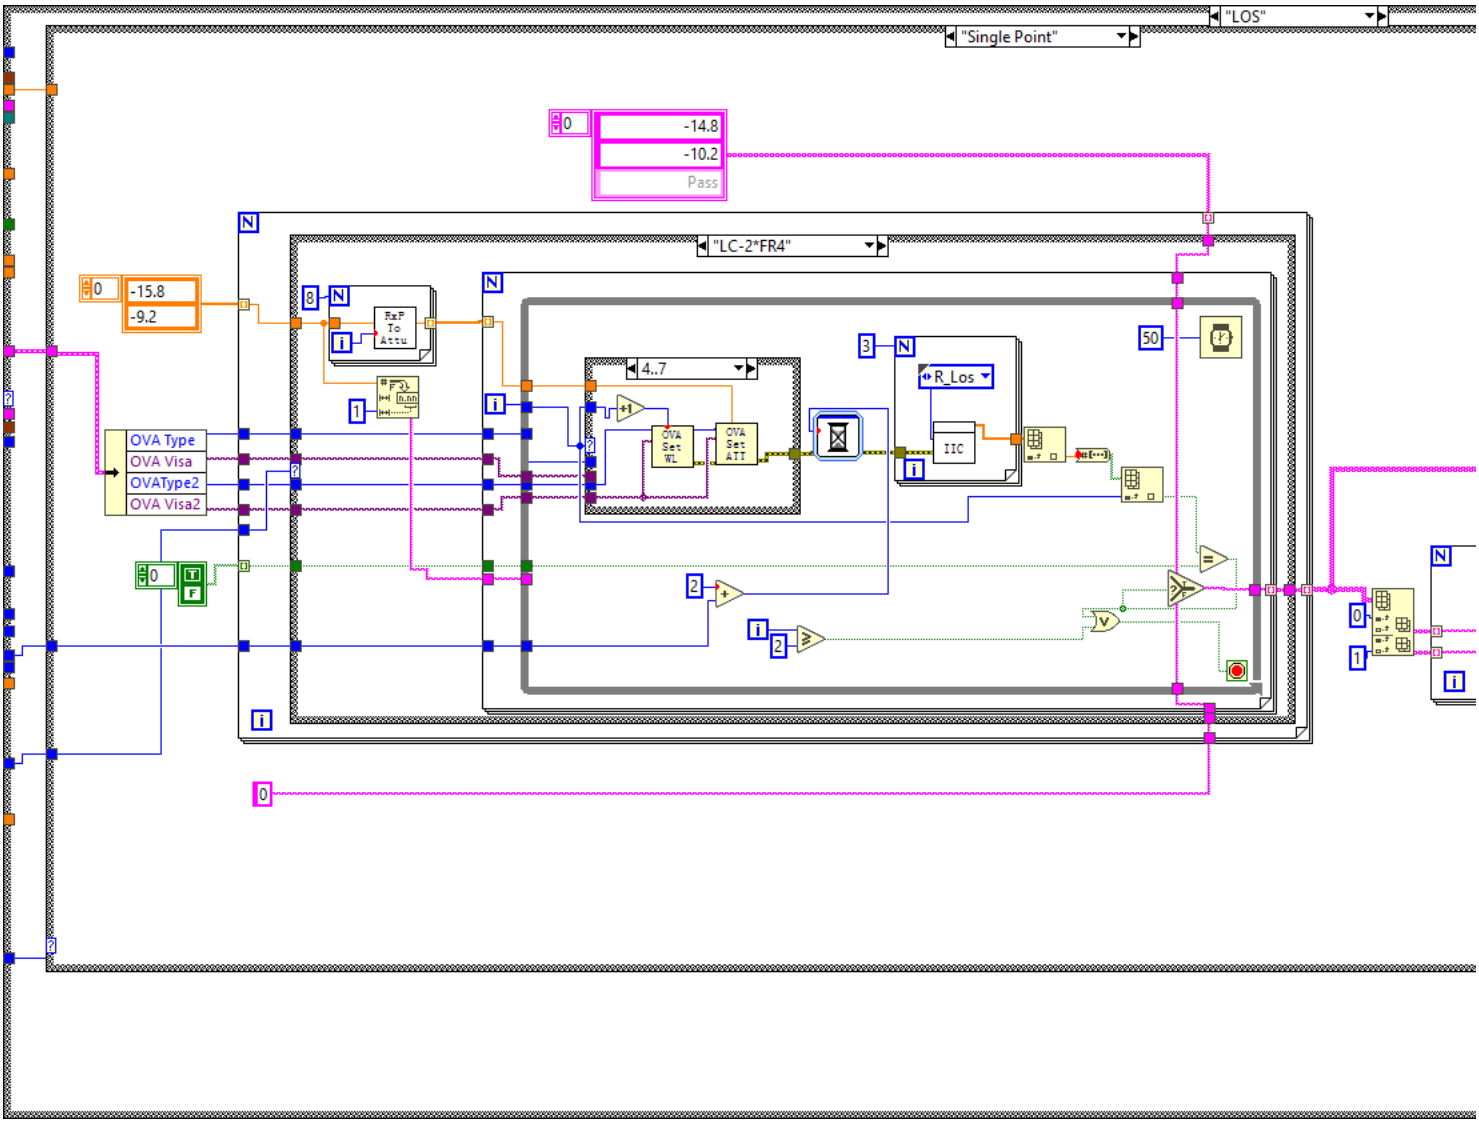

0..3, Default
OVA Set WL
OVA Set ATT

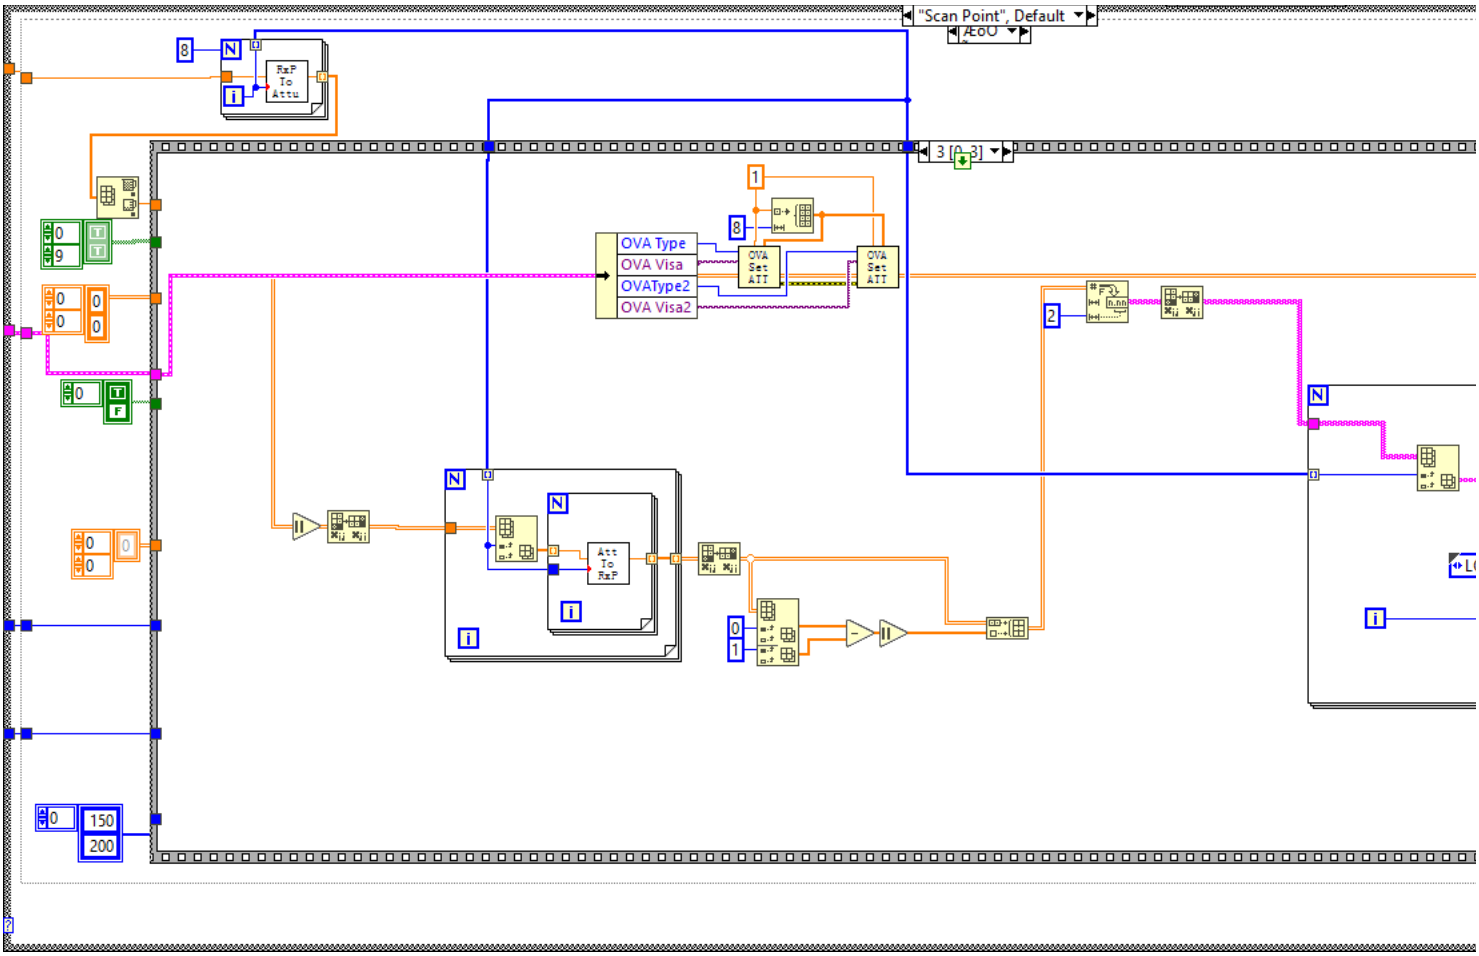

1 [0..2]
E±¼äÑÓ³Ù37
2

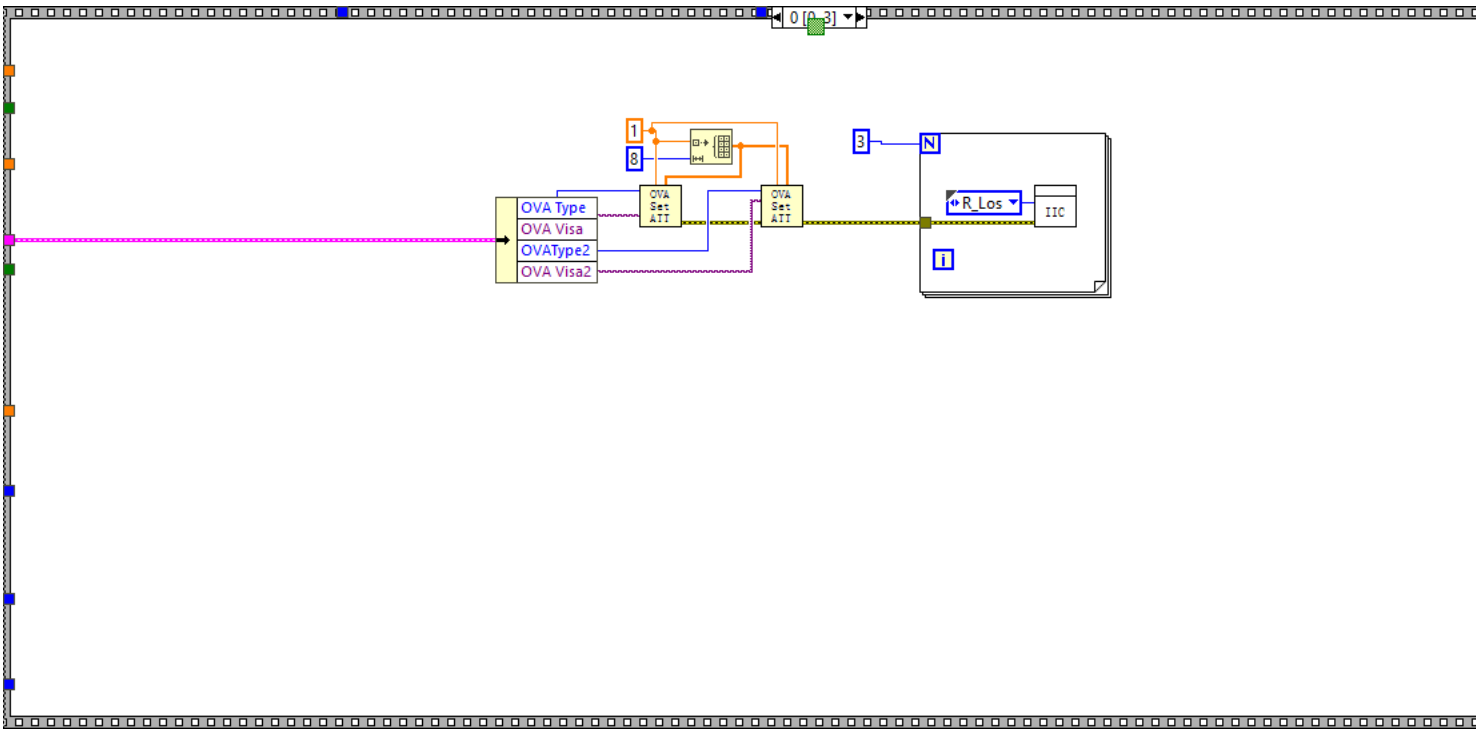

Disabled

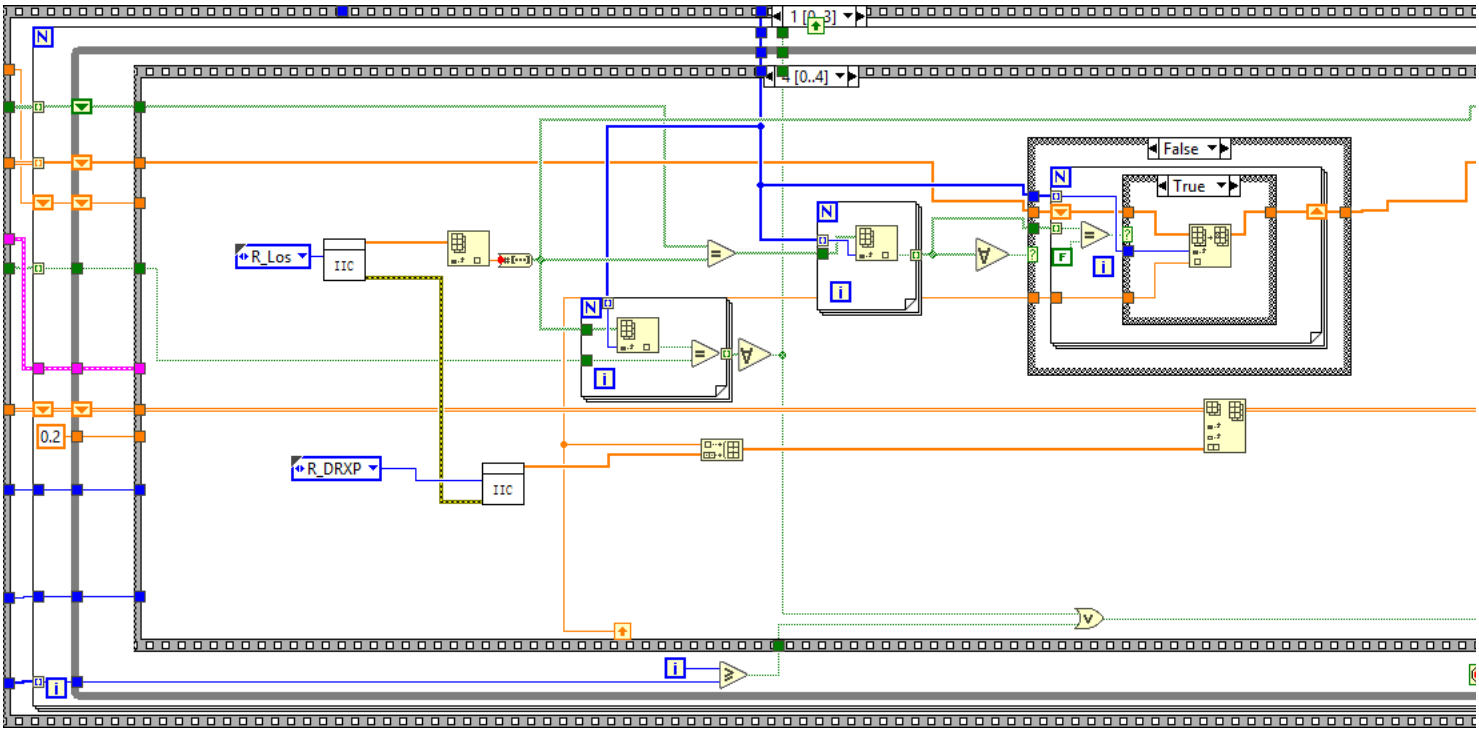

True

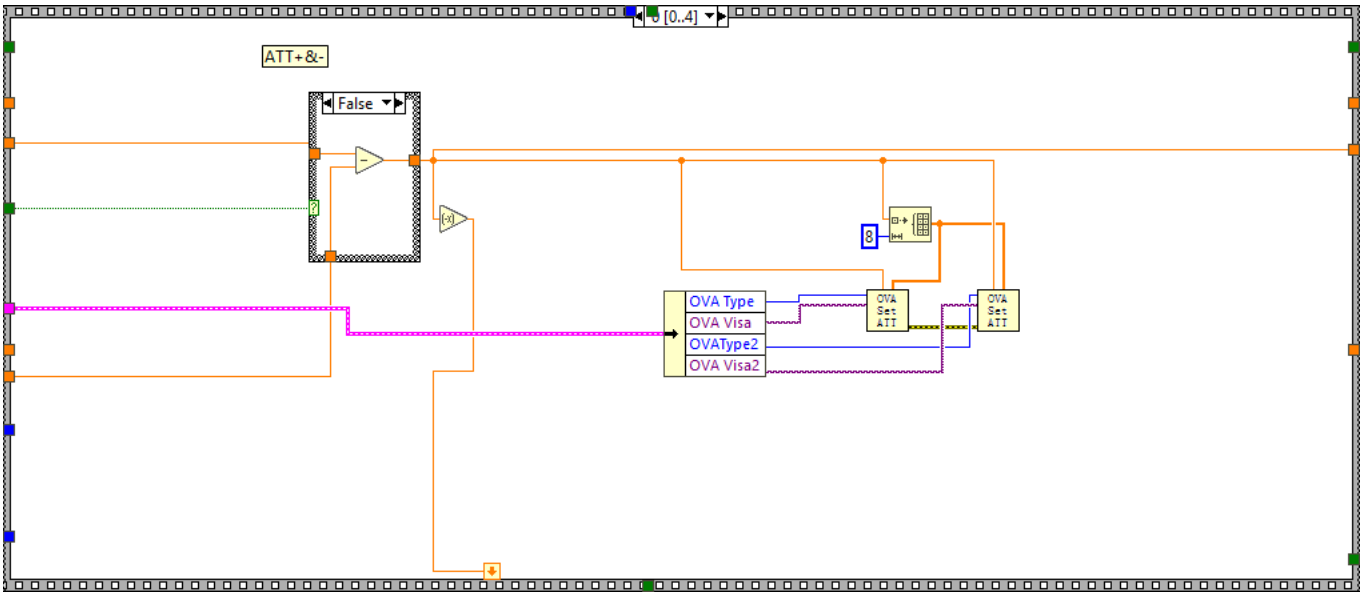

"¼Ù", Defa



"LOS"
"Single Point"
-14.8
-10.2
Pass
"LC-2*FR4"
-15.8
-9.2
RxP To Attu
4..7
OVA Set WL
OVA Set ATT
R_Los
IIC
50
OVA Type
OVA Visa
OVAType2
OVA Visa2

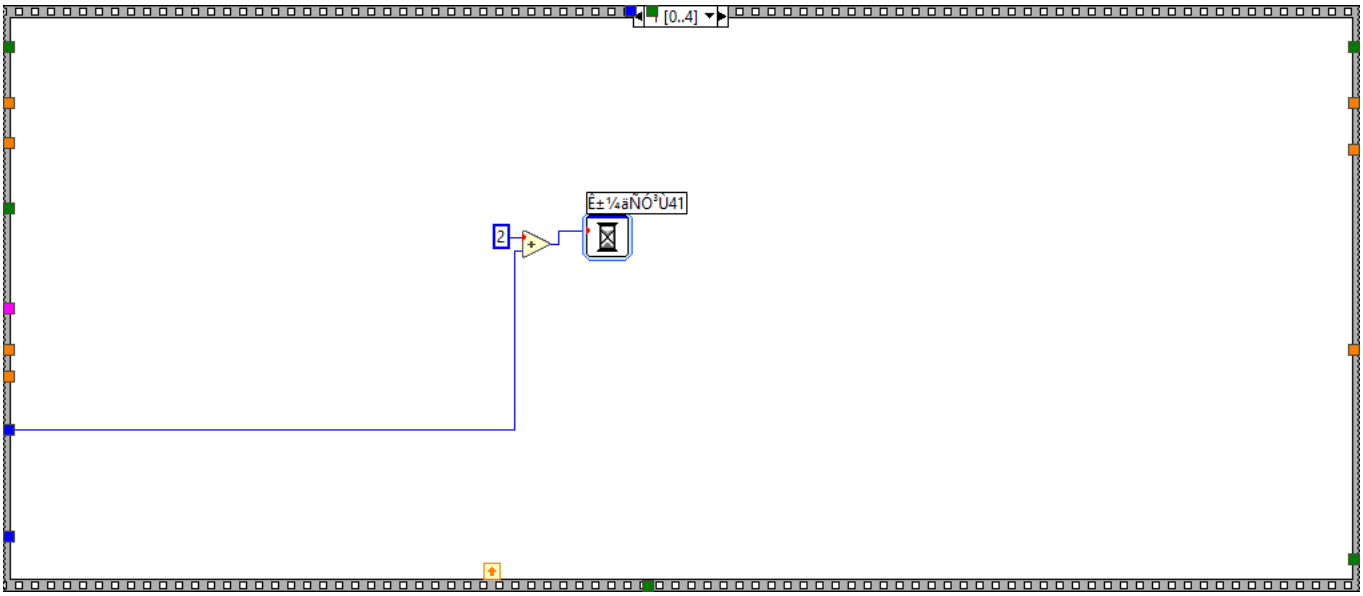

"Scan Point", Default
3 [0..3]
RxP To Attu
OVA Type
OVA Visa
OVAType2
OVA Visa2
OVA Set ATT
Att To RxP
150
200

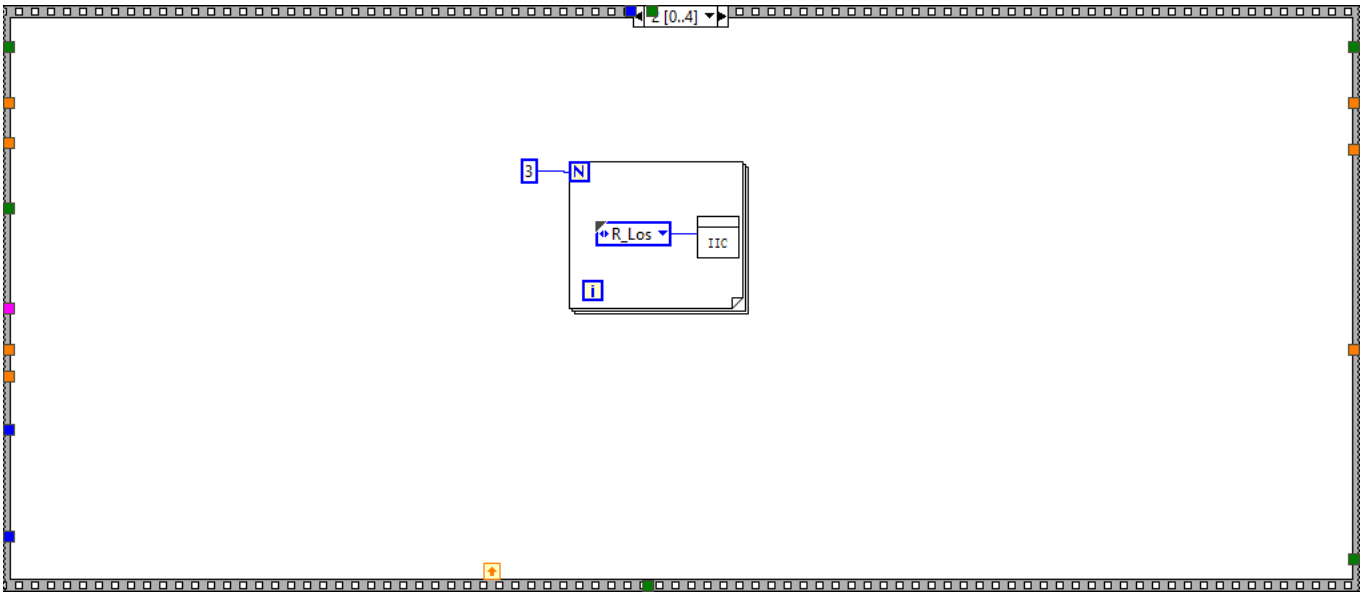

0 [0..3]
OVA Type
OVA Visa
OVAType2
OVA Visa2
OVA Set ATT
R_Los
IIC

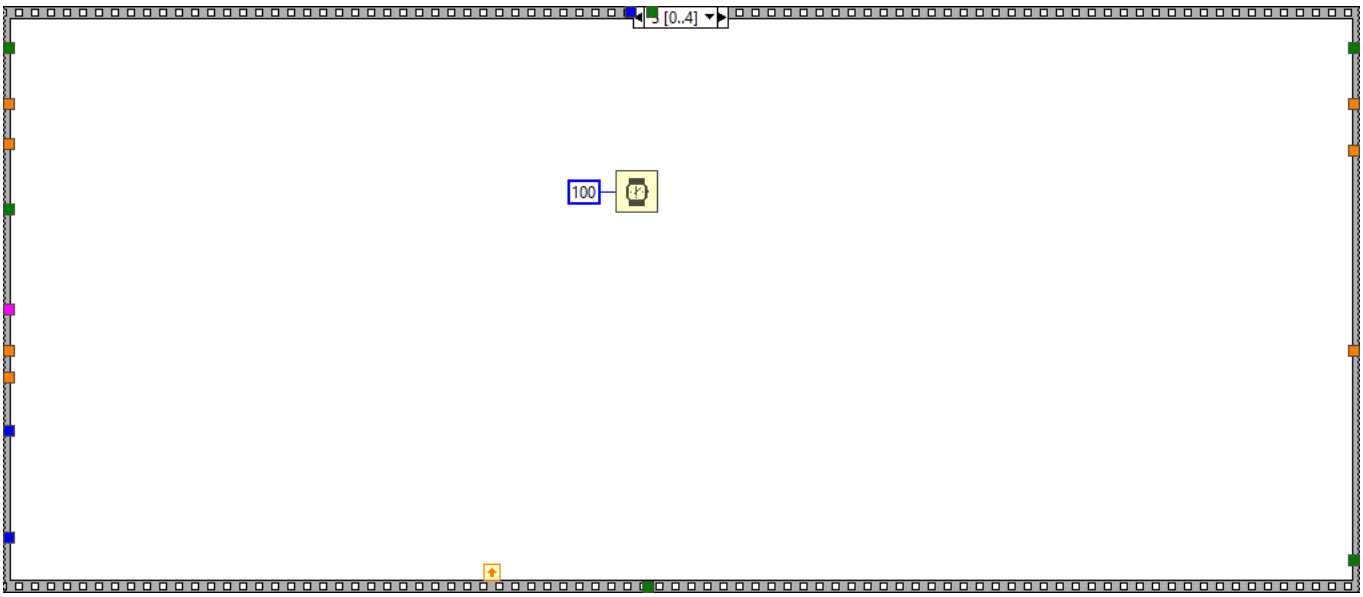

1 [0..3]
[0..4]
False
True
R_Los
IIC
0.2
R_DRXP
IIC



0 [0..4]
ATT+&-
False
8
OVA Type
OVA Visa
OVAType2
OVA Visa2
OVA Set ATT
OVA Set ATT



True

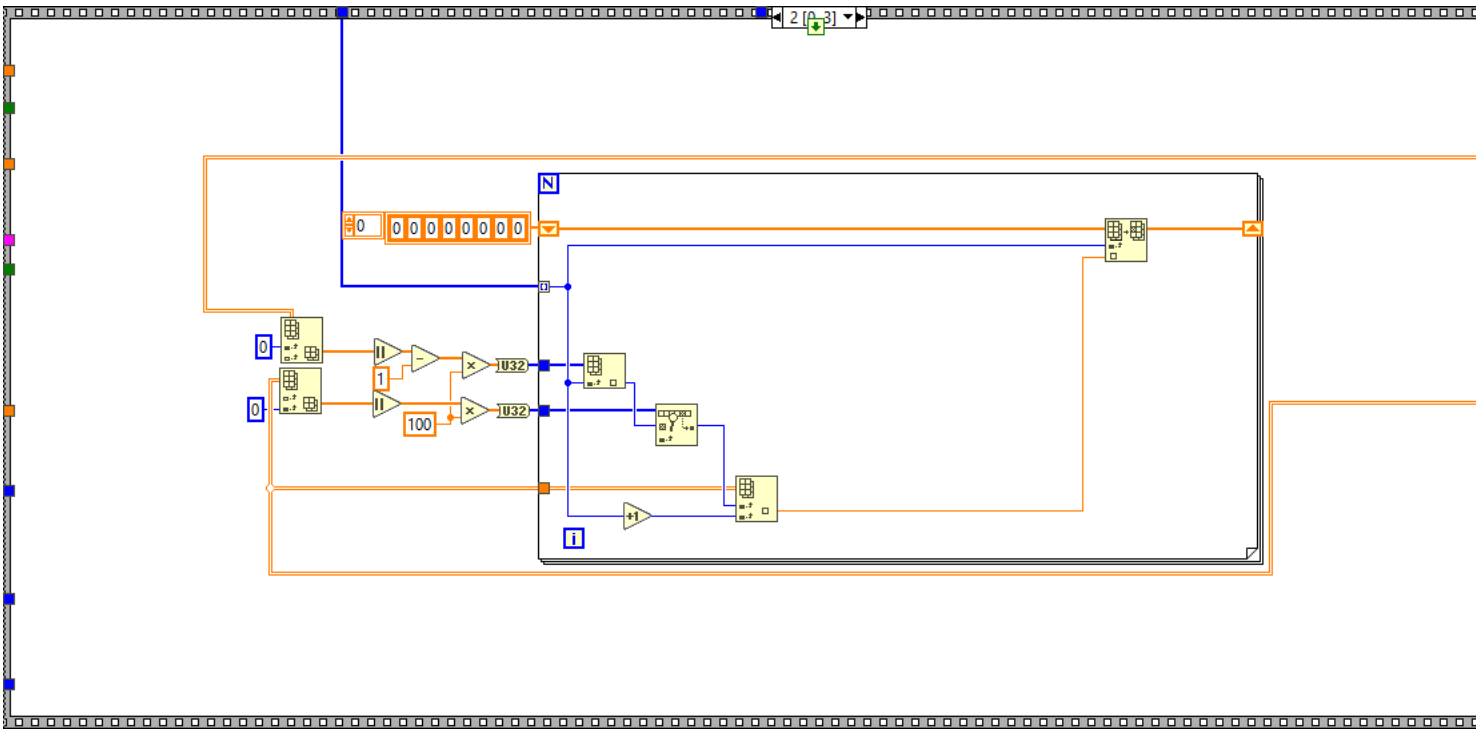

1 [0..4]
Ê±¼aÑÓ³Ù41
2

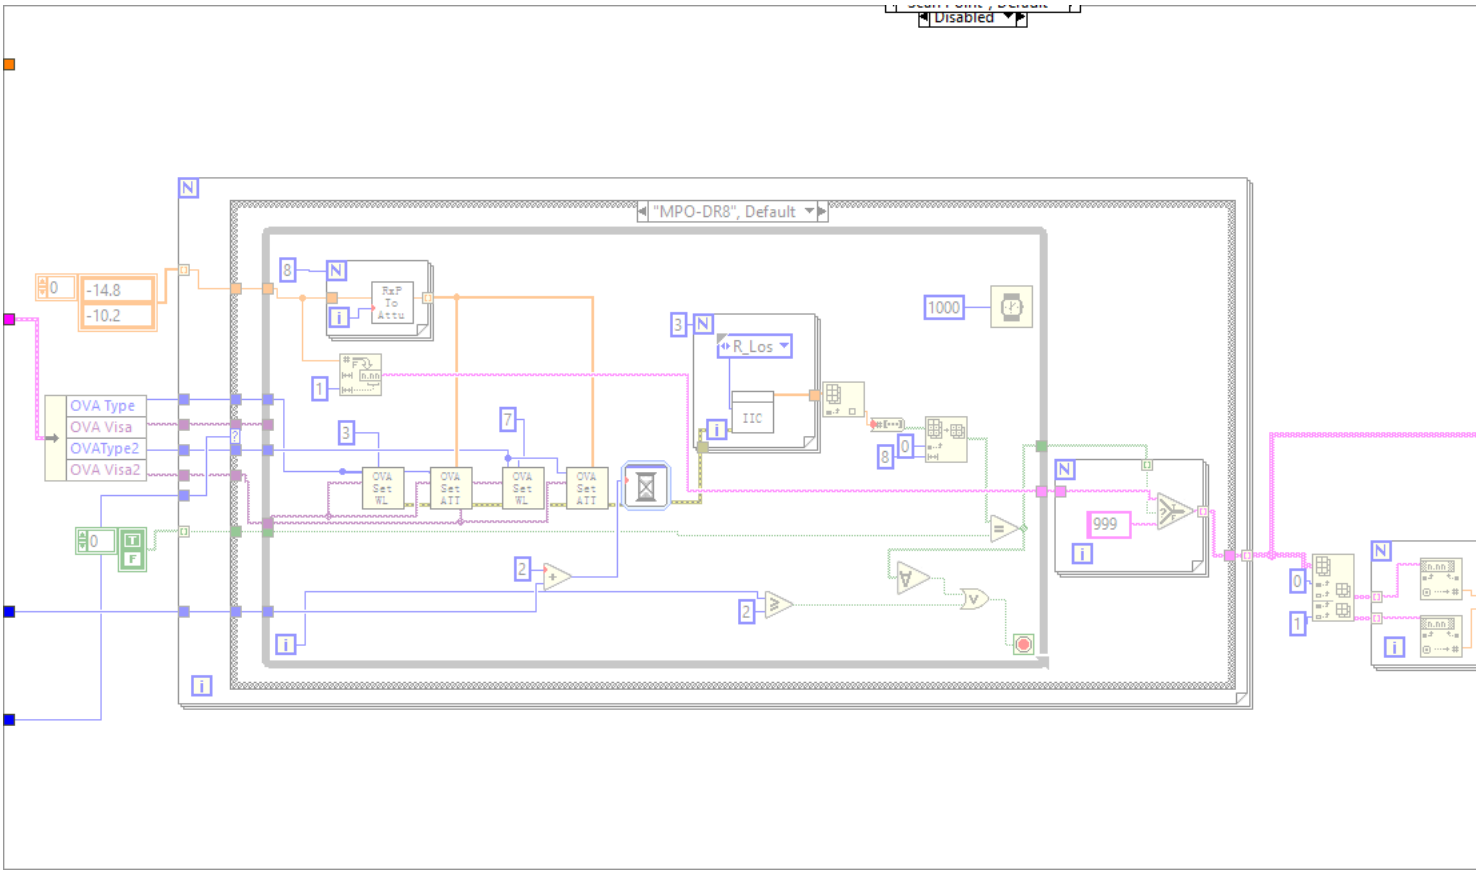

2 [0..4]
3
N
R_Los
IIC
i

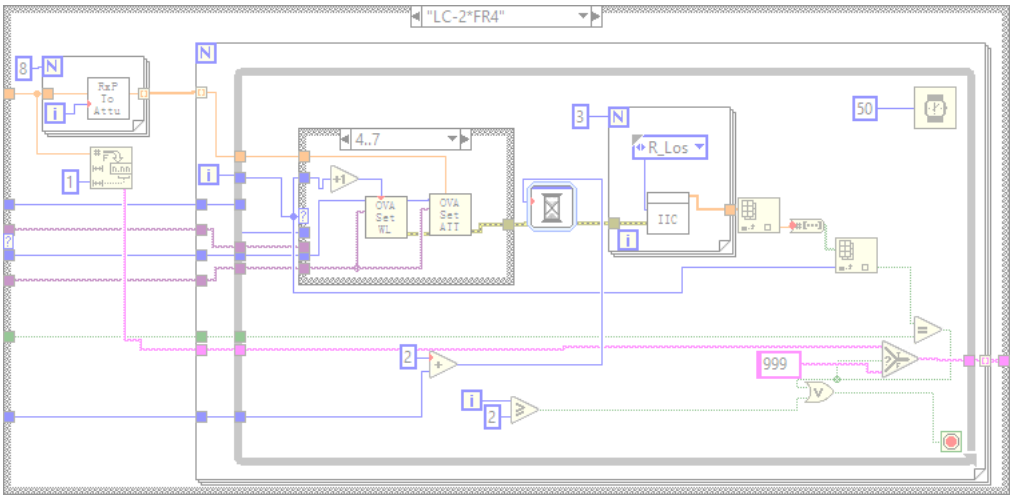

3 [0..4]
100



False



True

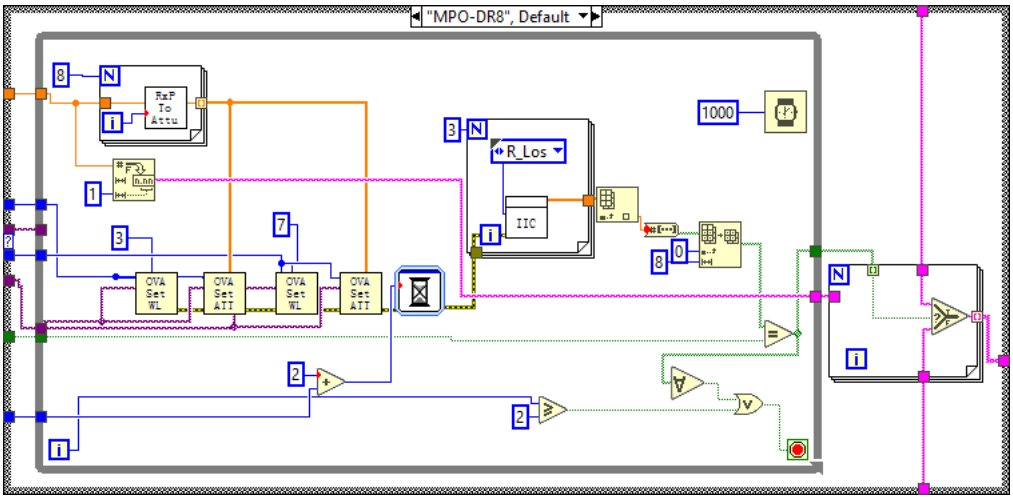

2 [0..3]
N
0
0 0 0 0 0 0 0 0
0
0
1
U32
100
U32
+1
i



Disabled
"MPO-DR8", Default
-14.8
-10.2
OVA Type
OVA Visa
OVAType2
OVA Visa2
RxP To Attu
R_Los
IIC
OVA Set WL
OVA Set ATT
1000
999

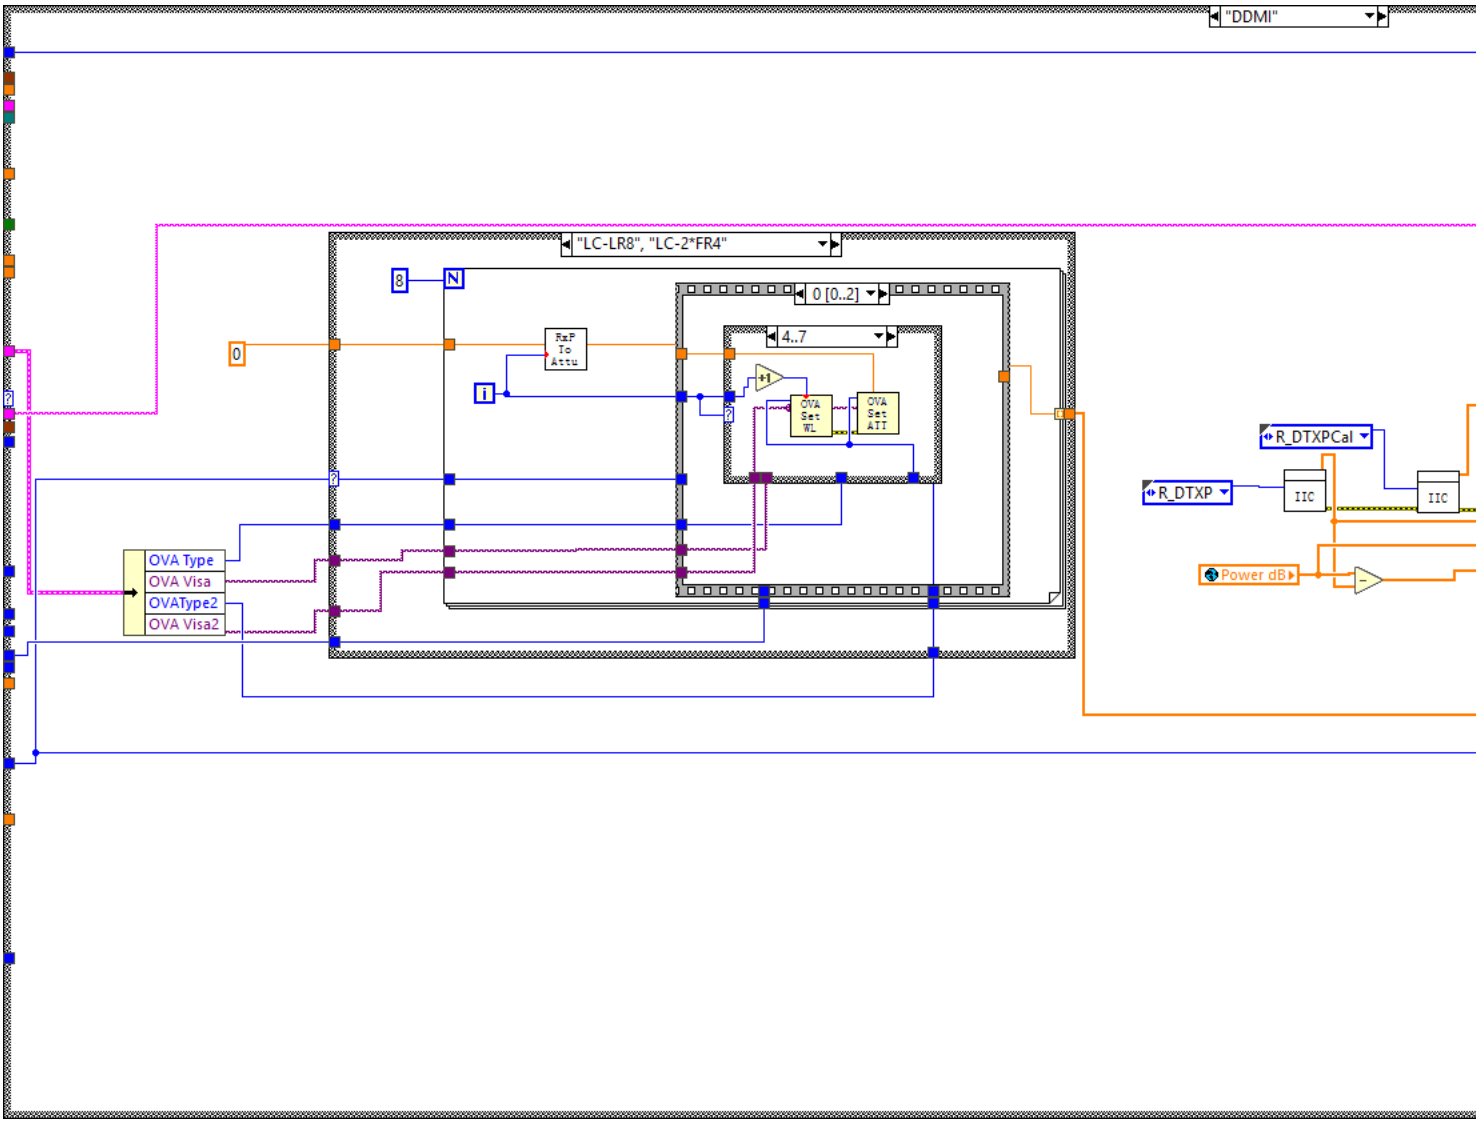

"LC-2*FR4"
RxP To Attu
4..7
R_Los
IIC
OVA Set WL
OVA Set ATT
50
999



0..3, Default
OVA Set WL
OVA Set ATT



0..3, Default
OVA Set WL
OVA Set ATT

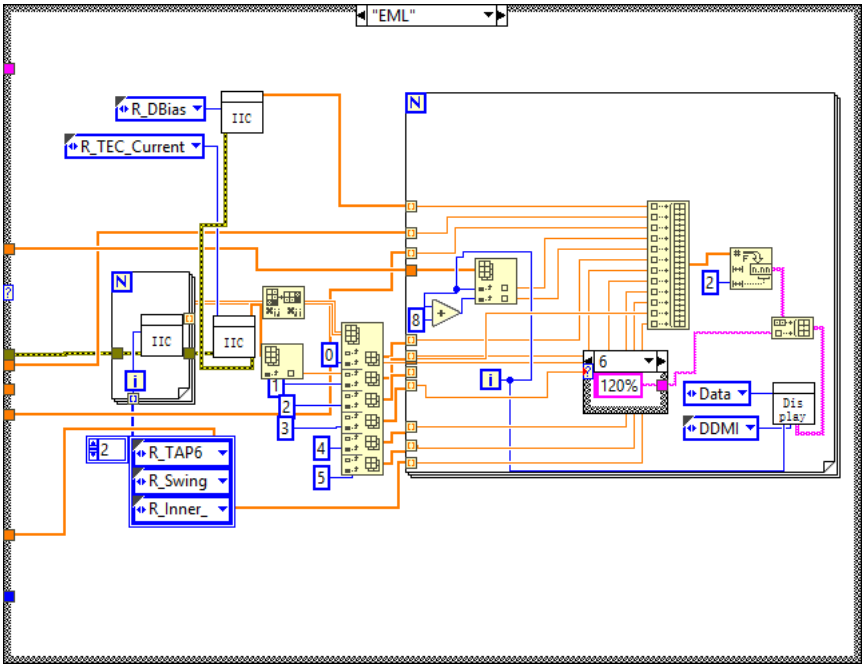

"MPO-DR8", Default
RxP To Attu
R_Los
IIC
1000
OVA Set WL
OVA Set ATT


Disabled
Pass
Pass
Fail


"DDMI"
"LC-LR8", "LC-2*FR4"
0 [0..2]
4..7
RxP To Attu
OVA Set WL
OVA Set ATT
OVA Type
OVA Visa
OVAType2
OVA Visa2
R_DTXPCal
R_DTXP
IIC
Power dB


"LC-2


"¼Ù", Defaul


"EML"
R_DBias
IIC
R_TEC_Current
N
IIC
IIC
i
0
1
2
3
4
5
8
6
120%
2
Data
DDMI
Dis play
2
R_TAP6
R_Swing
R_Inner_


0, Def
60%

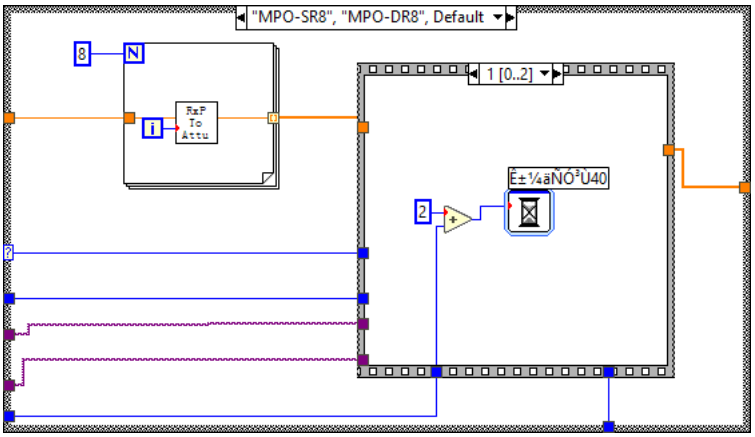

1
70%



2
80%



3
90%



4
100%



5
110%



"MPO-SR8", "MPO-DR8", Default
8
N
i
RxP To Attu
1 [0..2]
2
É±¼äNÓ³U40

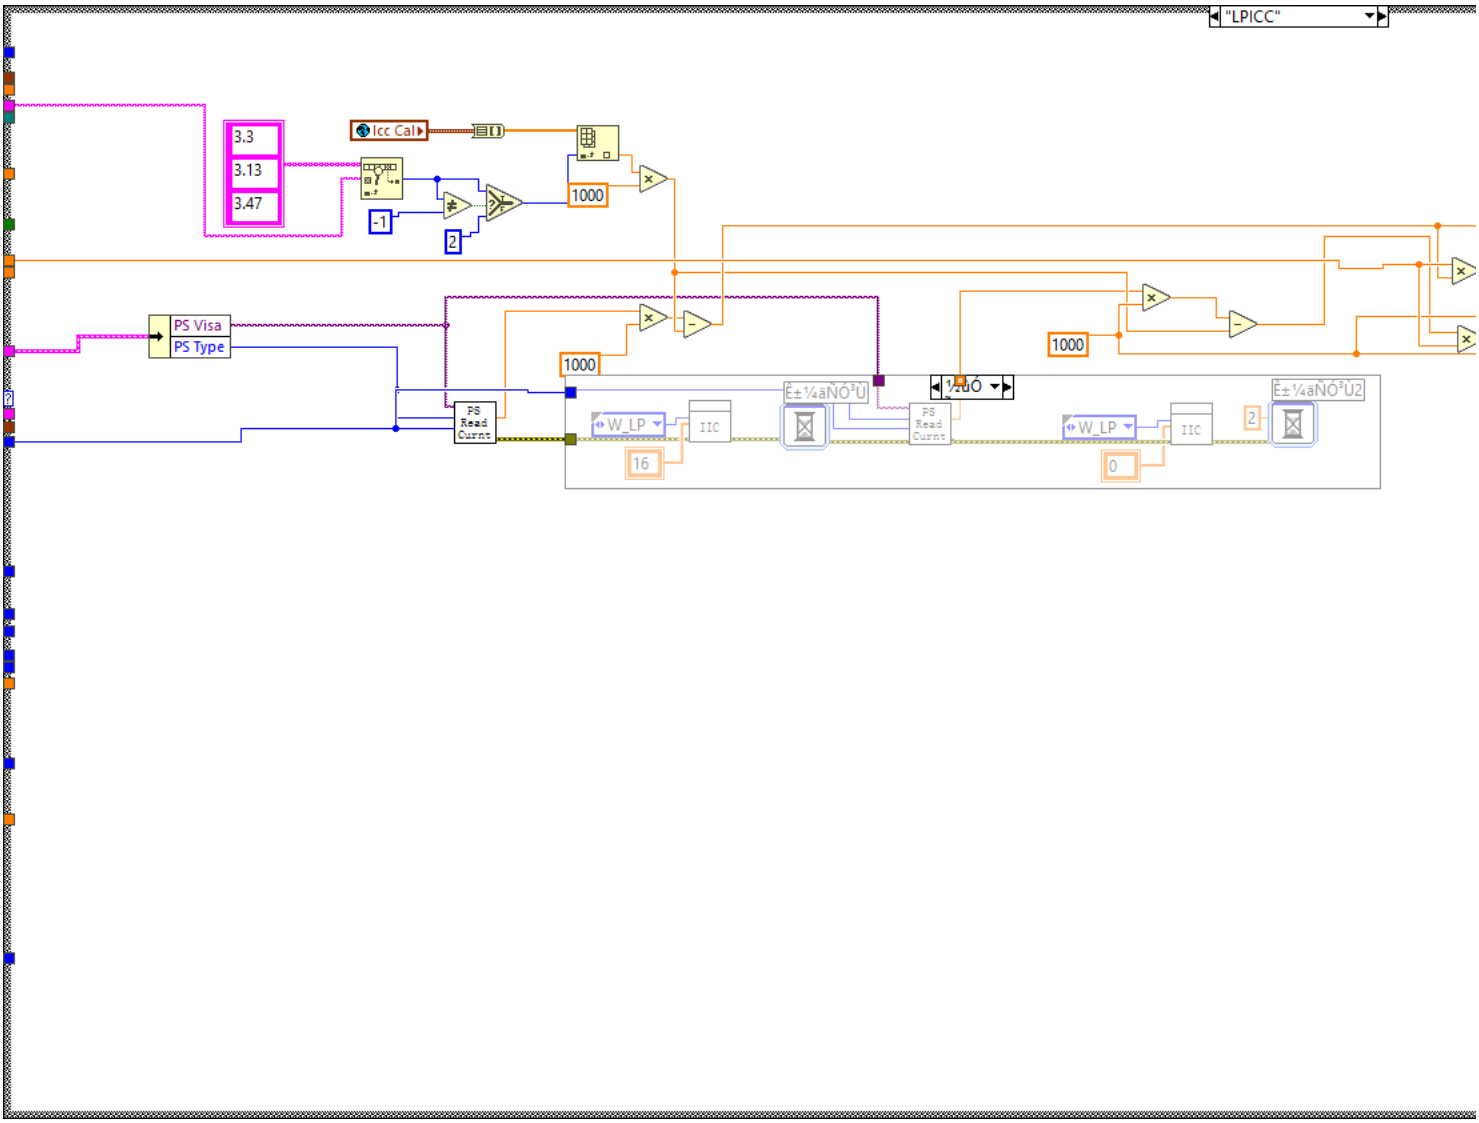

0 [0..2]
OVA Set ATT
OVA Set ATT

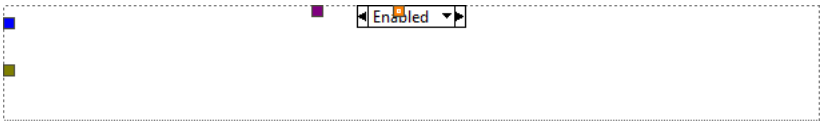

2 [0..2]
R_RSSI
IIC
8
400

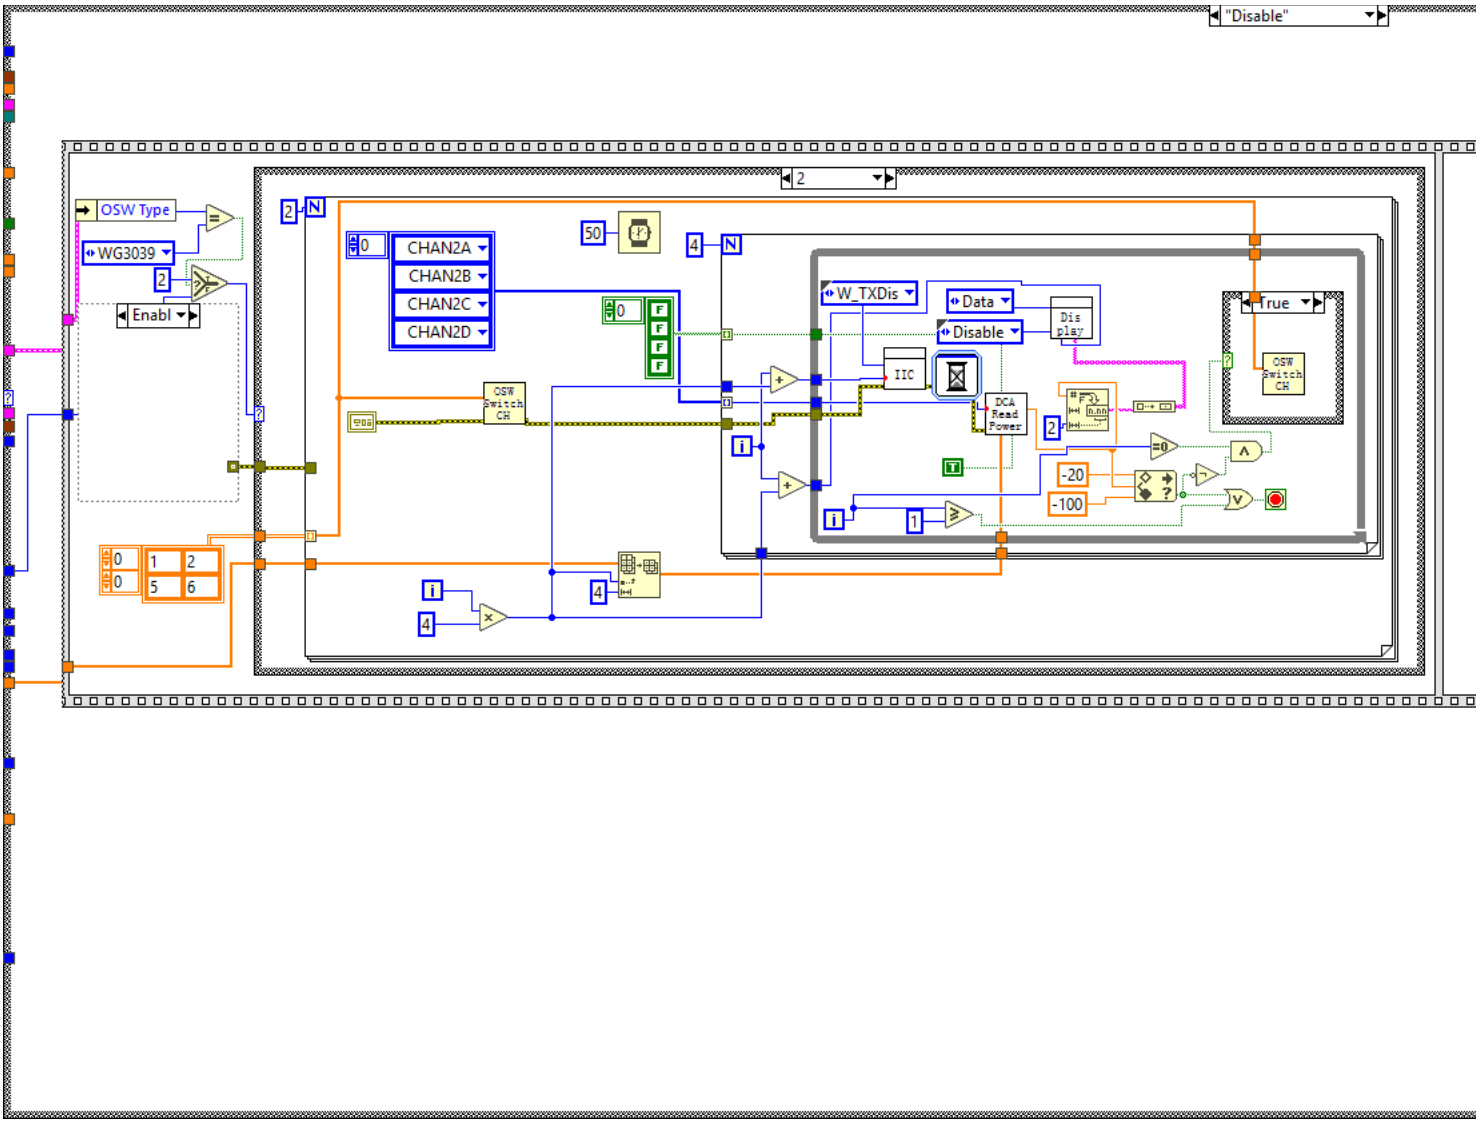

0..3, Default
+1
2
OVA Set WL
OVA Set ATT

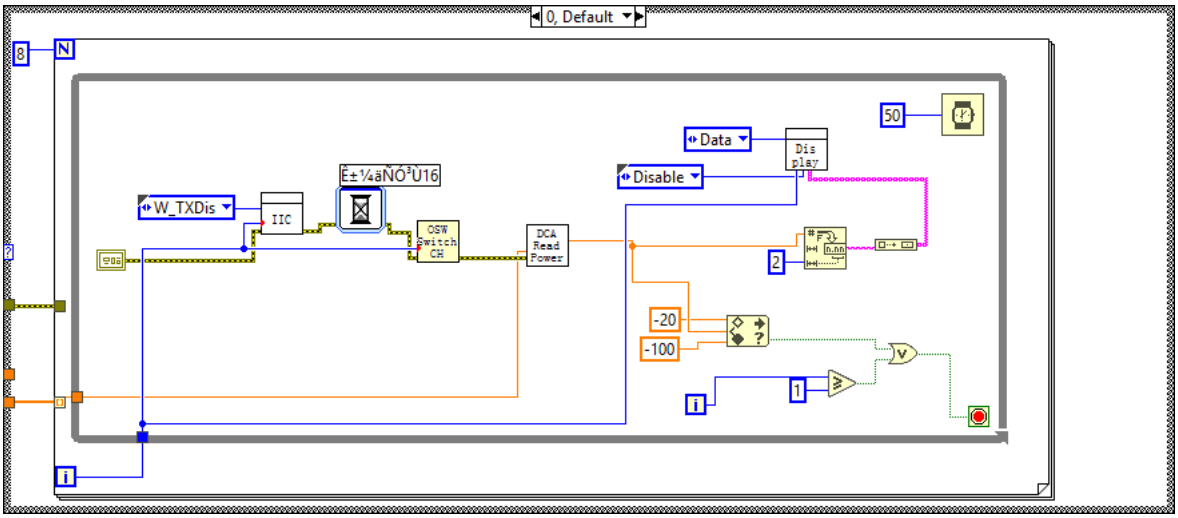

1 [0..2]
Ë±¼äÑÓ³Ù39
2
+



2 [0..2]
R_RSSI
IIC



"LPICC"
3.3
3.13
3.47
Icc Cal
1000
-1
2
PS Visa
PS Type
PS Read Currnt
1000
1000
W_LP
IIC
16
W_LP
IIC
0
2

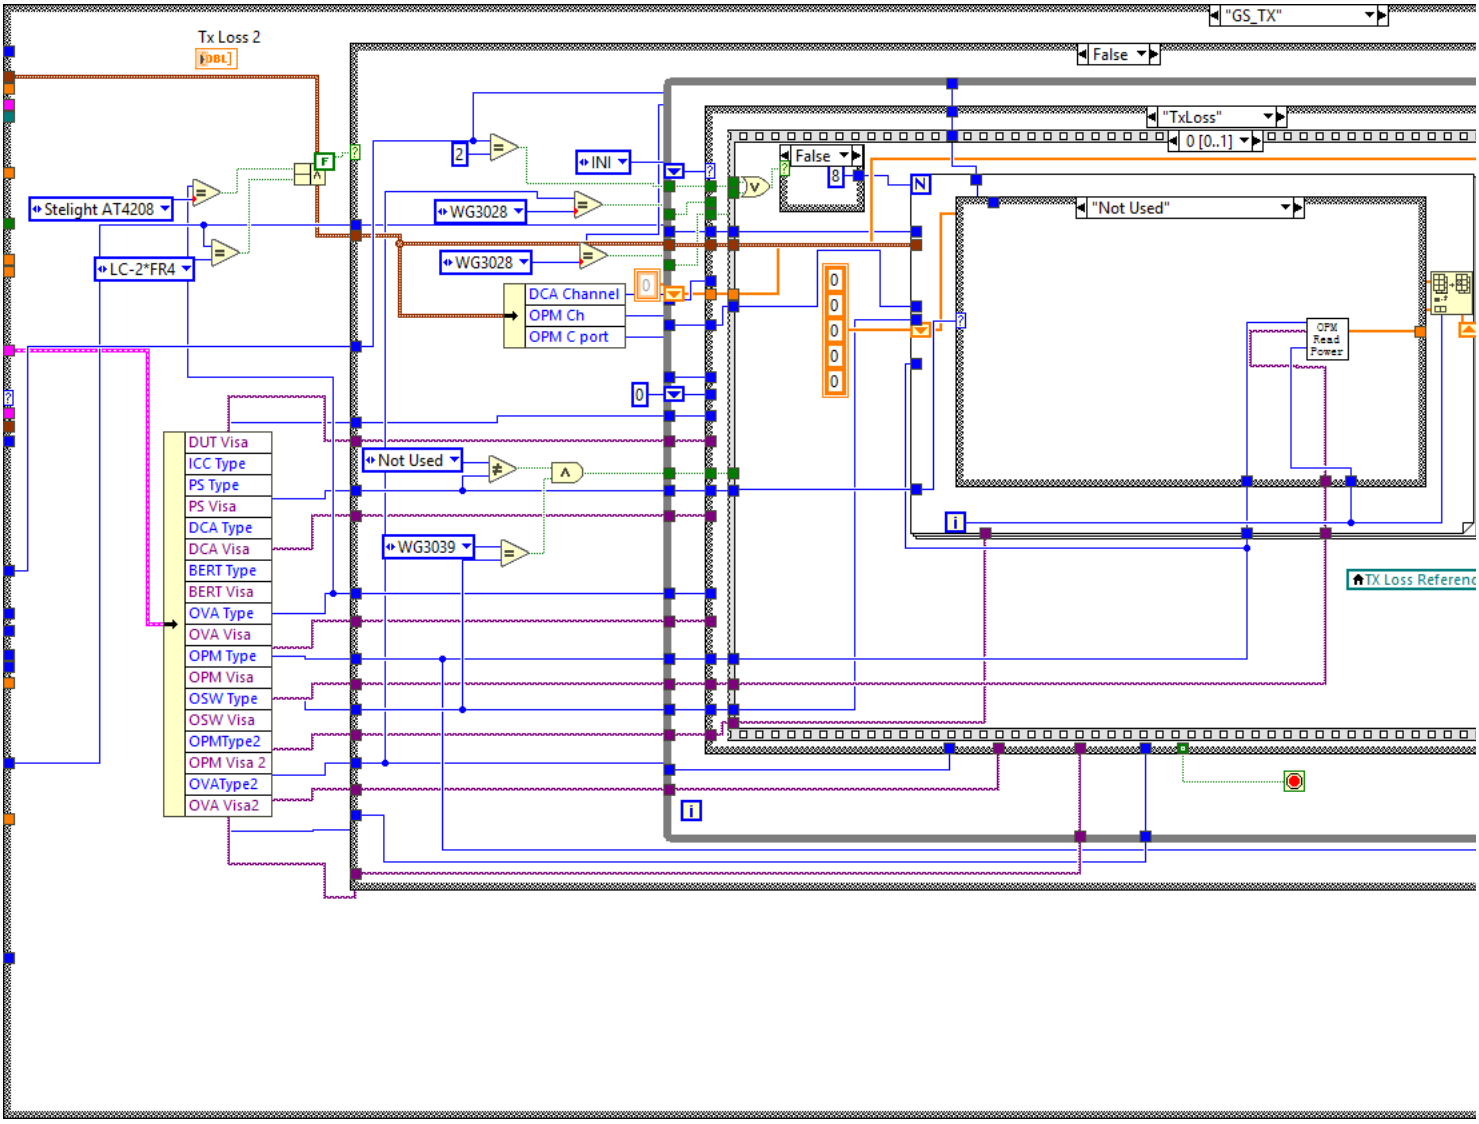

Enabled

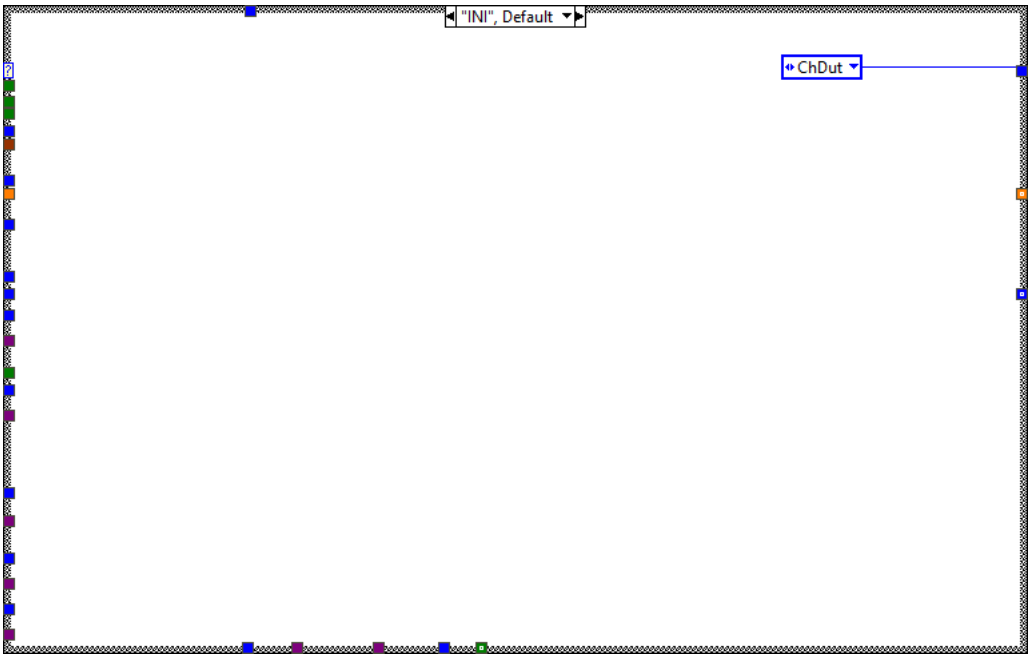

"Disable"
2
OSW Type
WG3039
Enabl
CHAN2A
CHAN2B
CHAN2C
CHAN2D
50
W_TXDis
Data
Disable
Dis play
IIC
DCA Read Power
OSW Switch CH
True
-20
-100

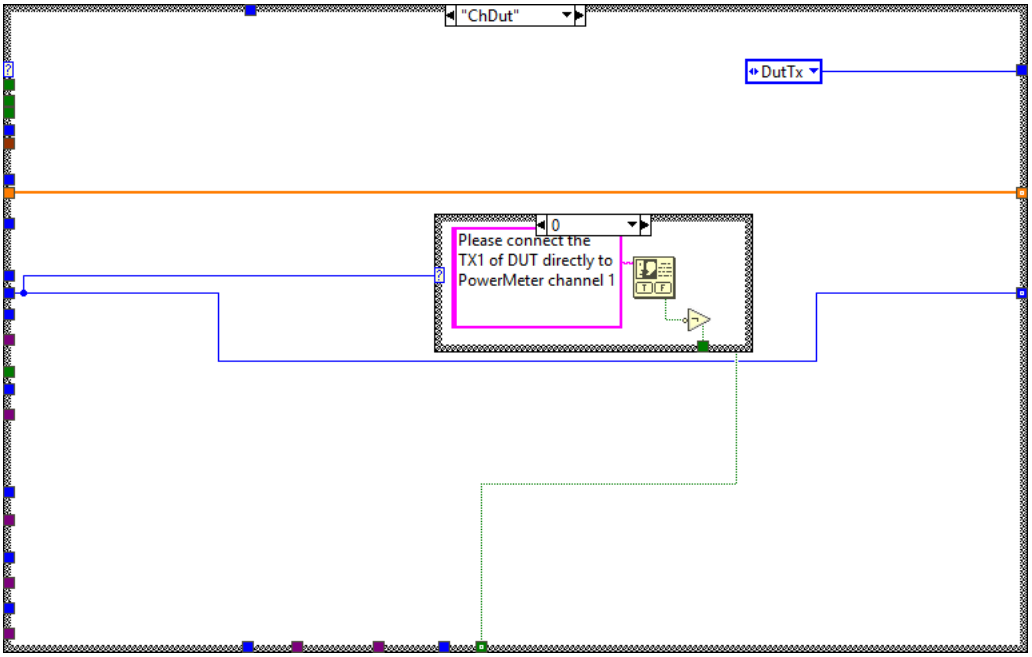

0, Default
W_TXDis
IIC
OSW Switch CH
DCA Read Power
Data
Dis play
Disable
50
-20
-100



False



Disabled
W_TXDis
IIC
ALL CLOSE

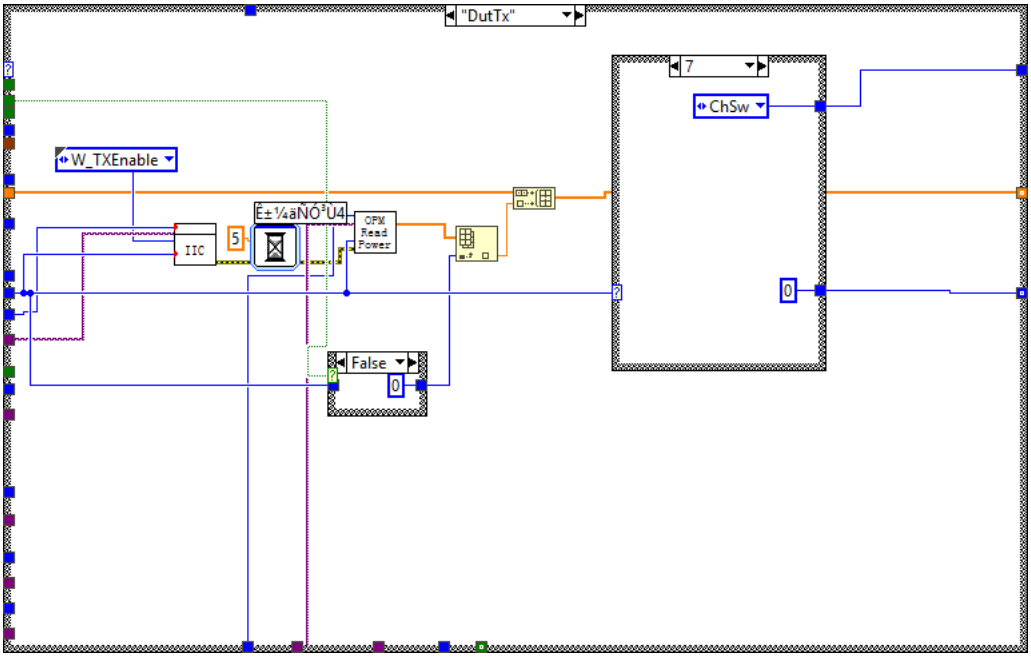

Tx Loss 2
DBL
"GS_TX"
False
"TxLoss"
0 [0..1]
False
"Not Used"
Stelight AT4208
LC-2*FR4
INI
WG3028
WG3028
DCA Channel
OPM Ch
OPM C port
Not Used
WG3039
DUT Visa
ICC Type
PS Type
PS Visa
DCA Type
DCA Visa
BERT Type
BERT Visa
OVA Type
OVA Visa
OPM Type
OPM Visa
OSW Type
OSW Visa
OPMType2
OPM Visa 2
OVAType2
OVA Visa2
OPM Read Power
TX Loss Referenc



"INI", Default
ChDut



"ChDut"
DutTx
0
Please connect the
TX1 of DUT directly to
PowerMeter channel 1

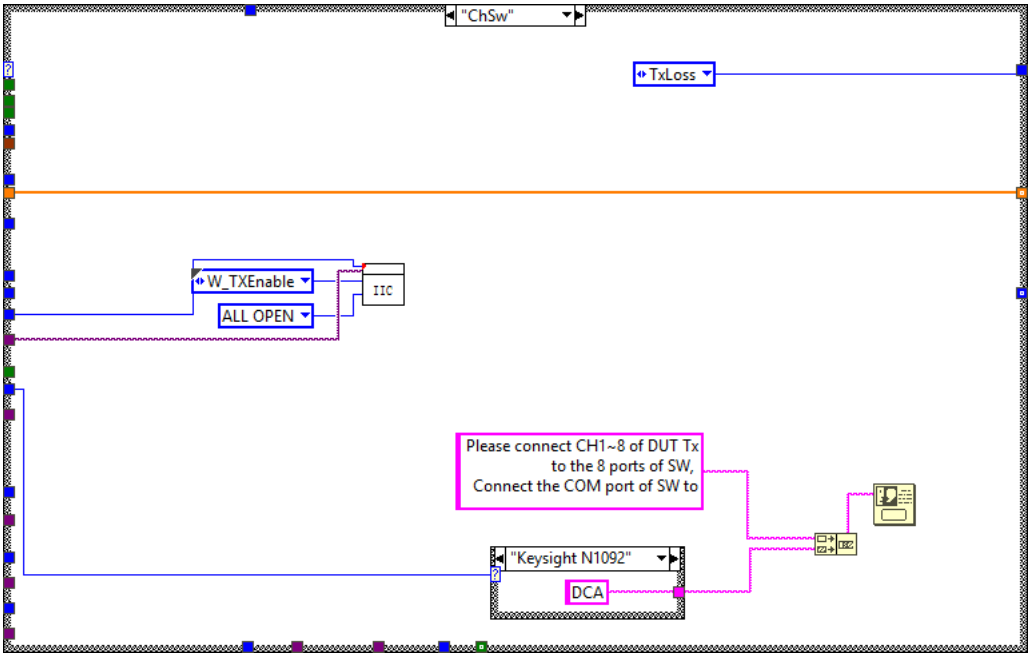

4
Please connect the
TX2 of DUT directly to
PowerMeter channel 1



1, Default
F


"DutTx"
7
ChSw
W_TXEnable
IIC
5
OPM Read Power
0
False
0

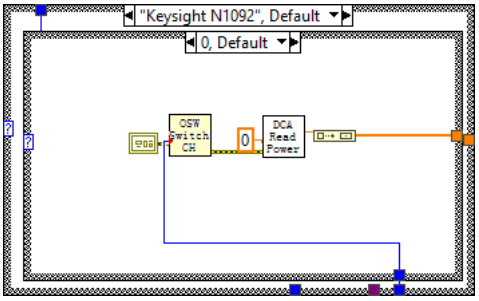

Default
ChDut
+1

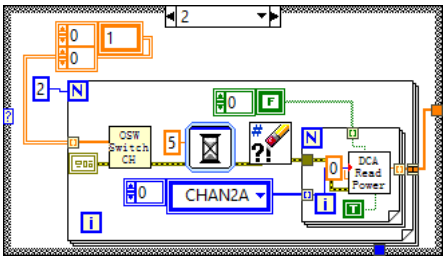

True

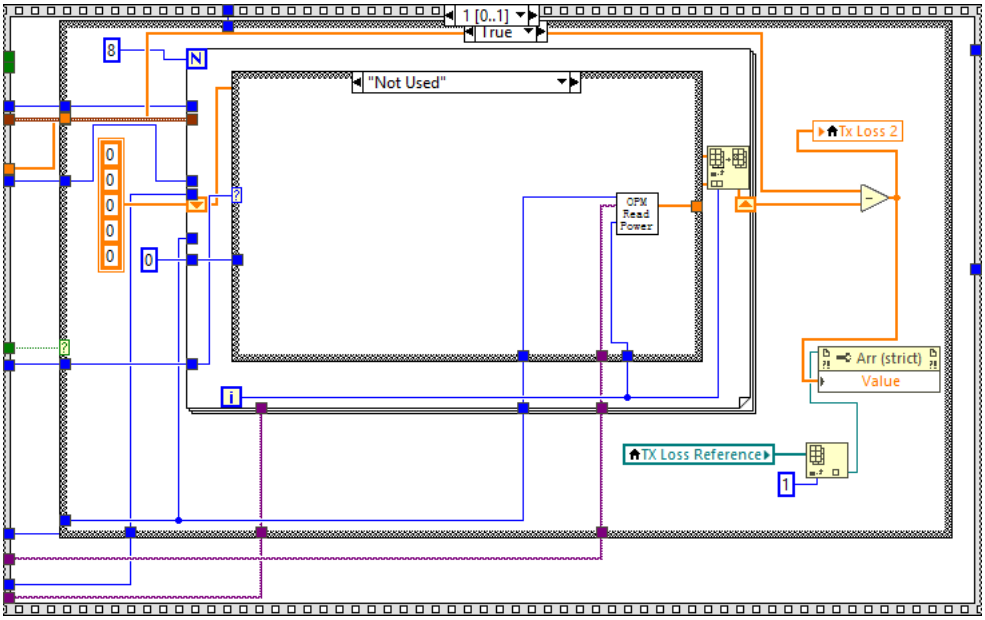

"ChSw"
TxLoss
W_TXEnable
ALL OPEN
IIC
Please connect CH1~8 of DUT Tx
to the 8 ports of SW,
Connect the COM port of SW to
"Keysight N1092"
DCA

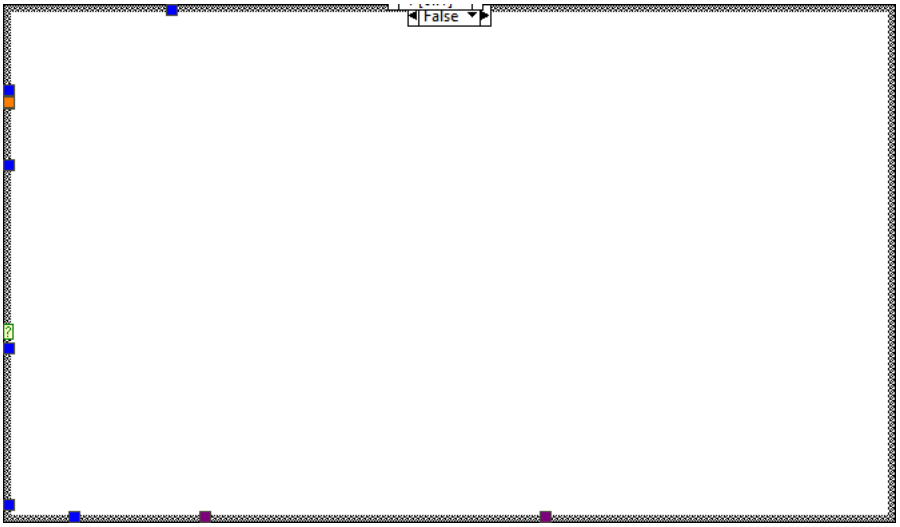

"Not Used", Default
PowerMeter

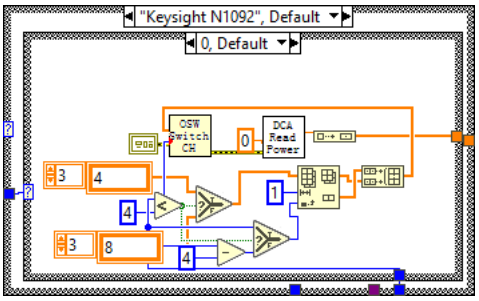

True
1

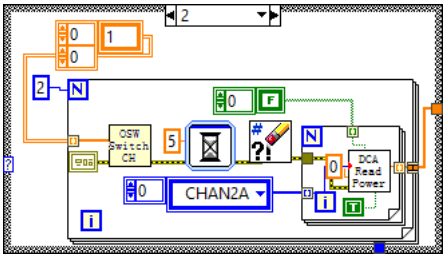

"Keysight N1092", Default
0, Default
OSW Switch CH
0
DCA Read Power

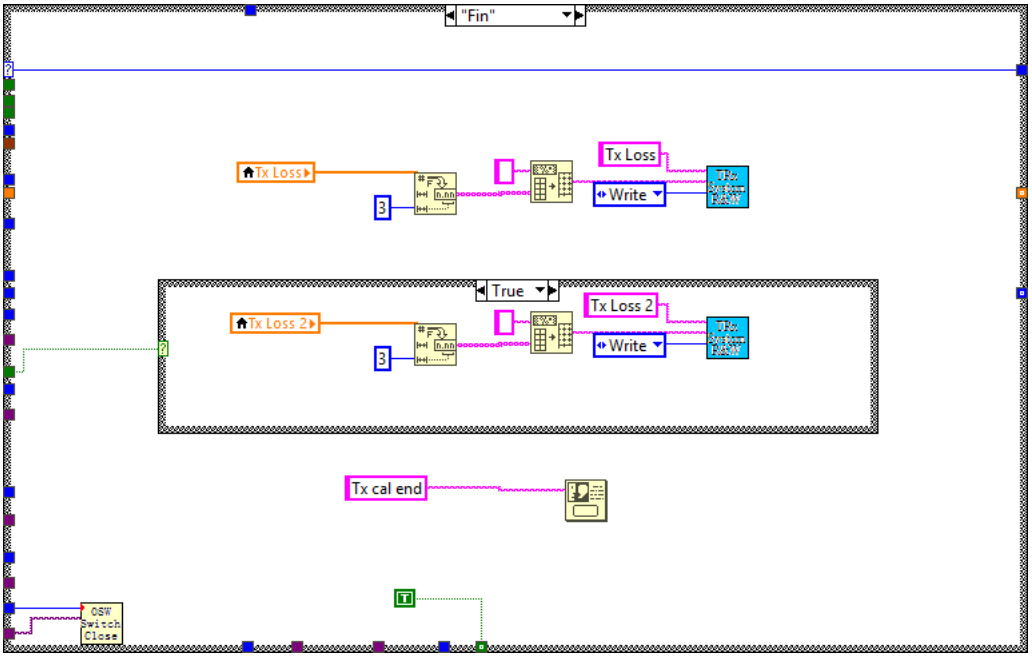

2
0
1
2
N
0
F
OSW Switch CH
5
#
?
N
0
DCA Read Power
0
CHAN2A
i
T

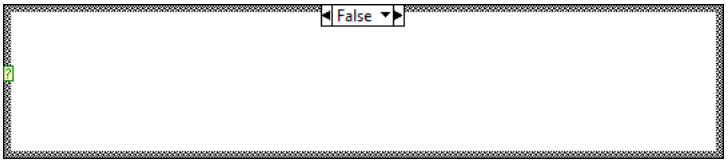

1 [0..1]
True
8
N
"Not Used"
0
0
0
0
0
0
i
OPM Read Power
Tx Loss 2
Arr (strict)
Value
TX Loss Reference
1

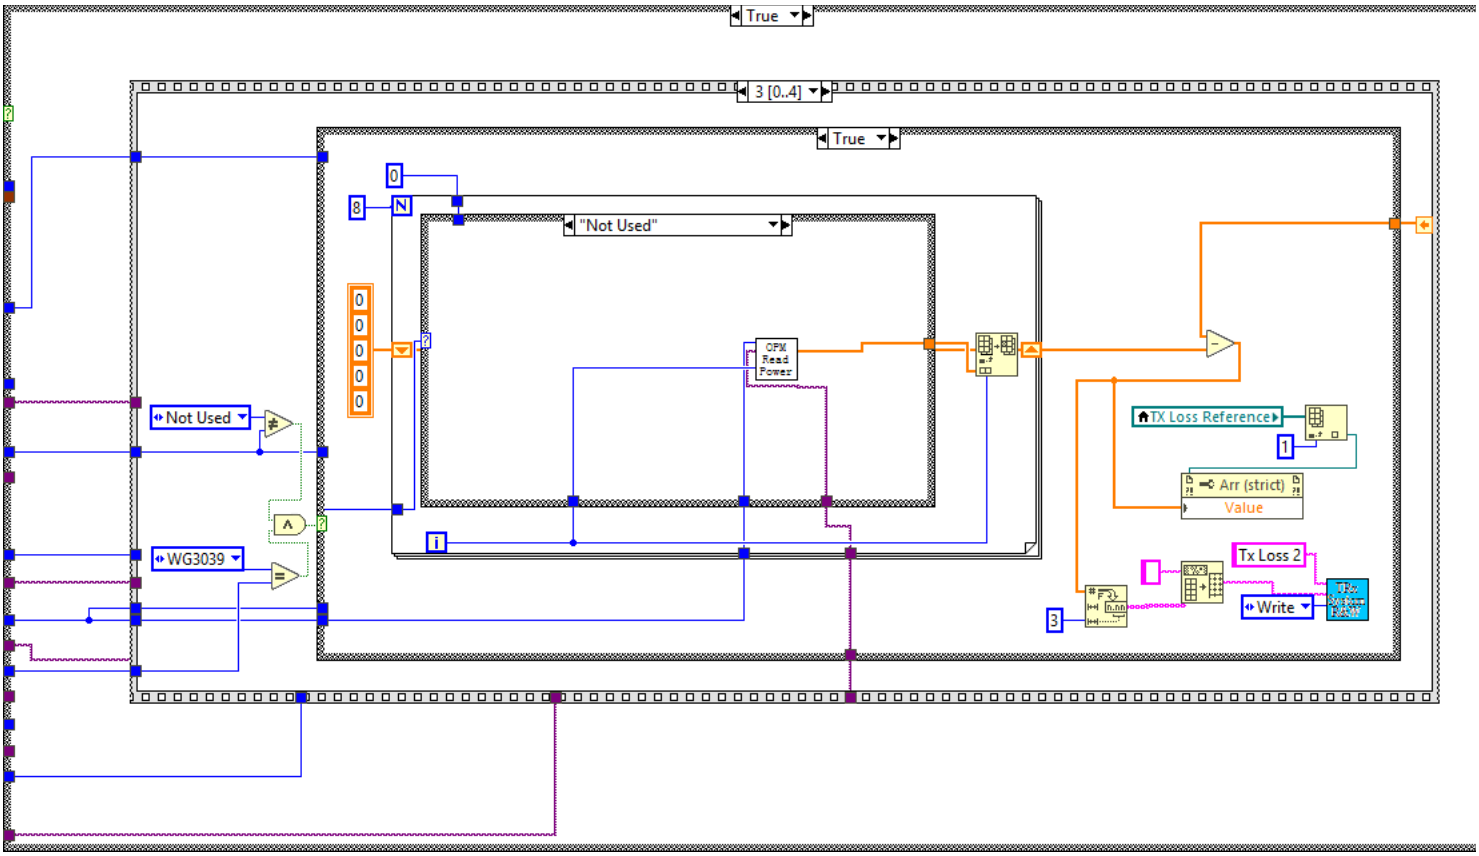

False

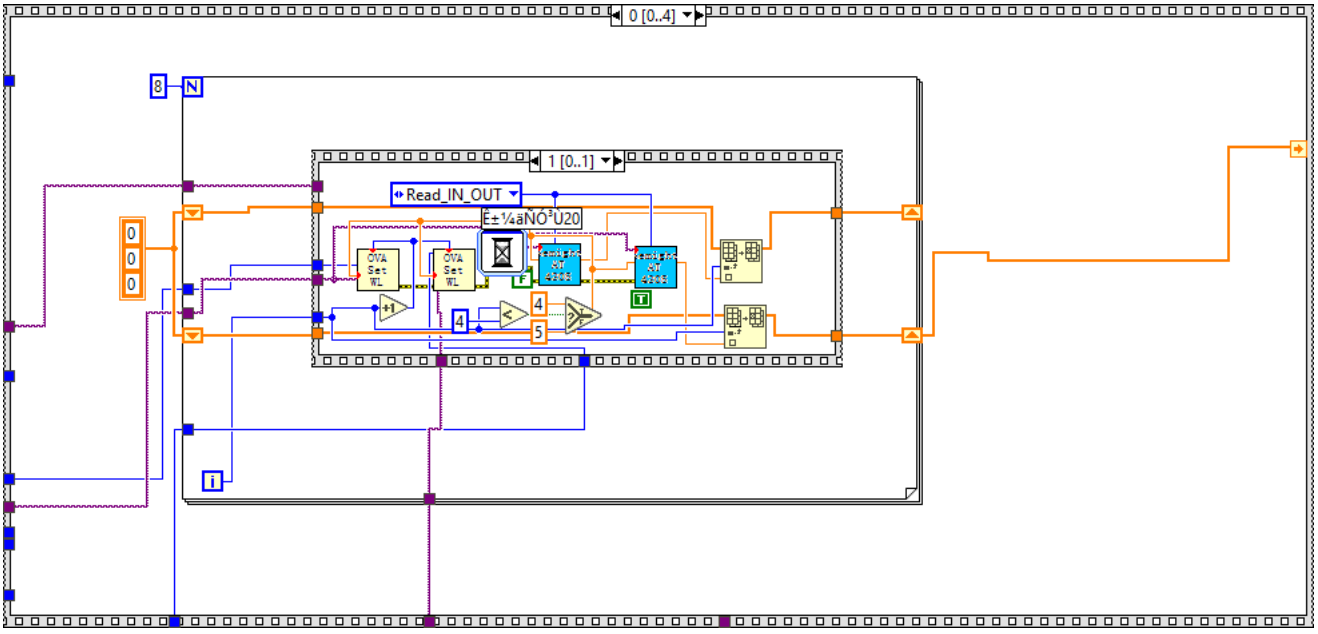

"Keysight N1092", Default
0, Default
OSW Switch CH
DCA Read Power

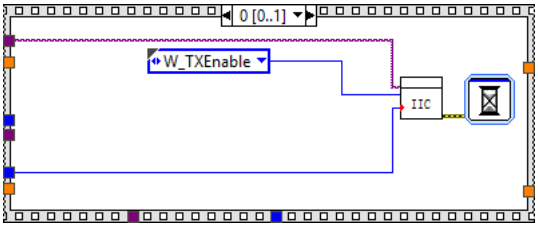

2
OSW Switch CH
DCA Read Power
CHAN2A

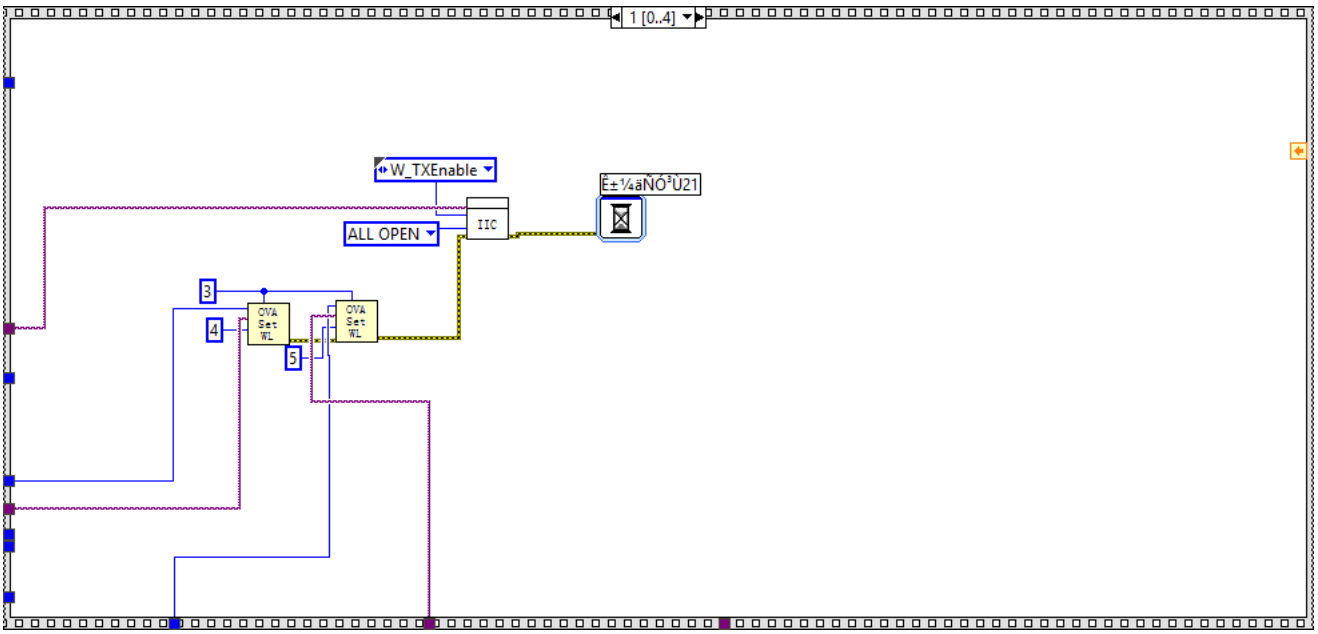

"Fin"
Tx Loss
Write
True
Tx Loss 2
Write
Tx cal end
OSW Switch Close

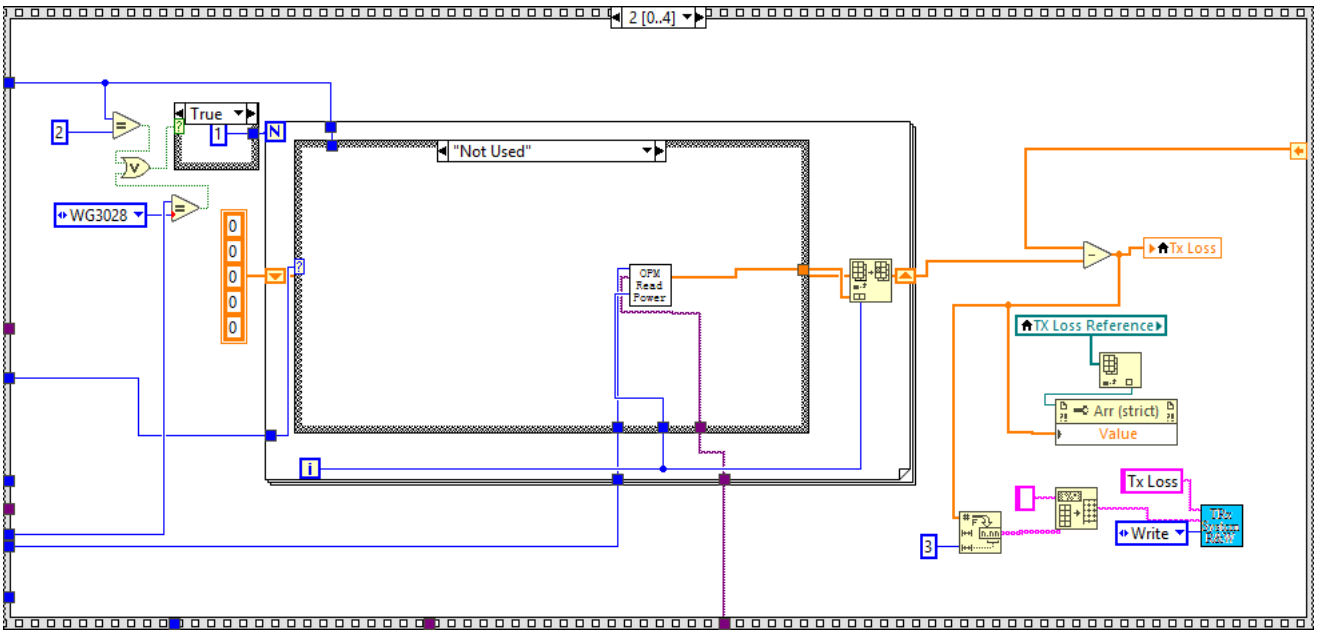

False

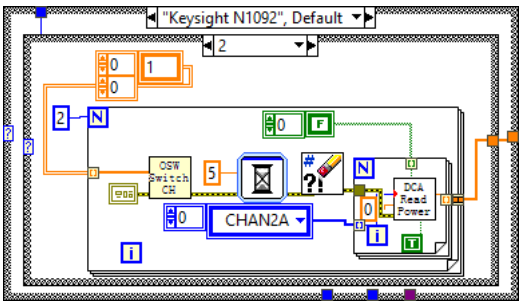

True
3 [0..4]
True
"Not Used"
OPM Read Power
Not Used
WG3039
TX Loss Reference
Arr (strict)
Value
Tx Loss 2
Write

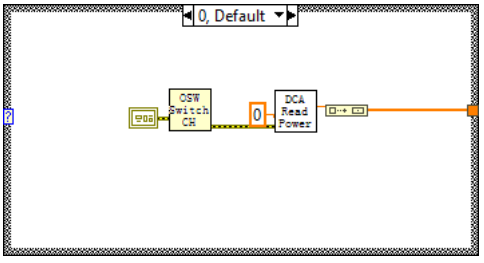

0 [0..4]
1 [0..1]
Read_IN_OUT


0 [0..1]
W_TXEnable
IIC

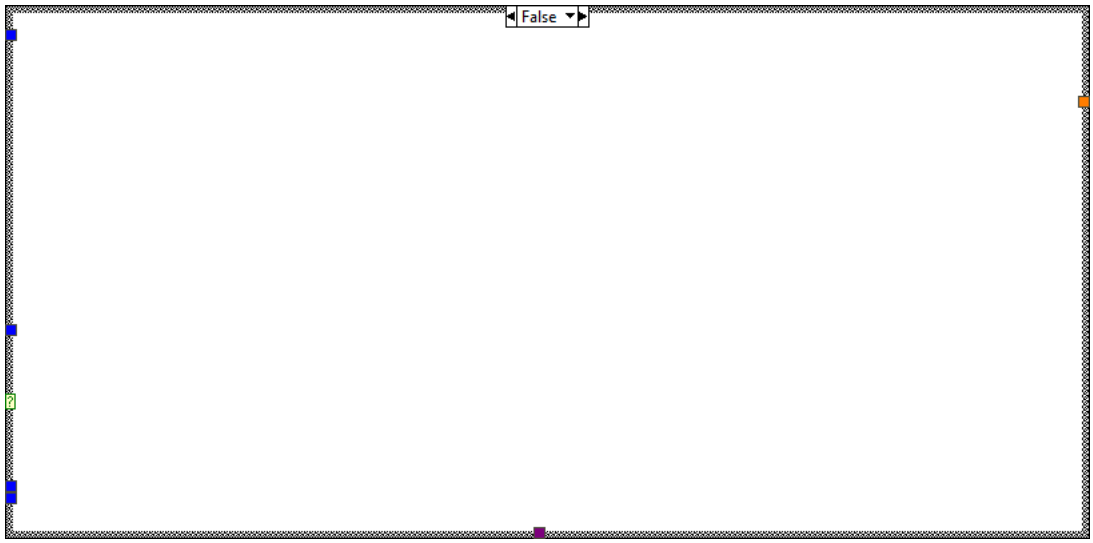

1 [0..4]
W_TXEnable
ALL OPEN
IIC
OVA Set WL
OVA Set WL

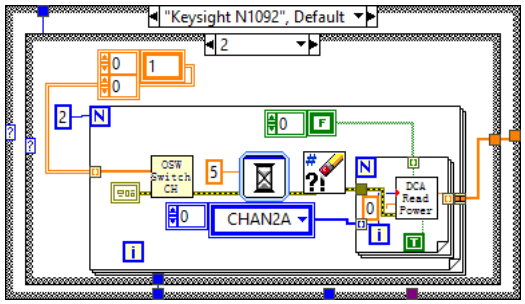

2 [0..4]
True
"Not Used"
WG3028
OPM Read Power
Tx Loss
TX Loss Reference
Arr (strict)
Value
Write

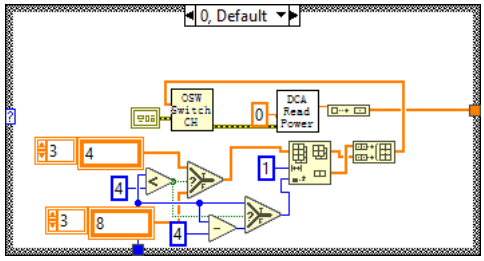

"Keysight N1092", Default
OSW Switch CH
DCA Read Power
CHAN2A

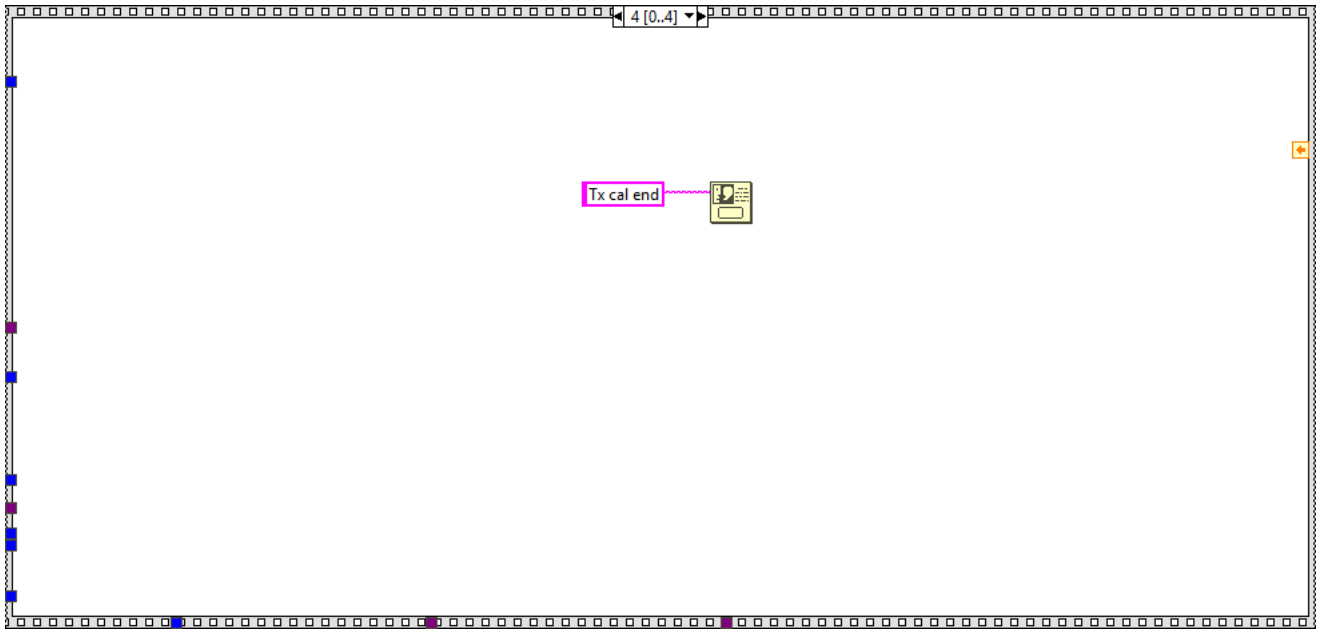

0, Default
OSW Switch CH
DCA Read Power

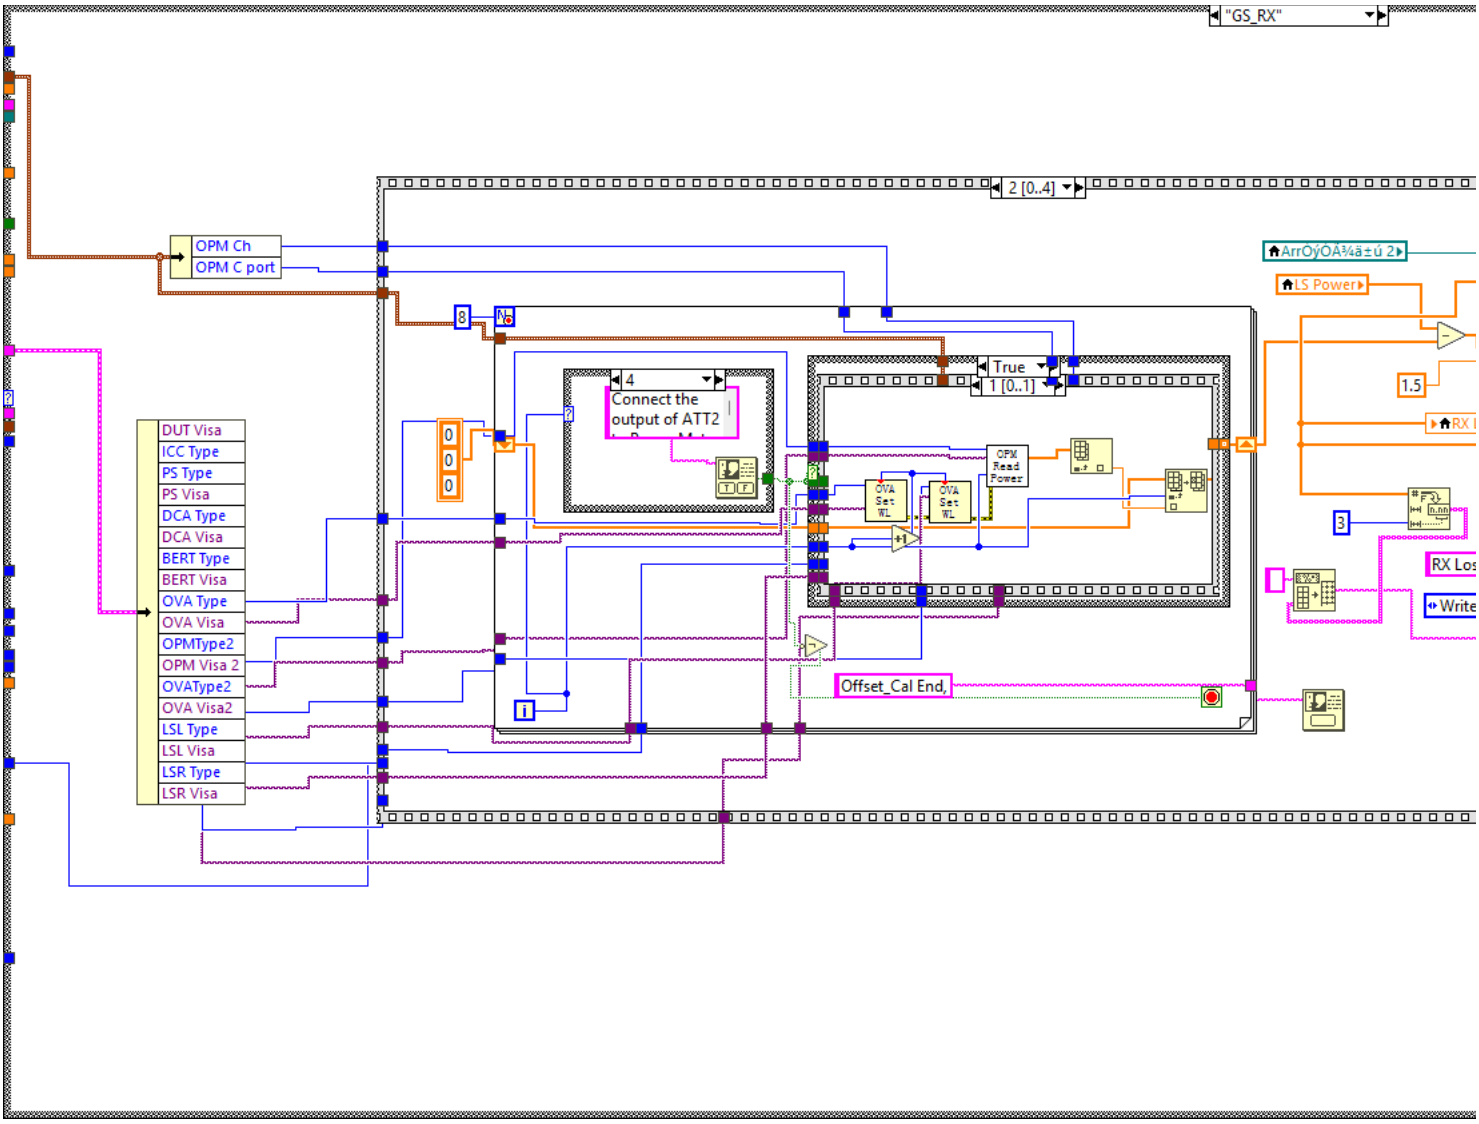

False

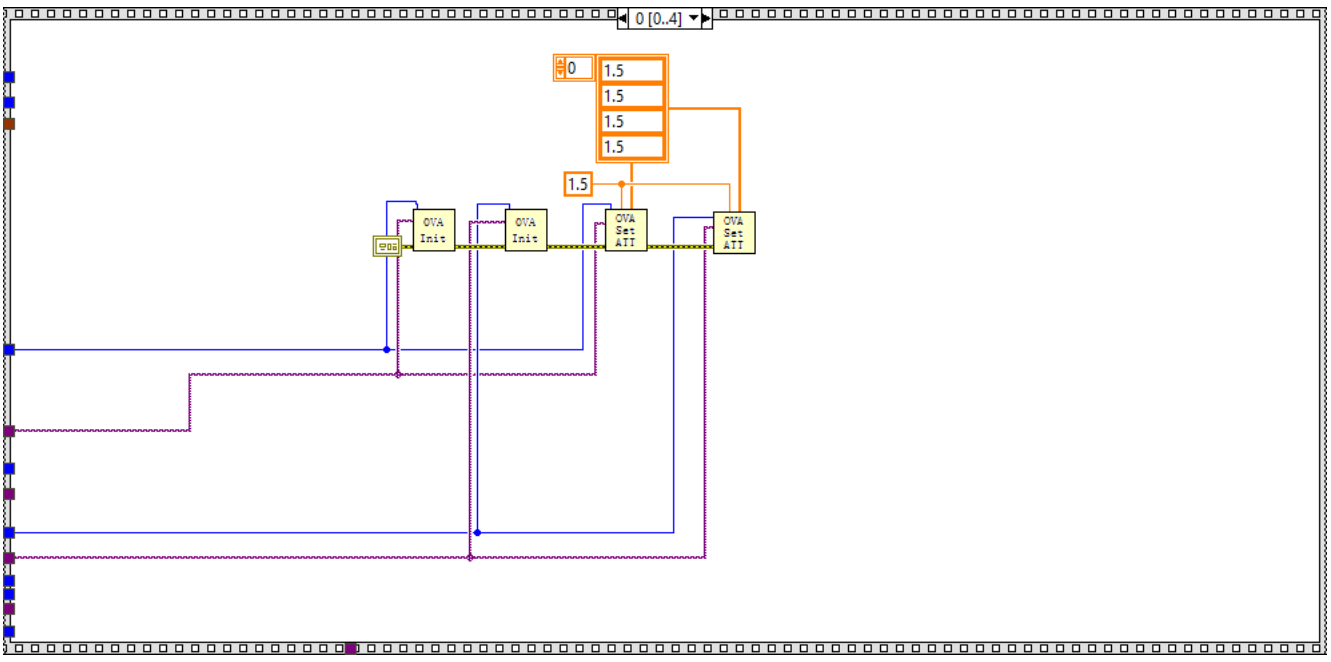

False

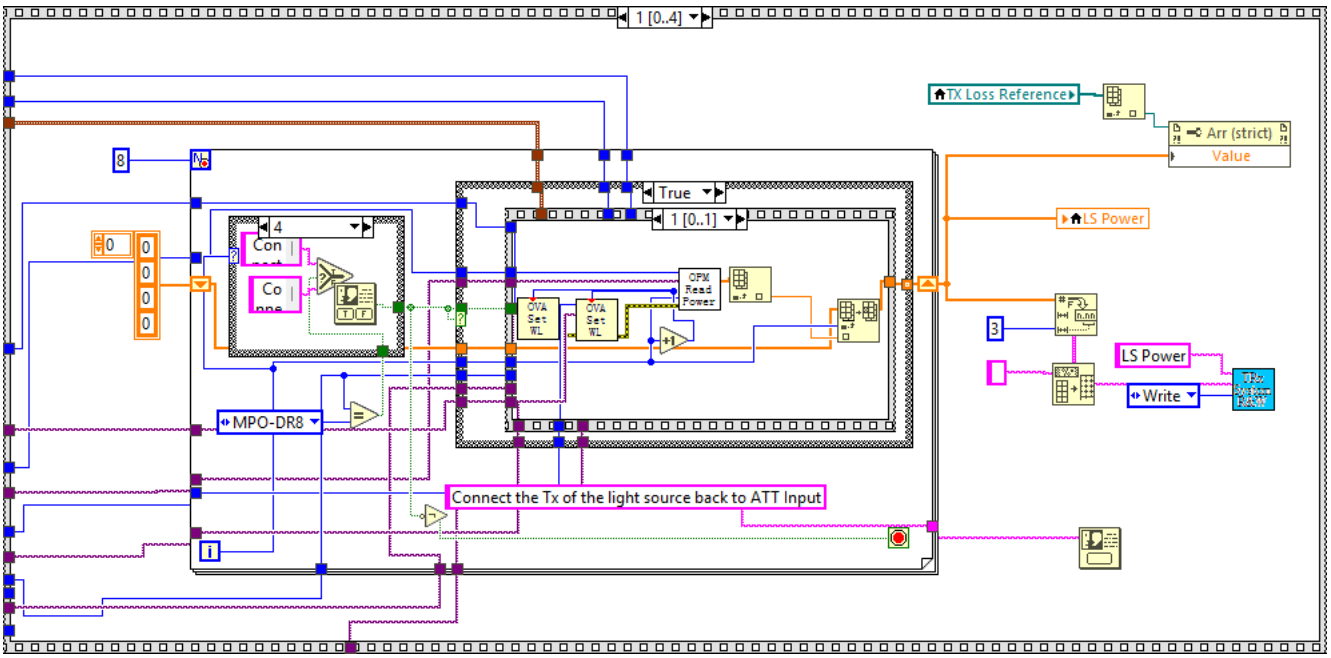

"Keysight N1092", Default
2
OSW Switch CH
DCA Read Power
CHAN2A



0, Default
OSW Switch CH
DCA Read Power



4 [0..4]
Tx cal end

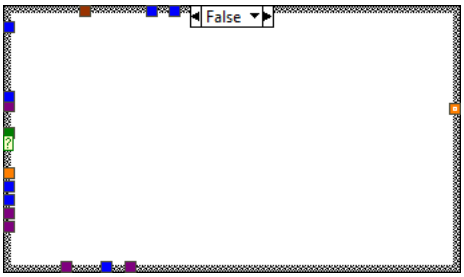

"GS_RX"
2 [0..4]
OPM Ch
OPM C port
DUT Visa
ICC Type
PS Type
PS Visa
DCA Type
DCA Visa
BERT Type
BERT Visa
OVA Type
OVA Visa
OPMType2
OPM Visa 2
OVAType2
OVA Visa2
LSL Type
LSL Visa
LSR Type
LSR Visa
4
Connect the output of ATT2
True
1 [0..1]
OVA Set WL
OVA Set WL
OPM Read Power
LS Power
1.5
3
RX Los
Write
Offset_Cal End,

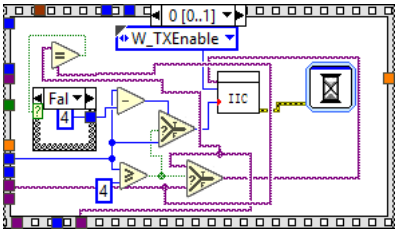

0 [0..4]
0
1.5
1.5
1.5
1.5
1.5
OVA Init
OVA Init
OVA Set ATT
OVA Set ATT


1 [0..4]
TX Loss Reference
Arr (strict)
Value
8
True
1 [0..1]
4
Con
Co
nne
0
0
0
0
0
OPM Read Power
OVA Set WL
OVA Set WL
+1
LS Power
3
Write
MPO-DR8
Connect the Tx of the light source back to ATT Input
1



1, Default



0
Conn
Conn
ect

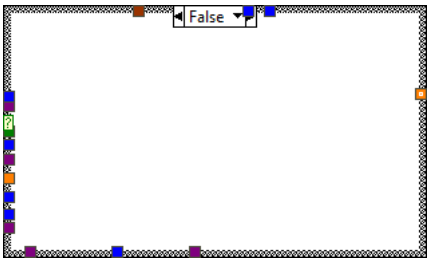

False

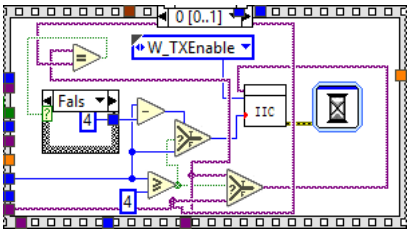

0 [0..1]
W_TXEnable
Fal
4
IIC
4


Tr
0

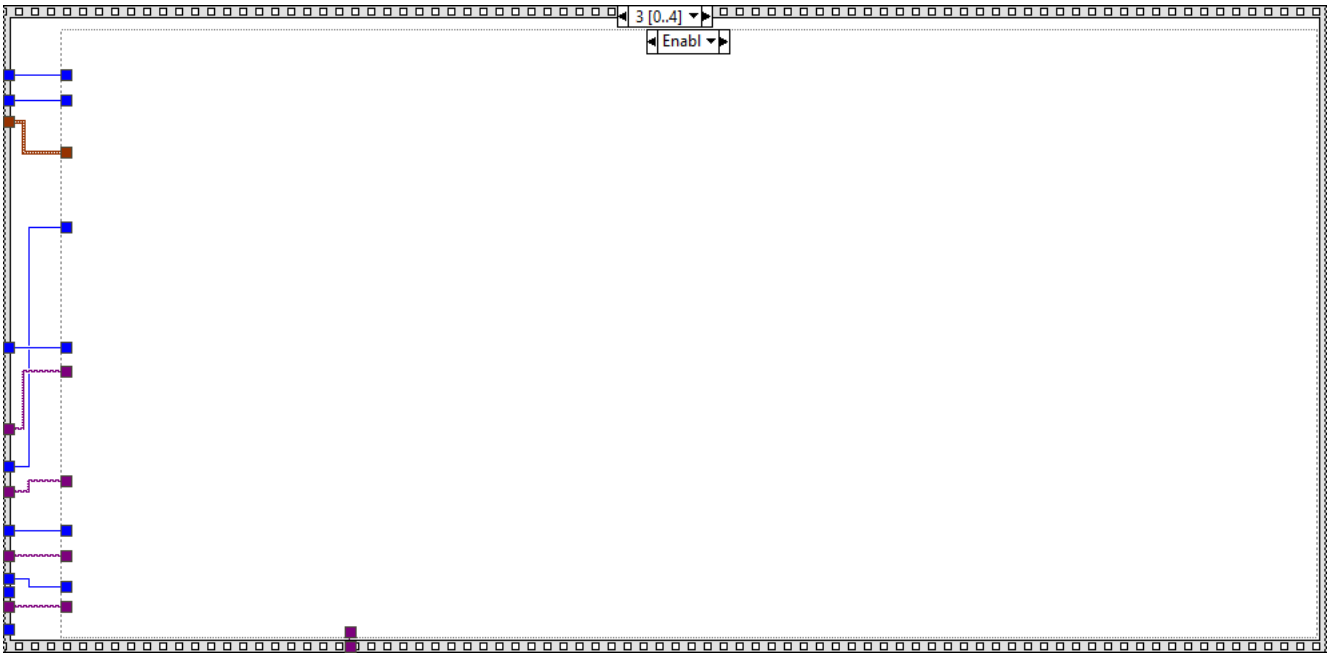

1, Default

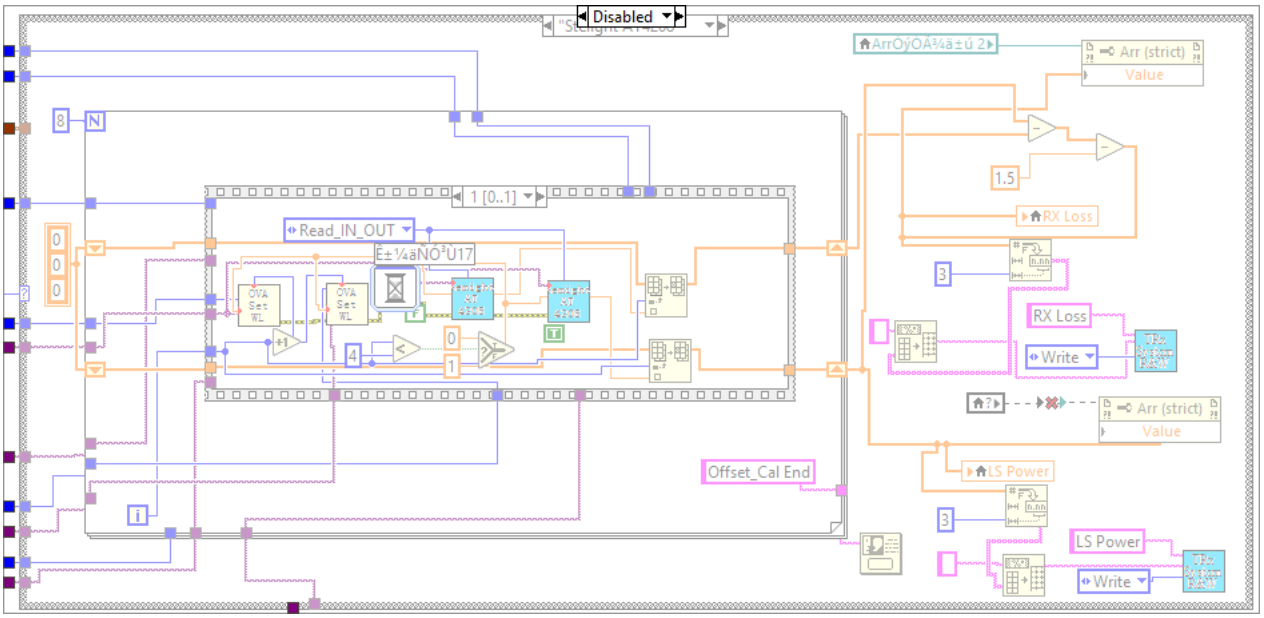

0
Connect the output of ATT1 to Power Meter

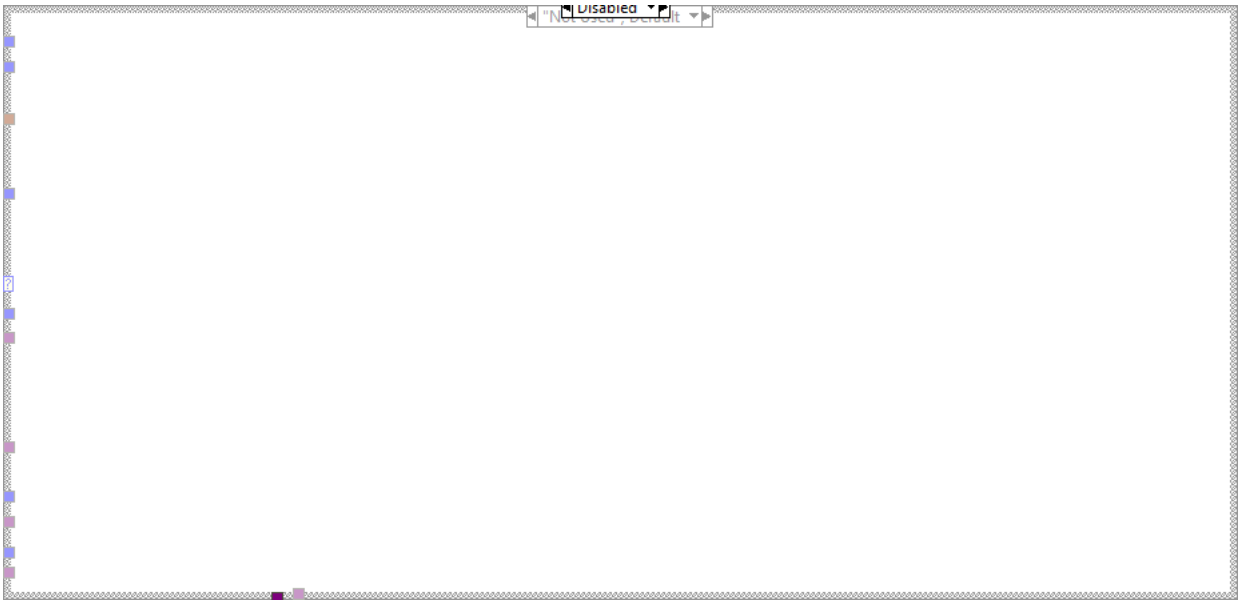

False

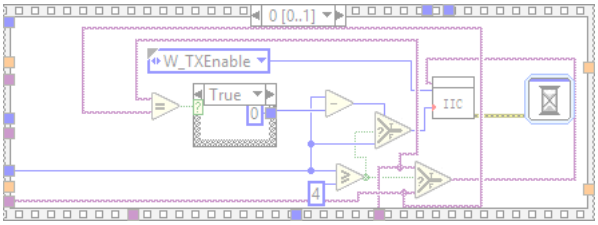

0 [0..1]
W_TXEnable
Fals
IIC


True

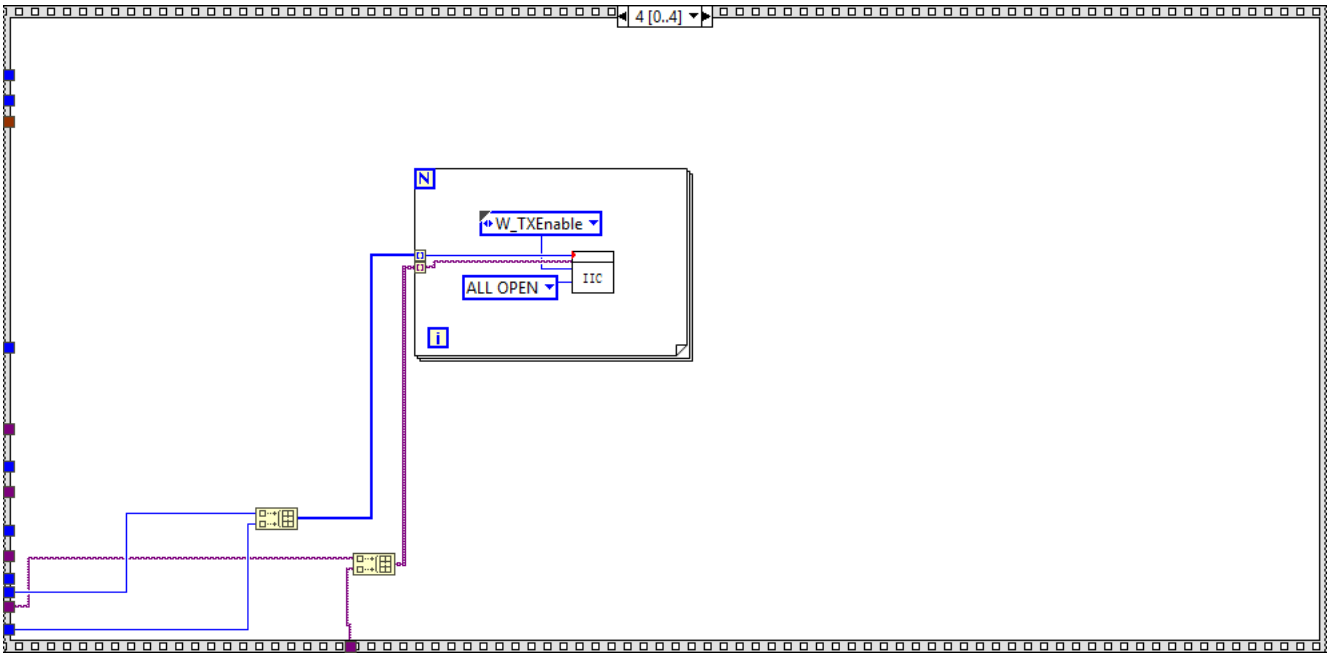

3 [0..4]
Enabl

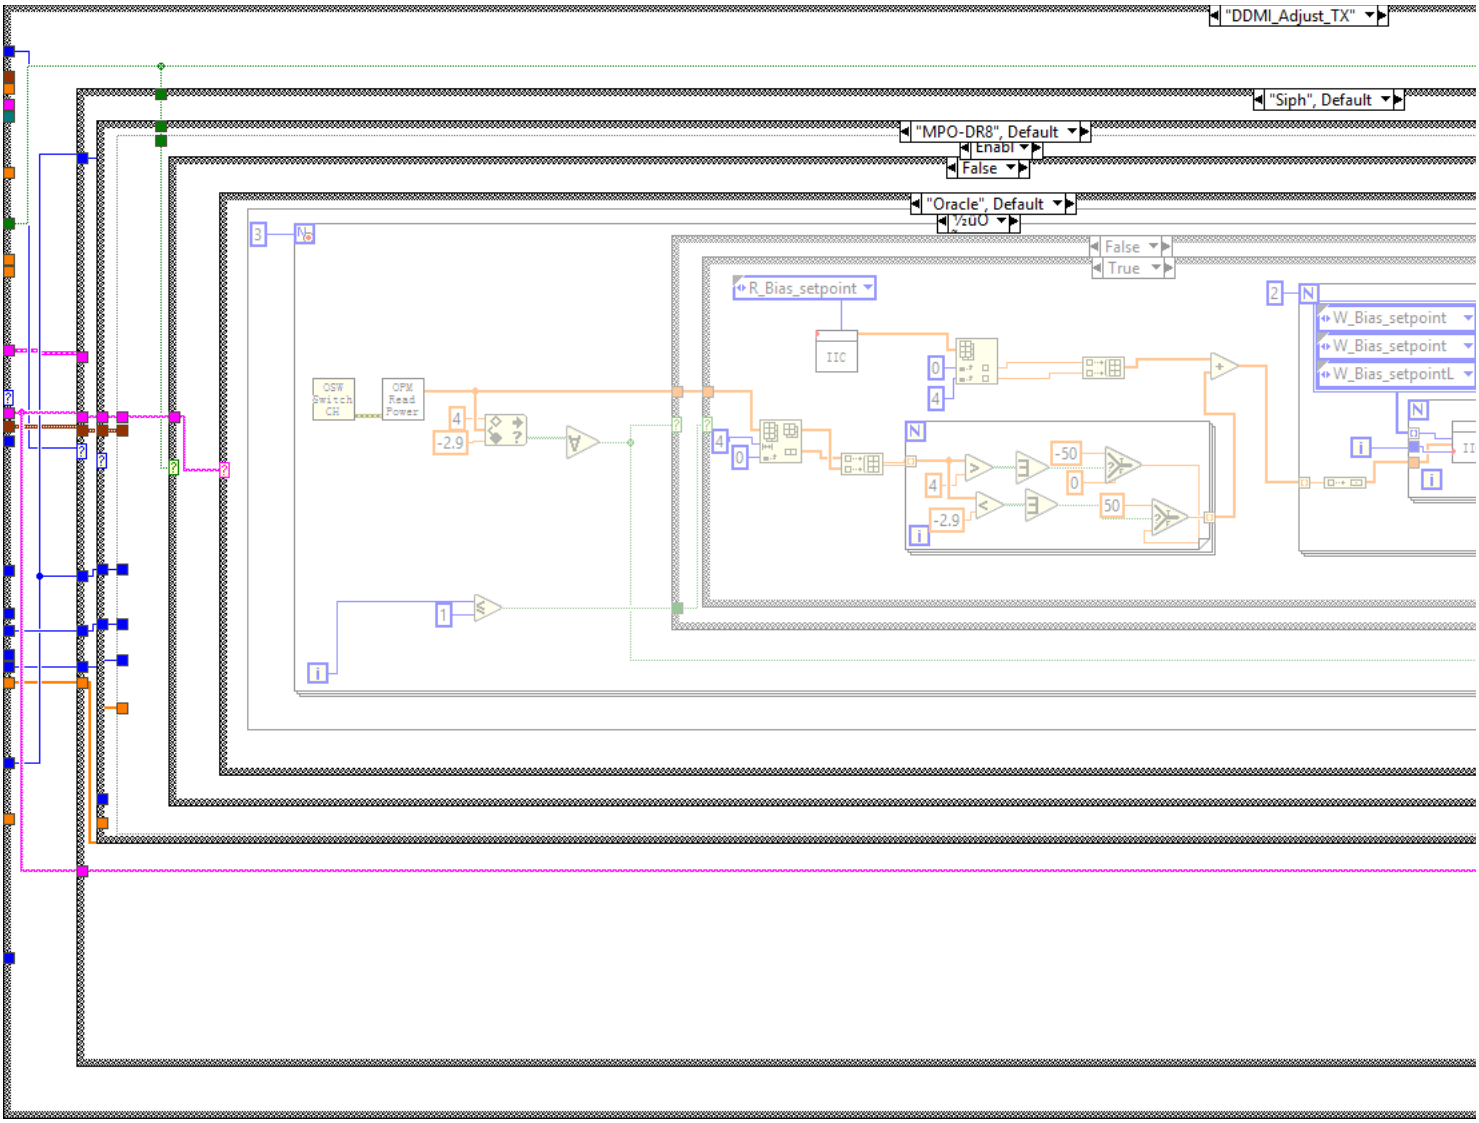

Disabled
1 [0..1]
Read_IN_OUT
Offset_Cal End
RX Loss
Write
LS Power
Arr (strict)
Value



Disabled



0 [0..1]
W_TXEnable
True
0
IIC
4

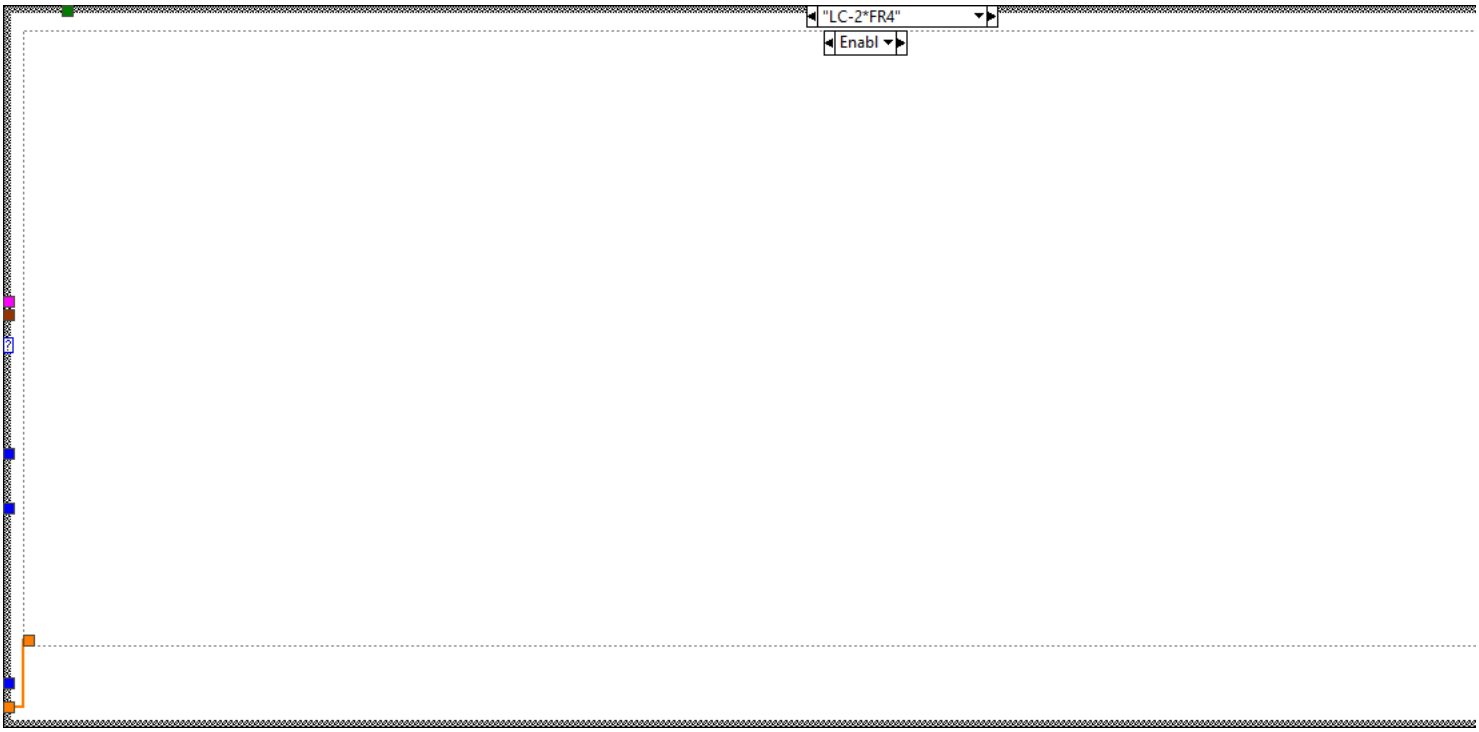

False
4

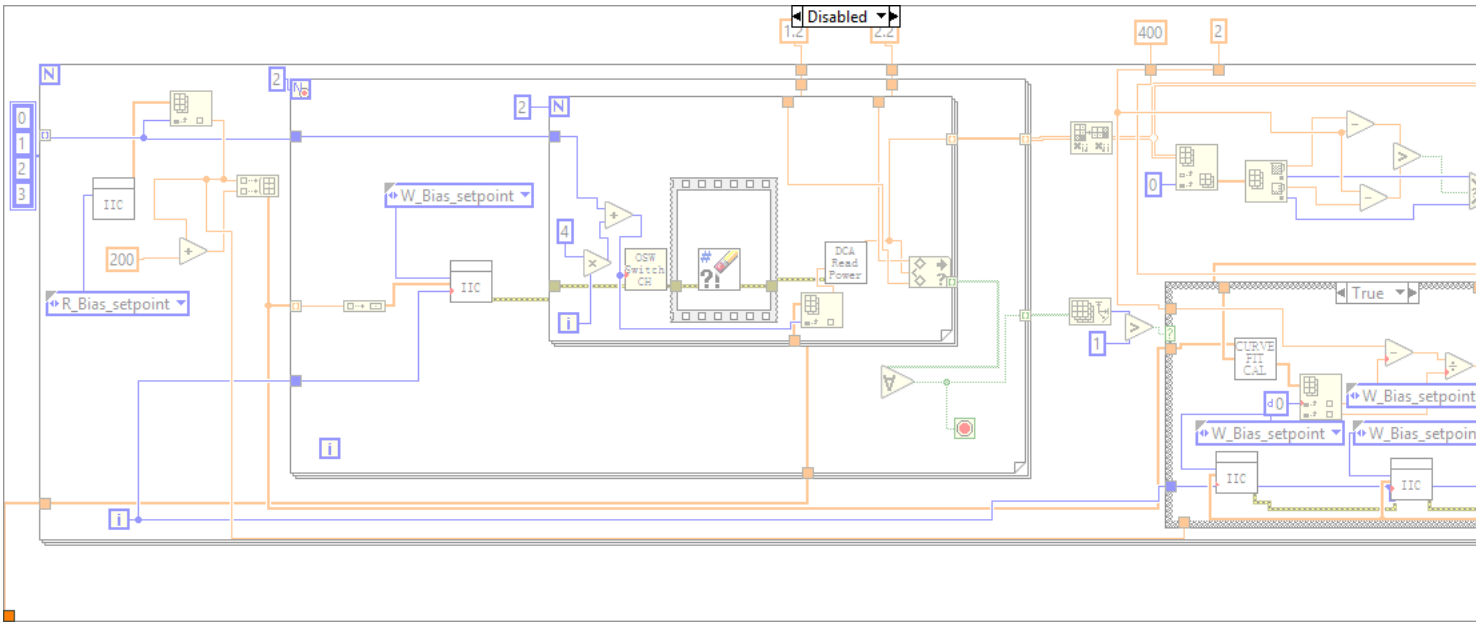

4 [0..4]
N
W_TXEnable
ALL OPEN
IIC
i

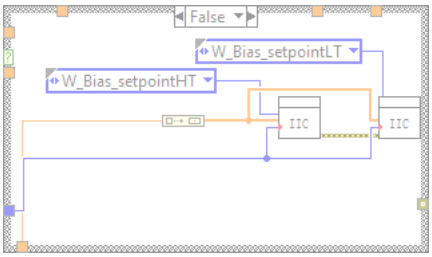

"DDMI_Adjust_TX"
"Siph", Default
"MPO-DR8", Default
Enabl
False
"Oracle", Default
½uÓ
False
True
R_Bias_setpoint
IIC
OSW Switch CH
OPM Read Power
W_Bias_setpoint
W_Bias_setpoint
W_Bias_setpointL
-2.9
-50
50

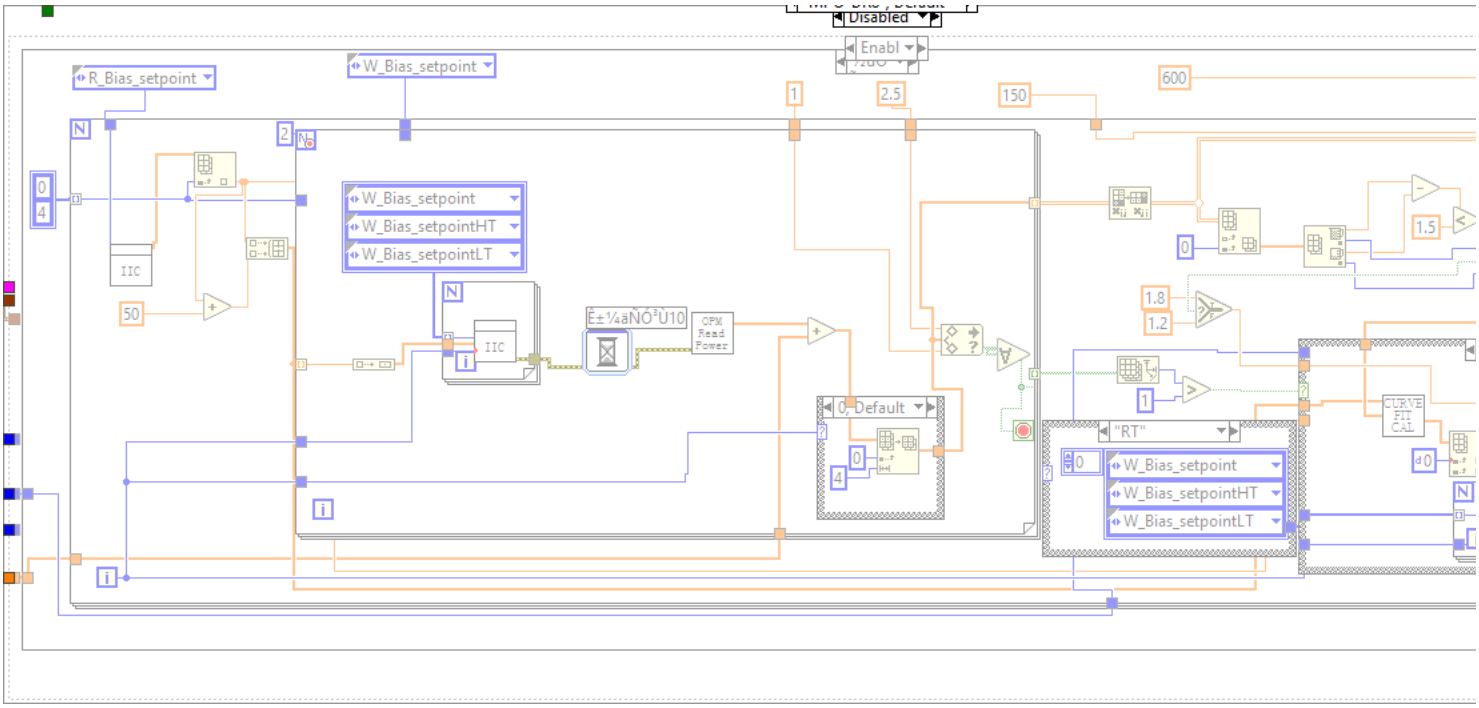

"¼Ù", Defa

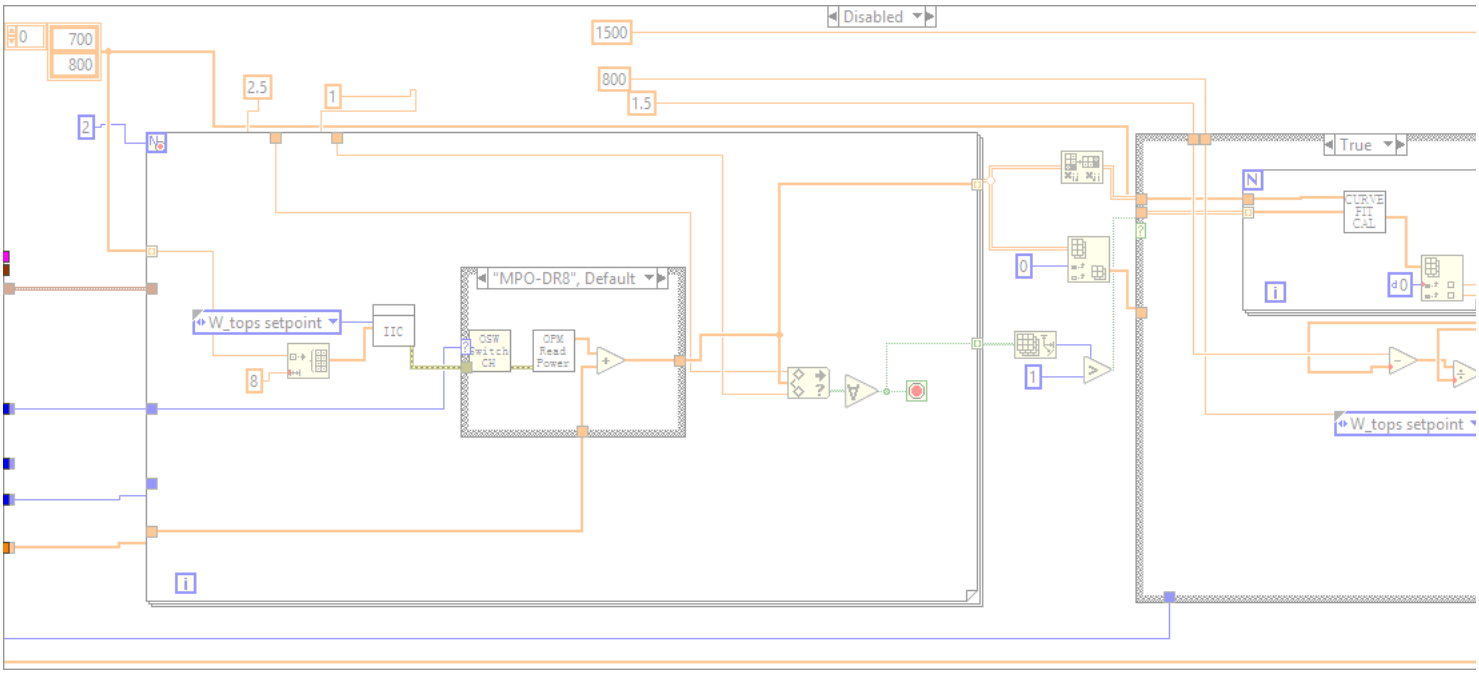

True



"LC-2*FR4"
Enabl

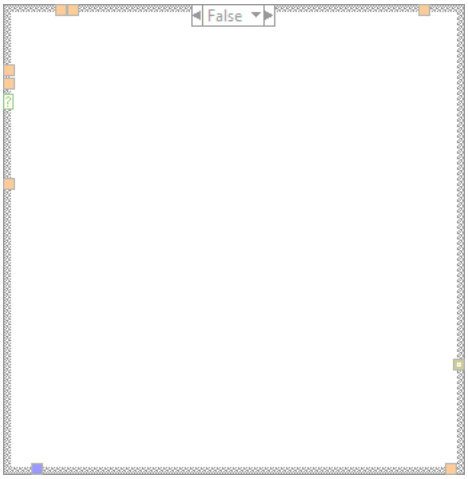

Disabled
1.2
2.2
400
2
W_Bias_setpoint
R_Bias_setpoint
200
IIC
OSW Switch CH
DCA Read Power
True
CURVE FIT CAL
W_Bias_setpoint
W_Bias_setpoint
W_Bias_setpoint



False
W_Bias_setpointLT
W_Bias_setpointHT
IIC
IIC

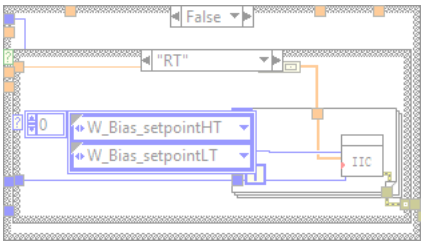

Disabled
Enabl
R_Bias_setpoint
W_Bias_setpoint
W_Bias_setpoint
W_Bias_setpointHT
W_Bias_setpointLT
IIC
50
OPM Read Power
0, Default
"RT"
W_Bias_setpoint
W_Bias_setpointHT
W_Bias_setpointLT
CURVE FIT CAL
1.5
1.8
1.2
600
150
2.5


Disabled
1500
800
700
1.5
2.5
"MPO-DR8", Default
W_tops setpoint
IIC
OSW Switch CH
OPM Read Power
True
CURVE FIT CAL
W_tops setpoint



"LC-2*FR4"
OSW Switch CH
DCA Read Power


False

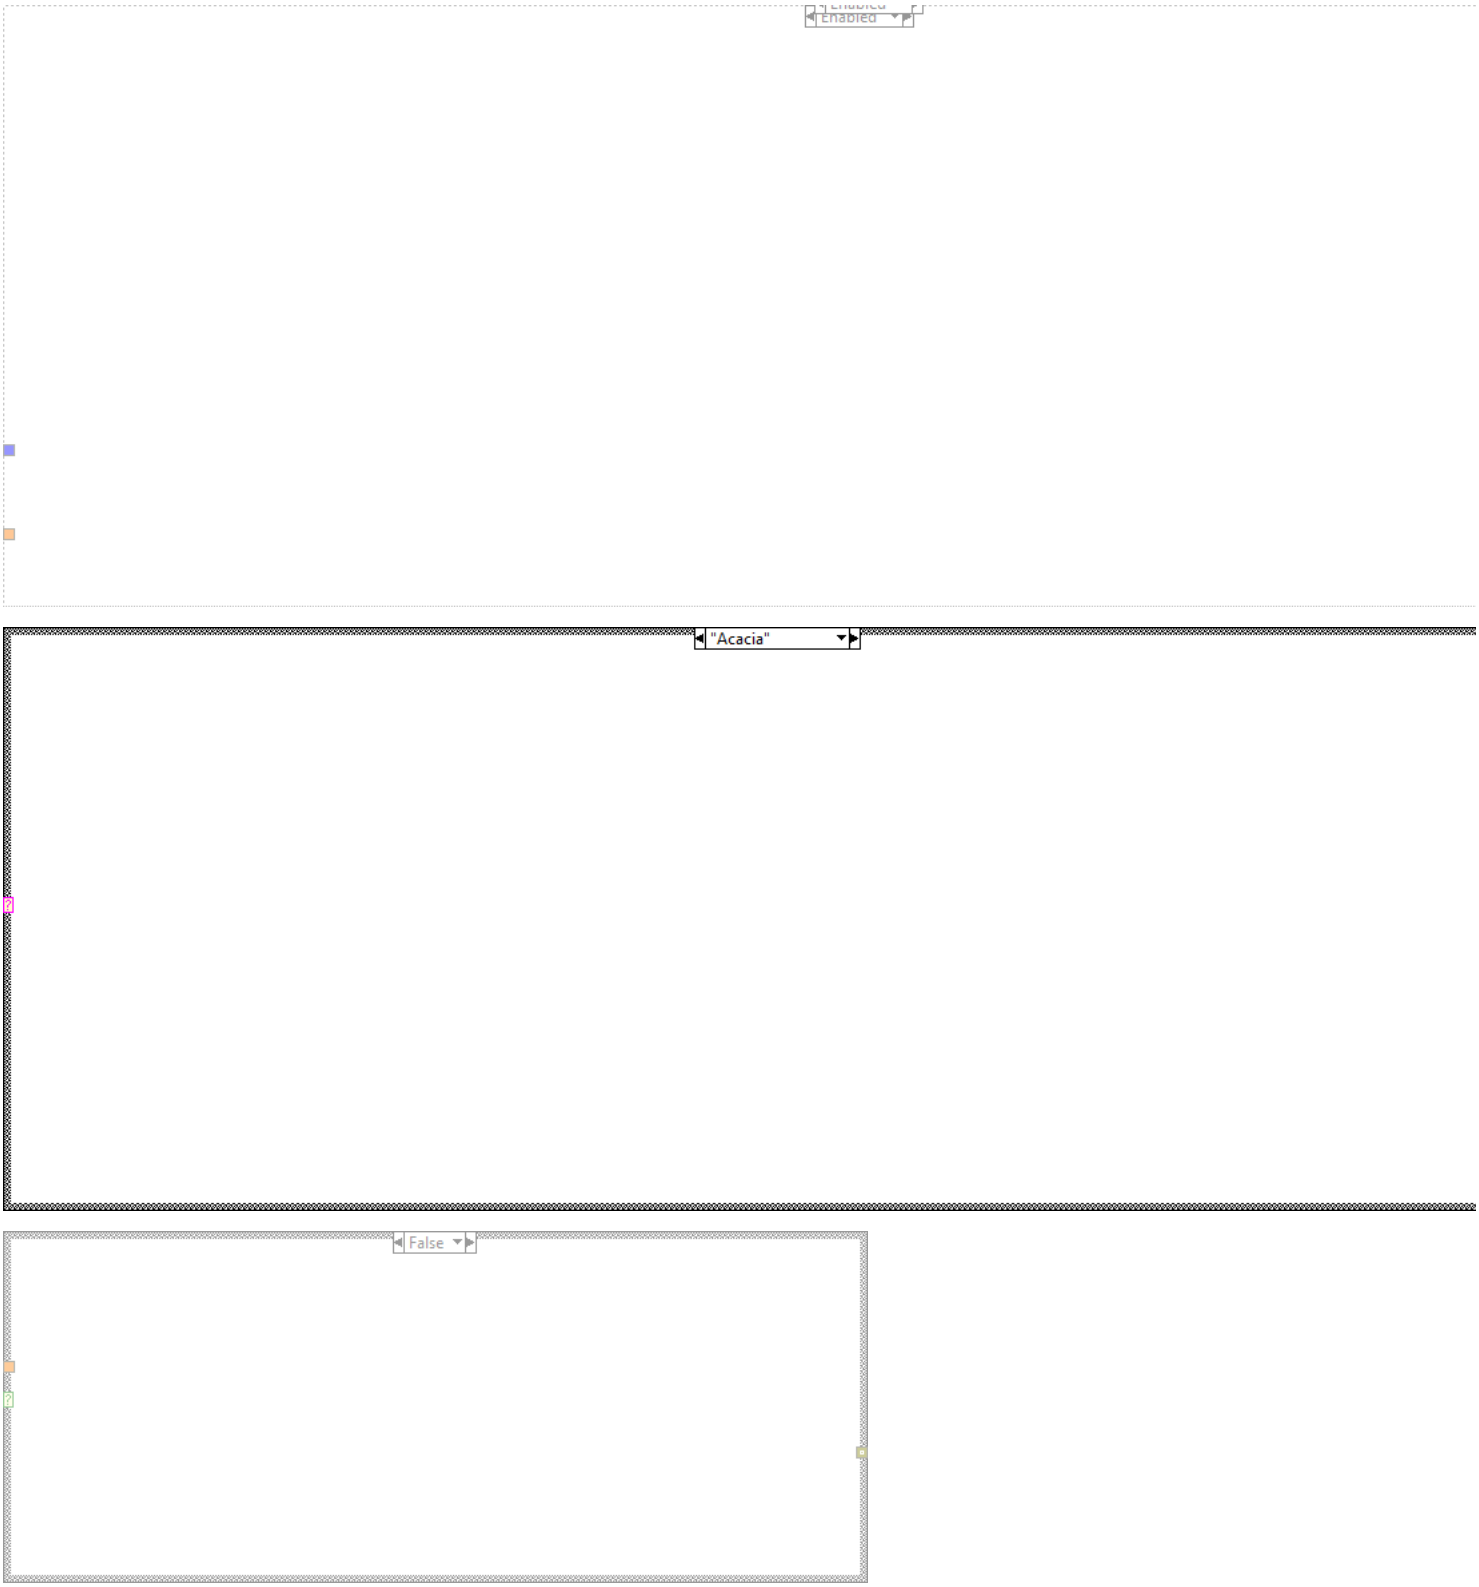

1
4
4


False
"RT"
0
W_Bias_setpointHT
W_Bias_setpointLT
IIC

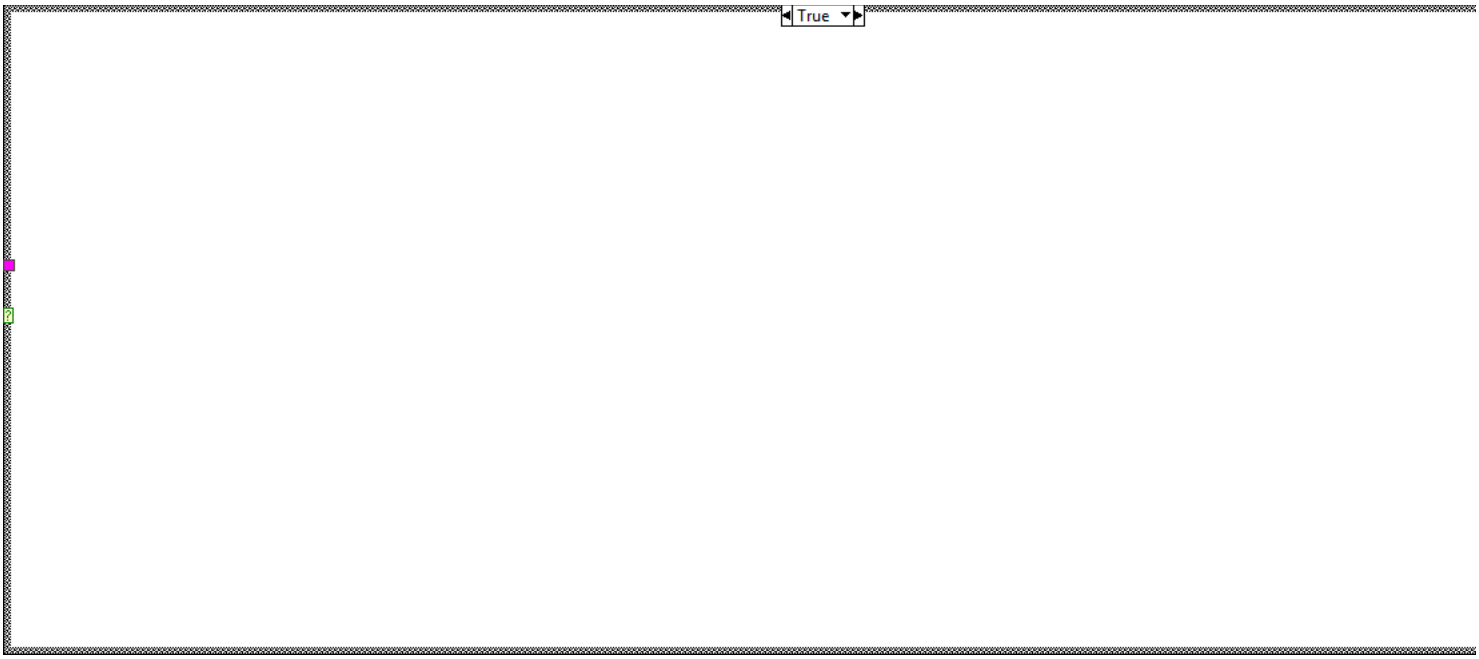

"HT", Default

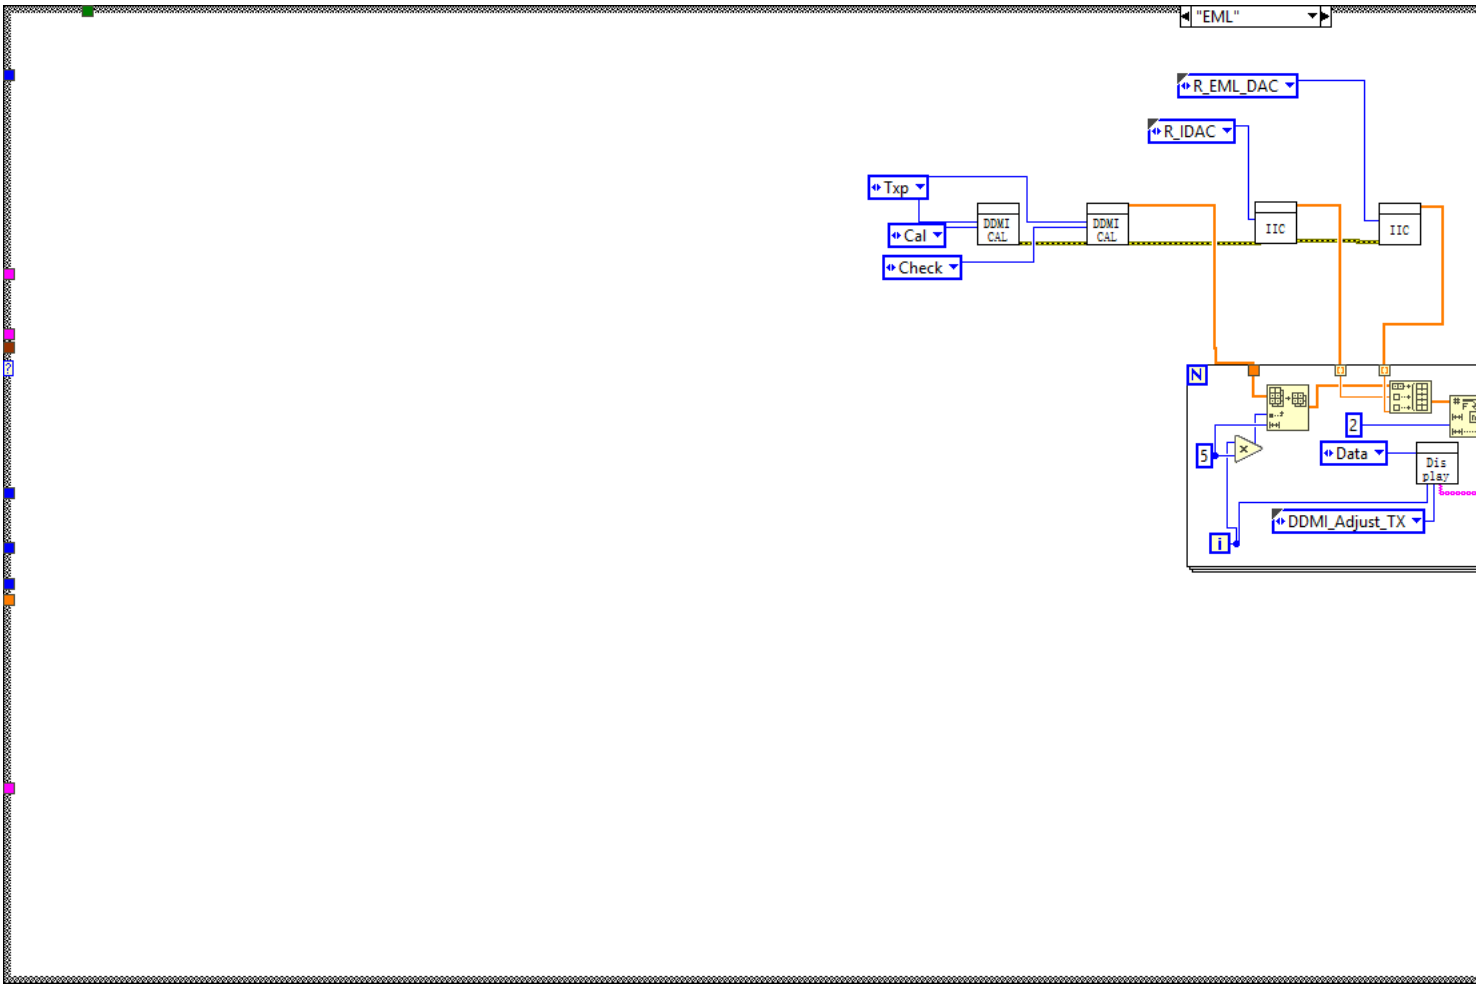

"HT", Default
0
W_Bias_setpointHT

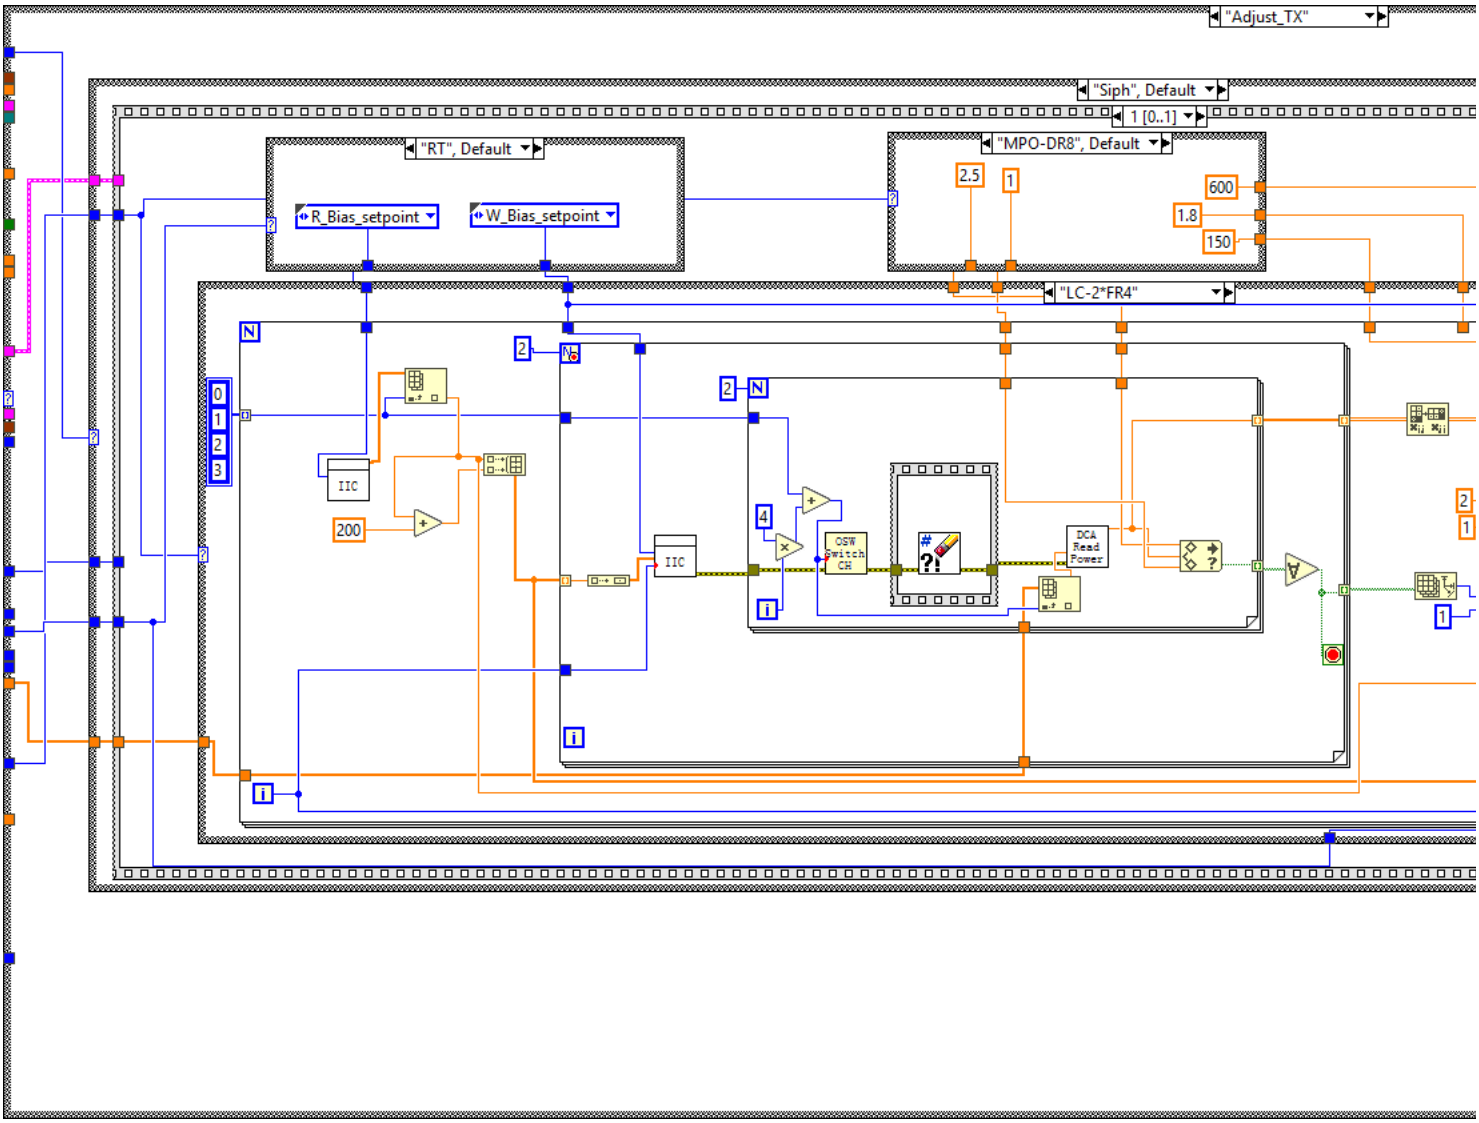

"LT"
0
W_Bias_setpointLT

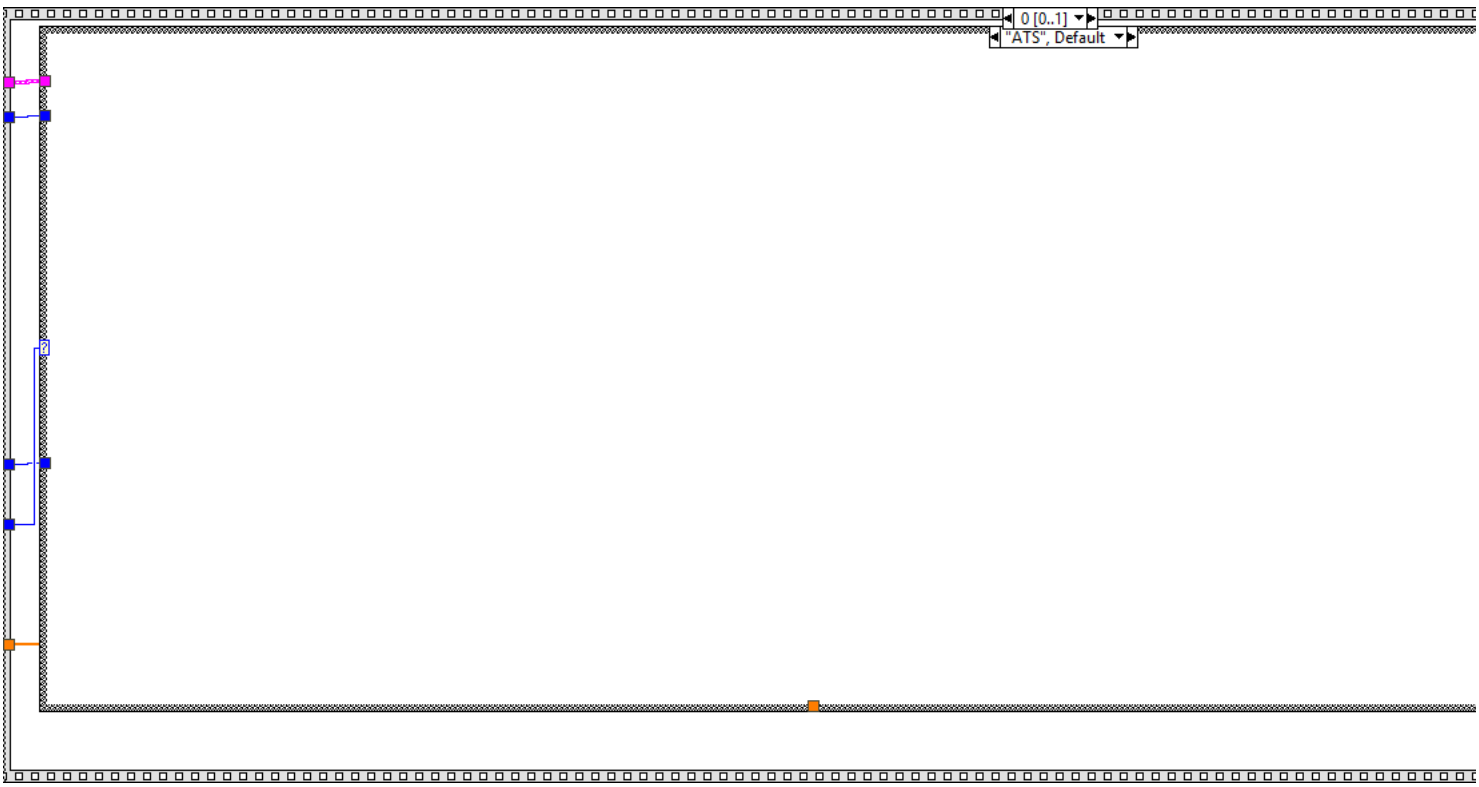

Enabled
"Acacia"
False

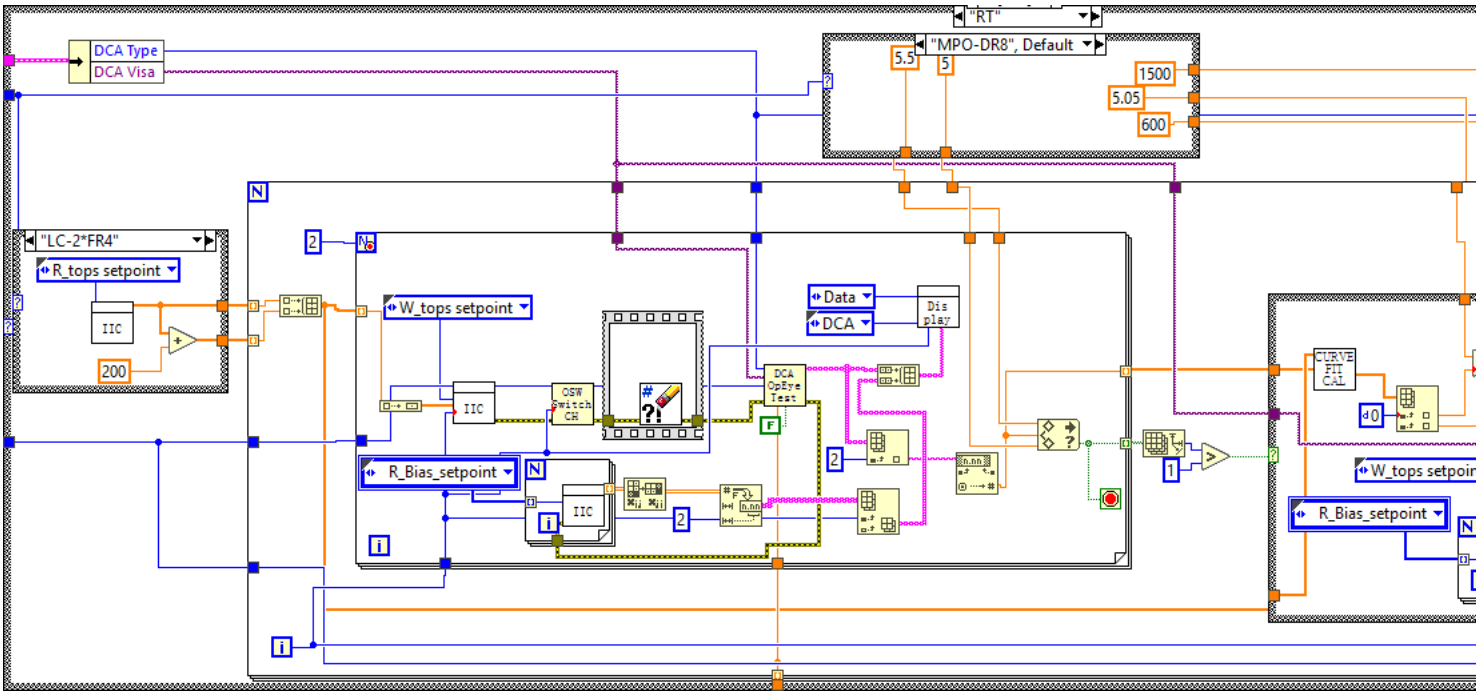

True
Enabled
"AWS"

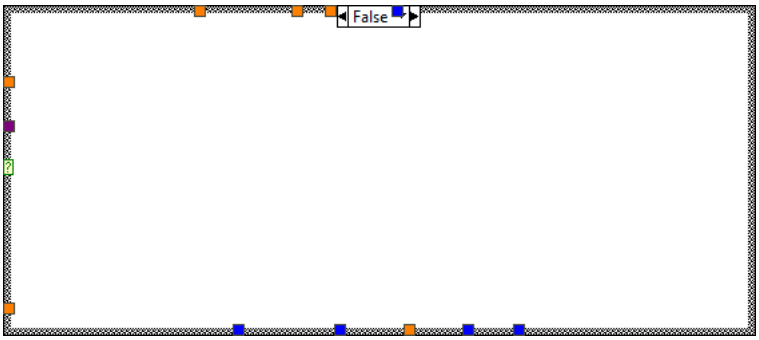

True



"EML"
R_EML_DAC
R_IDAC
Txp
Cal
Check
DDMI CAL
DDMI CAL
IIC
IIC
N
2
5
Data
Dis play
DDMI_Adjust_TX
1



"Adjust_TX"
"Siph", Default
1 [0..1]
"RT", Default
R_Bias_setpoint
W_Bias_setpoint
"MPO-DR8", Default
2.5
1
600
1.8
150
"LC-2*FR4"
IIC
200
IIC
OSW Switch CH
DCA Read Power

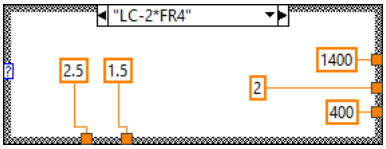

0 [0..1]
"ATS", Default

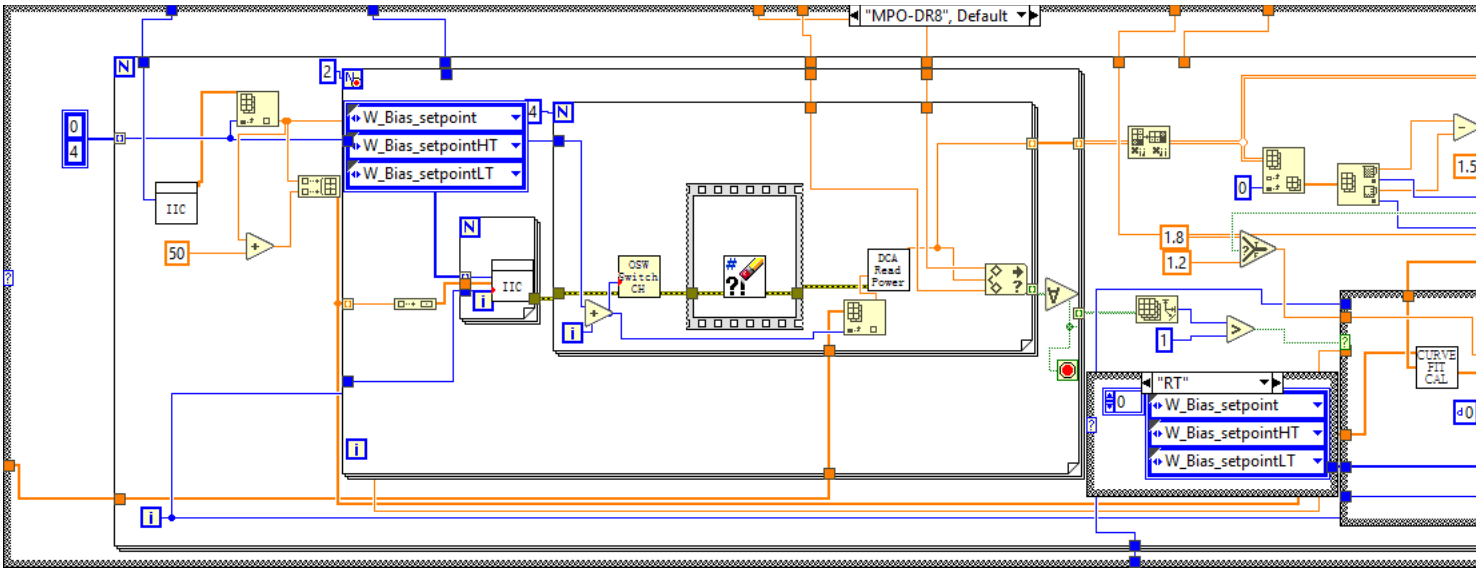

DCA Type
DCA Visa
"RT"
"MPO-DR8", Default
5.5
5
1500
5.05
600
"LC-2*FR4"
R_tops setpoint
IIC
200
W_tops setpoint
Data
DCA
Dis play
OSW Switch CH
DCA OpEye Test
R_Bias_setpoint
CURVE FIT CAL
W_tops setpoin
R_Bias_setpoint

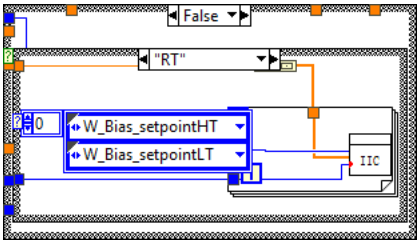

False

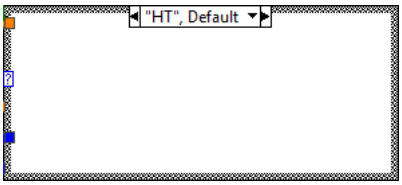

"LC-2*FR4"
5.2
4.5
2500
5
100



"MPO-DR8", Default
R_tops setpoint
IIC
100



"LC-2*FR4"
2.5
1.5
1400
2
400

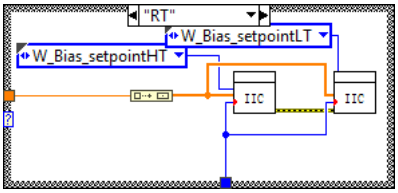

"MPO-DR8", Default
W_Bias_setpoint
W_Bias_setpointHT
W_Bias_setpointLT
IIC
OSW Switch CH
DCA Read Power
"RT"
CURVE FIT CAL

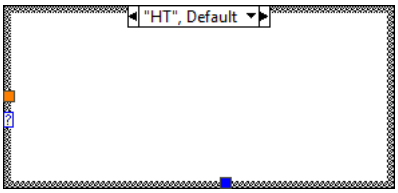

False
"RT"
W_Bias_setpointHT
W_Bias_setpointLT
IIC

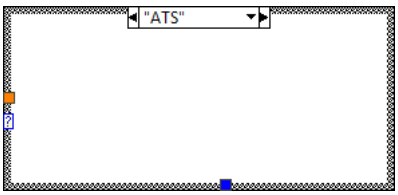

"HT", Default

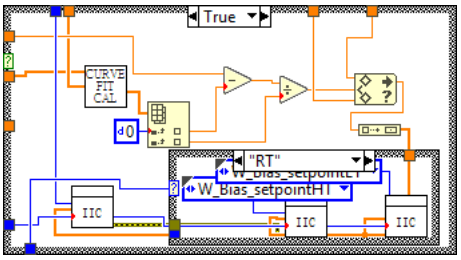

"HT", Default
W_Bias_setpointHT



"LT"
W_Bias_setpointLT



"RT"
W_Bias_setpointLT
W_Bias_setpointHT
IIC
IIC



"HT", Default

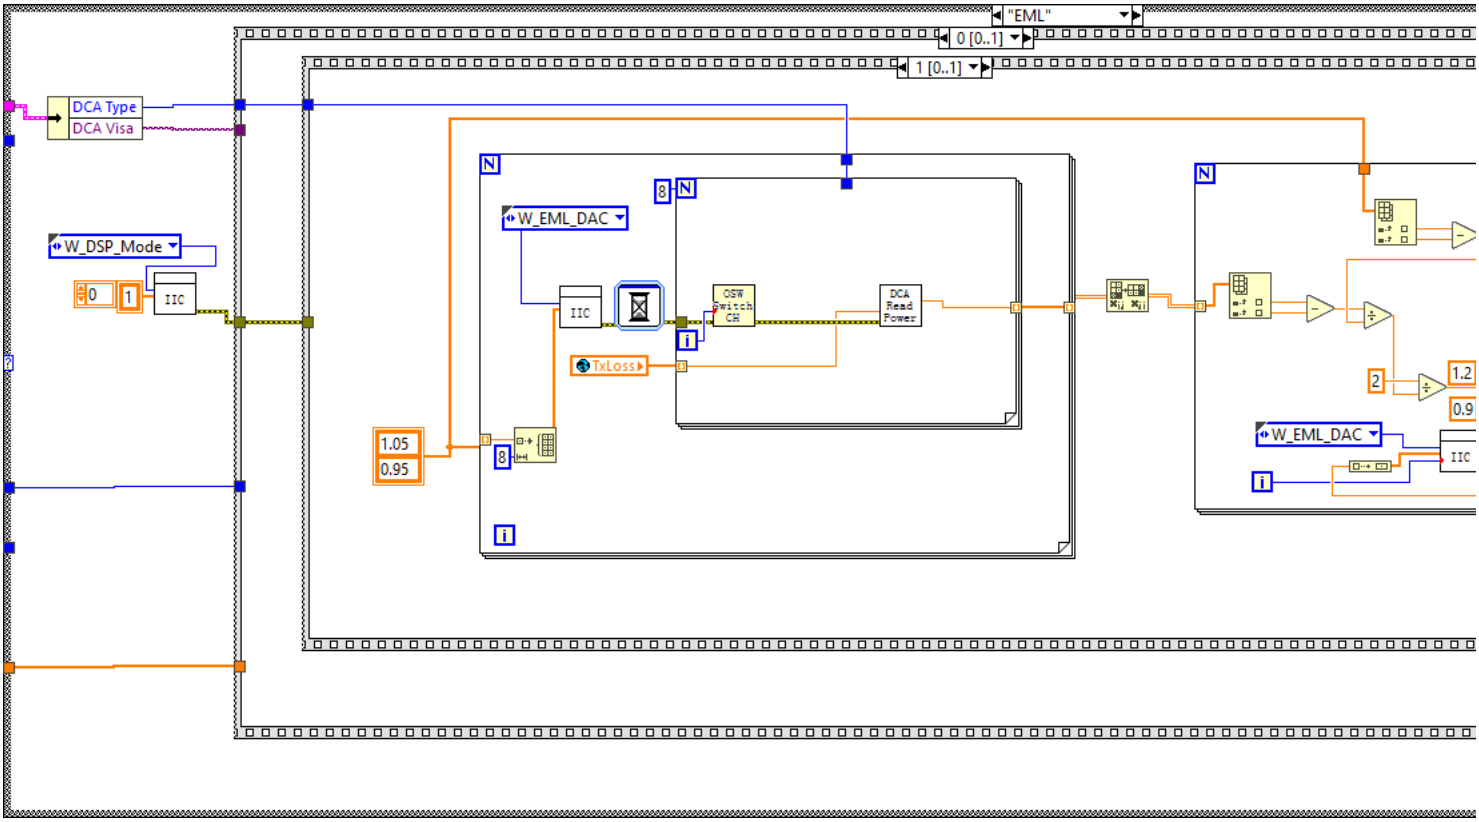

"ATS"

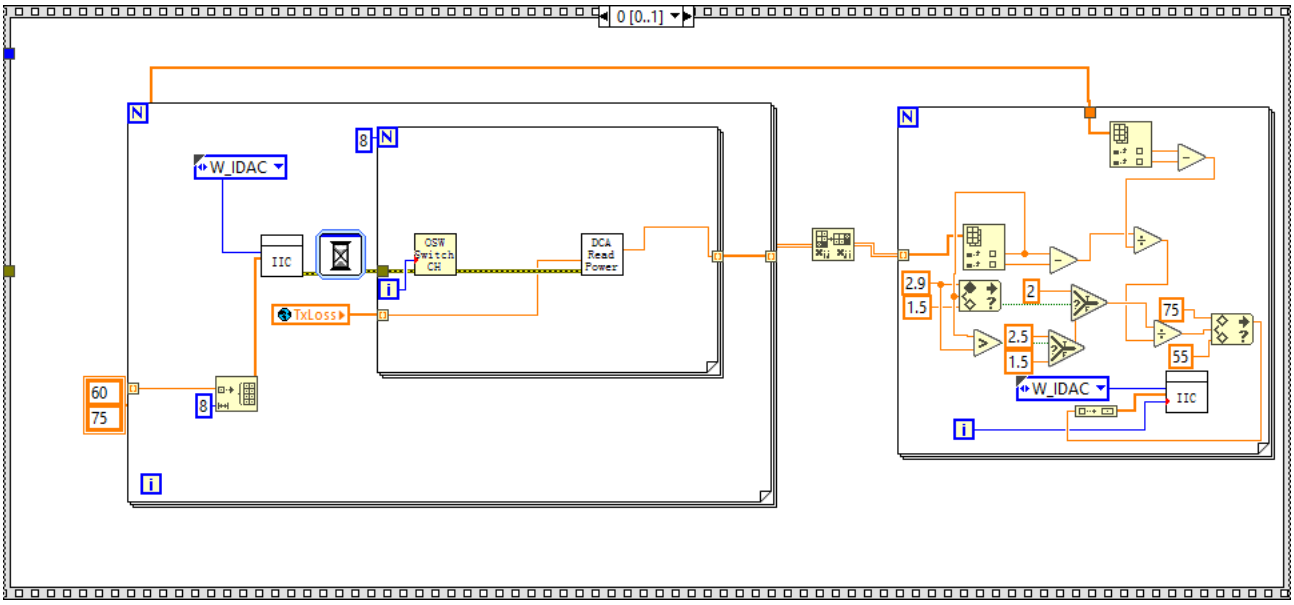

True
CURVE FIT CAL
0
"RT"
W_Bias_setpointHT
IIC
IIC
IIC

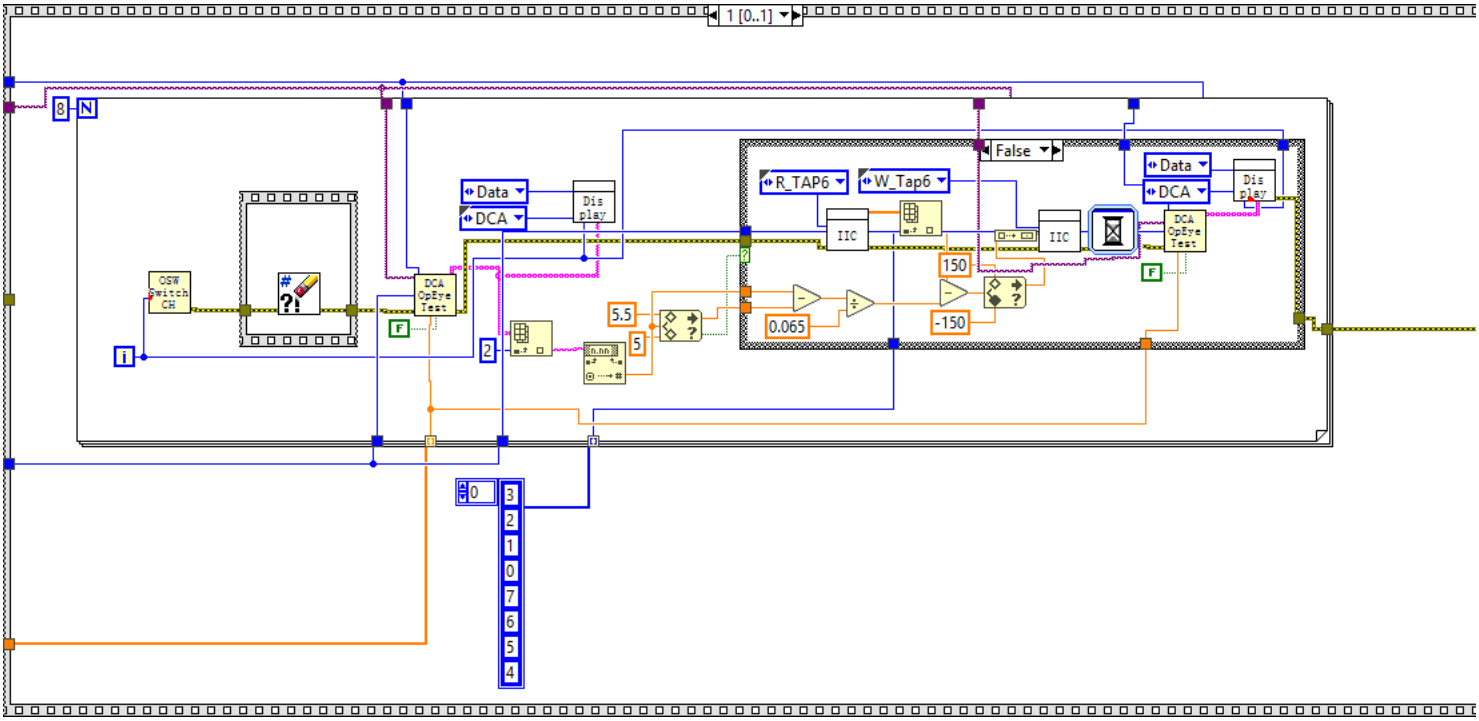

"HT", Default

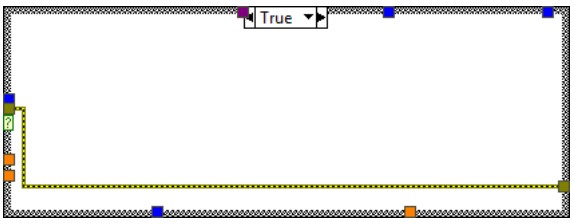

"HT"
R_Bias_setpointHT
W_Bias_setpointHT

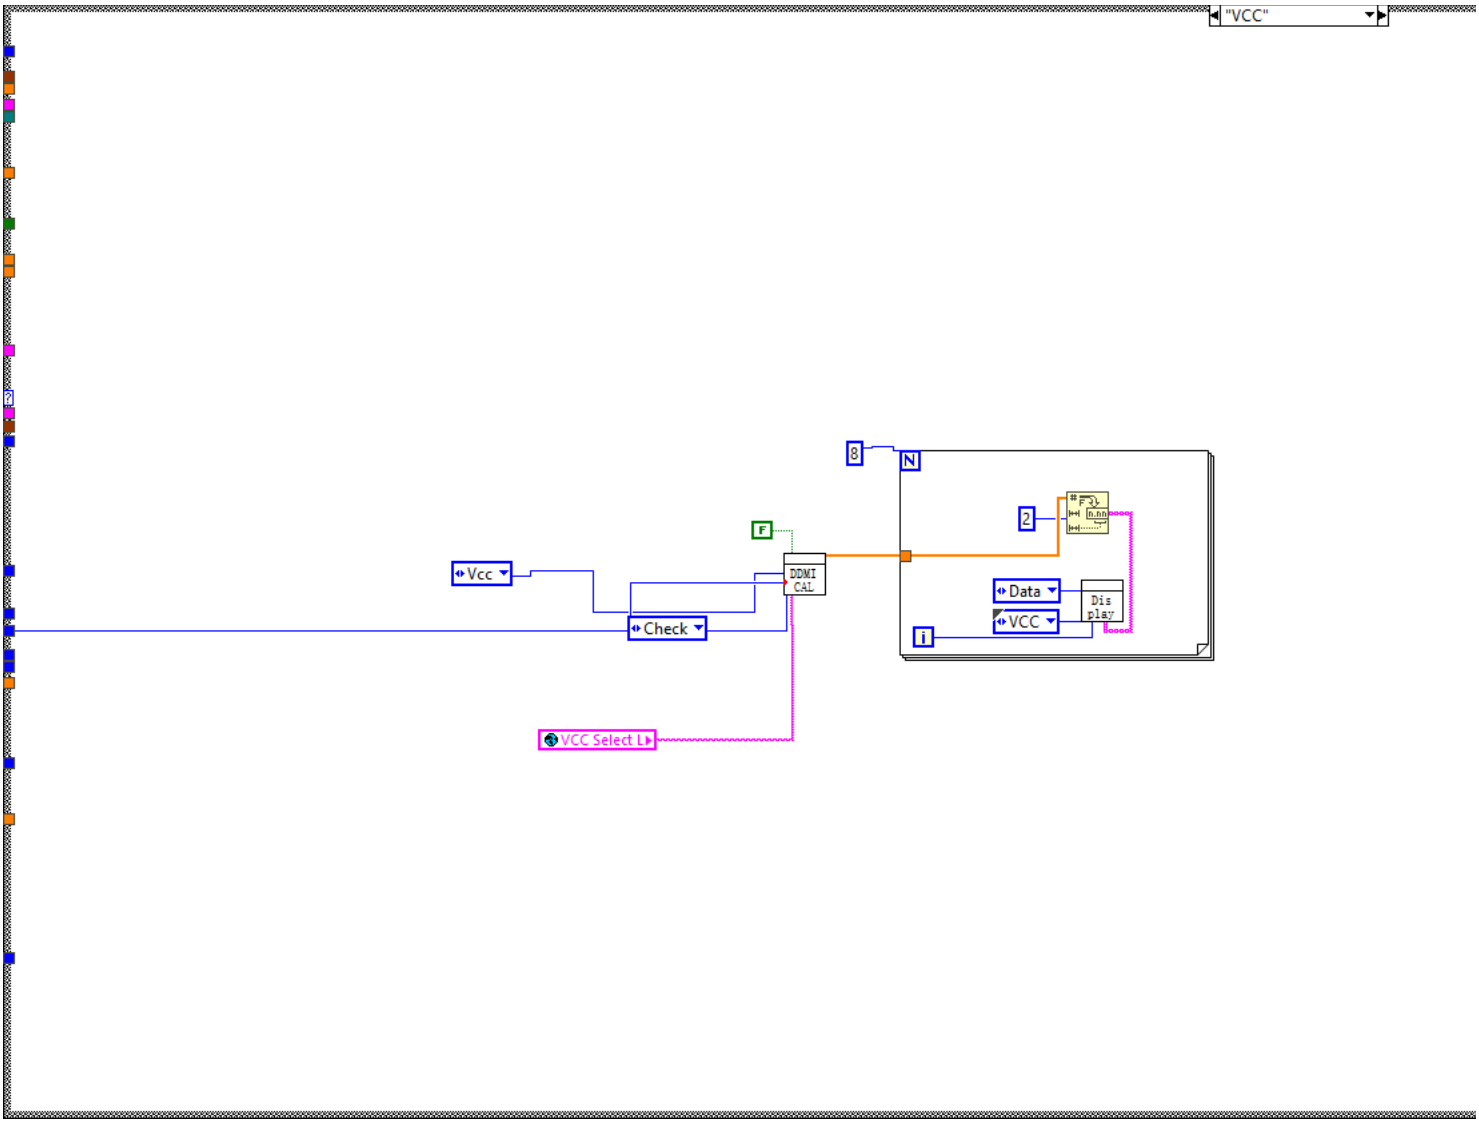

"LT"
R_Bias_setpointLT
W_Bias_setpointLT



"EML"
0 [0..1]
1 [0..1]
DCA Type
DCA Visa
W_DSP_Mode
0
1
IIC
W_EML_DAC
IIC
OSW Switch CH
DCA Read Power
TxLoss
1.05
0.95
8
N
i
2
1.2
0.9
W_EML_DAC
IIC

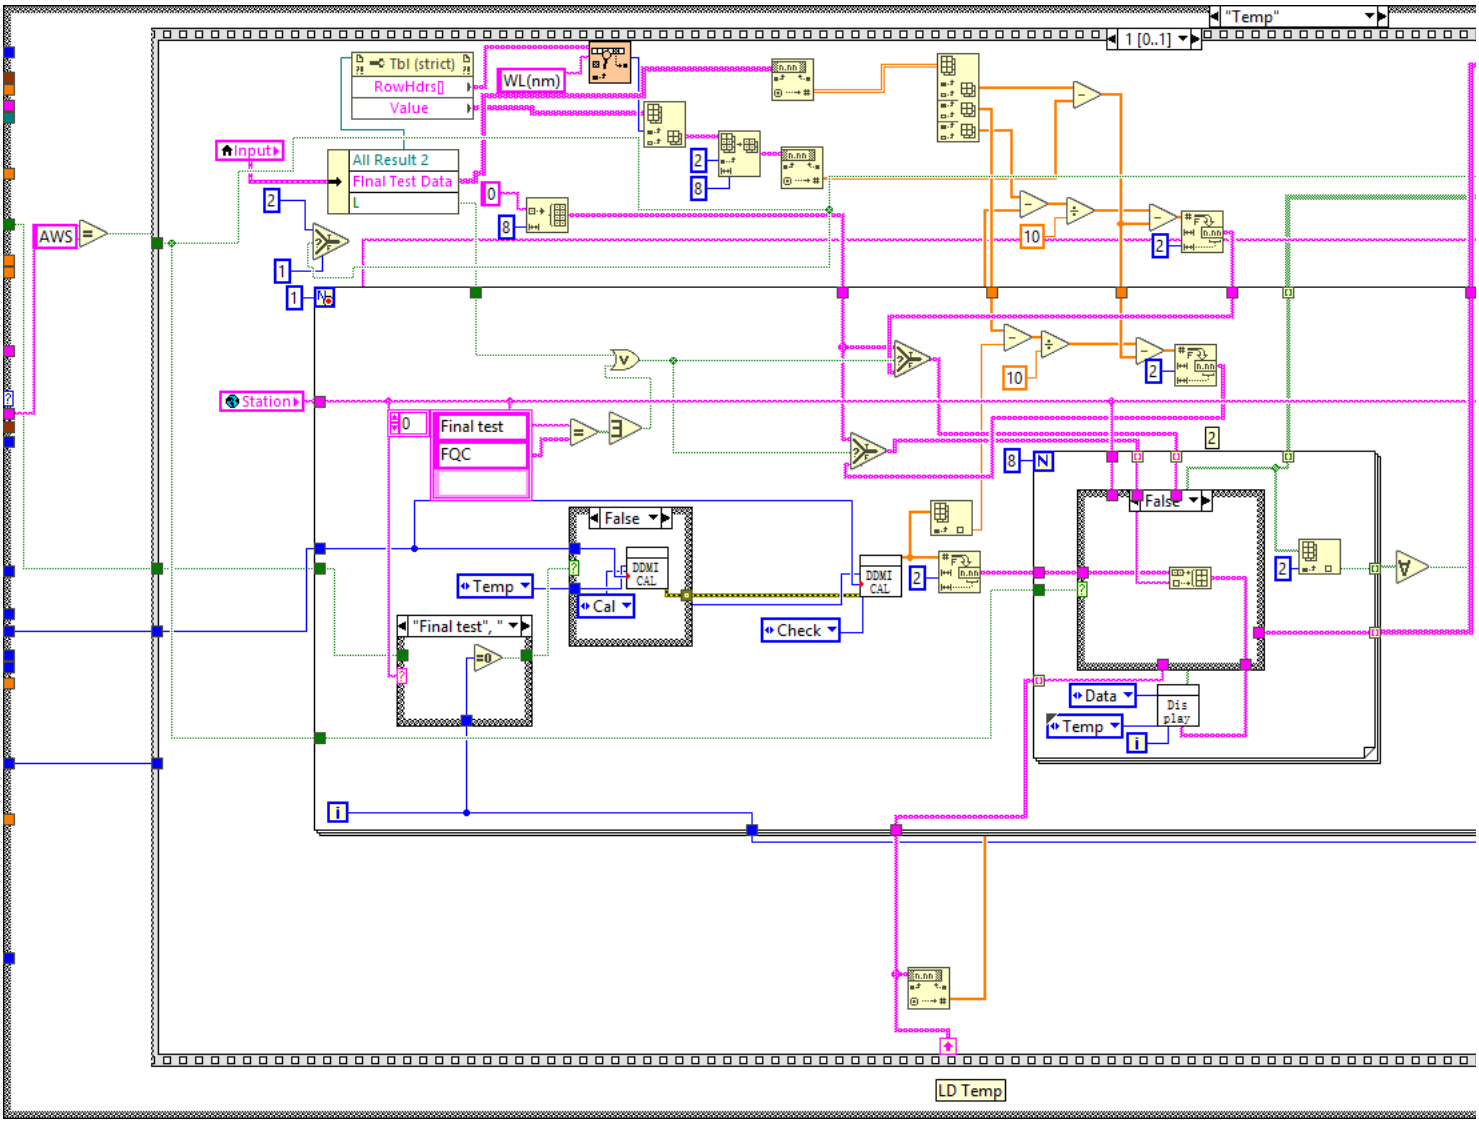

0 [0..1]
W_IDAC
IIC
OSW Switch CH
DCA Read Power
TxLoss
60
75
8
2.9
1.5
2
2.5
1.5
75
55
W_IDAC
IIC

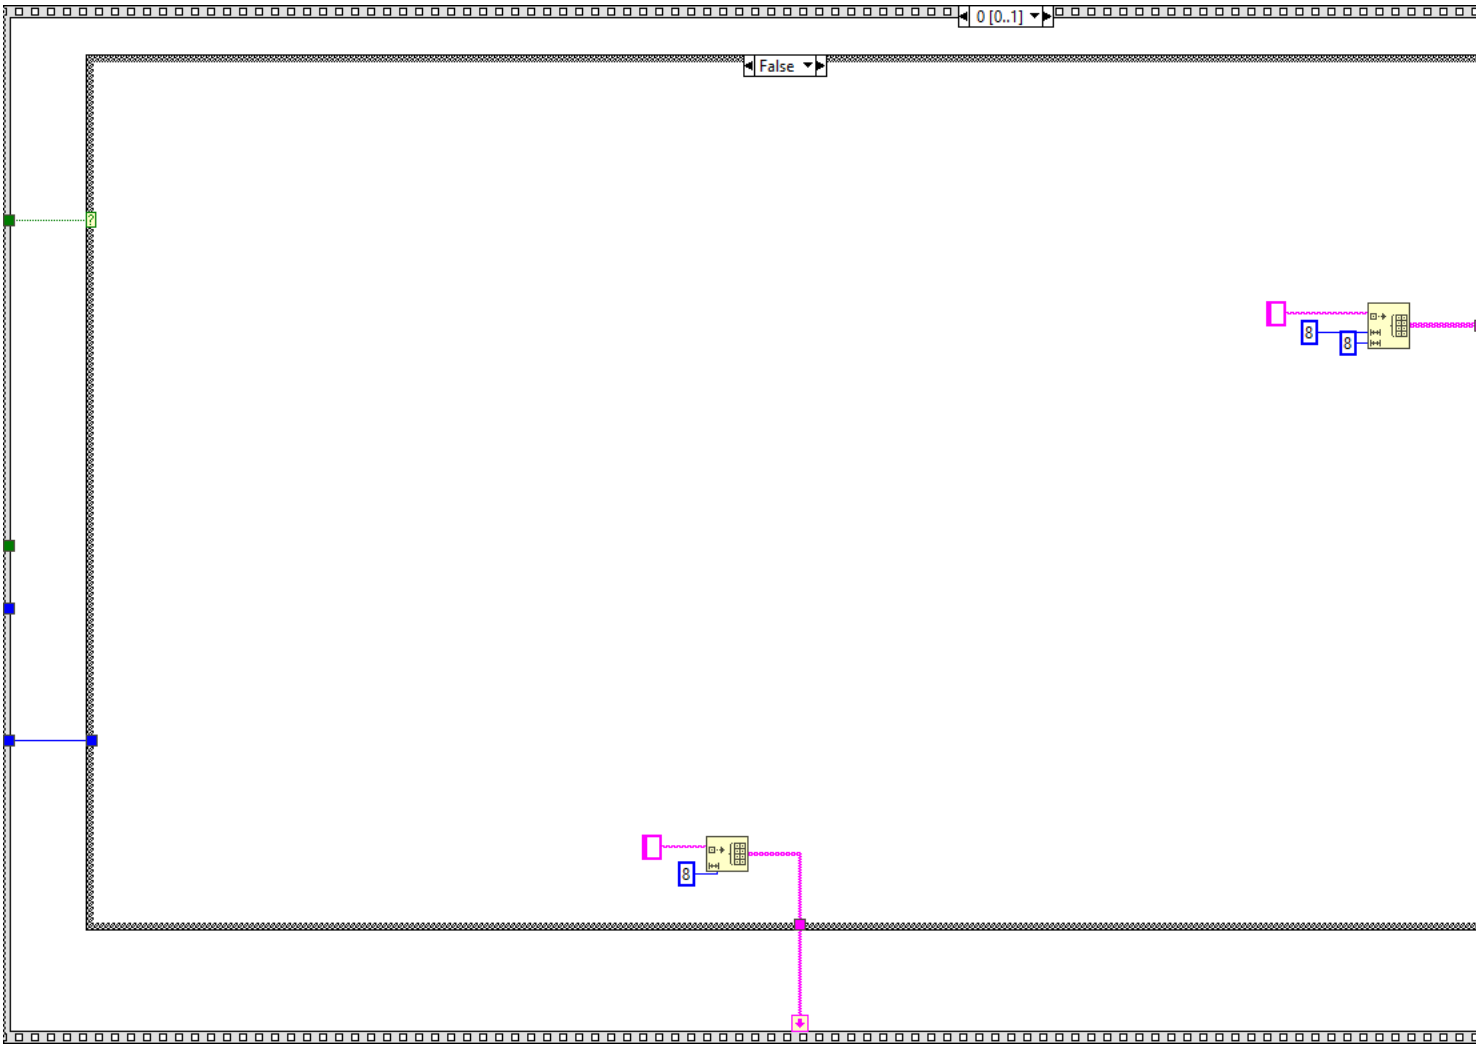

1 [0..1]
OSW Switch CH
DCA OpEye Test
Data
DCA
Dis play
R_TAP6
W_Tap6
IIC
False
150
-150
0.065
5.5
5
2
0
3
2
1
0
7
6
5
4

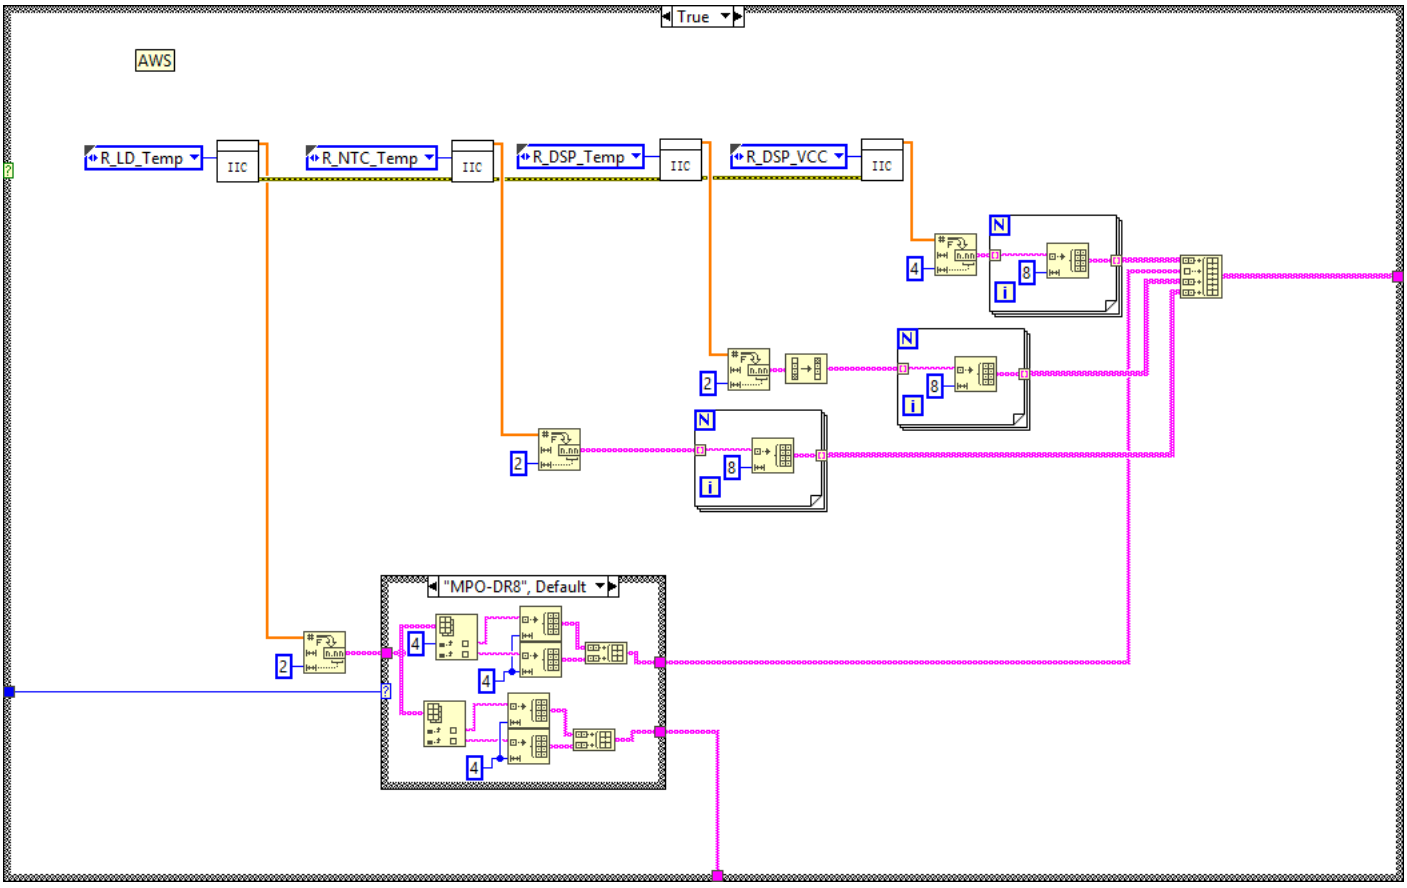

True



"VCC"
8
N
2
n.nn
F
Vcc
DDMI CAL
Data
VCC
Dis play
Check
i
VCC Select L



True



"Temp"
1 [0..1]
Tbl (strict)
RowHdrs[]
Value
WL(nm)
Input
All Result 2
Final Test Data
L
AWS
Station
Final test
FQC
False
DDMI CAL
Temp
Cal
"Final test", "
Check
Data
Dis play
LD Temp



0 [0..1]
False



True
AWS
R_LD_Temp
IIC
R_NTC_Temp
IIC
R_DSP_Temp
IIC
R_DSP_VCC
IIC
"MPO-DR8", Default



"LC-2*FR4"
4
4
0
4

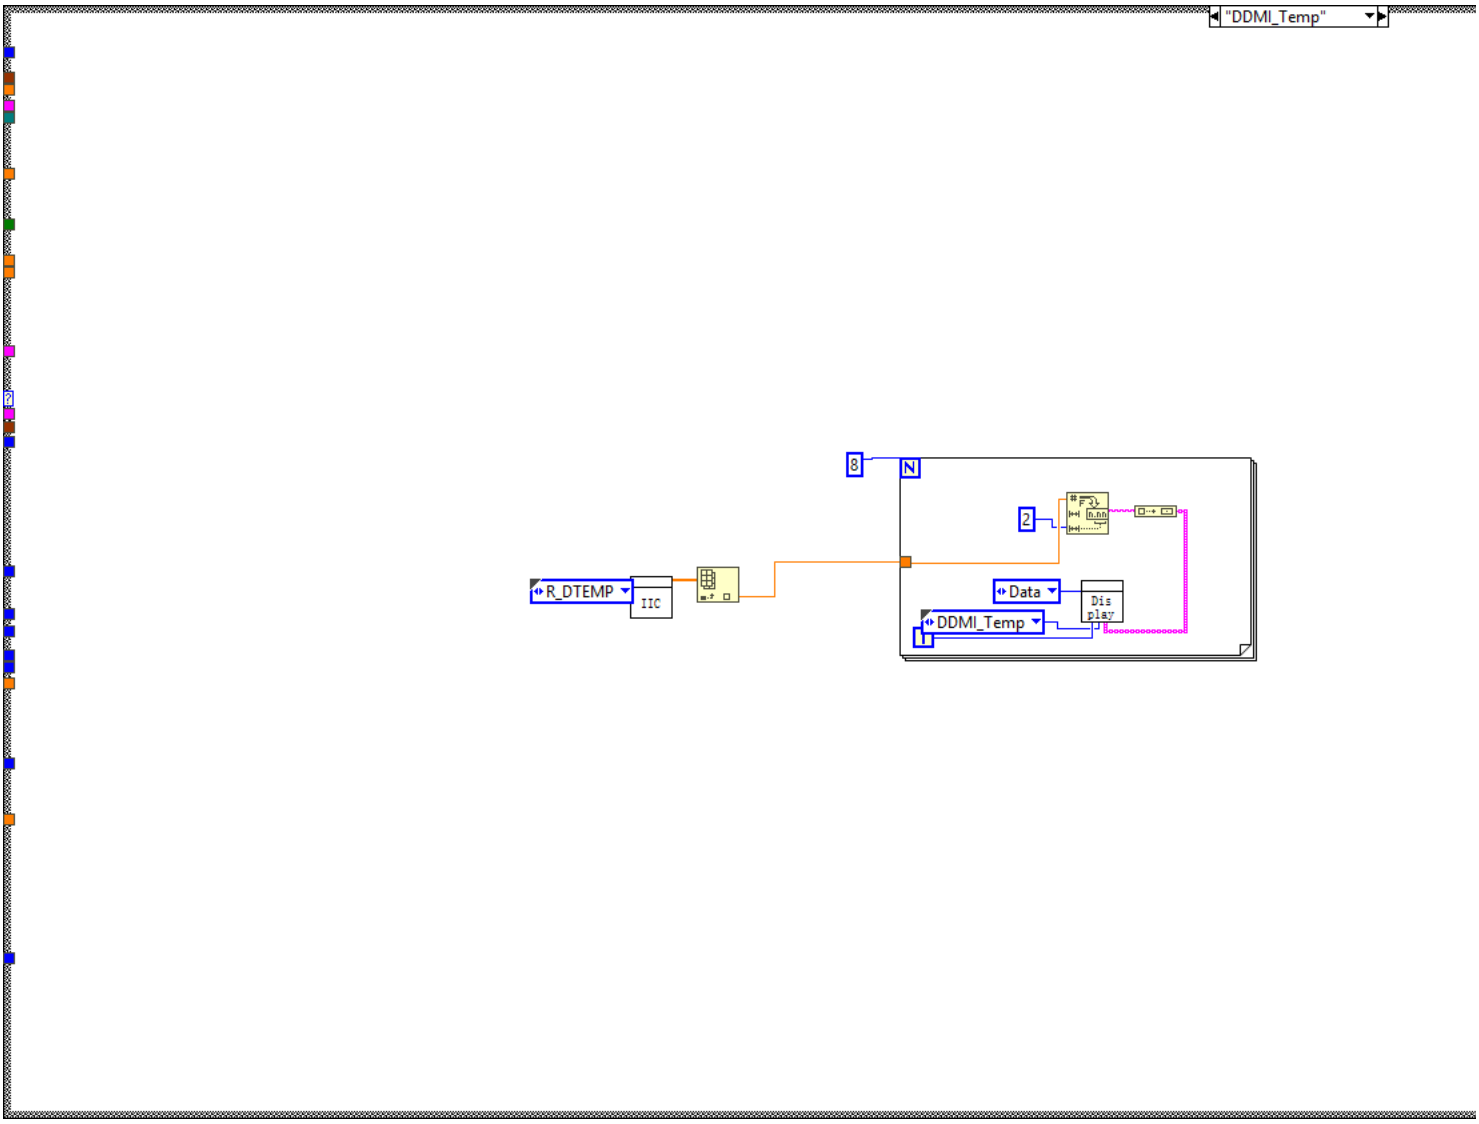

True
"Final test HT",
AWS

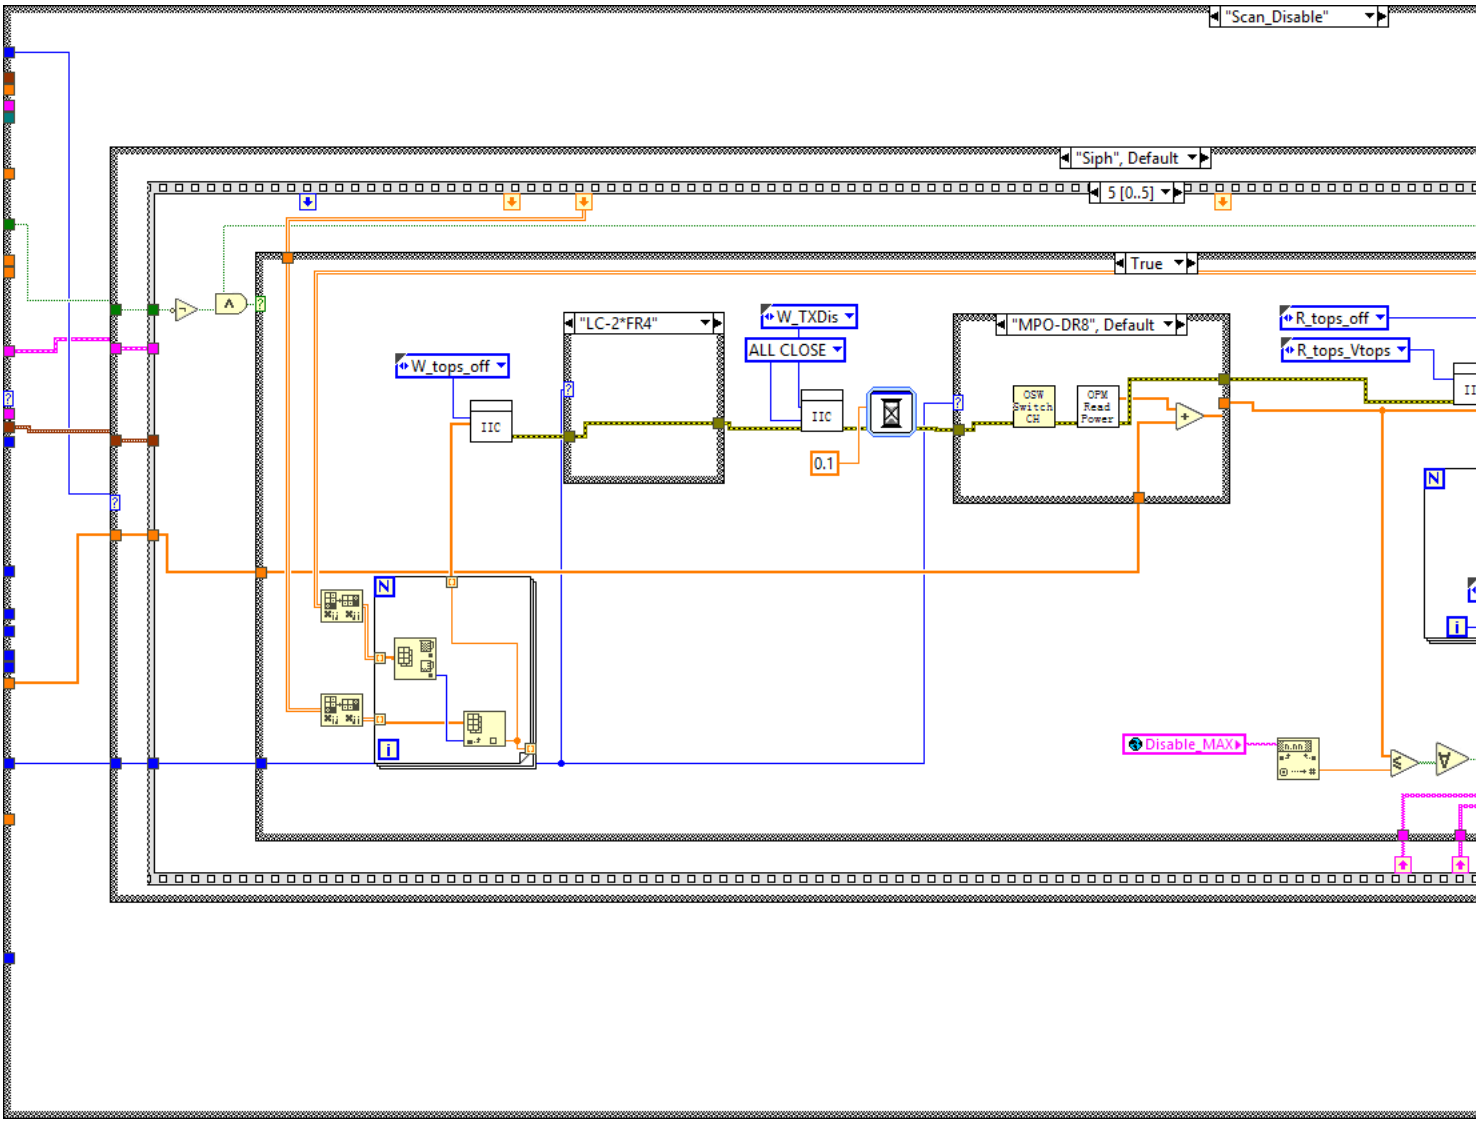

"¼U", Default

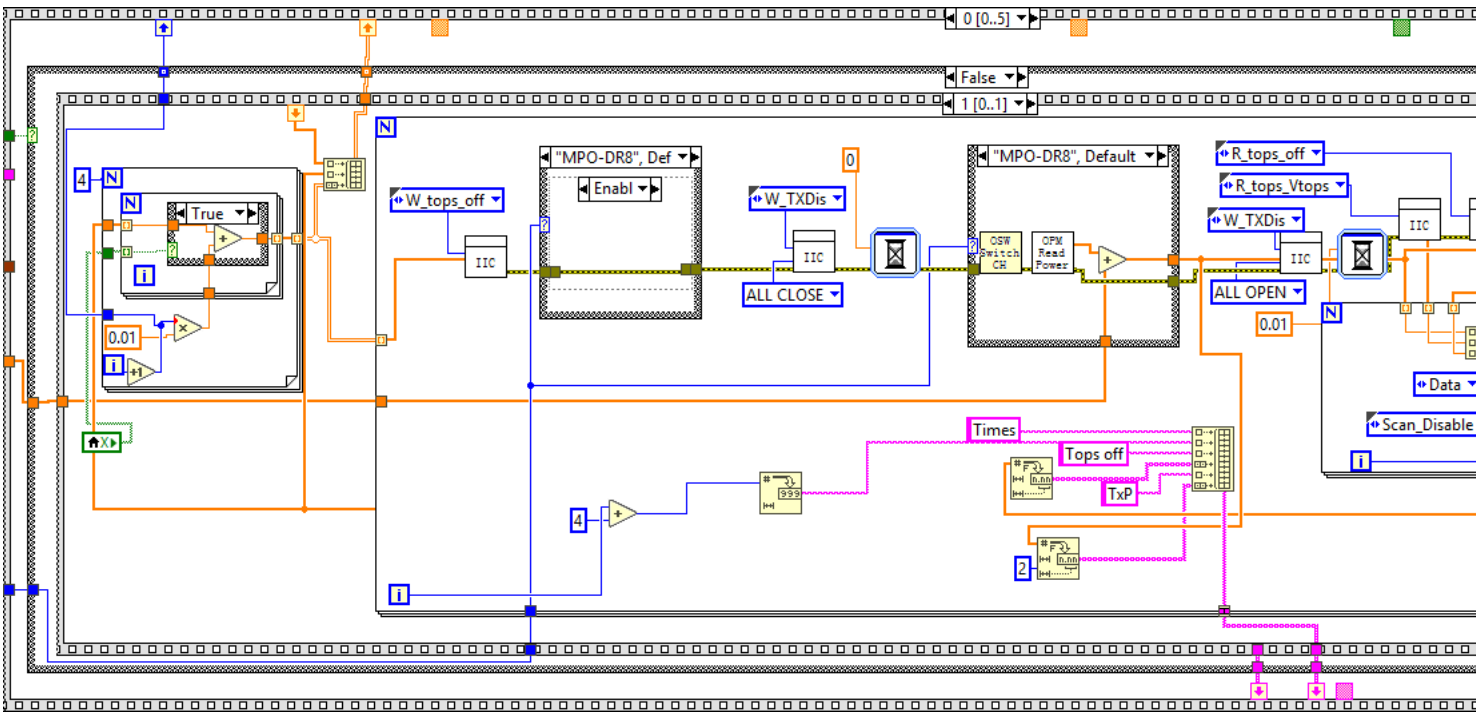

True

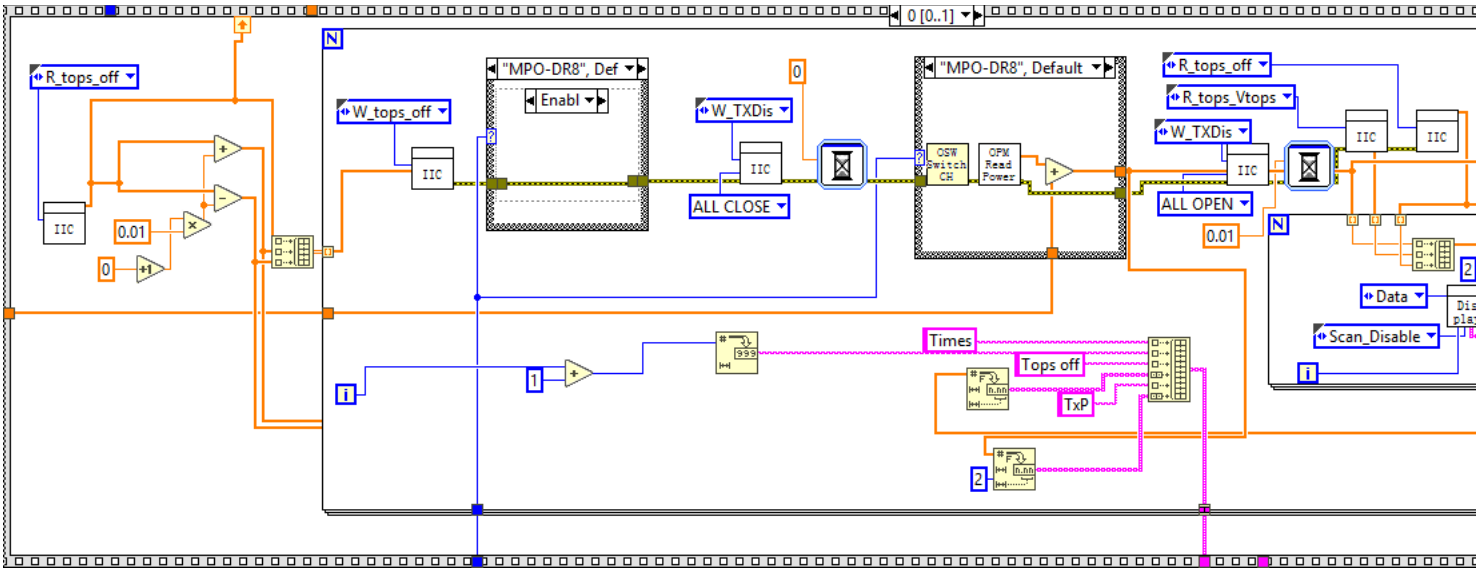

"Final test", "Final test HT



"¼Ù", Defaul



"DDMI_Temp"
8
N
2
R_DTEMP
IIC
Data
DDMI_Temp
Dis
play



"Scan_Disable"
"Siph", Default
5 [0..5]
True
W_tops_off
IIC
"LC-2*FR4"
W_TXDis
ALL CLOSE
IIC
0.1
"MPO-DR8", Default
OSW Switch CH
OPM Read Power
R_tops_off
R_tops_Vtops
Disable_MAX



0 [0..5]
False
1 [0..1]
4
True
0.01
W_tops_off
IIC
"MPO-DR8", Def
Enabl
W_TXDis
0
ALL CLOSE
"MPO-DR8", Default
OSW Switch CH
OPM Read Power
R_tops_off
R_tops_Vtops
W_TXDis
ALL OPEN
0.01
Data
Scan_Disable
Times
Tops off
TxP
4
2



0 [0..1]
R_tops_off
W_tops_off
"MPO-DR8", Def
Enabl
W_TXDis
0
"MPO-DR8", Default
R_tops_off
R_tops_Vtops
W_TXDis
ALL CLOSE
ALL OPEN
IIC
0.01
OSW Switch CH
OPM Read Power
Times
Tops off
TxP
Data
Scan_Disable



"LC-2*FR4"
Enabl
OSW Switch CH
OPM Read Power



Disabled
OSW Switch CH
DCA Read Power



"LC-2*FR4"



Disabled
IIC



True



True

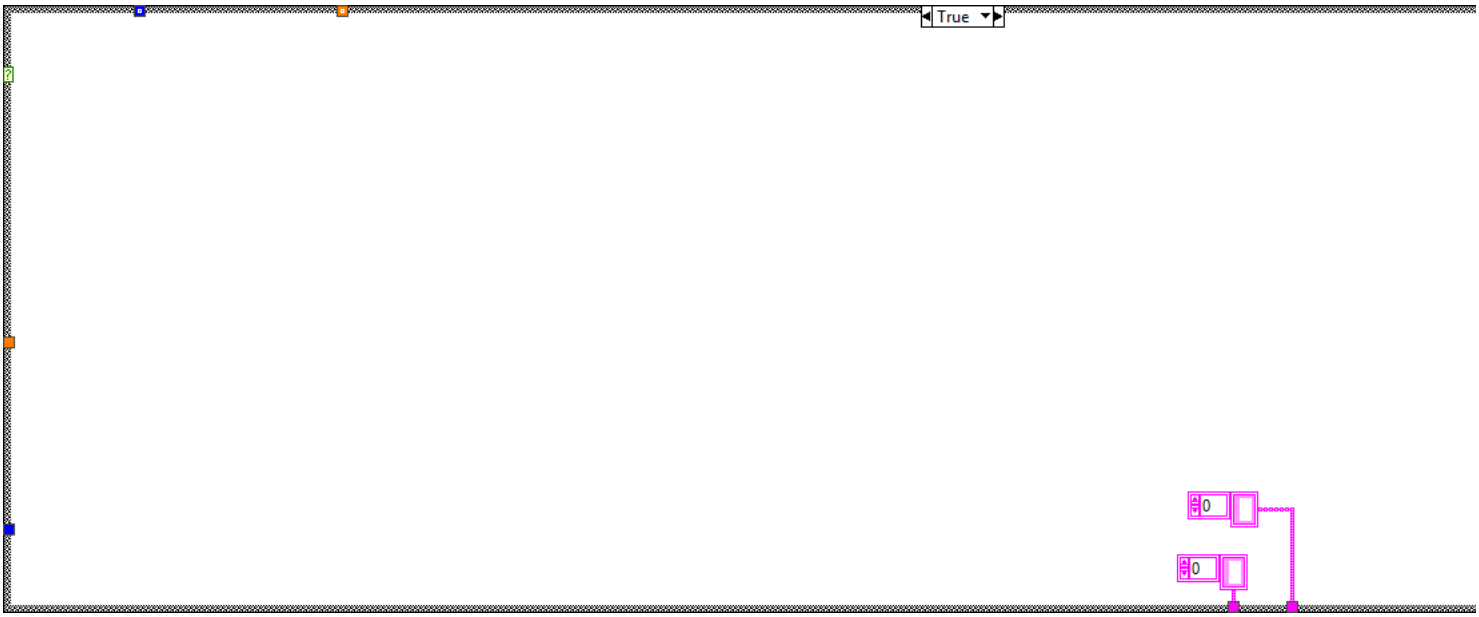

"LC-2*FR4"
Enabl
OSW Switch CH
OPM Read Power


Disabled
OSW Switch CH
DCA Read Power

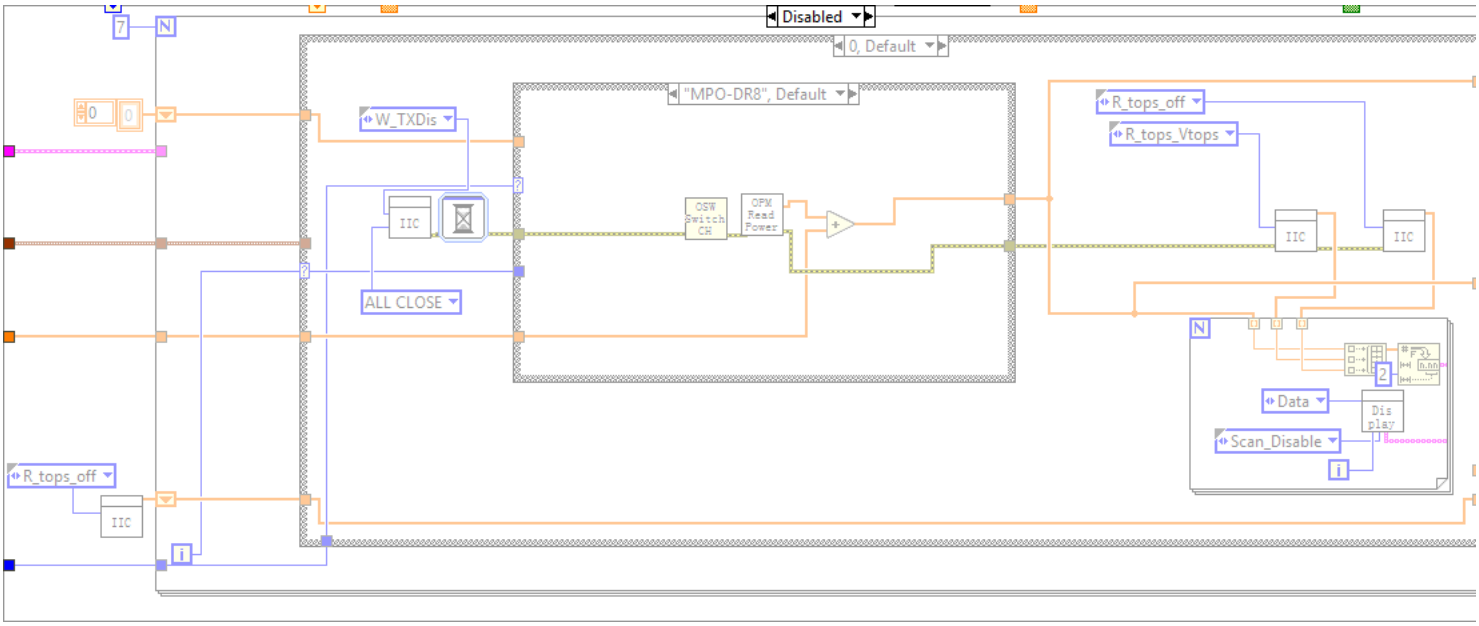

"LC-2*FR4"

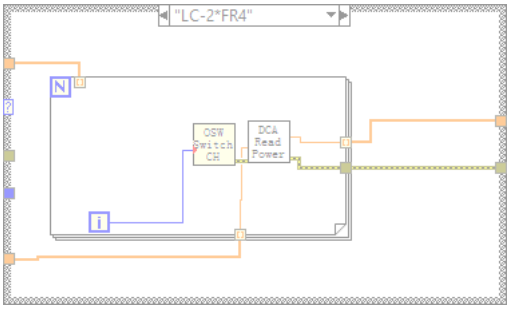

Disabled
IIC

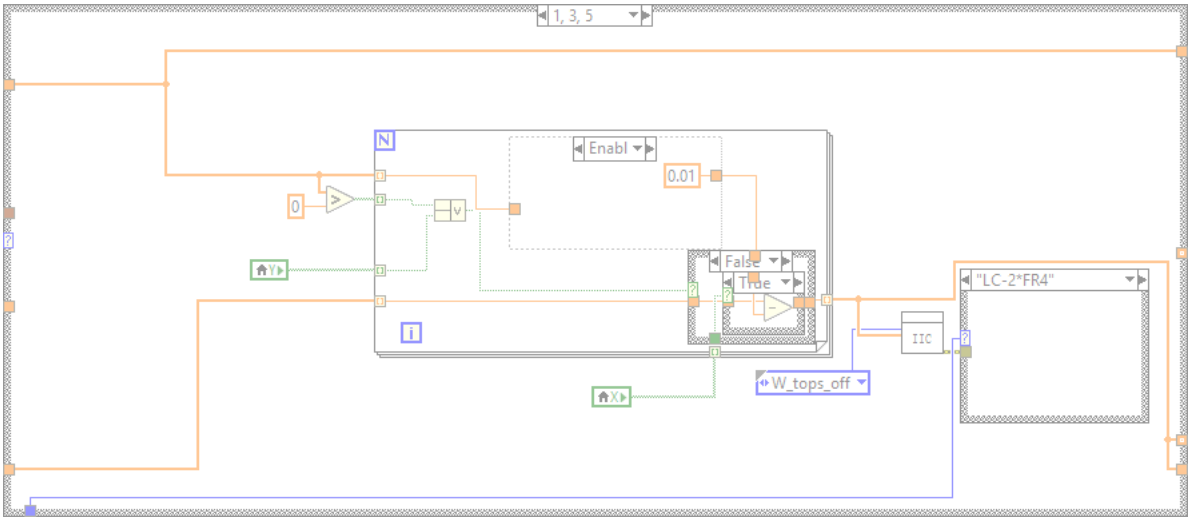

False


True
0
0



1 [0..5]
Enabl



Disabled
0, Default
"MPO-DR8", Default
W_TXDis
ALL CLOSE
R_tops_off
R_tops_Vtops
Data
Scan_Disable
IIC
OSW Switch CH
OPM Read Power
Dis play



"LC-2*FR4"
OSW Switch CH
DCA Read Power

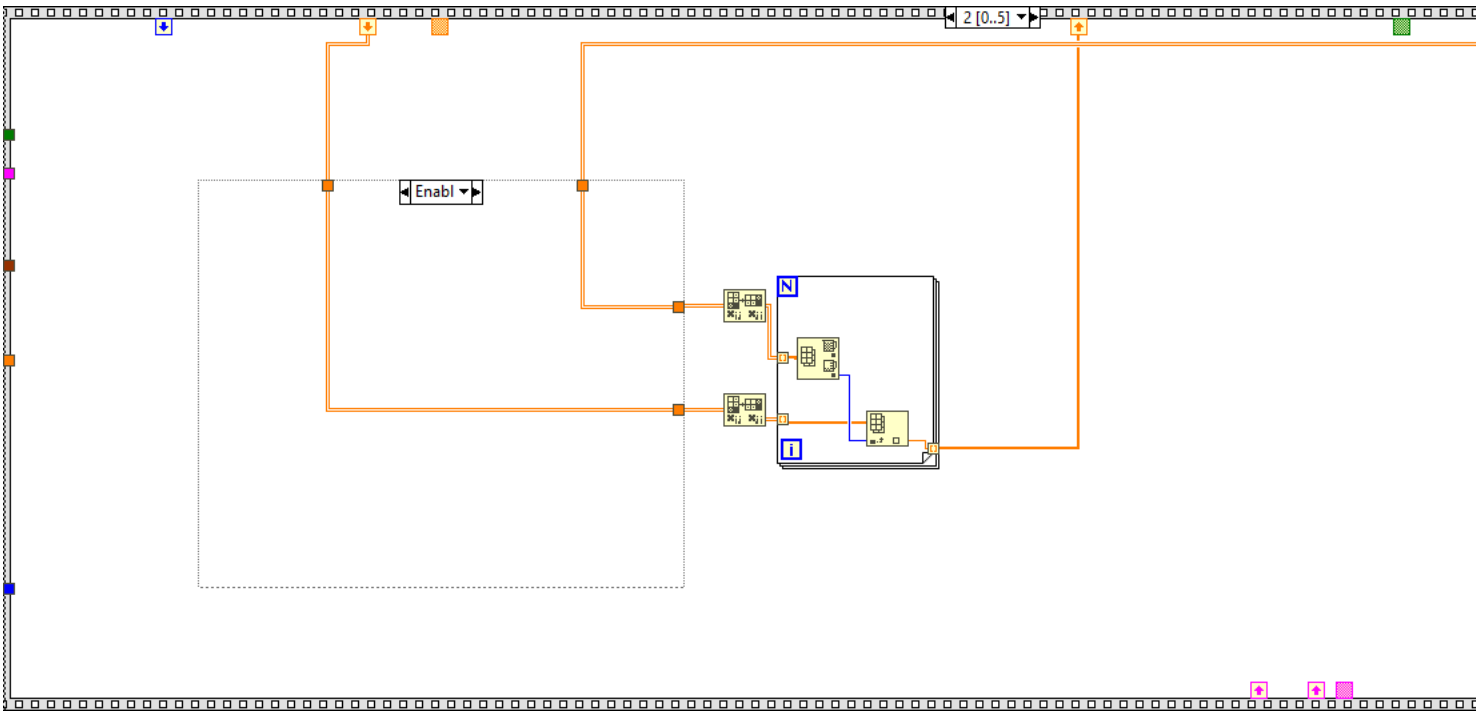

1, 3, 5
Enabl
0.01
0
False
True
W_tops_off
"LC-2*FR4"
IIC

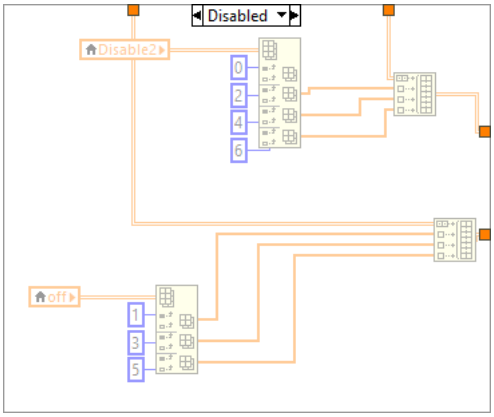

False

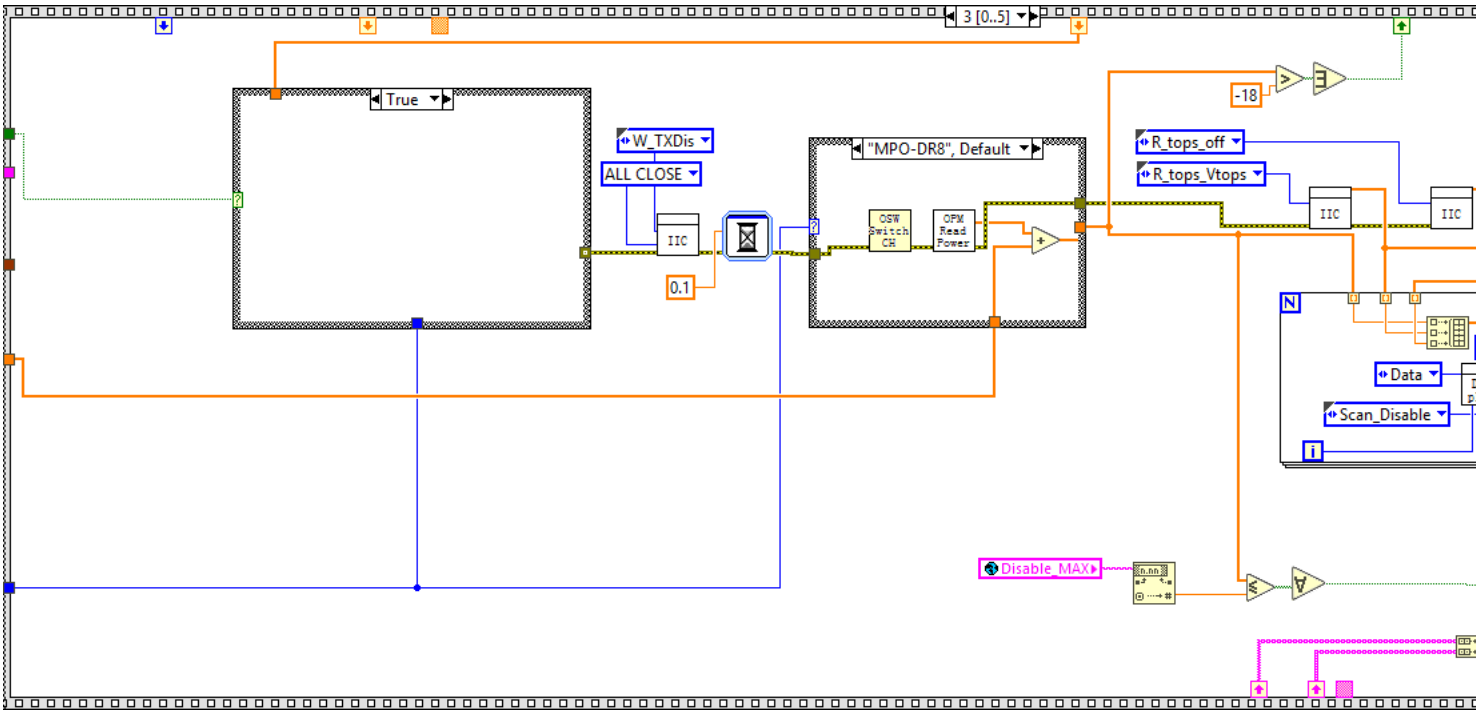

True



Disabled
-15
-19
0.03
0.01



"MPO-DR8", Default
IIC
W_Reset

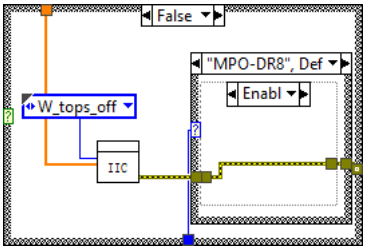

2 [0..5]
Enabl



Disabled
Disable2
0
2
4
6
off
1
3
5



3 [0..5]
True
W_TXDis
ALL CLOSE
IIC
0.1
"MPO-DR8", Default
OSW Switch CH
OPM Read Power
-18
R_tops_off
R_tops_Vtops
IIC
IIC
N
Data
Scan_Disable
i
Disable_MAX
8.nn

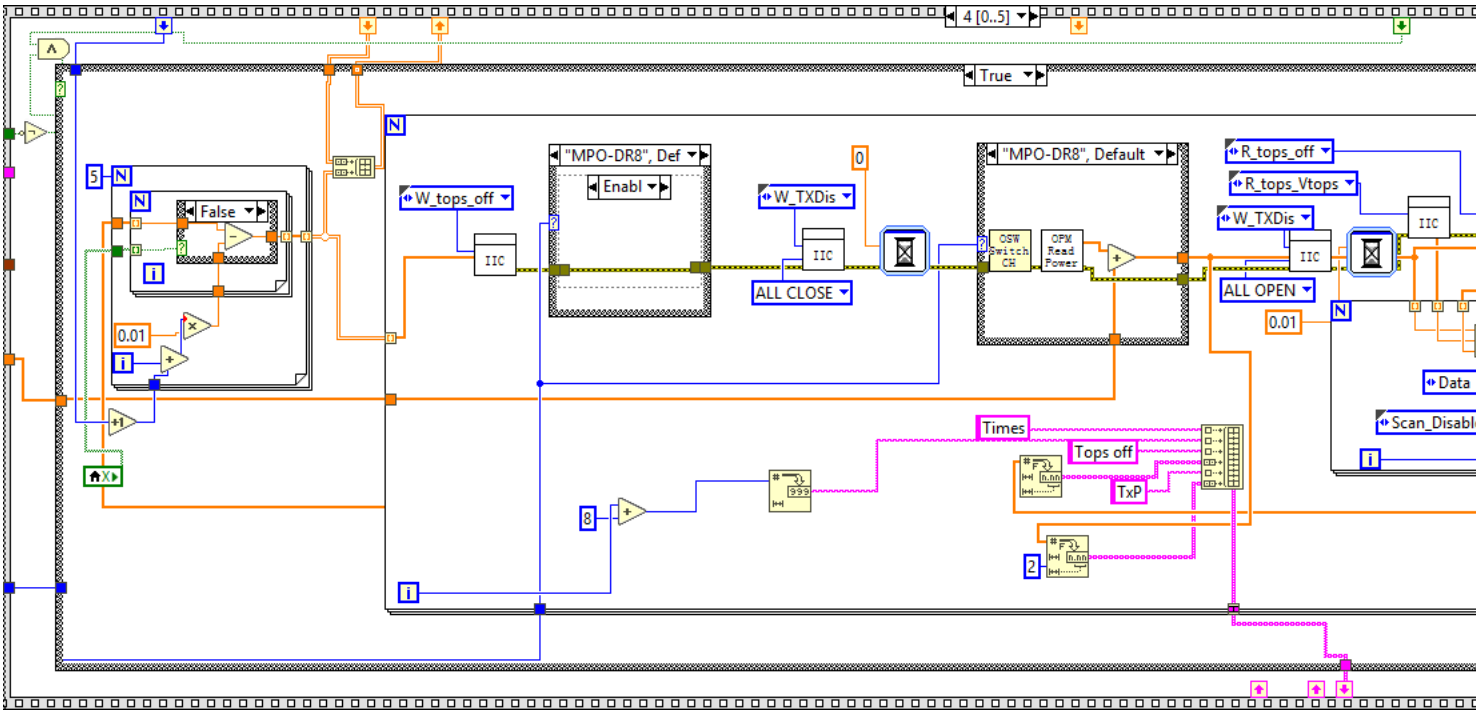

"LC-2*FR4"
Enabl
OSW Switch CH
OPM Read Power

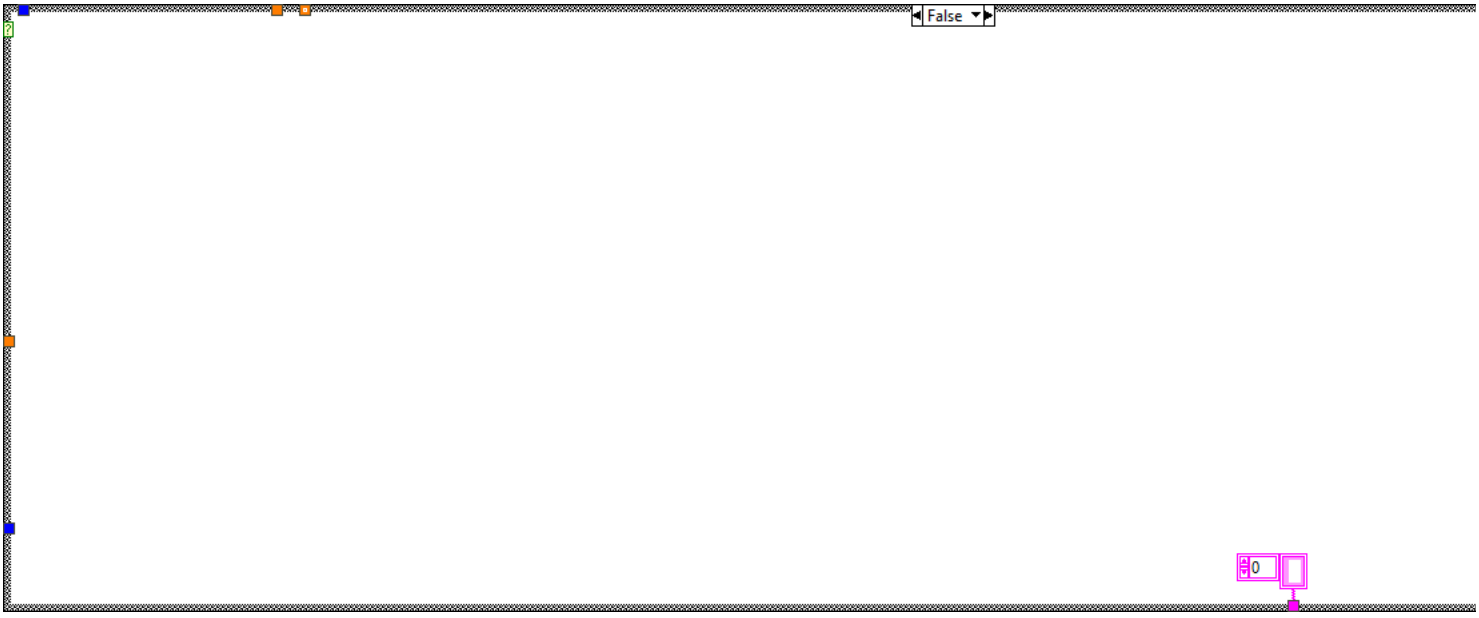

Disabled
N
OSW Switch CH
DCA Read Power
i



False
"MPO-DR8", Def
Enabl
W_tops_off
IIC



"LC-2*FR4"



Disabled
W_Reset
IIC



4 [0..5]
True
5
N
False
i
0.01
W_tops_off
IIC
"MPO-DR8", Def
Enabl
W_TXDis
0
ALL CLOSE
"MPO-DR8", Default
OSW Switch CH
OPM Read Power
R_tops_off
R_tops_Vtops
W_TXDis
ALL OPEN
0.01
Data
Scan_Disabl
Times
Tops off
TxP
8
999
2
f(n)



False
0

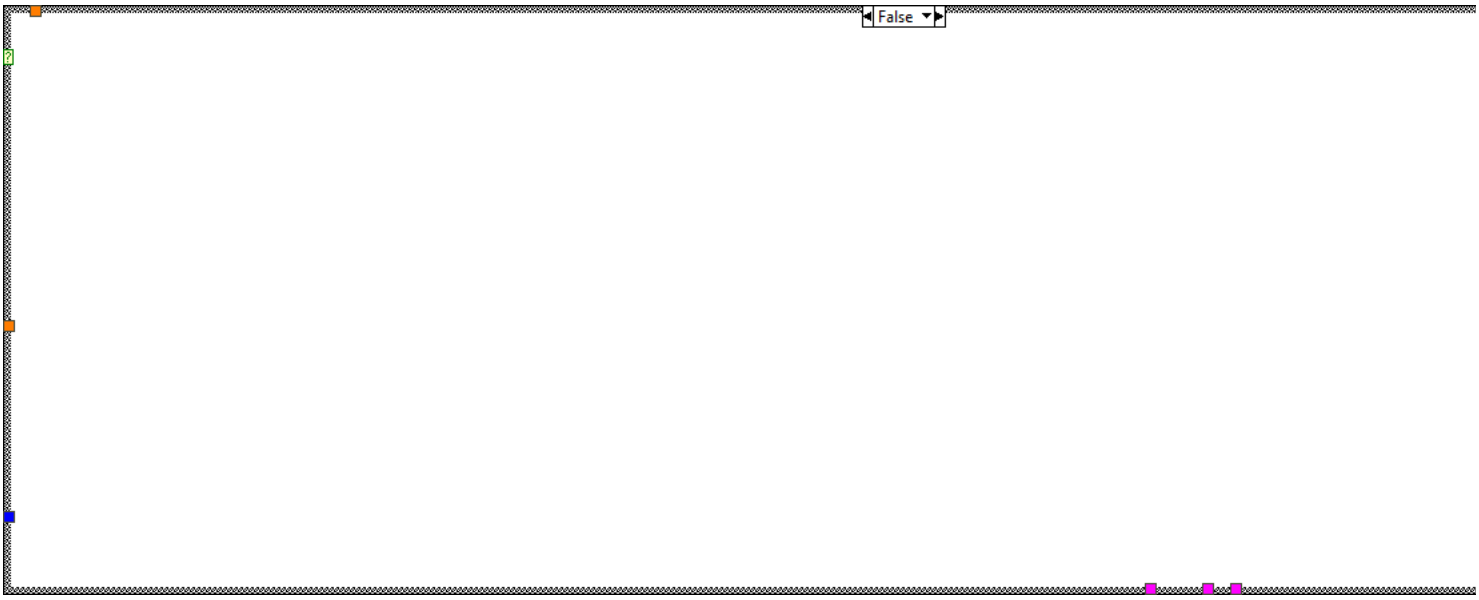

"LC-2*FR4"
Enabl
OSW Switch CH
OPM Read Power



Disabled
N
i
OSW Switch CH
DCA Read Power



"LC-2*FR4"



Disabled
IIC



True

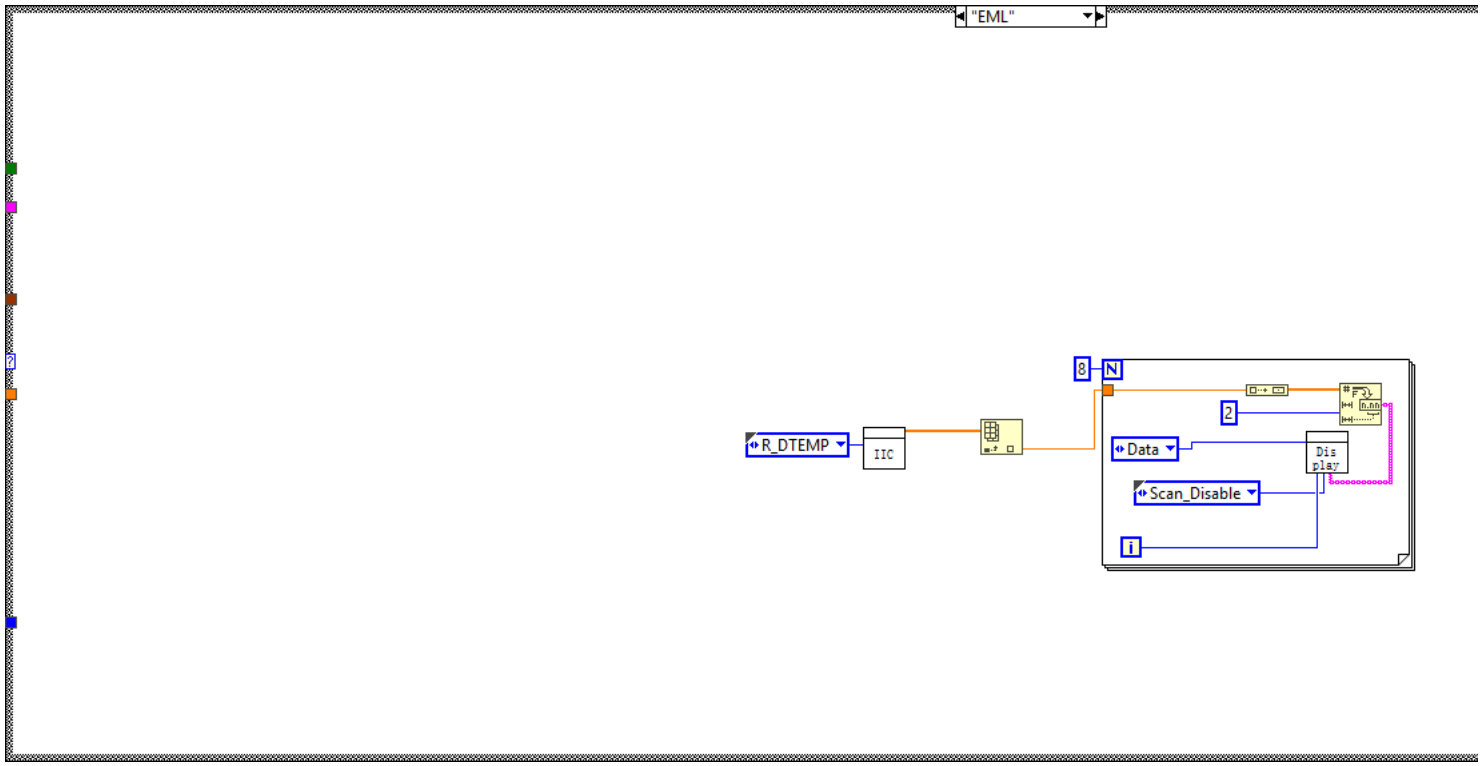

False

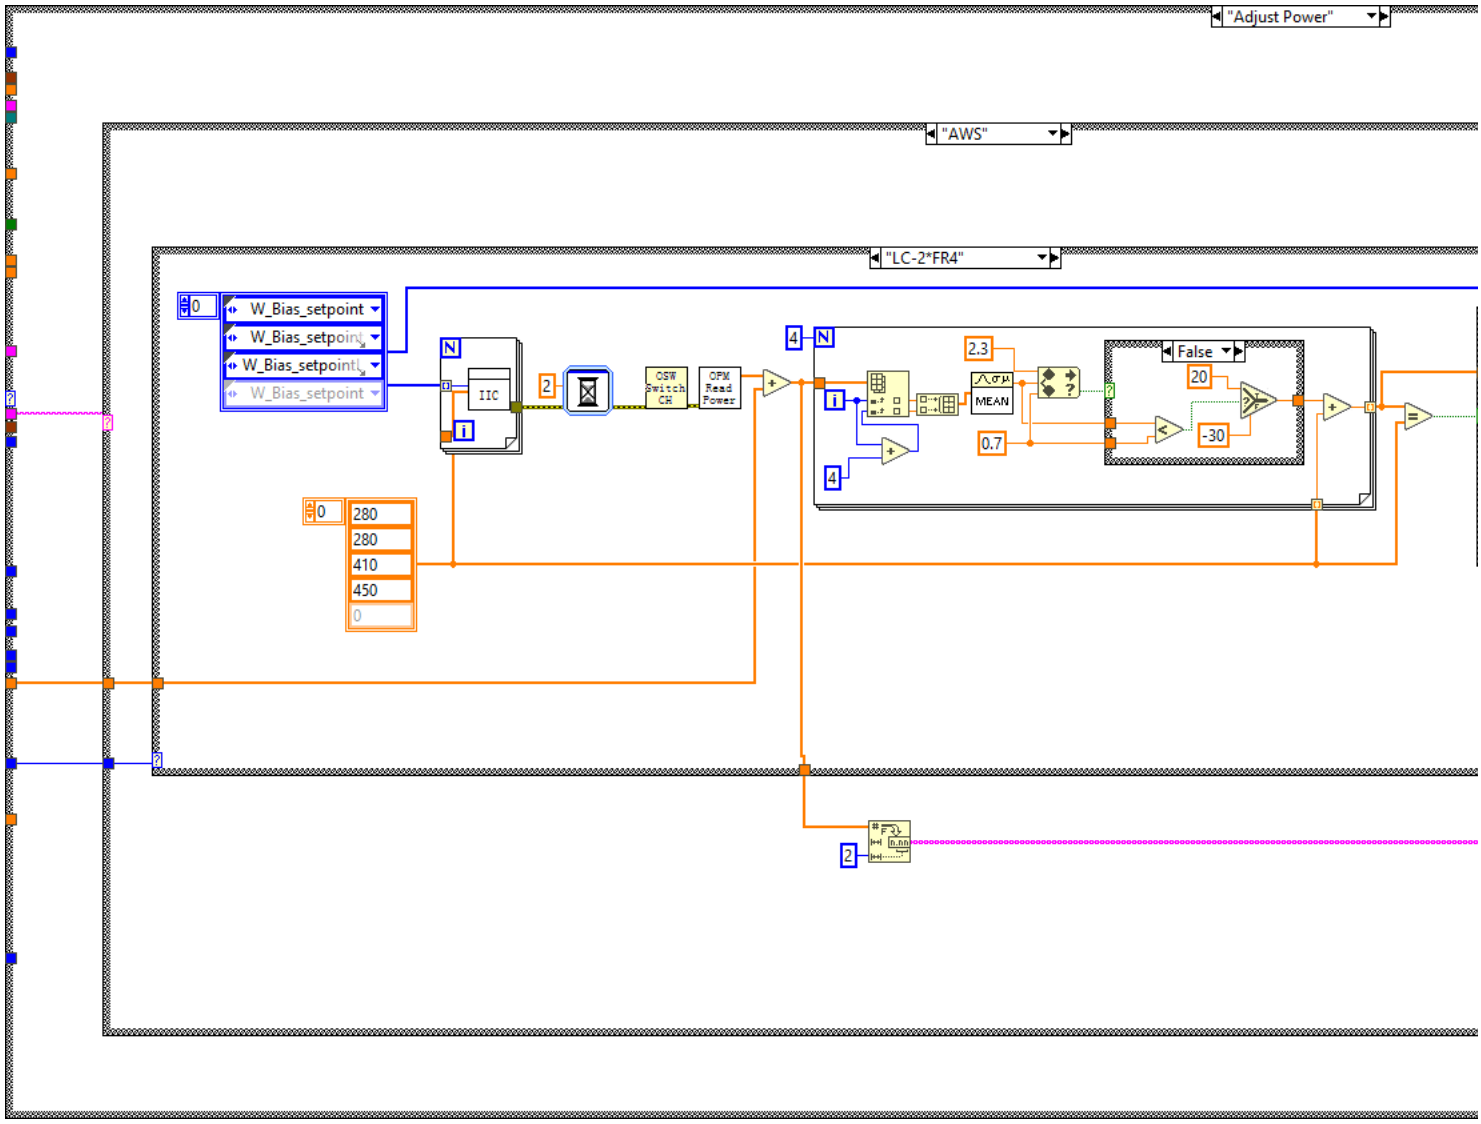

"LC-2*FR4"
Enabl
OSW Switch CH
OPM Read Power

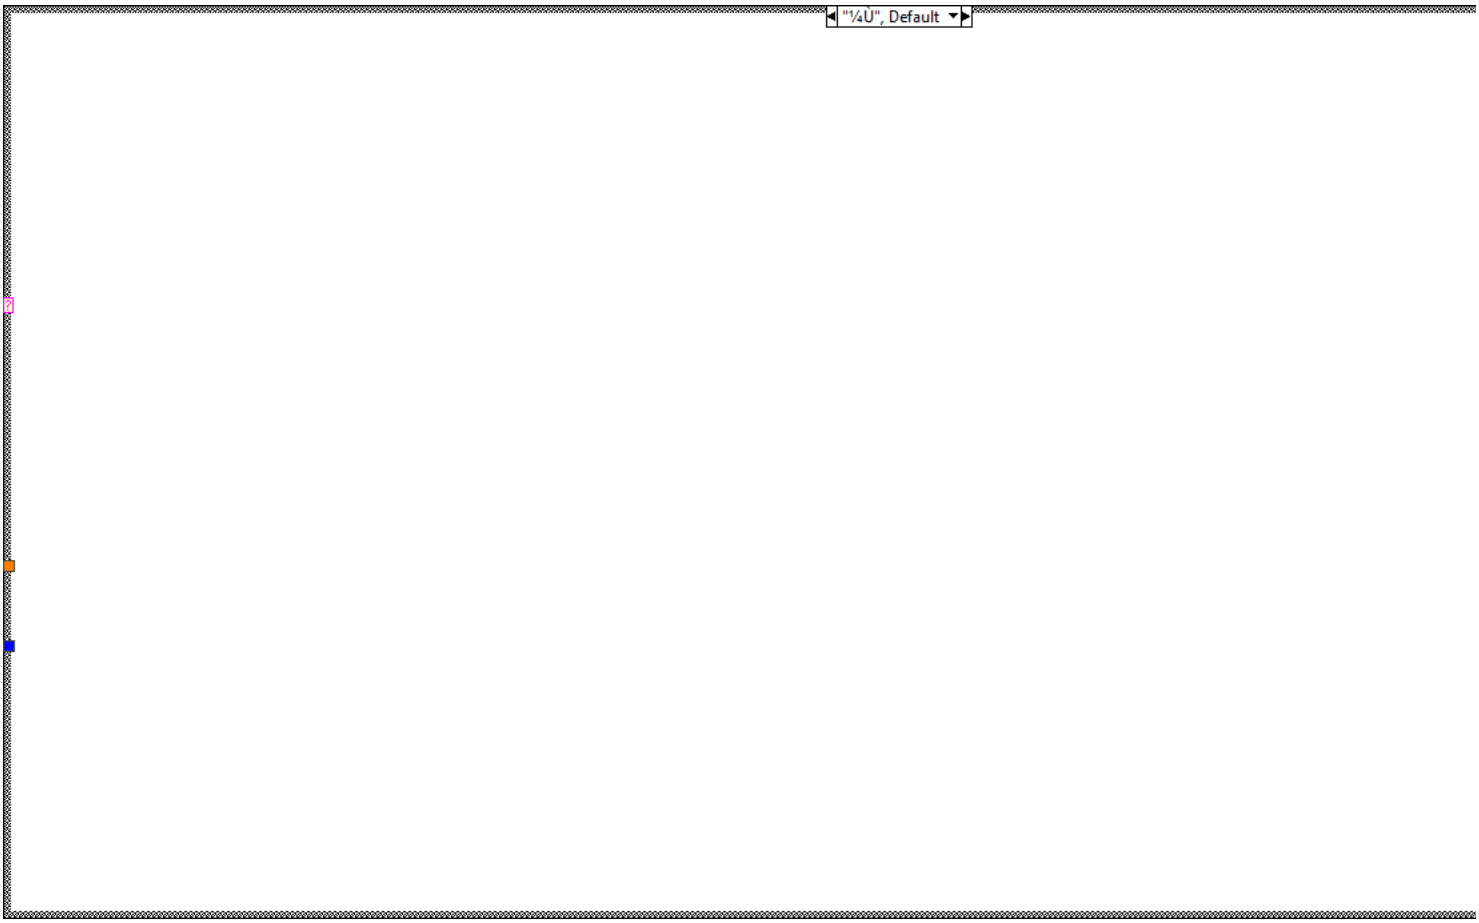

Disabled
N
OSW Switch CH
DCA Read Power
i

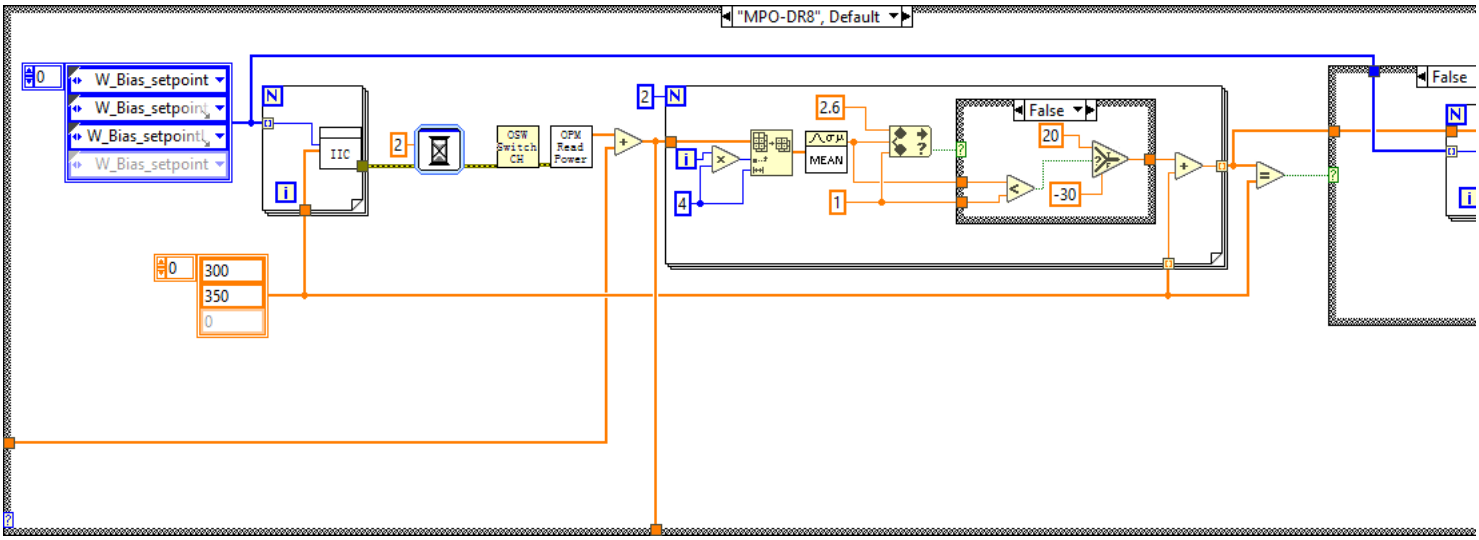

"MPO-DR8", Def
Enabl



Disabled
IIC



"EML"
R_DTEMP
IIC
8
N
2
Data
Dis play
Scan_Disable
i



"Adjust Power"
"AWS"
"LC-2*FR4"
0
W_Bias_setpoint
W_Bias_setpoint
W_Bias_setpoint
W_Bias_setpoint
IIC
2
OSW Switch CH
OPM Read Power
4
N
i
2.3
MEAN
0.7
False
20
-30
4
0
280
280
410
450
0
2



"¼U", Default


"MPO-DR8", Default
0
W_Bias_setpoint
W_Bias_setpoint
W_Bias_setpoint
W_Bias_setpoint
N
i
IIC
2
OSW Switch CH
OPM Read Power
+
2
N
i
4
2.6
MEAN
1
False
20
-30
+
=
False
N
i
0
300
350
0


True
0


True





List of SubVIs and Express VIs with Configuration Information

Item_Step.ctl

C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\Item_Step.ctl

Temp Type.ctl

C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\Temp Type.ctl

subTimeDelay.vi

C:\Program Files (x86)\National Instruments\LabVIEW 2025\vi.lib\express\express execution control\TimeDelayBlock.llb\subTimeDelay.vi

Clear Errors.vi

C:\Program Files (x86)\National Instruments\LabVIEW 2025\vi.lib\Utility\error.llb\Clear Errors.vi

NI_AALBase.lvlib:Mean.vi

C:\Program Files (x86)\National Instruments\LabVIEW 2025\vi.lib\Analysis\baseanly.llb\Mean.vi

Save Record.vi

C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\Save Record.vi

NI_AALBase.lvlib:Mean (DBL).vi

C:\Program Files (x86)\National Instruments\LabVIEW 2025\vi.lib\Analysis\baseanly.llb\Mean (DBL).vi

IIC.vi

C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\IIC.vi

Display_Step.ctl

C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\Display_Step.ctl

Calulate_Curve Fit Coefficient.vi

C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\Calulate_Curve Fit Coefficient.vi

TDECQ_4.8E_6.vi

C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\TDECQ_4.8E_6.vi

Read_TX_Total_AOP.vi

C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\Read_TX_Total_AOP.vi

SEN Cal_400G.vi

C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\SEN Cal_400G.vi

OMA Formula.vi

C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\OMA Formula.vi

BERT Read ER.vi

C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\BERT Read ER.vi

OVA Set Wavelength.vi

C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\OVA Set Wavelength.vi

Set Temp.vi

C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\Set Temp.vi

Wait_Temp.vi

C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\Wait_Temp.vi

OSW2 Switch CH.vi

C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\OSW2 Switch CH.vi

OVA Init.vi

C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\OVA Init.vi

OSW Close.vi

C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\OSW Close.vi

TRx_System_R&W.vi

C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\TRx_System_R&W.vi

OPM Read Chs Power.vi

C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\OPM Read Chs Power.vi

Dispaly.vi

C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\Dispaly.vi

DDMI_Cal.vi

C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\DDMI_Cal.vi

OVA Set Chs Att.vi

C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\OVA Set Chs Att.vi

CH RxP To Att.vi

C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\CH RxP To Att.vi

DCA Read Power.vi

C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\DCA Read Power.vi

OSW Switch CH.vi

C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\OSW Switch CH.vi

I2C_Step.ctl

C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\I2C_Step.ctl

CH Att To RxP.vi

C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\CH Att To RxP.vi

DCA Optical Eye Test.vi

C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\DCA Optical Eye Test.vi

OSA Read Ch Data.vi

C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\OSA Read Ch Data.vi

PS Read Current.vi

C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\PS Read Current.vi

Equal Functor.lvclass:Equals.vi

C:\Program Files (x86)\National Instruments\LabVIEW 2025\vi.lib\Comparison\Equal\Equal Functor\Equals.vi

Equal Comparable.lvclass:Equals.vi

C:\Program Files (x86)\National Instruments\LabVIEW 2025\vi.lib\Comparison\Equal\Equal Comparable\Equals.vi

NI_AALPro.lvlib:Linear Fit.vi

C:\Program Files (x86)\National Instruments\LabVIEW 2025\vi.lib\Analysis\6fits.llb\Linear Fit.vi

G_100G.vi

C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\G_100G.vi

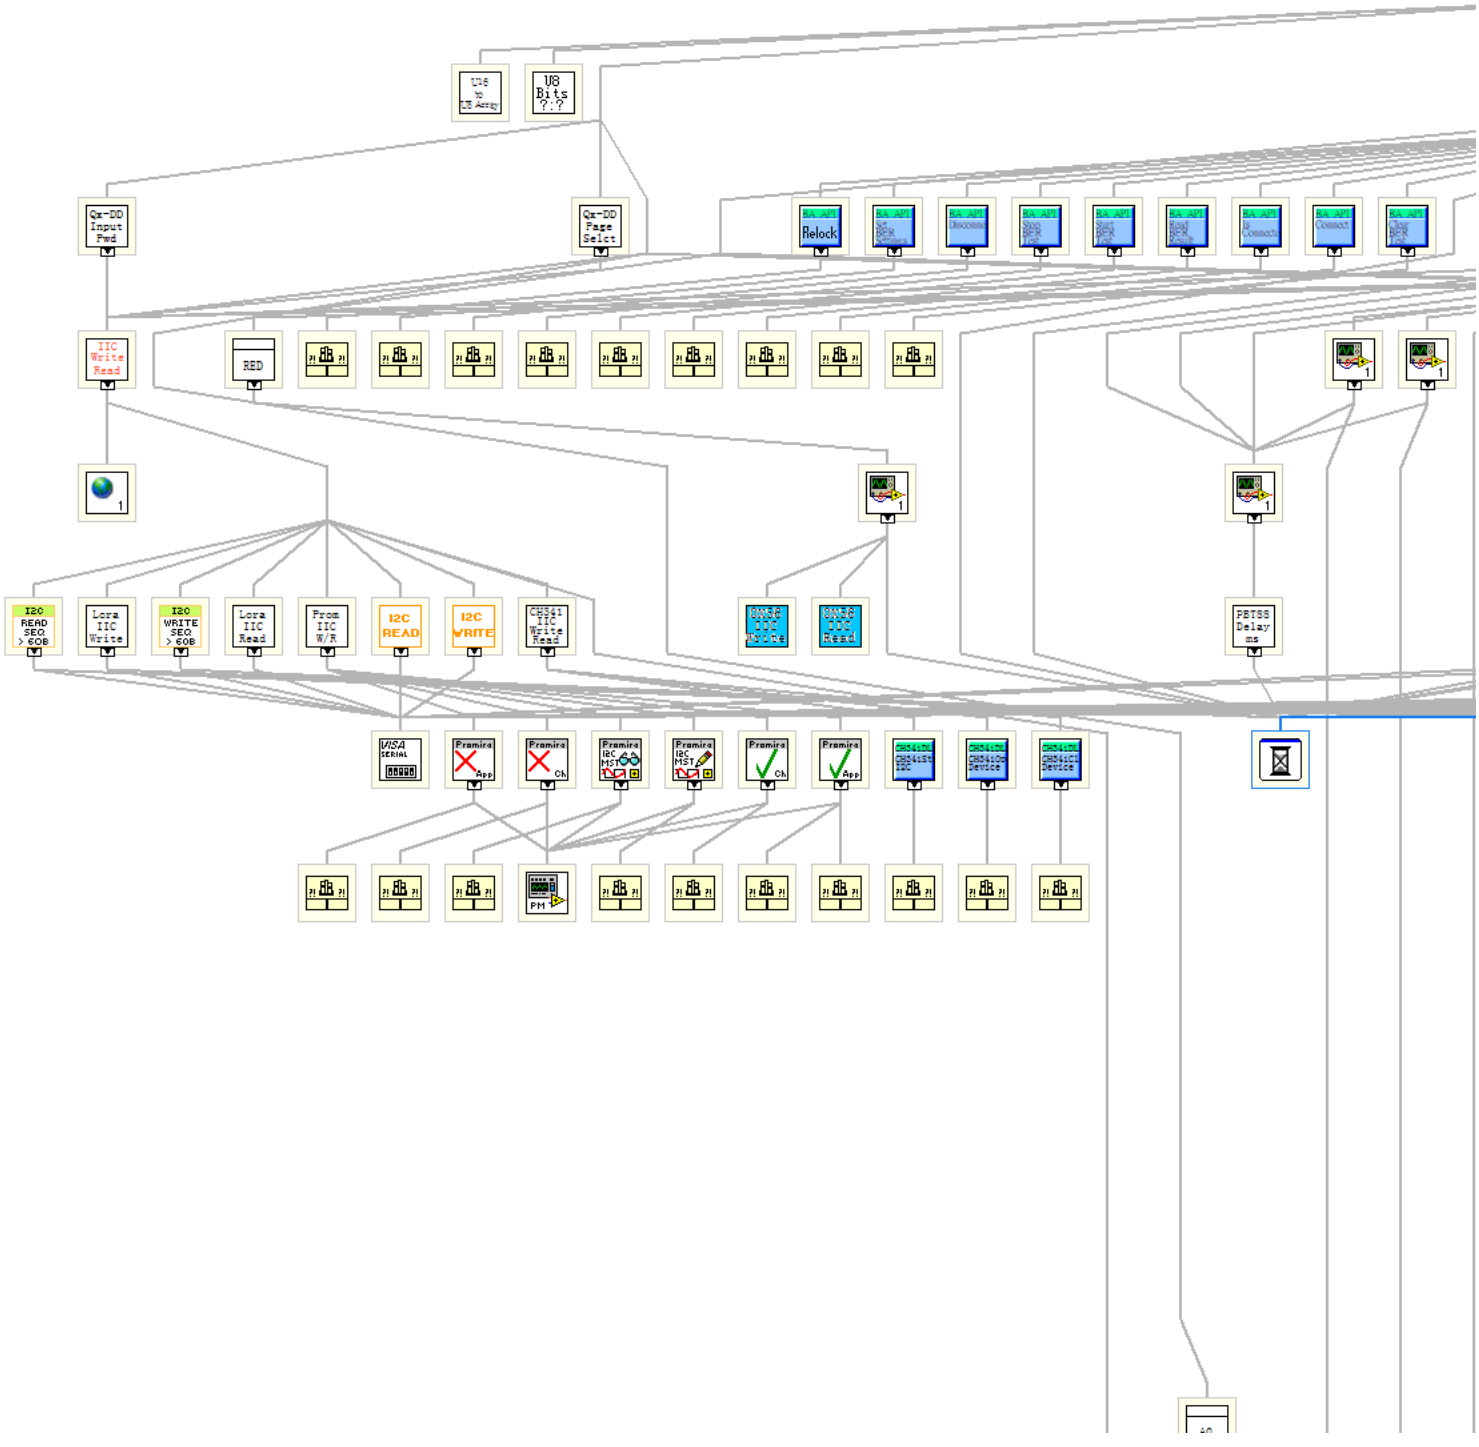
---

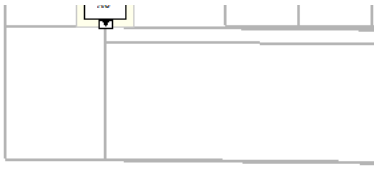
VI Revision History

"Item_Test.vi History"

Current Revision: 836

Position in Hierarchy


U16 to U8 Array
U8 Bits ?.?
Qx-DD Input Fwd
Qx-DD Page Selct
Relock
IIC Write Read
RED
I2C READ SEQ > 60B
Lora IIC Write
I2C WRITE SEQ > 60B
Lora IIC Read
From IIC W/R
I2C READ
I2C WRITE
CH341 IIC Write Read
CH341 I2C Write
CH341 I2C Read
PBTSS Delay ms
VISA SERIAL
Framira App
Framira Ch
Framira I2C MST
CH341A I2C
CH341A Device
PM



Iconified Cluster Constants
































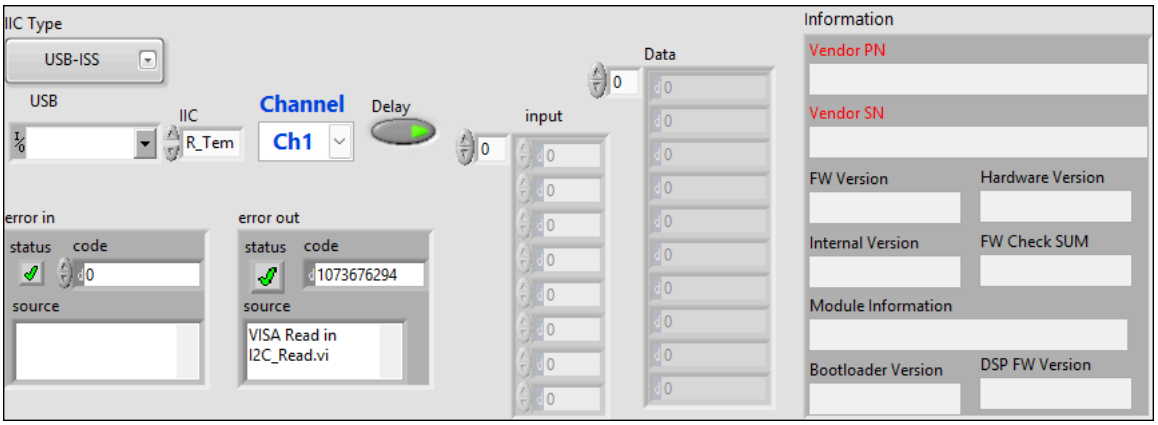




IIC.vi

Connector Pane



Front Panel



Controls and Indicators

error in

error in can accept error information wired from VIs previously called. Use this information to decide if any functionality should be bypassed in the event of errors from other VIs.

Right-click the **error in** control on the front panel and select **Explain Error** or **Explain Warning** from the shortcut menu for more information about the error.

status

status is TRUE (X) if an error occurred or FALSE (checkmark) to indicate a warning or that no error occurred.

Right-click the **error in** control on the front panel and select **Explain Error** or **Explain Warning** from the shortcut menu for more information about the error.

code

code is the error or warning code.

Right-click the **error in** control on the front panel and select **Explain Error** or **Explain Warning** from the shortcut menu for more information about the error.

source

source describes the origin of the error or warning.

Right-click the **error in** control on the front panel and select **Explain Error** or **Explain Warning** from the shortcut menu for more information about the error.

USB

IIC Type

IIC

Channel[Channel]

input

element

Delay

error out

The **error in** cluster can accept error information wired from VIs previously called. Use this information to decide if any functionality should be bypassed in the event of errors from other VIs.

The pop-up option **Explain Error** (or Explain Warning) gives more information about the error displayed.

status

The **status** boolean is either TRUE (X) for an error, or FALSE (checkmark) for no error or a warning.

The pop-up option **Explain Error** (or Explain Warning) gives more information about the error displayed.

code

The **code** input identifies the error or warning.

The pop-up option **Explain Error** (or Explain Warning) gives more information about the error displayed.

source

The **source** string describes the origin of the error or warning.

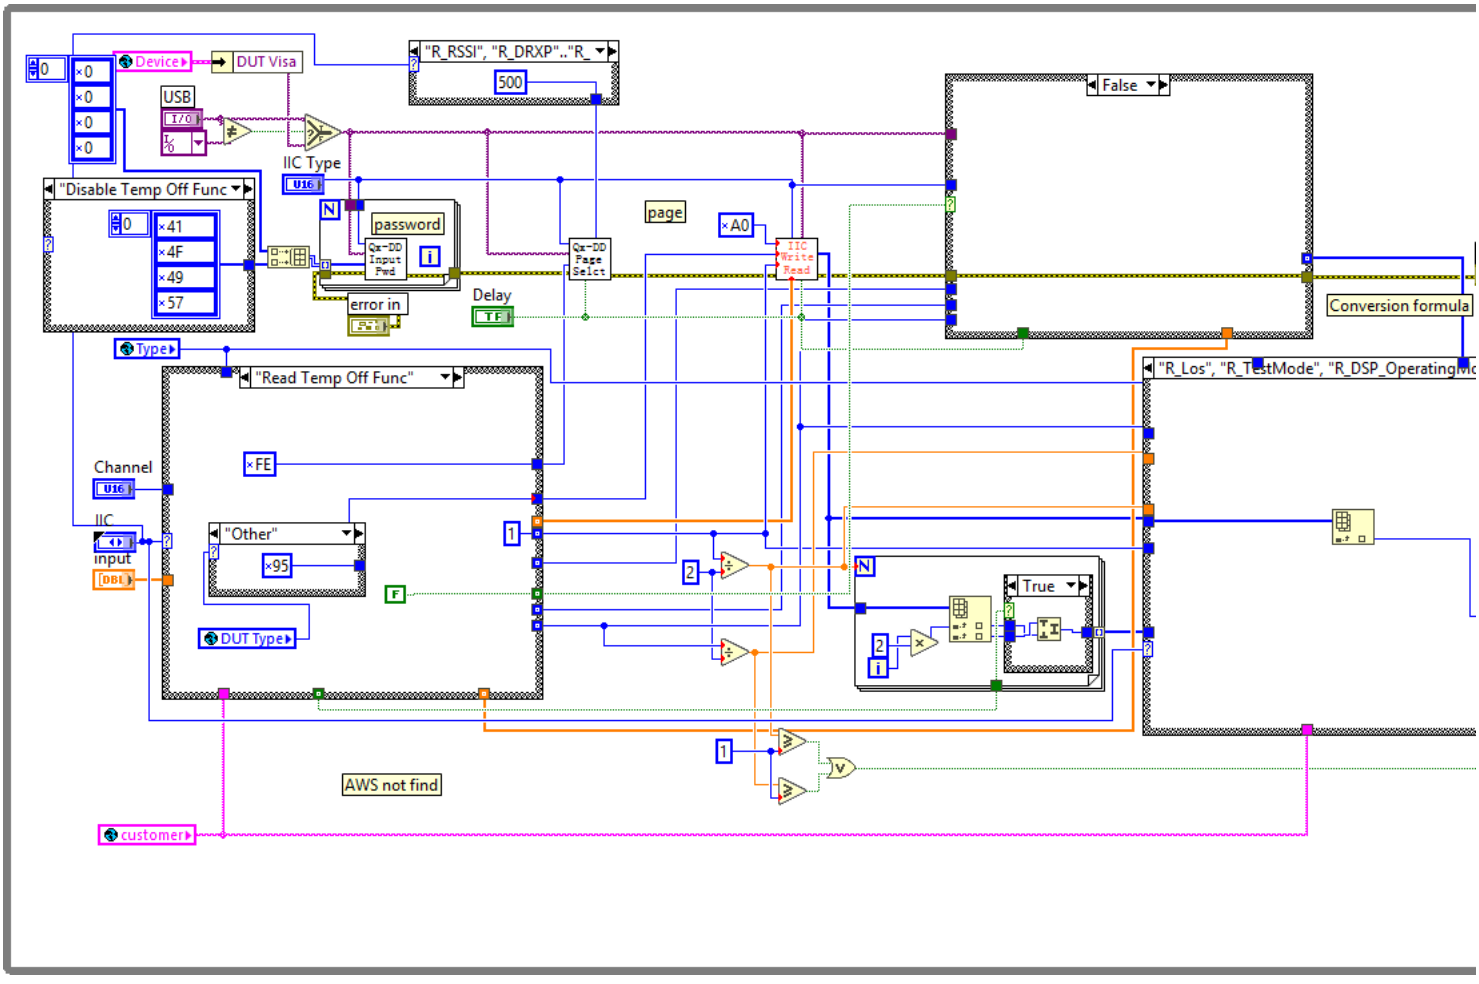
The pop-up option **Explain Error** (or Explain Warning) gives more information about the error displayed.

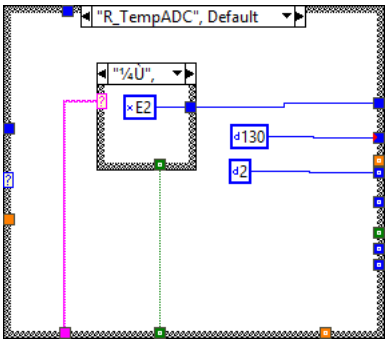
Data


Information

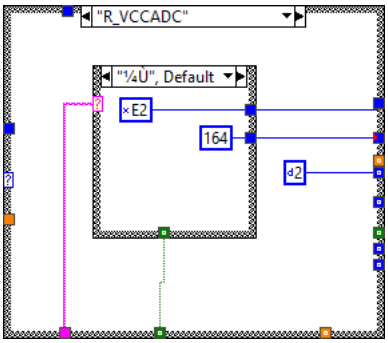
- **Vendor PN[Vendor PN]**
- **Vendor SN[Vendor SN]**
- **FW Version[FW Version]**
- **Hardware Version[HW Version]**
- **Internal Version[Internal Version]**
- **FW Check SUM[FW Check SUM]**
- **Module Information[Module Info]**
- **Bootloader Version[Bootloader Version]**
- **DSP FW Version[DSP FW Version]**


Block Diagram

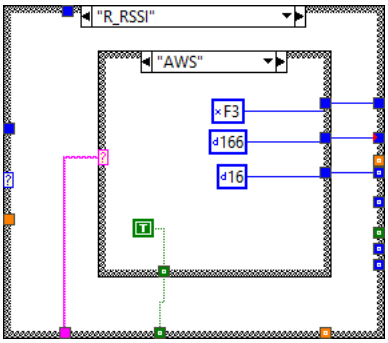




"R_TempADC", Default
"¼Ù",
×E2
d130
d2

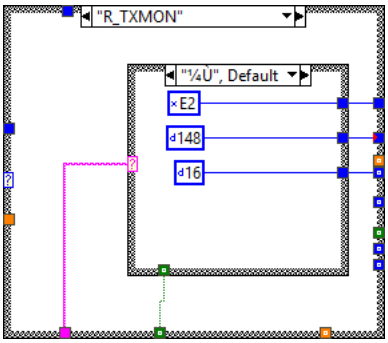

"AWS"
×F3



"R_VCCADC"
"¼Ù", Default
×E2
164
d2

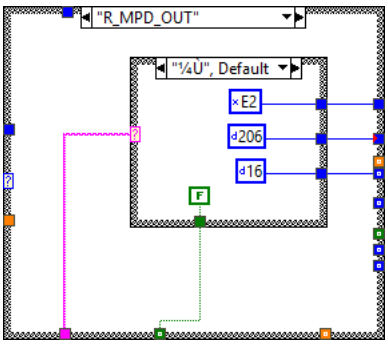

"AWS"
×F3
d132



"R_RSSI"
"AWS"
×F3
d166
d16

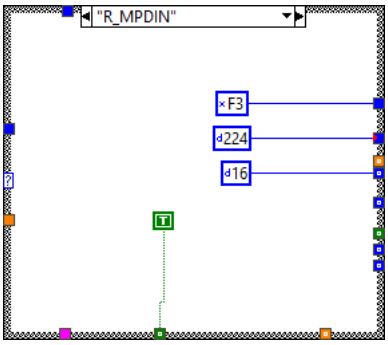

"¼Ù", Default
×E2
d132
d16

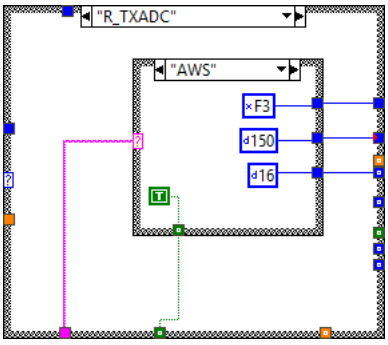

"R_TXMON"
"¼Ù", Default
×E2
d148
d16



"AWS"
×F3
d134
d16
T

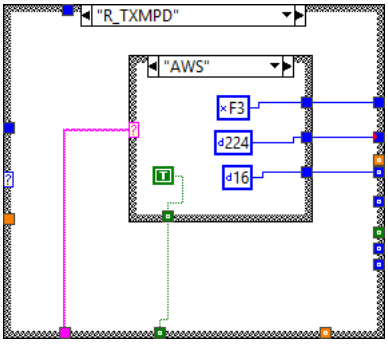

"R_MPD_OUT"
"¼Ù", Default
×E2
d206
d16
F



"AWS"
×F3
d240
d16
T

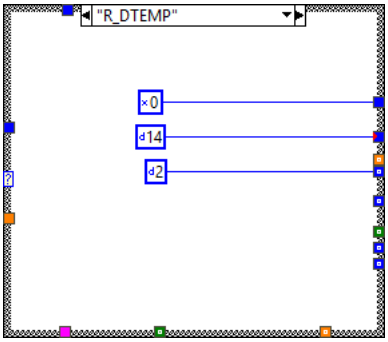

"R_MPDIN"
×F3
d224
d16
T

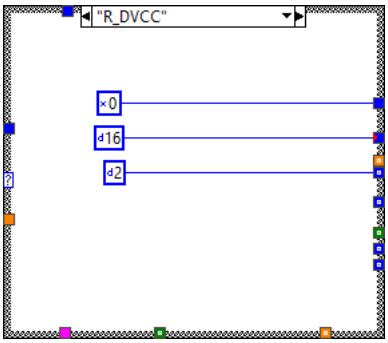

"R_TXADC"
"AWS"
×F3
d150
d16
T

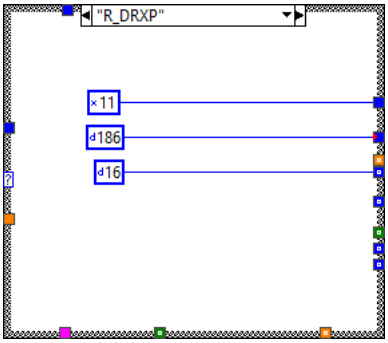

"¼Ù", Default
×E2
d206
d16

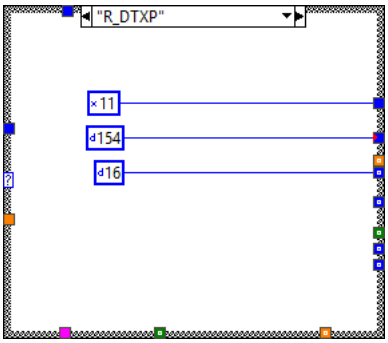

"R_TXMPD"
"AWS"
×F3
d224
d16

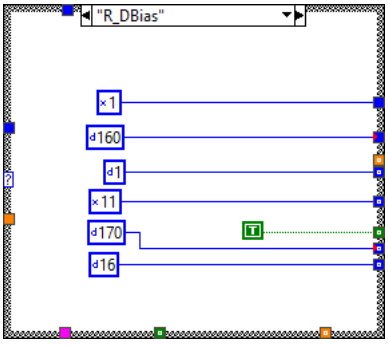

"¼Ù", Default
×E2
d172
d8

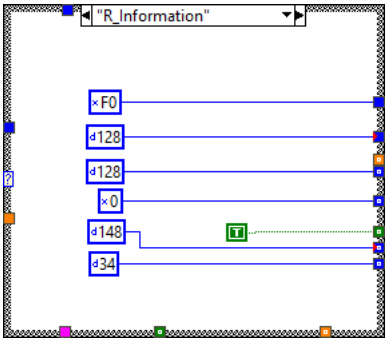

"R_DTEMP"
×0
d14
d2

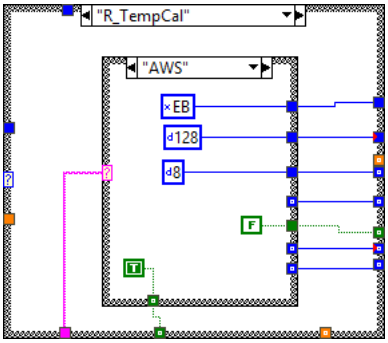

"R_DVCC"
×0
d16
d2



"R_DRXP"
×11
d186
d16

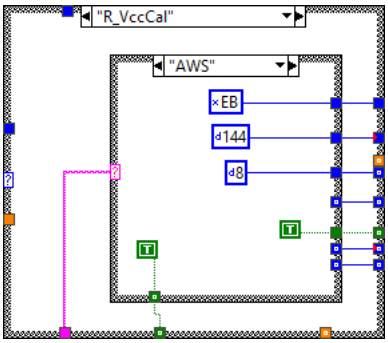

"R_DTXP"
×11
d154
d16



"R_DBias"
×1
d160
d1
×11
d170
d16

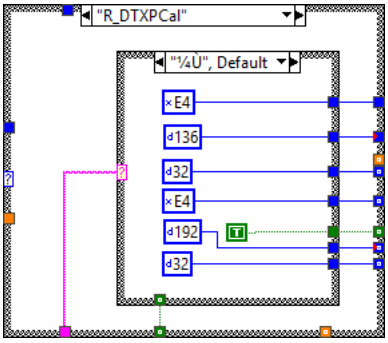

"R_Information"
×F0
d128
d128
×0
d148
d34



"R_TempCal"
"AWS"
×EB
d128
d8

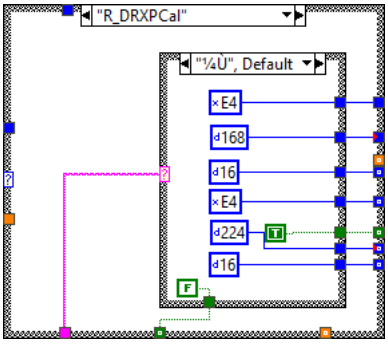

"¼Ù", Default
×E4
d132
d2
×E4
d240
2



"R_VccCal"
"AWS"
×EB
d144
d8

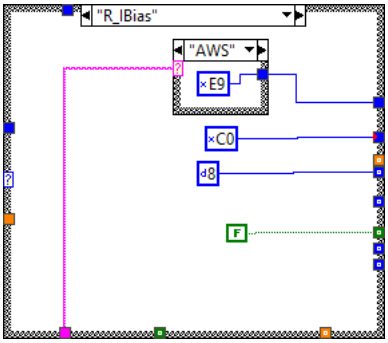

"¼Ù", Default
×E4
d128
d2
×E4
d184
d2



"R_DTXPCal"
"¼Ù", Default
×E4
d136
d32
×E4
d192
d32

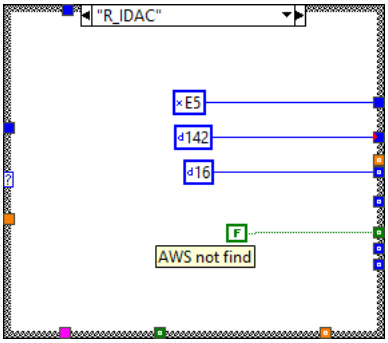

"AWS"
×EC
d192
d32
×ED
d192
d32

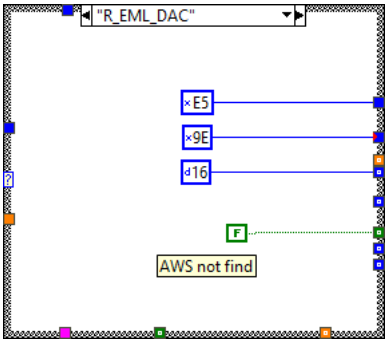

"R_DRXPCal"
"¼Ù", Default
×E4
d168
d16
×E4
d224
d16

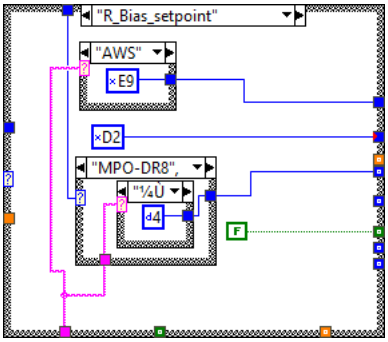

"AWS"
×EC
d144
d32
×ED
d144
d32



"R_IBias"
"AWS"
×E9
×C0
d8
F


"¼Ù",
×E5



"R_IDAC"
×E5
d142
d16
F
AWS not find

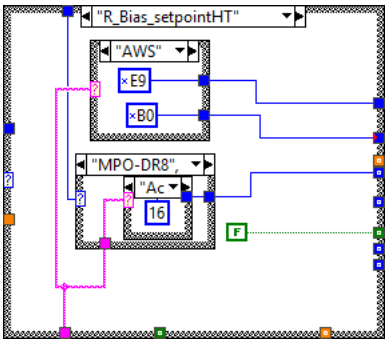

"R_EML_DAC"
×E5
×9E
d16
F
AWS not find



"R_Bias_setpoint"
"AWS"
×E9
×D2
"MPO-DR8",
"¼U
d4
F


"LC-2*FR4"
8



"Aca
16

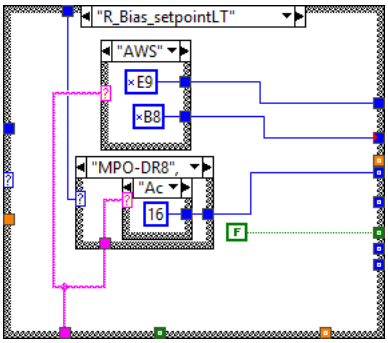

"¼Ù",
×E5



"R_Bias_setpointHT"
"AWS"
×E9
×B0
"MPO-DR8",
"Ac
16
F


"LC-2*FR4"
8



"¼
d4

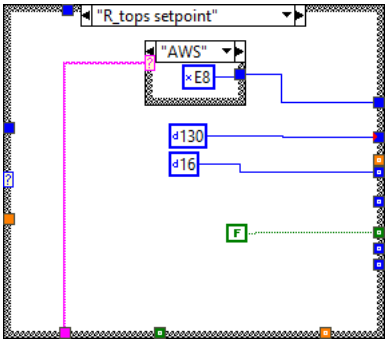

Default
×E3
×E2



"R_Bias_setpointLT"
"AWS"
×E9
×B8
"MPO-DR8",
"Ac
16
F

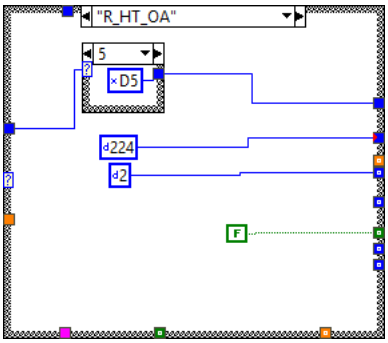

"LC-2*FR4"
8


"¼
d4


Defaul
×E3
×EA


"R_tops setpoint"
"AWS"
×E8
d130
d16
F


"¼U", D
×E3


"R_HT_OA"
5
D5
224
2
F


0, De
D0


1
D1

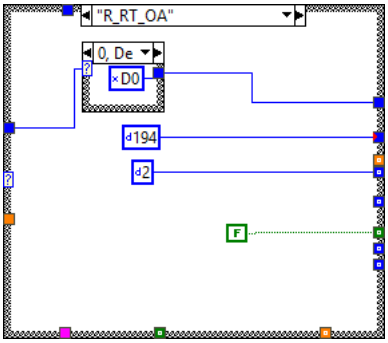

2
D2


3
D3


4
D4


6
D6


7
D7


"R_RT_OA"
0, De
D0
194
2
F


1
D1


2
D2

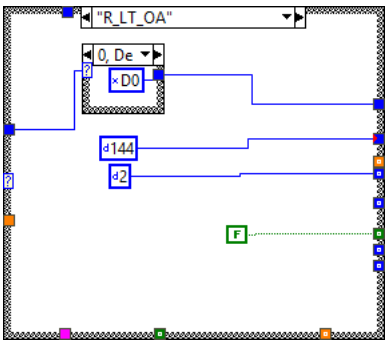

3
D3


4
D4


5
D5


6
D6


7
D7


"R_LT_OA"
0, De
D0
144
2
F


1
D1


2
D2

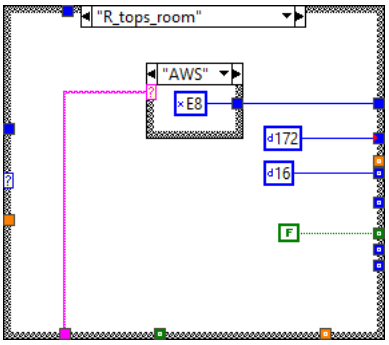

3
D3



4
D4

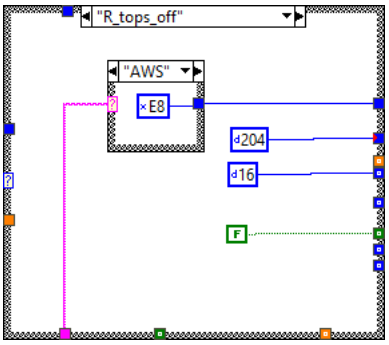

5
D5



6
D6

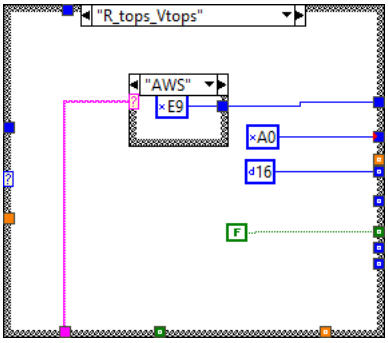

7
D7



"R_tops_room"
"AWS"
E8
172
16
F

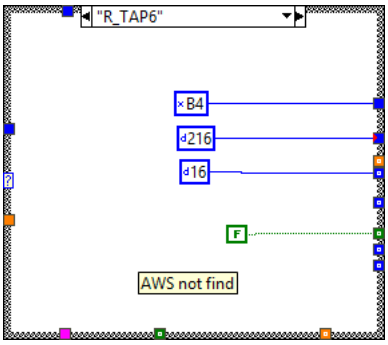

"¼Ù",
E3

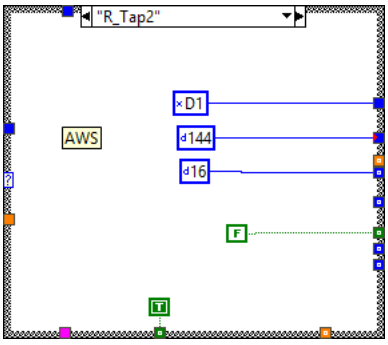

"R_tops_off"
"AWS"
E8
204
16
F

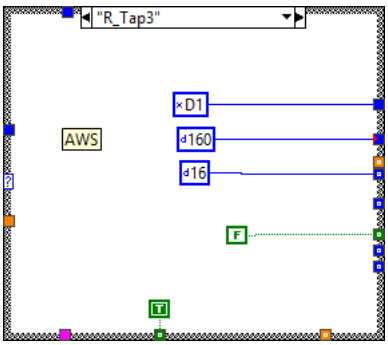

"¼Ù",
E3

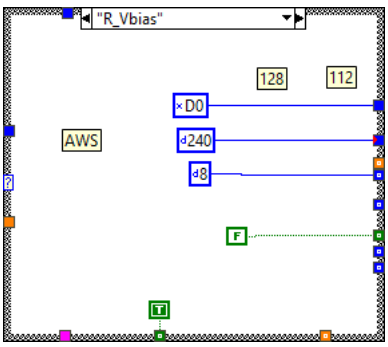

"R_tops_Vtops"
"AWS"
E9
A0
16
F

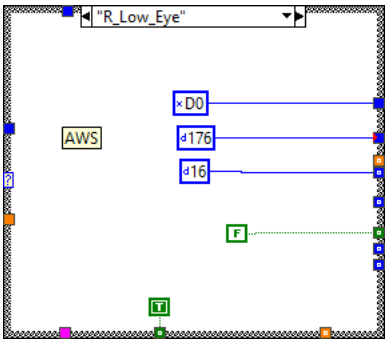

"¼Ù",
E5

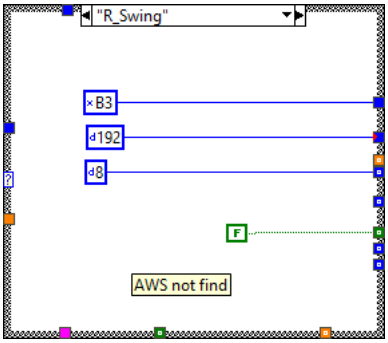

"R_TAP6"
B4
216
16
F
AWS not find

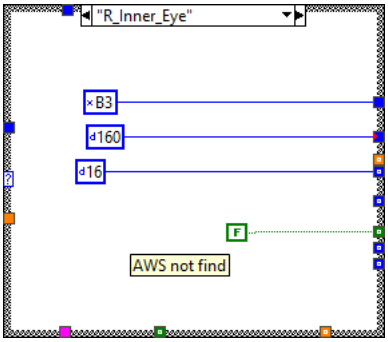

"R_Tap2"
D1
AWS
144
16
F
T

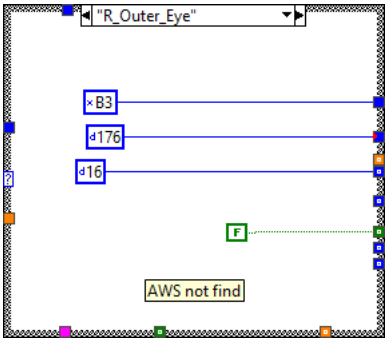

"R_Tap3"
D1
AWS
160
16
F
T

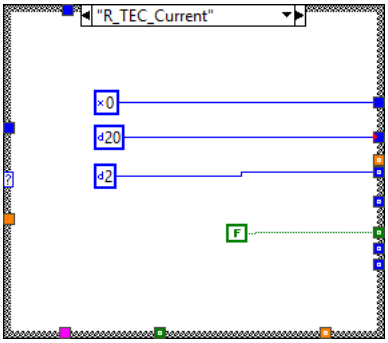

"R_Vbias"
128
112
D0
AWS
240
8
F
T

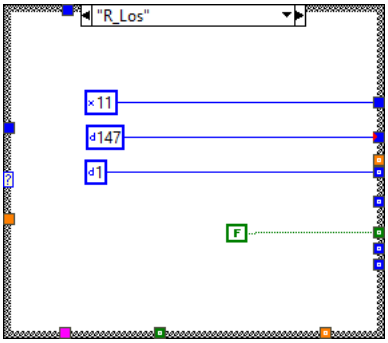

"R_Low_Eye"
AWS
x D0
d 176
d 16
F
T

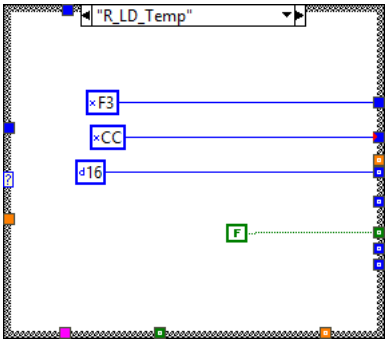

"R_Swing"
x B3
d 192
d 8
F
AWS not find

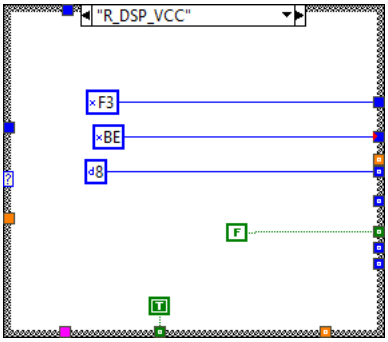

"R_Inner_Eye"
x B3
d 160
d 16
F
AWS not find

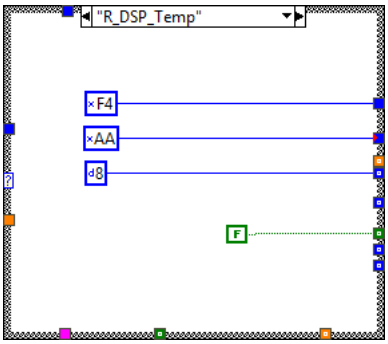

"R_Outer_Eye"
x B3
d 176
d 16
F
AWS not find

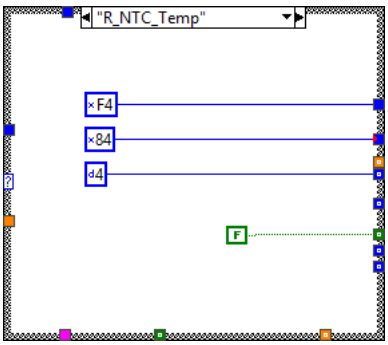

"R_TEC_Current"
x 0
d 20
d 2
F

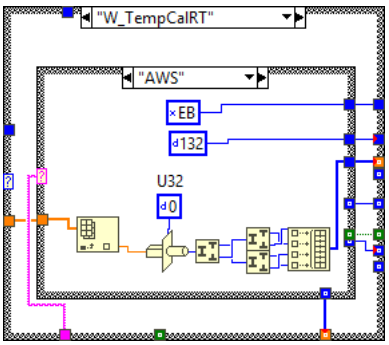

"R_Los"
×11
d147
d1
F



"R_LD_Temp"
×F3
×CC
d16
F

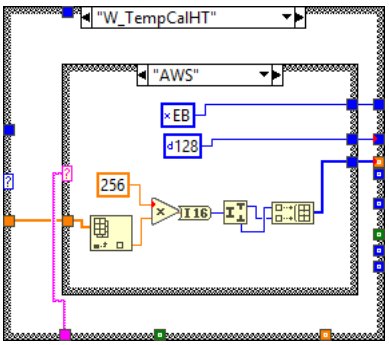

"R_DSP_VCC"
×F3
×BE
d8
F
T



"R_DSP_Temp"
×F4
×AA
d8
F

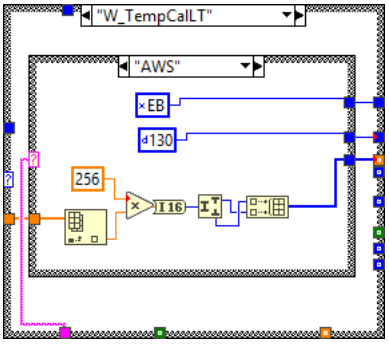

"R_NTC_Temp"
×F4
×84
d4
F



"W_TempCalRT"
"AWS"
x EB
d 132
U32
d 0

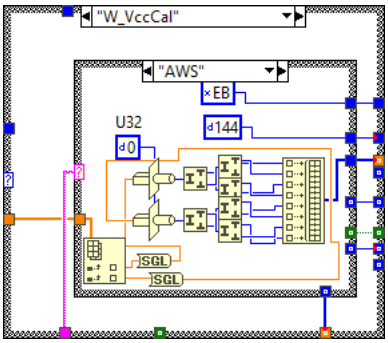

"¼Ù", Default
x E4
d 132
I16
10
x E4
F
d 188
I16
256



"W_TempCalHT"
"AWS"
x EB
d 128
256
I16

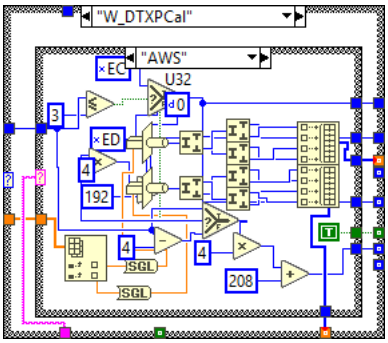

"¼Ù", Default
x E4
d 241
I8
U8
10



"W_TempCalLT"
"AWS"
x EB
d 130
256
I16

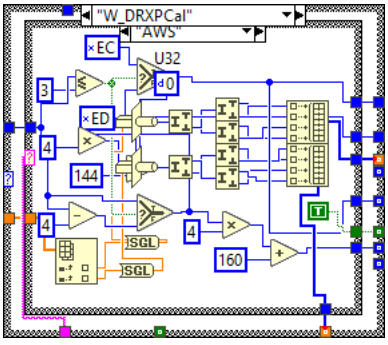

"¼Ù", Default
x E4
d 240
10
I8
U8



"W_VccCal"
"AWS"
EB
U32
144
0
SGL
SGL

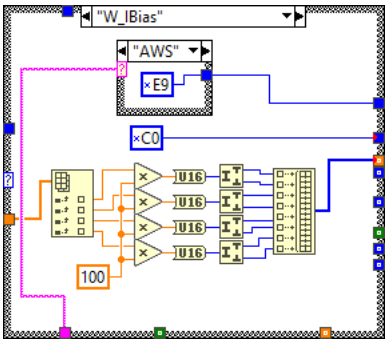

"¼Ù", Default
E4
128
I16
E4
184
T
256
I16



"W_DTXPCal"
"AWS"
EC
U32
3
0
ED
4
192
4
SGL
SGL
4
208
T

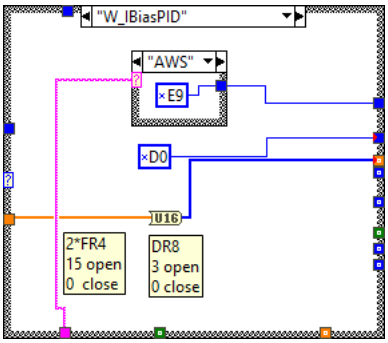

"¼Ù", Default
E4
136
4
I32
E4
192
4
T
256
I32



"W_DRXPCal"
"AWS"
EC
U32
3
0
ED
4
144
4
SGL
SGL
4
160
T

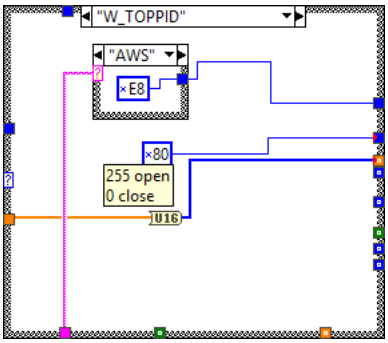

"¼Ù", Default
E4
168
2
I16
E4
224
2
T
256
I16



"W_IBias"
"AWS"
×E9
×C0
U16
U16
U16
U16
100

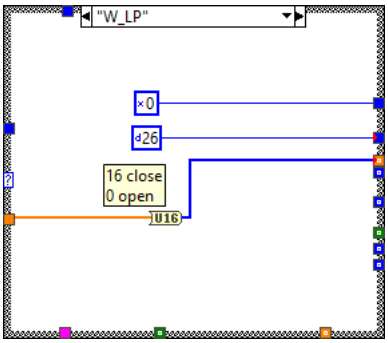

"¼Ù"
×E5

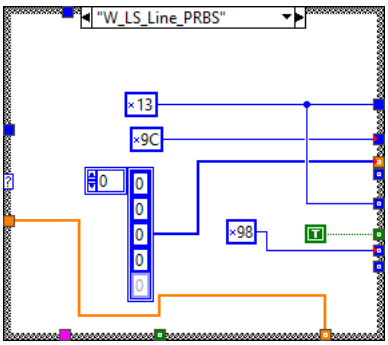

"W_IBiasPID"
"AWS"
×E9
×D0
U16
2*FR4
15 open
0 close
DR8
3 open
0 close

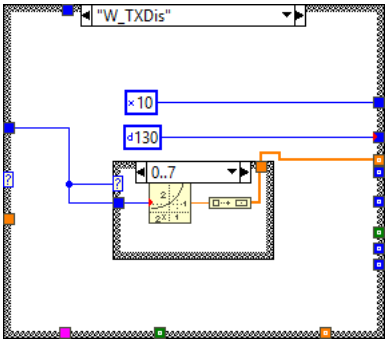

"¼Ù"
×E5



"W_TOPPID"
"AWS"
×E8
×80
255 open
0 close
U16



"¼Ù"
×E3

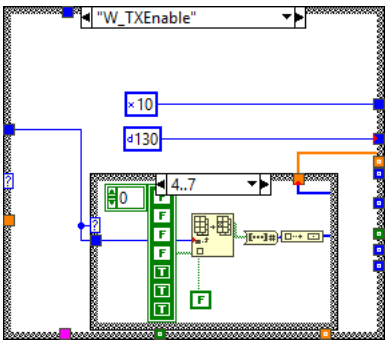

"W_LP"
×0
d26
16 close
0 open
U16



"W_LS_Line_PRBS"
×13
×9C
0
0
0
0
0
0
×98



"W_TXDis"
×10
130
0..7

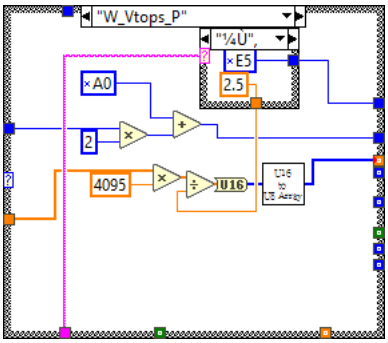

8, Default
0
0
all open



9
0
255
all close

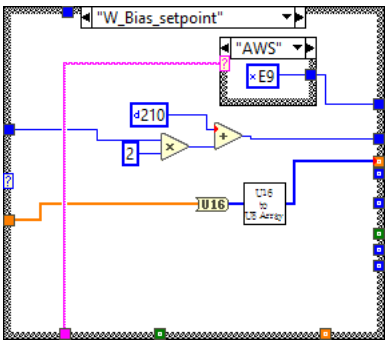

"W_TXEnable"
×10
130
4..7
0
F
F
F
T
T
T
F



8, Default
0
0

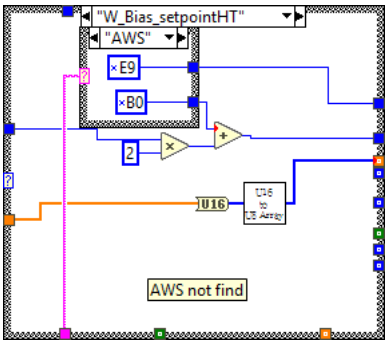

0..3
0
T
T
T
F
F
F
F



"W_Vtops_P"
"¼U"
×E5
2.5
×A0
2
4095
U16
U16 to DBL Array

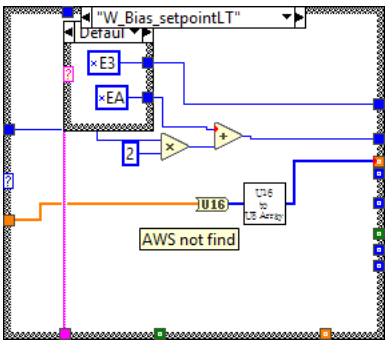

"AWS"
×E9
5



"W_Bias_setpoint"
"AWS"
×E9
d210
2
U16
U16 to DBL Array

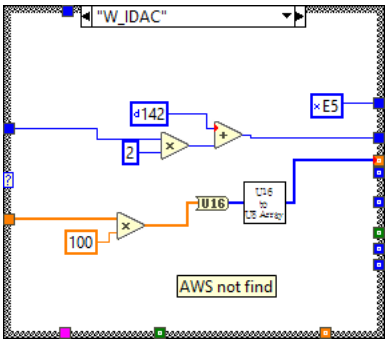

"¼U"
×E5

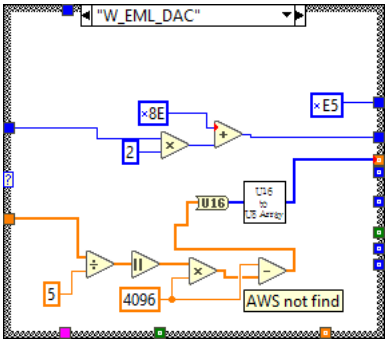

"W_Bias_setpointHT"
"AWS"
×E9
×B0
2
U16
U16 to DBL Array
AWS not find

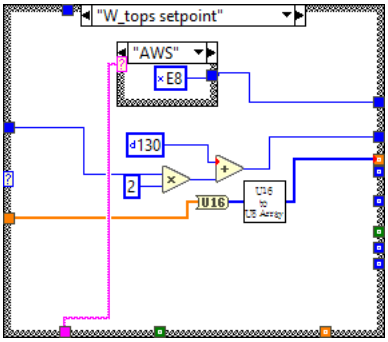

Default
×E3
×E2



"W_Bias_setpointLT"
Default
×E3
×EA
2
U16
U16 to DBL Array
AWS not find

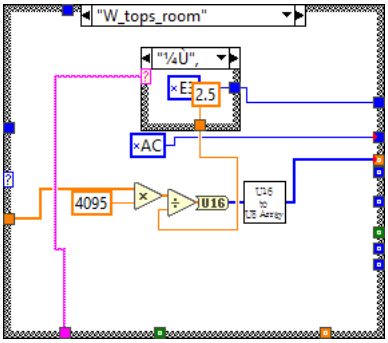

"AWS"
×E9
×B8



"W_IDAC"
142
2
E5
100
U16
U16 to U8 Array
AWS not find

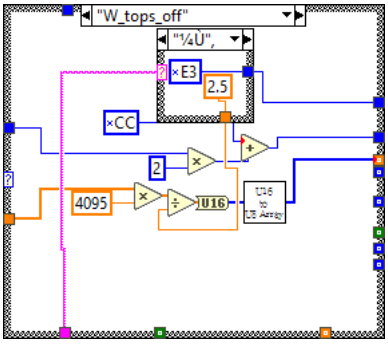

"W_EML_DAC"
8E
2
E5
U16
U16 to U8 Array
5
4096
AWS not find



"W_tops setpoint"
"AWS"
E8
130
2
U16
U16 to U8 Array

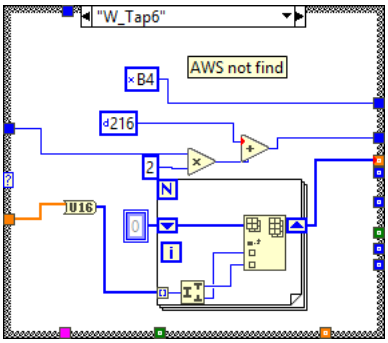

"¼Ù", D
E3

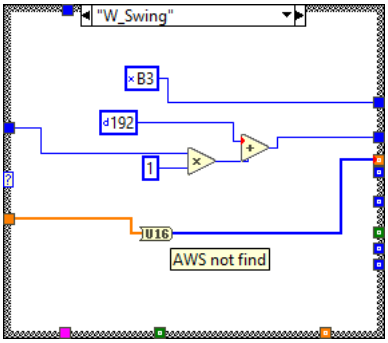

"W_tops_room"
"¼Ù",
E3
2.5
AC
4095
U16
U16 to U8 Array

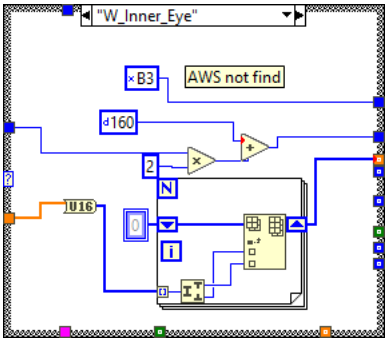

"AWS"
E8
5

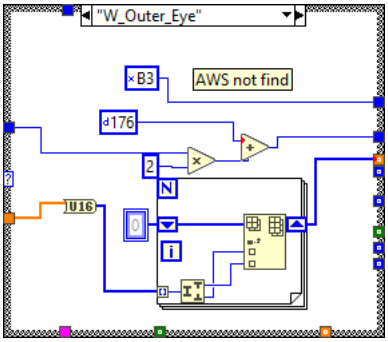

"W_tops_off"
"¼Ù",
E3
2.5
CC
2
4095
U16
U16 to U8 Array

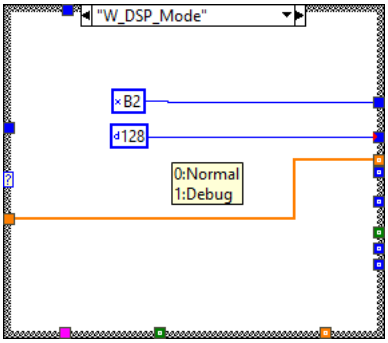

"AWS"
×E8
5

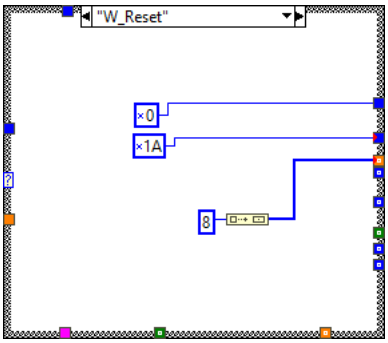

"W_Tap6"
AWS not find
×B4
d216
2
N
U16
0
i

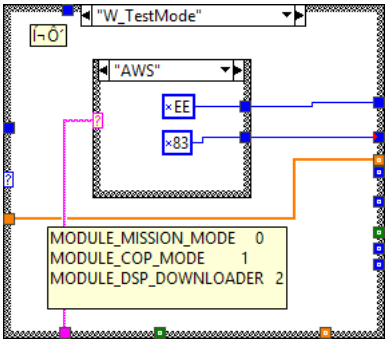

"W_Swing"
×B3
d192
1
U16
AWS not find



"W_Inner_Eye"
×B3
AWS not find
d160
2
N
U16
0
i

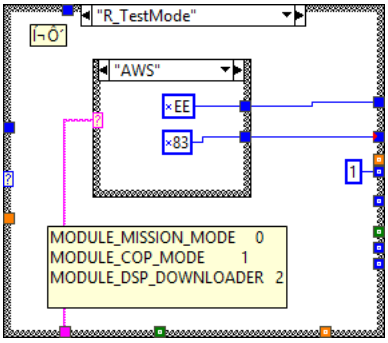

"W_Outer_Eye"
×B3
AWS not find
d176
2
N
U16
0
i



"W_DSP_Mode"
×B2
d128
0:Normal
1:Debug

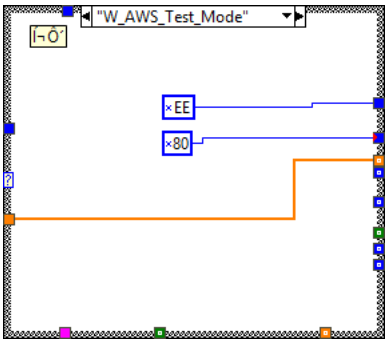

"W_Reset"
x0
x1A
8

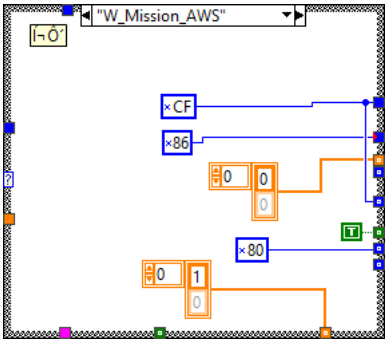

"W_TestMode"
"AWS"
xEE
x83
MODULE_MISSION_MODE 0
MODULE_COP_MODE 1
MODULE_DSP_DOWNLOADER 2

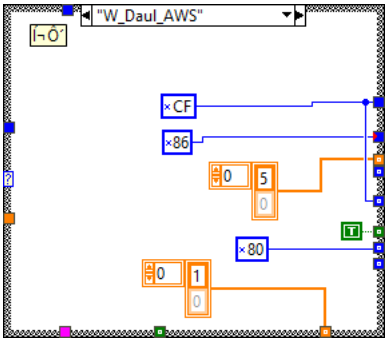

"¼Ù", Default
xE5
d255

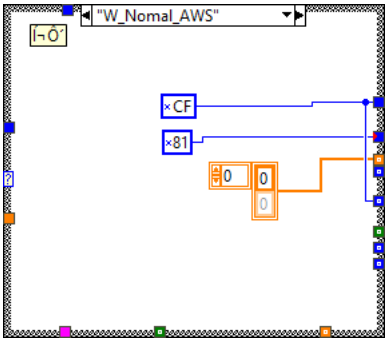

"R_TestMode"
"AWS"
xEE
x83
1
MODULE_MISSION_MODE 0
MODULE_COP_MODE 1
MODULE_DSP_DOWNLOADER 2

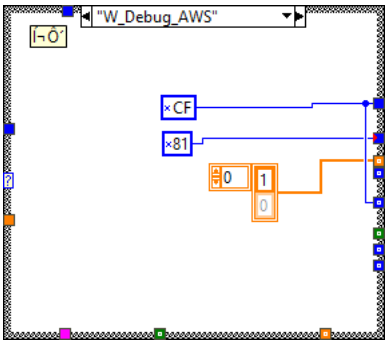

"¼Ù", Default
xE5
d255

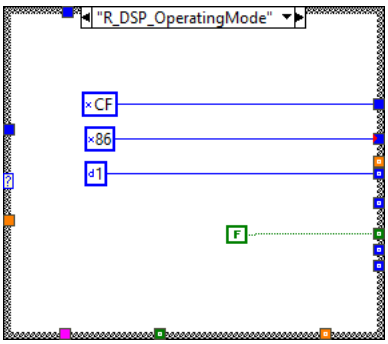

"W_AWS_Test_Mode"
xEE
x80

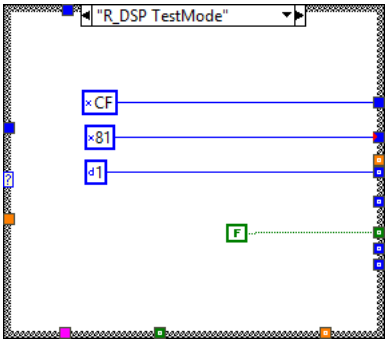

"W_Mission_AWS"
CF
86
0
0
80
0
1
0

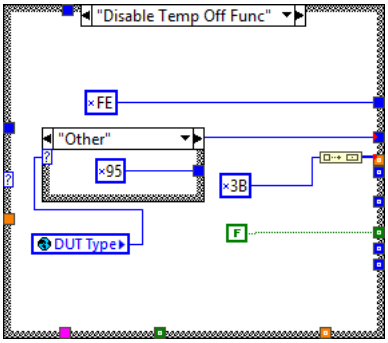

"W_Daul_AWS"
CF
86
0
5
0
80
0
1
0



"W_Nomal_AWS"
CF
81
0
0
0



"W_Debug_AWS"
CF
81
0
1
0



"R_DSP_OperatingMode"
CF
86
1
F

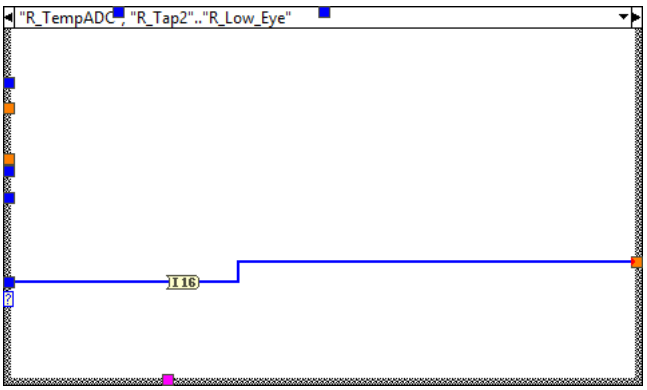

"R_DSP TestMode"
×CF
×81
d1
F

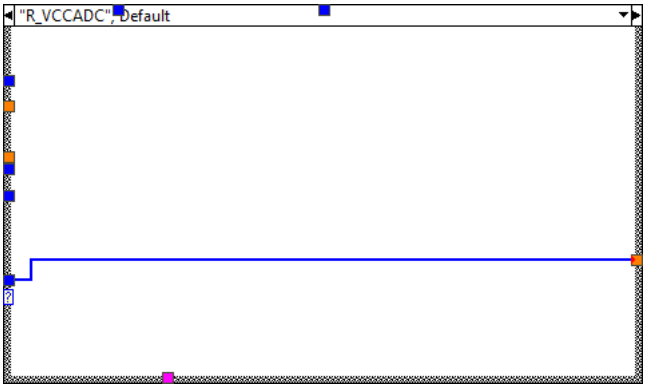

"Disable Temp Off Func"
×FE
"Other"
×95
×3B
F
DUT Type

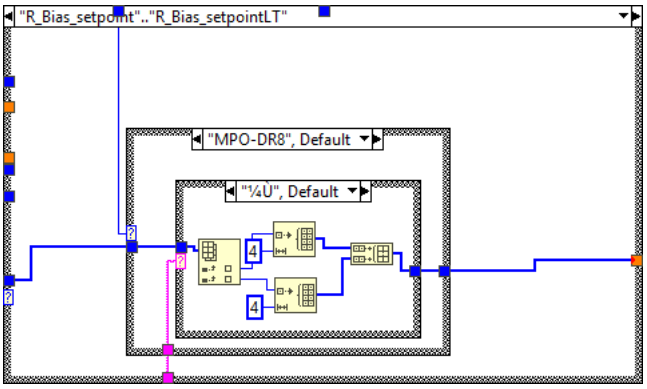

"Oracle(AWS DU
×98



"Oracle(AWS D
×98



False

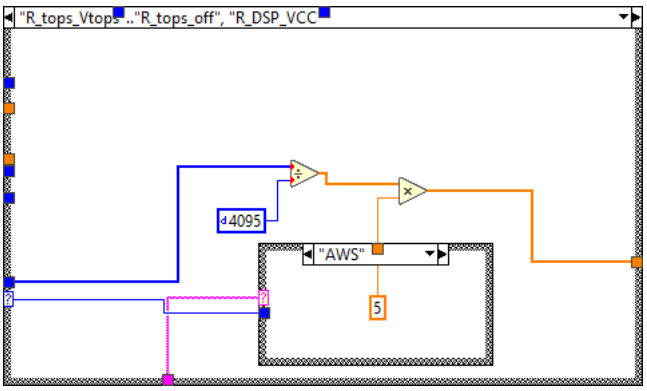

"R_TempADC", "R_Tap2"..."R_Low_Eye"
I16



"R_VCCADC", Default

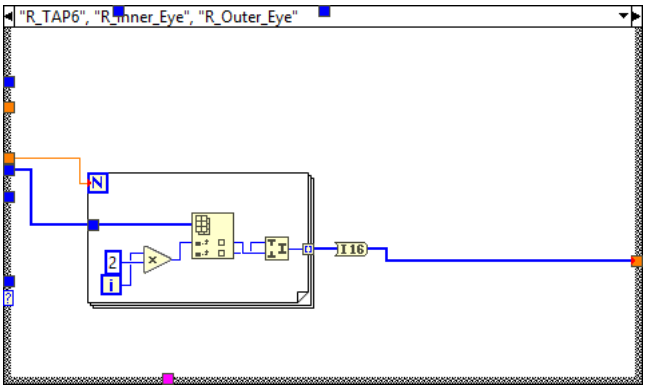

"R_Bias_setpoint".."R_Bias_setpointLT"
"MPO-DR8", Default
"¼U", Default
4
4

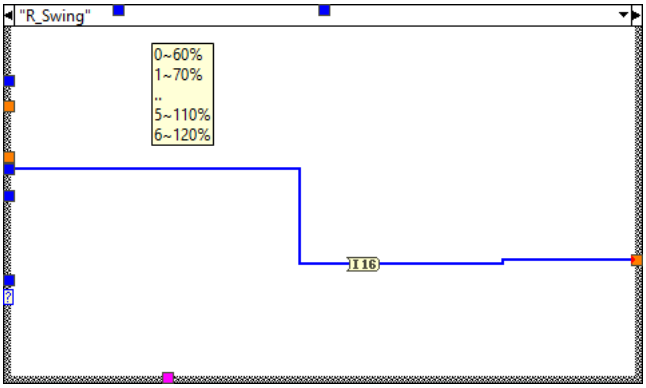

"LC-2*FR4"

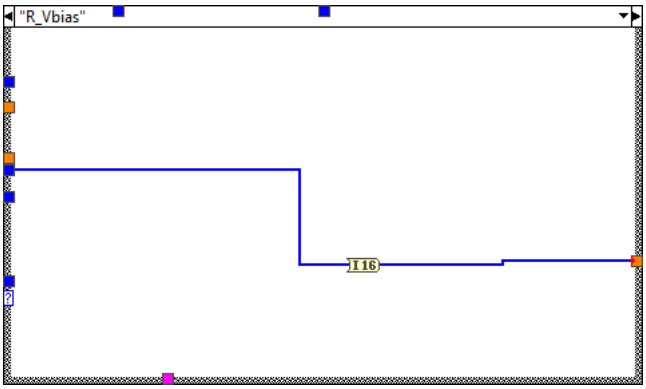

"Acacia"

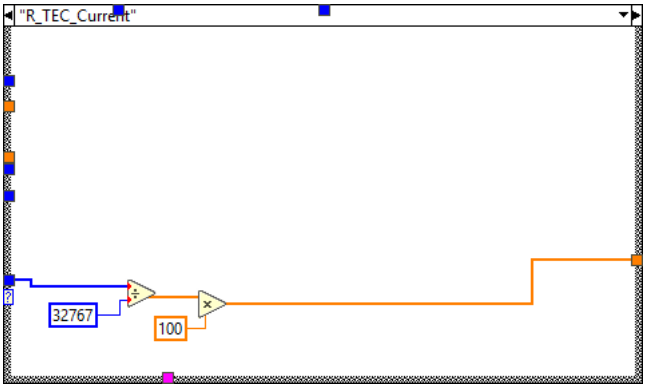

"R_tops_Vtops .."R_tops_off", "R_DSP_VCC
4095
"AWS"
5

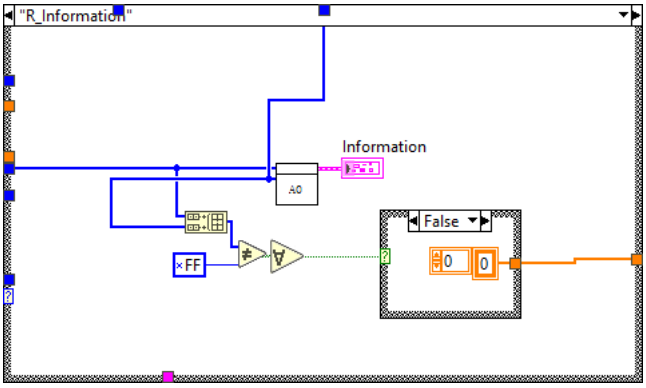

"¼U", Default
2.5



"R_TAP6", "R_Inner_Eye", "R_Outer_Eye"
N
2
i
116

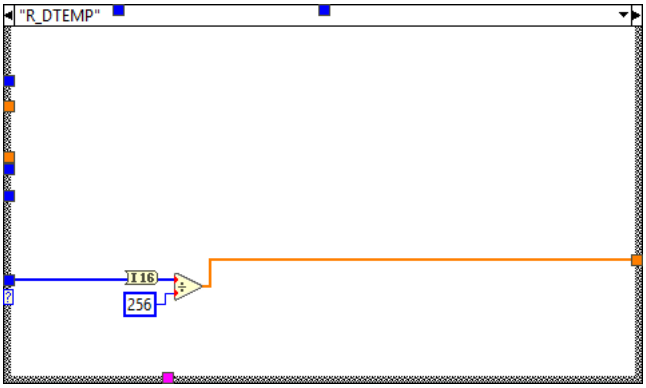

"R_Swing"
0~60%
1~70%
..
5~110%
6~120%
I16

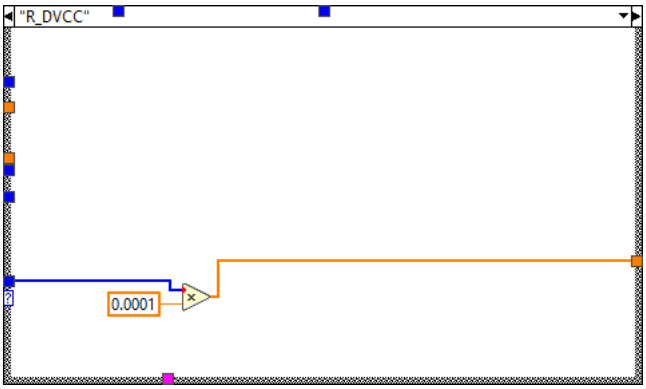

"R_Vbias"
I16

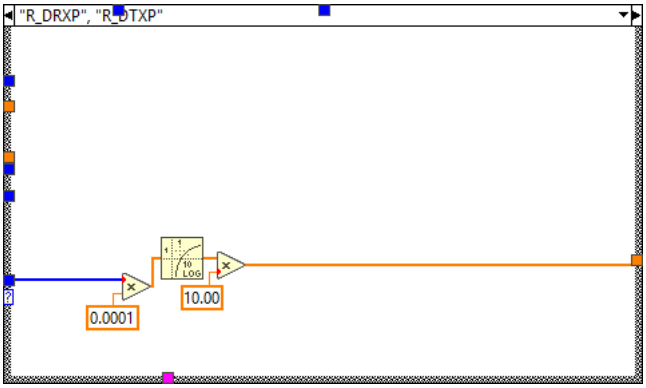

"R_TEC_Current"
32767
100

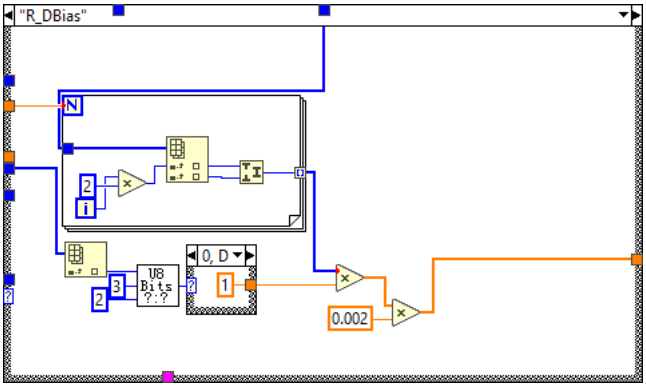

"R_Information"
Information
A0
×FF
False
0
0


True
0
1
1


"R_DTEMP"
I16
256

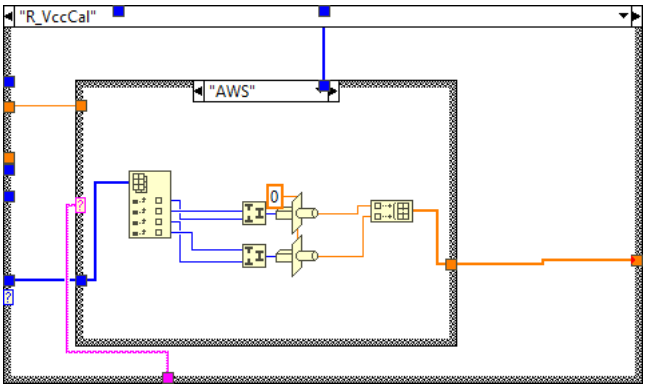

"R_DVCC"
0.0001

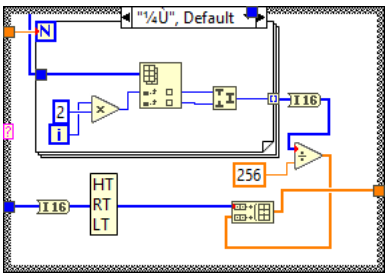

"R_DRXP", "R_DTXP"
0.0001
10.00

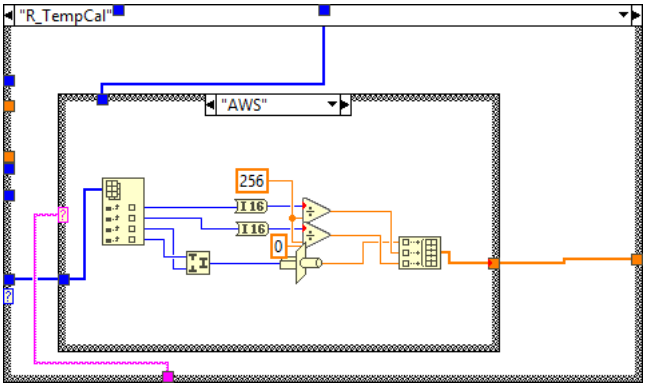

"R_DBias"
N
2
1
U8
Bits
?.?
3
2
0, D
1
0.002

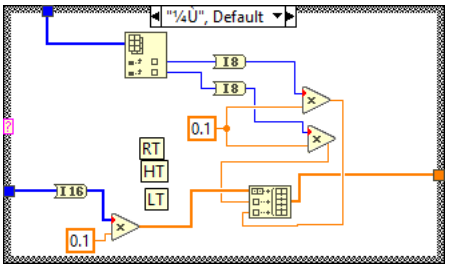

1
2

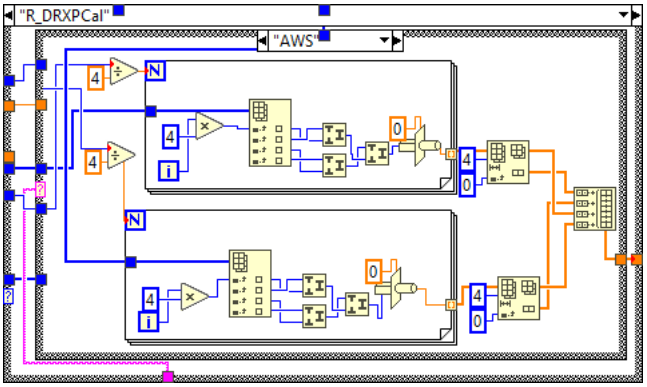

2
4

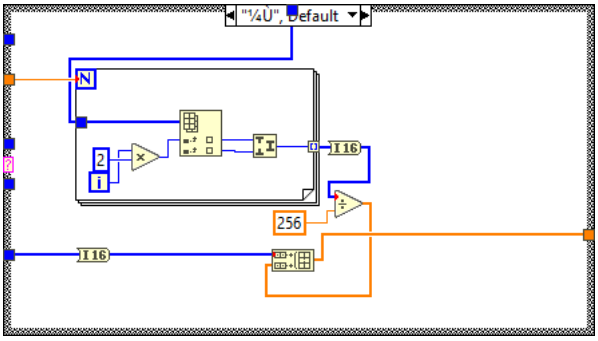

"R_VccCal"
"AWS"
0

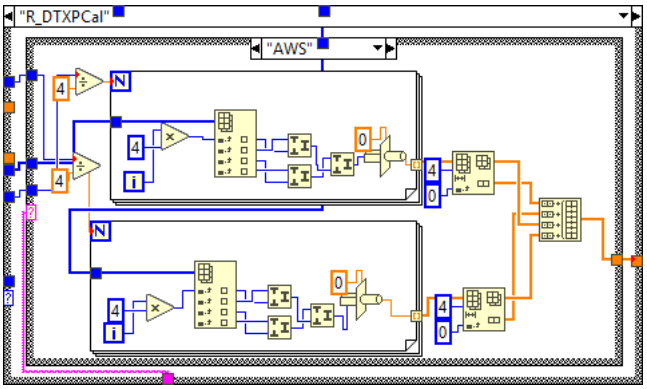

"¼Ù", Default
N
2
i
I16
256
I16
HT
RT
LT

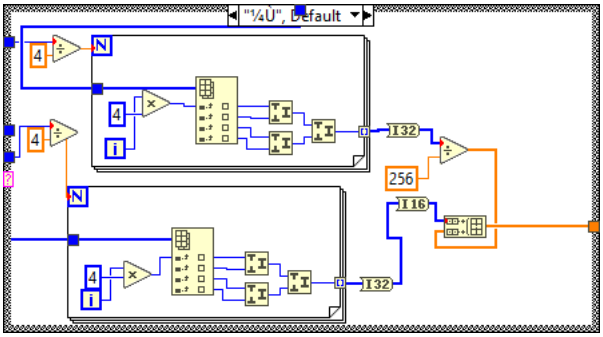

"R_TempCal"
"AWS"
256
I16
I16
0

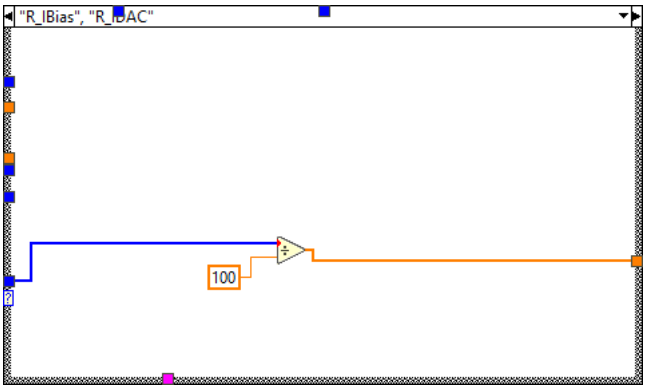

"¼Ù", Default
I8
I8
0.1
RT
HT
LT
I16
0.1

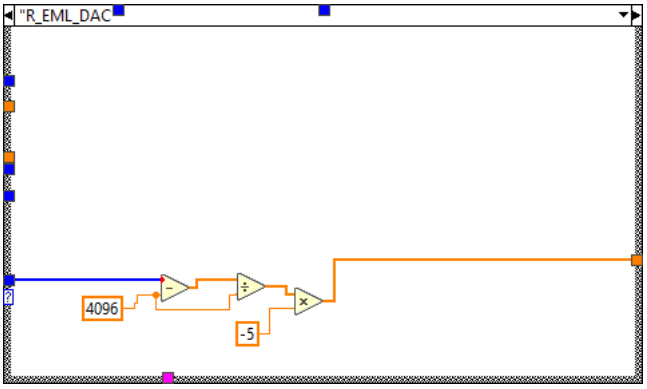

"R_DRXPCal"
"AWS"
4
N
4
i
0
4
0
N
4
i
0
4
0

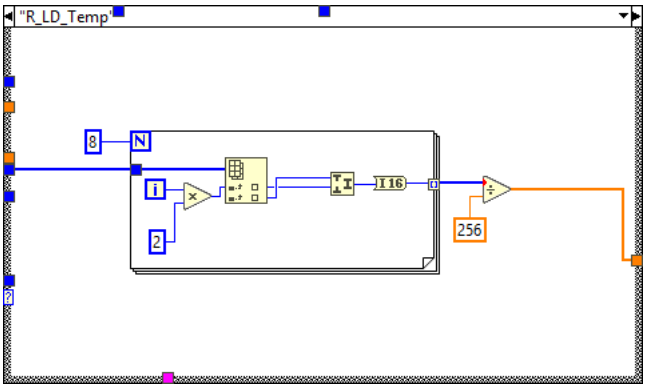

"¼Ù", Default
I16
256
I16

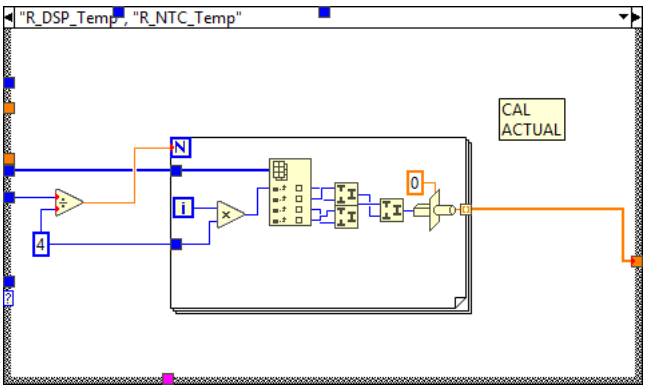

"R_DTXPCal"
"AWS"

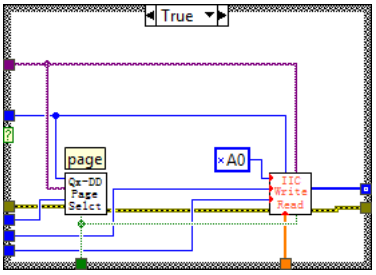

"¼Ù", Default
I32
256
I16
I32



"R_IBias", "R_IDAC"
100



"R_EML_DAC"
4096
-5














List of SubVIs and Express VIs with Configuration Information

G_100G.vi

C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\G_100G.vi

U16 to U8 Array.vi

C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\U16 to U8 Array.vi

ICC_information.vi

C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\ICC_information.vi

QSFP-DD IIC Input Passwod.vi

C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\QSFP-DD IIC Input Passwod.vi

I2C_Step.ctl

C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\I2C_Step.ctl

U8 Select Bits Num.vi

C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\U8 Select Bits Num.vi

IIC Write and Read.vi

C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\IIC Write and Read.vi

QSFP-DD IIC Page Select.vi

C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\QSFP-DD IIC Page Select.vi

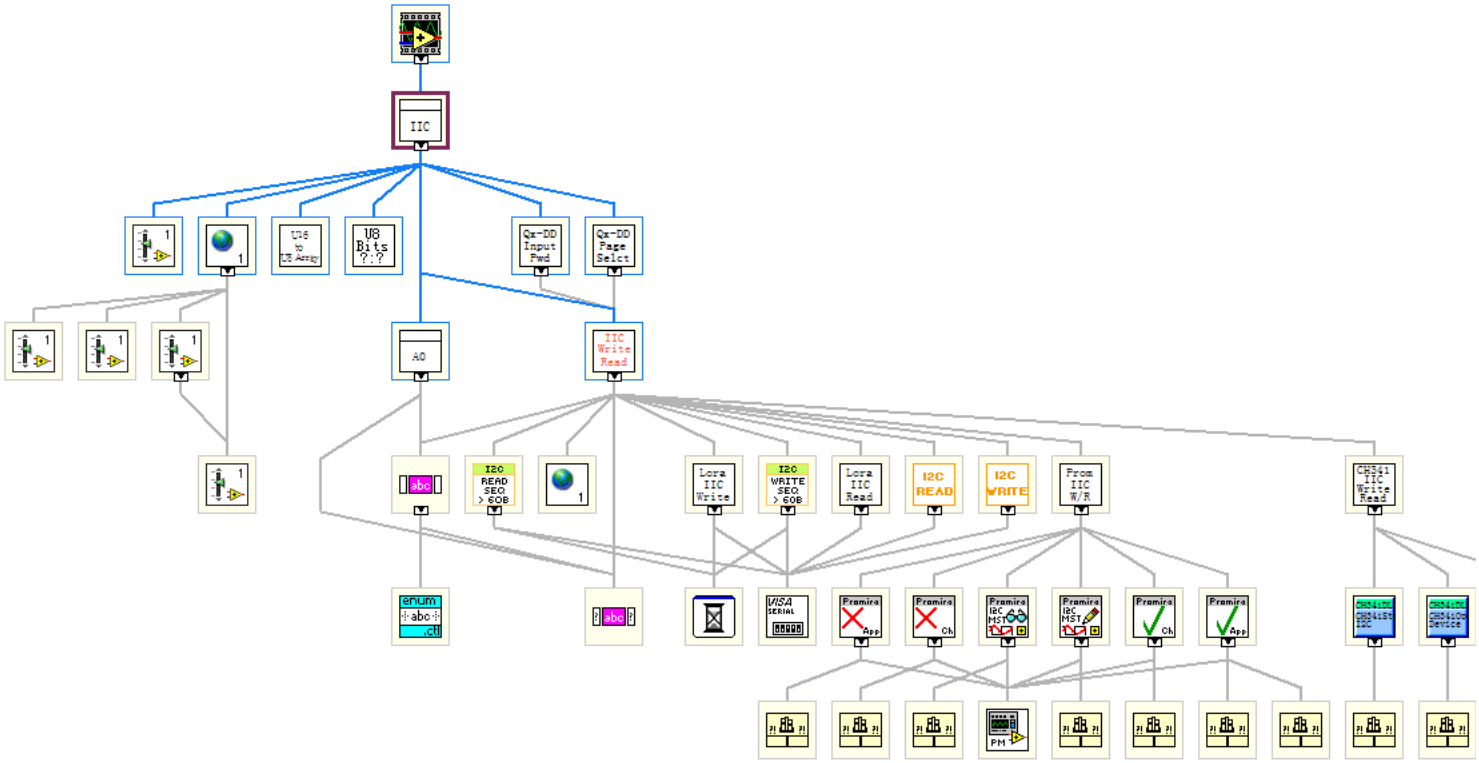
---

VI Revision History

"IIC.vi History"

Current Revision: 198


Position in Hierarchy



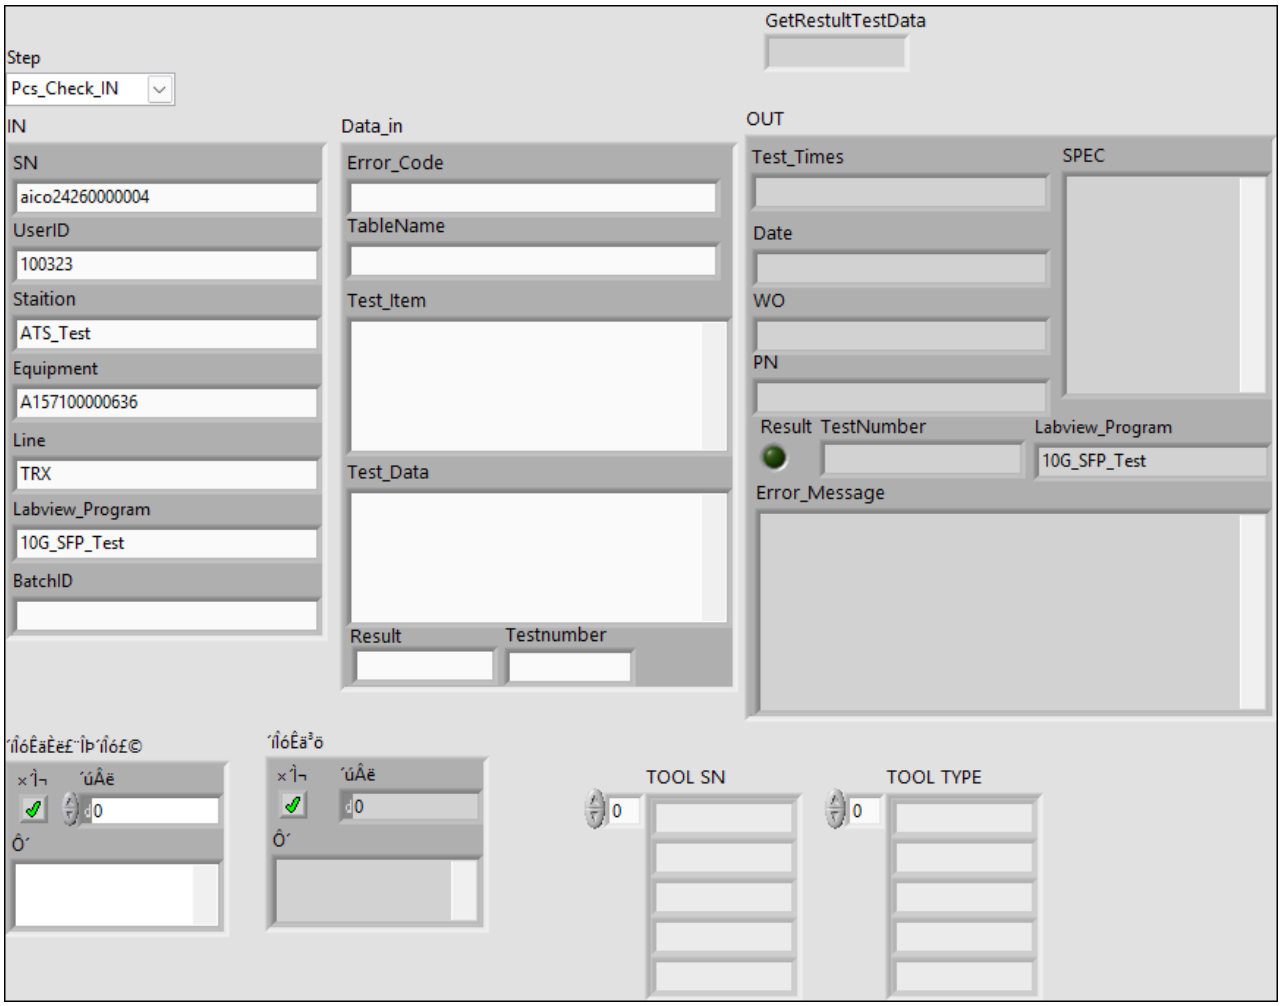
Iconified Cluster Constants

Cimes_All.vi

Connector Pane



Front Panel



Controls and Indicators

Step
IN

- **SN**
- **UserID**
- **Staition**
- **Equipment**
- **Line**
- **Labview_Program**
- **BatchID**

Data_in

Test_Item
TableName
Test_Data
Result
Error_Code
Testnumber

错误输入（无错误）[error in (no error)]

错误输入可接收来自前一个被调用VI的错误信息。当其它VI发生错误时，根据该信息决定是否需跳过执行某些功能。

关于错误的更多信息，请右键单击前面板上的**错误输入**输入控件并从快捷菜单中选择**解释错误**或**解释警告**。

状态[status]

状态为TRUE（叉）时表示错误，为FALSE（勾）时表示警告或无错误。

关于错误的更多信息，请右键单击前面板上的**错误输入**输入控件，并从快捷菜单中选择**解释错误**或**解释警告**。

代码[code]

代码表示错误或警告代码。

关于错误的更多信息，请右键单击前面板上的**错误输入**输入控件，并从快捷菜单中选择**解释错误**或**解释警告**。

源[source]

源表示错误或警告源。

关于错误的更多信息，请右键单击前面板上的**错误输入**输入控件，并从快捷菜单中选择**解释错误**或**解释警告**。

TOOL SN

字符串

TOOL TYPE

字符串

OUT

Error_Message
Test_Times
Date
Result
WO
PN
SPEC
TestNumber
Labview_Program

错误输出[error out]

错误输出可将VI的错误或警告信息传递至其他VI。

关于错误的更多信息，请右键单击前面板上的**错误输出**显示控件，并从快捷菜单中选择**解释错误**或**解释警告**。

状态[status]

状态为TRUE（叉）时表示错误，为FALSE（勾）时表示警告或无错误。

关于错误的更多信息，请右键单击前面板上的**错误输出**显示控件，并从快捷菜单中选择**解释错误**或**解释警告**。

代码[code]

代码表示错误或警告代码。

关于错误的更多信息，请右键单击前面板上的**错误输出**显示控件，从快捷菜单中选择**解释错误**或**解释警告**。

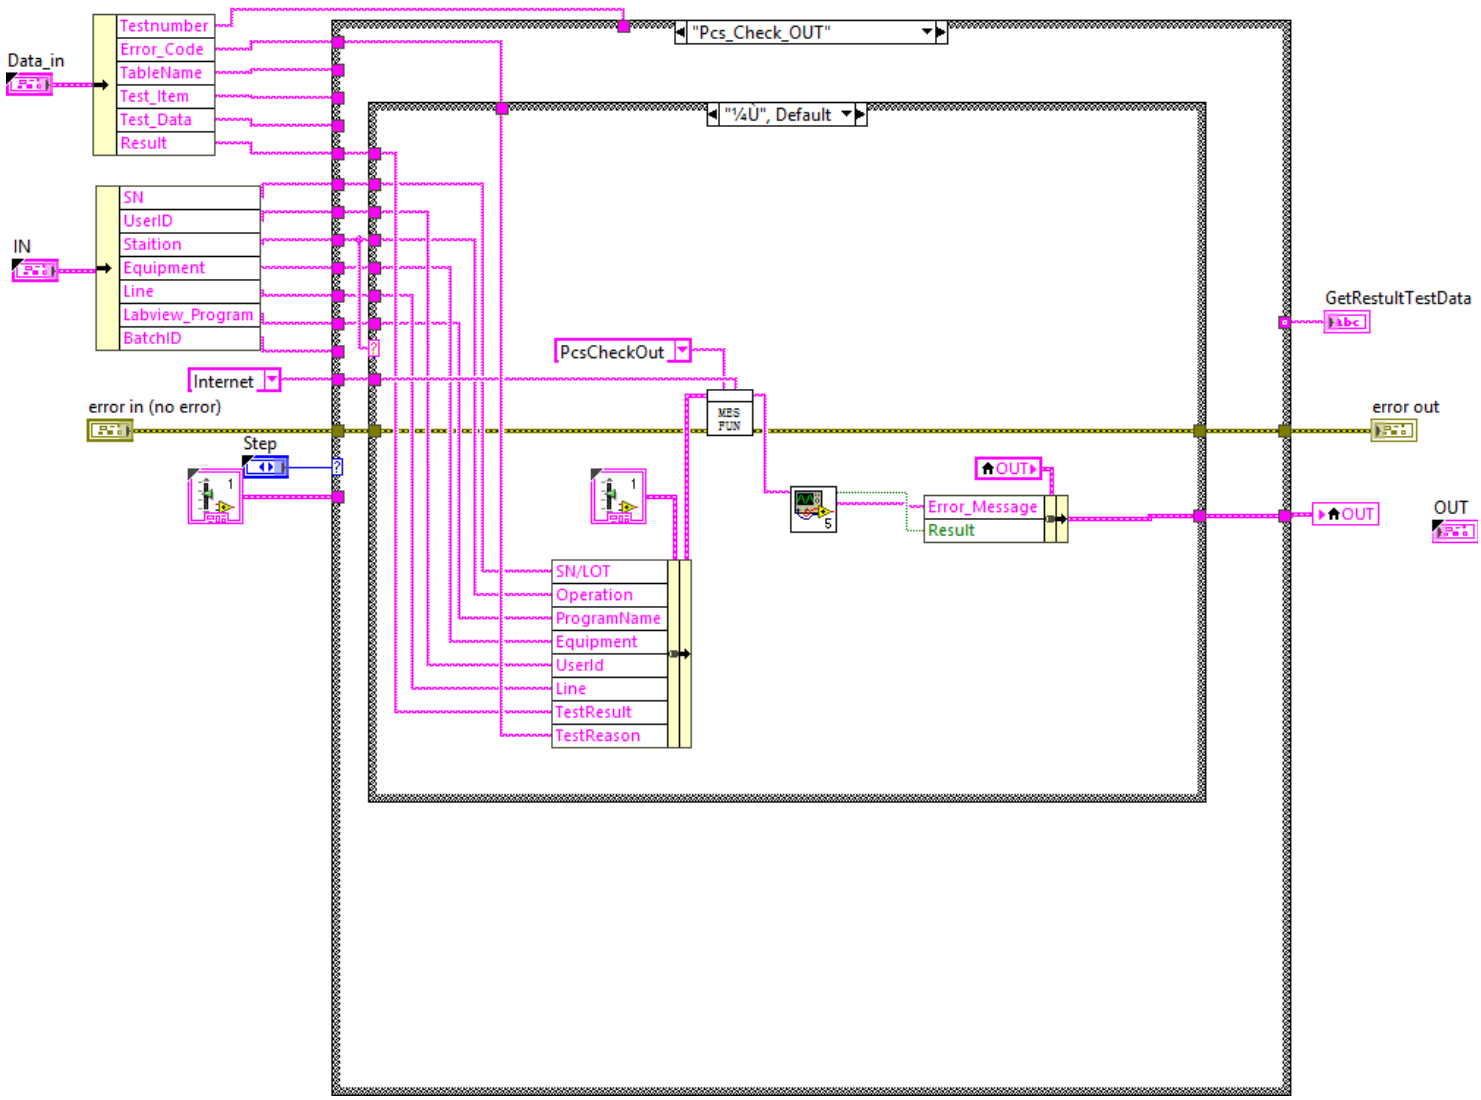
源[source]

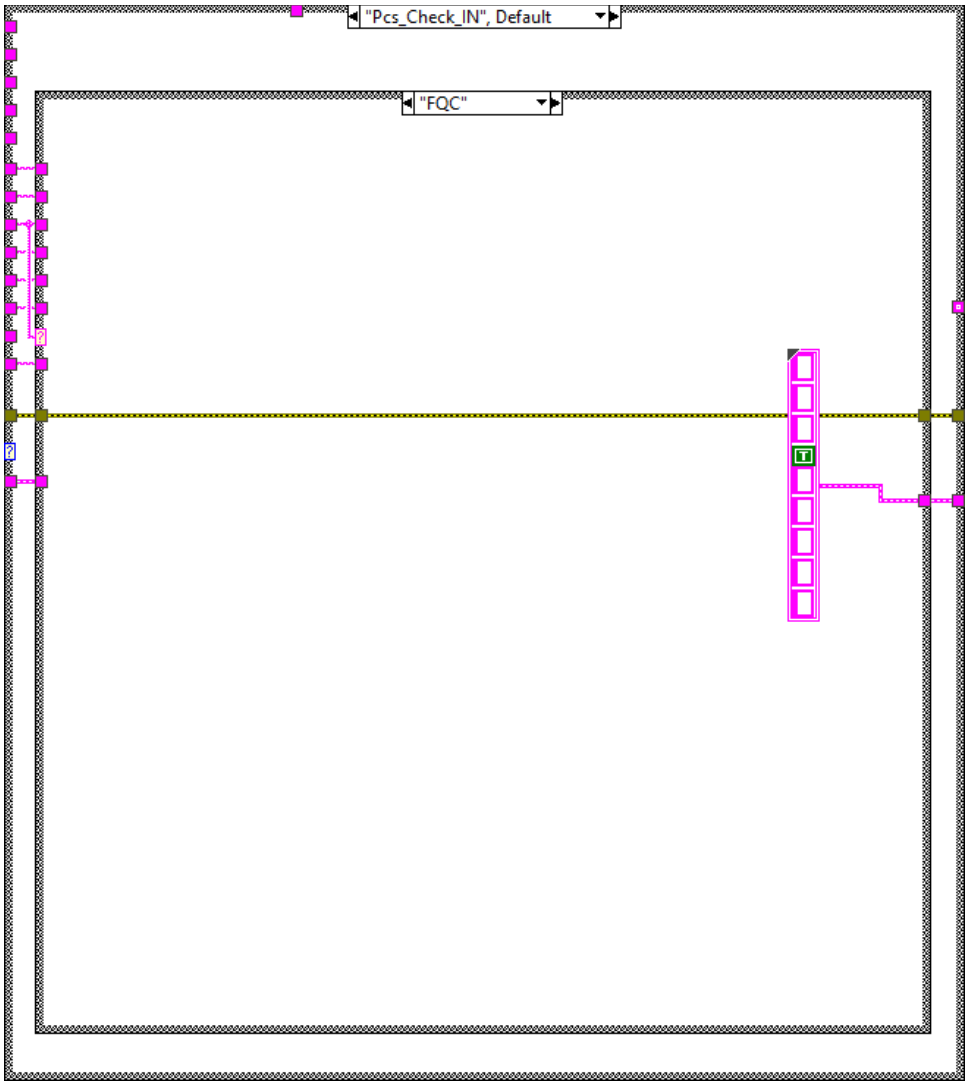
源字符串表示错误或警告源。

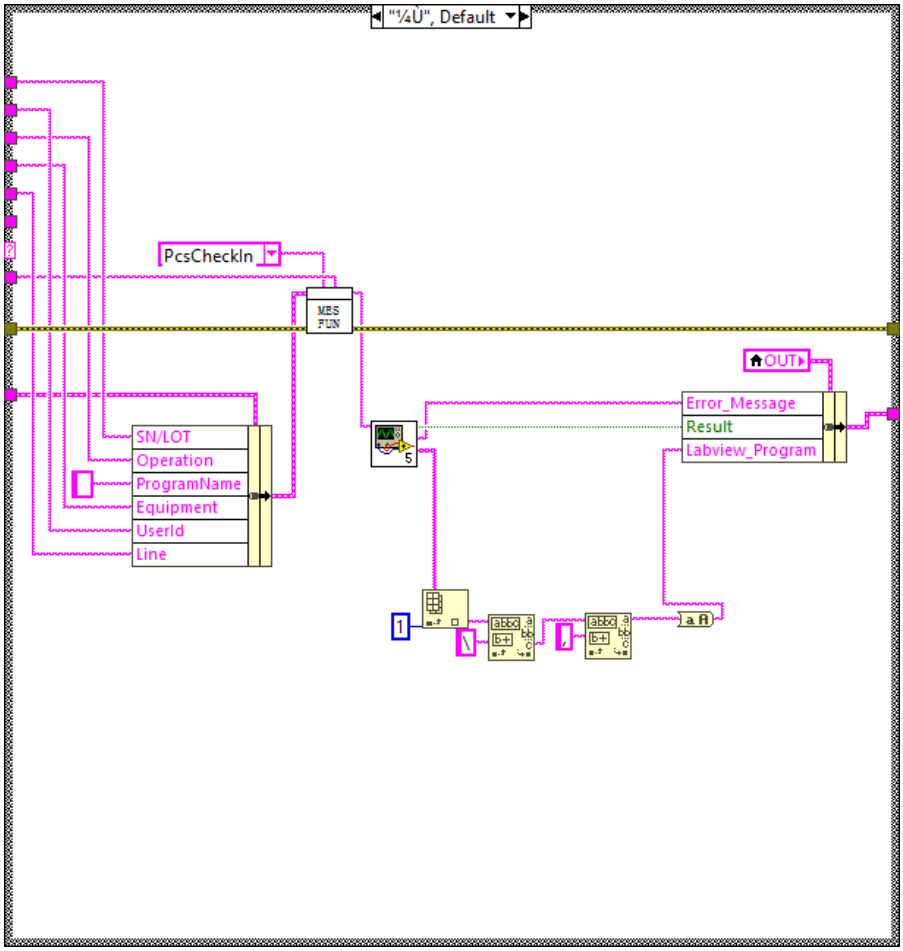
关于错误的更多信息，请右键单击前面板上的**错误输入**输入控件，并从快捷菜单中选择**解释错误**或**解释警告**。

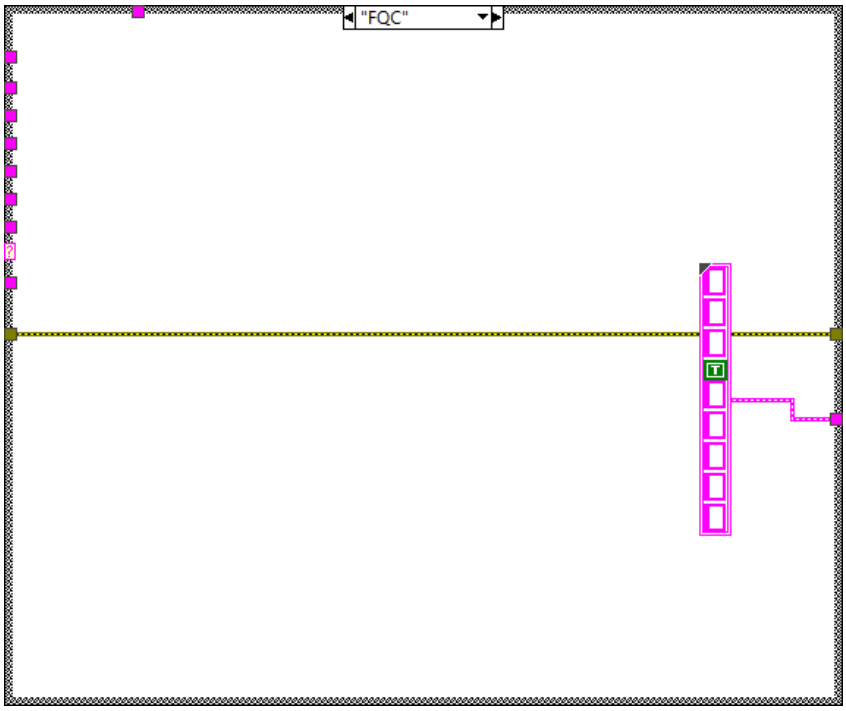
GetRestultTestData

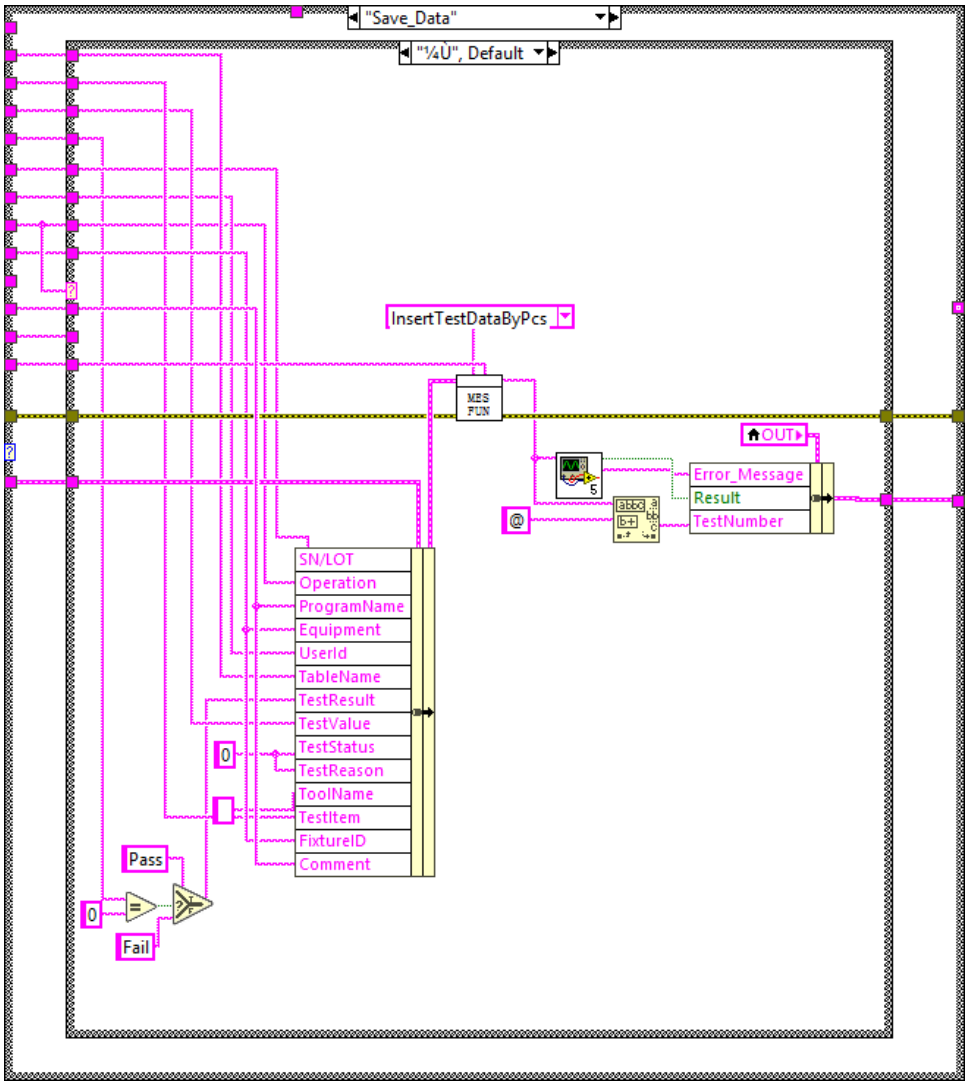
Block Diagram

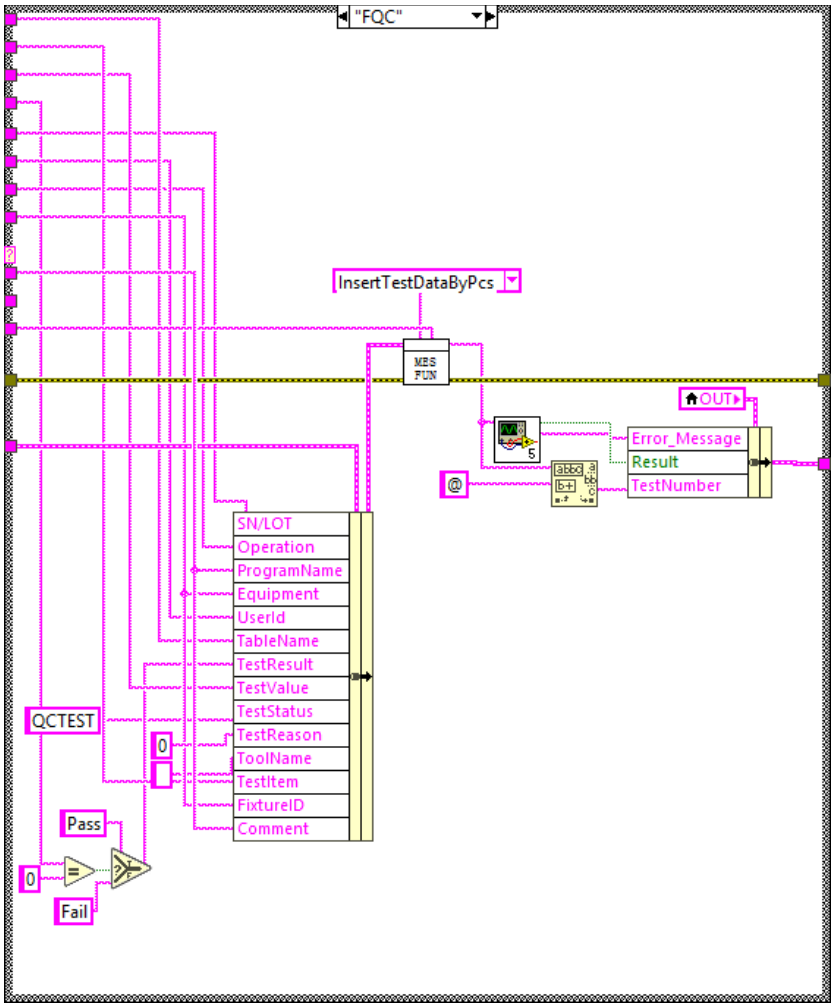


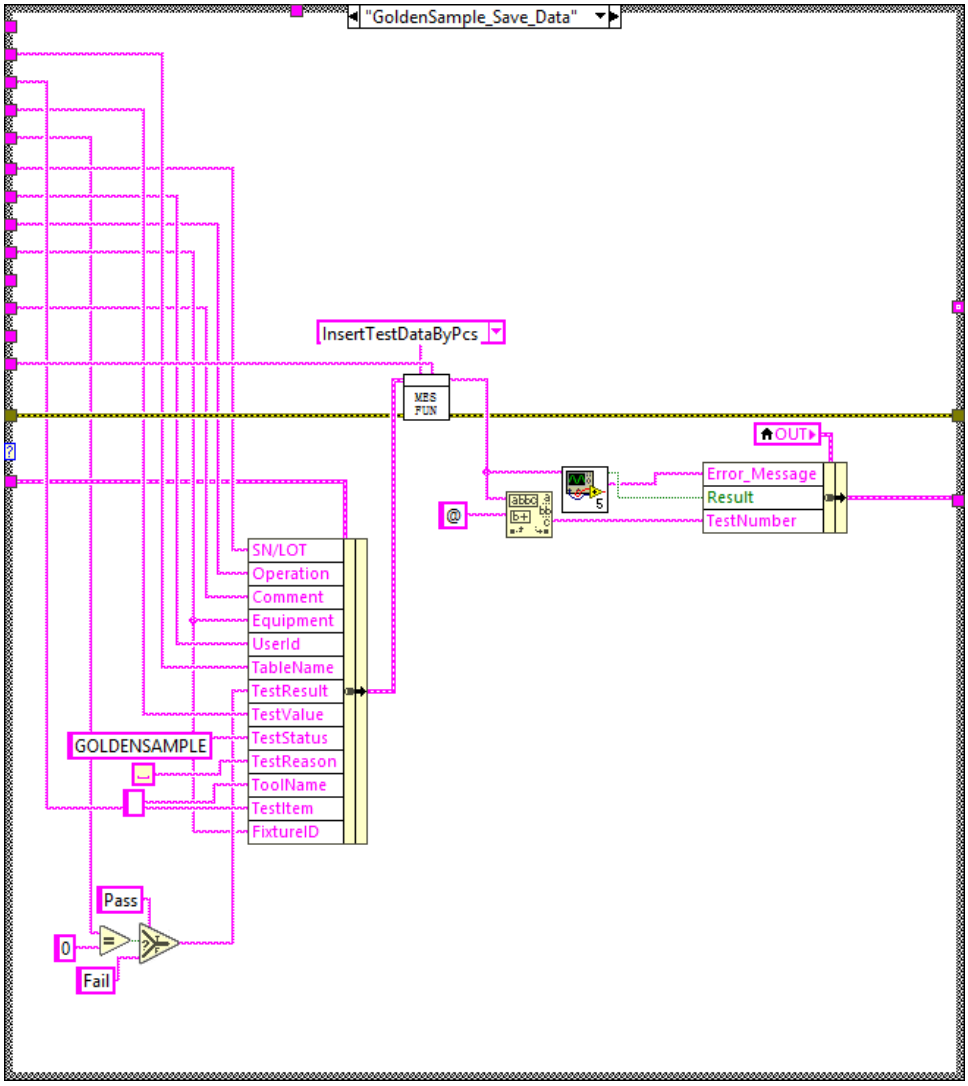

"Pcs_Check_IN", Default
"FQC"

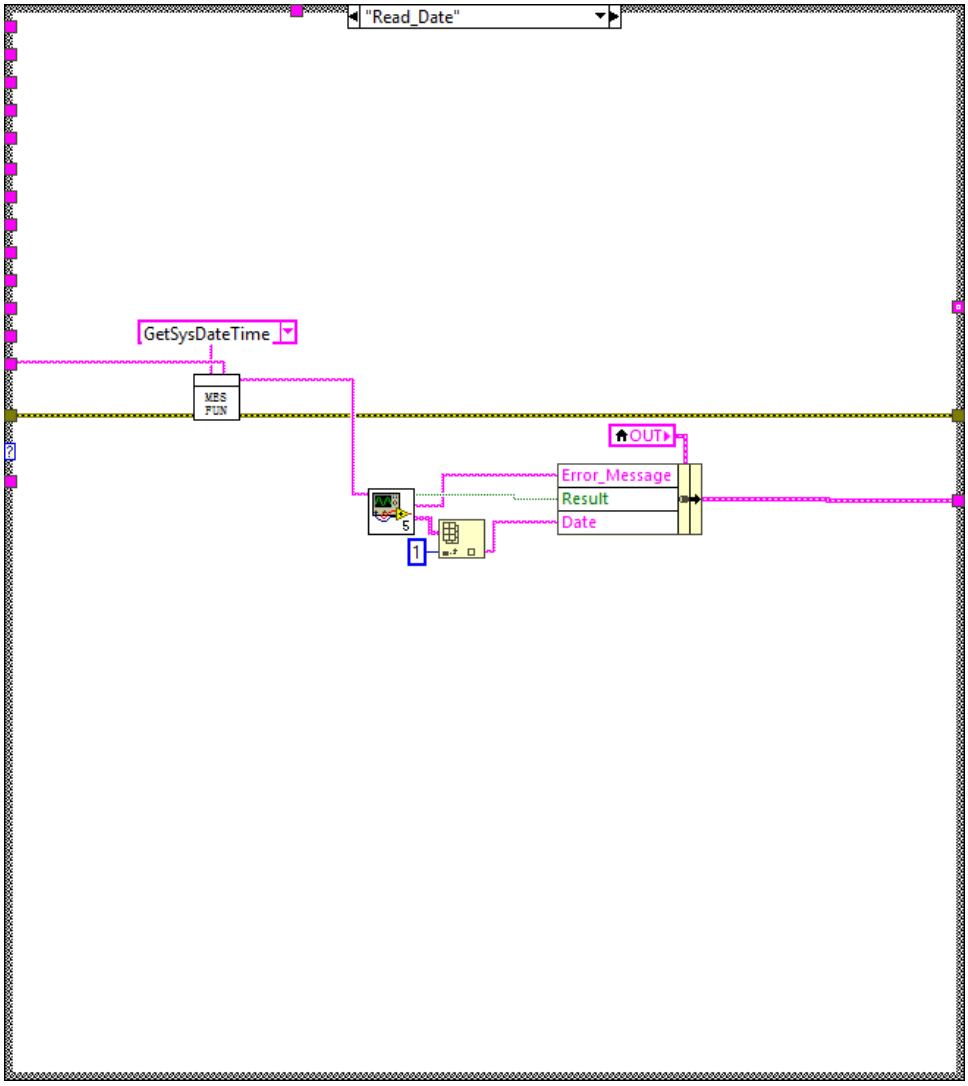

"¼Ù", Default
PcsCheckIn
MES FUN
OUT
SN/LOT
Operation
ProgramName
Equipment
UserId
Line
Error_Message
Result
Labview_Program

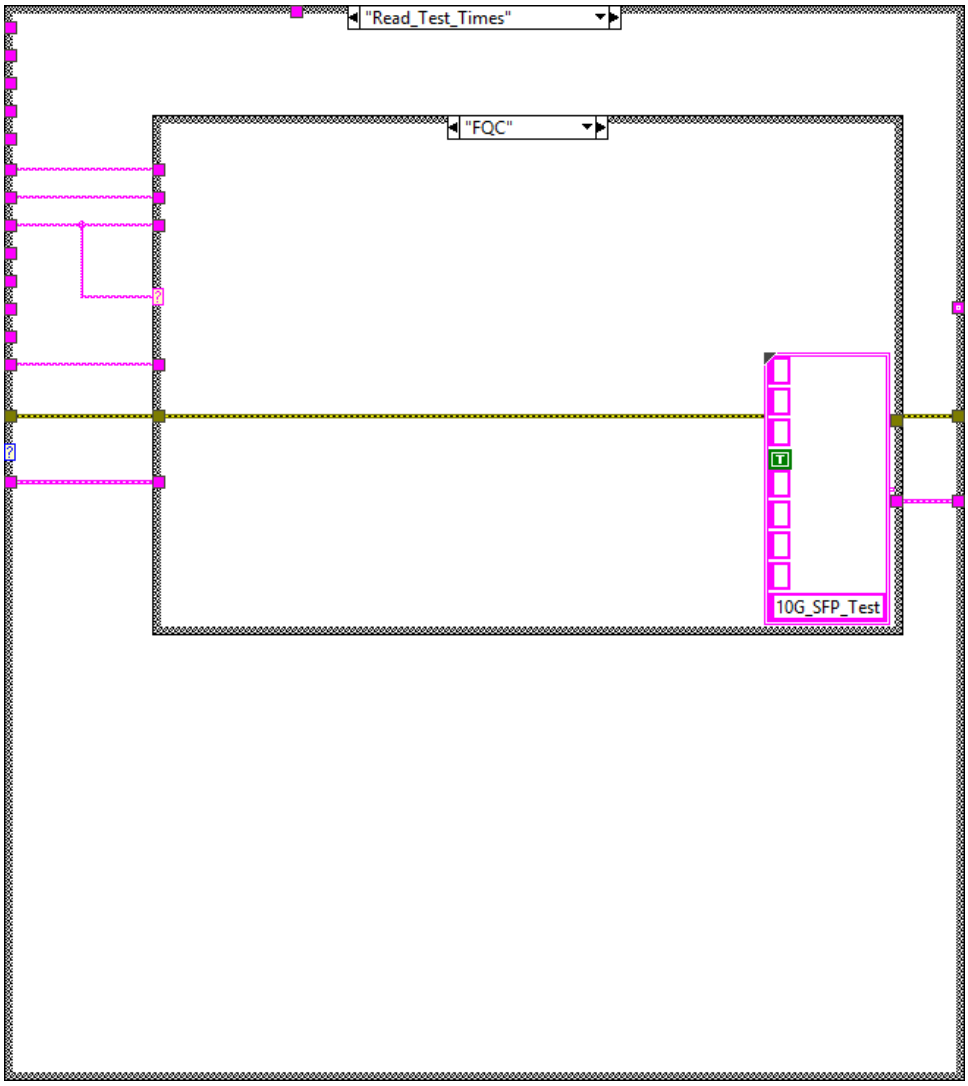

"FQC"

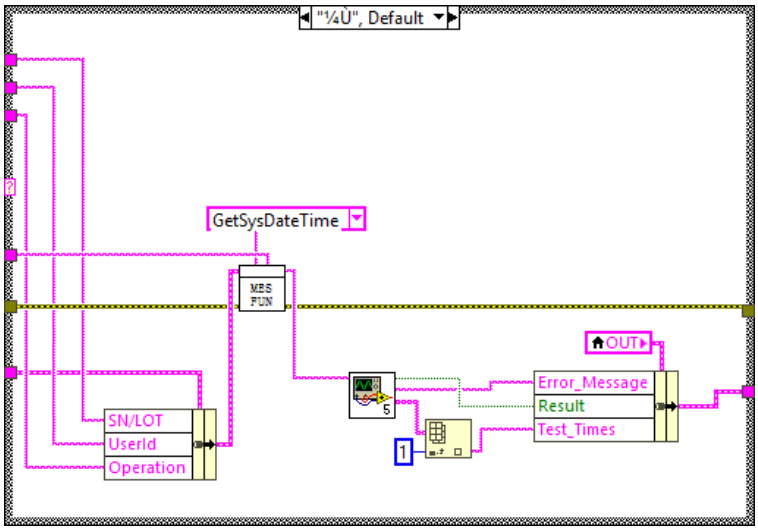

"Save_Data"
"¼Ù", Default
InsertTestDataByPcs
MBS FUN
OUT
Error_Message
Result
TestNumber
SN/LOT
Operation
ProgramName
Equipment
UserId
TableName
TestResult
TestValue
TestStatus
TestReason
ToolName
TestItem
FixtureID
Comment
0
Pass
Fail

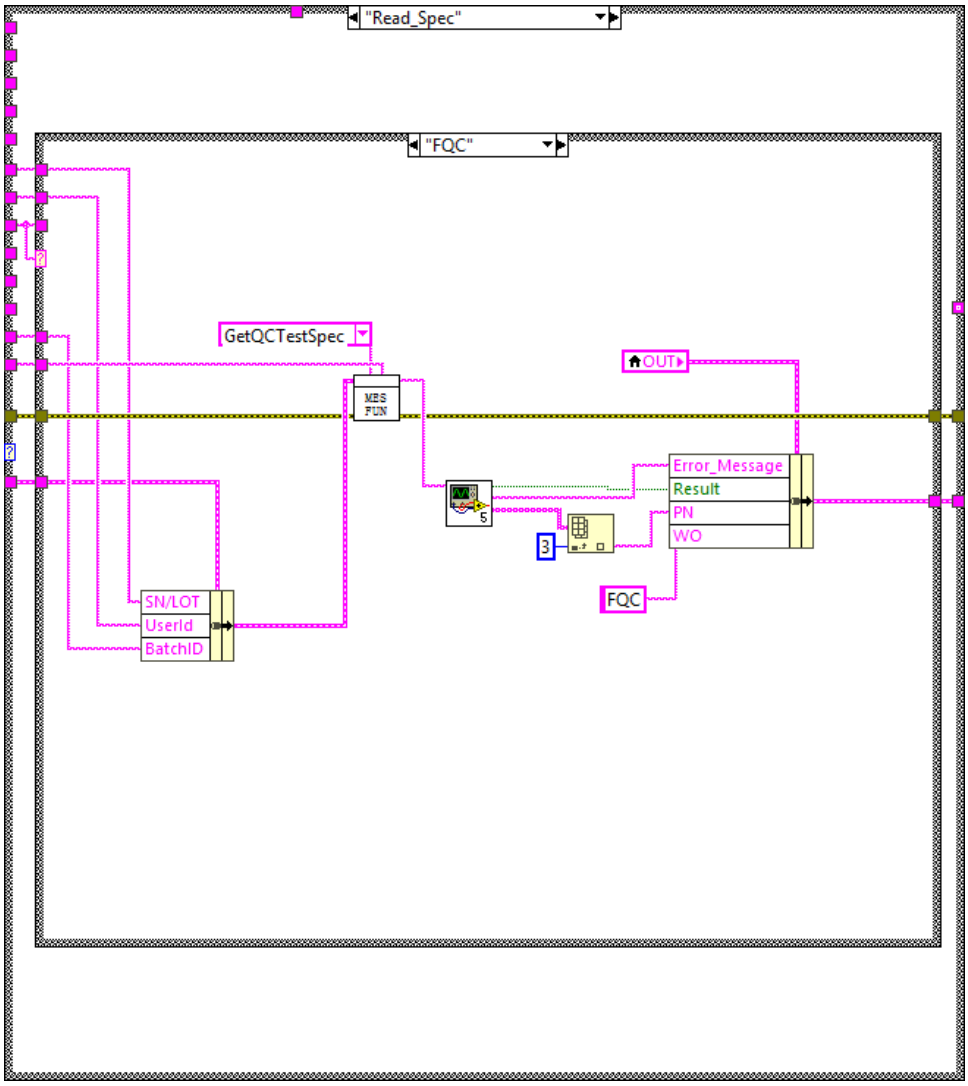

"FQC"
InsertTestDataByPcs
MES FUN
OUT
Error_Message
Result
TestNumber
SN/LOT
Operation
ProgramName
Equipment
UserId
TableName
TestResult
TestValue
TestStatus
TestReason
ToolName
TestItem
FixtureID
Comment
QCTEST
0
Pass
0
Fail

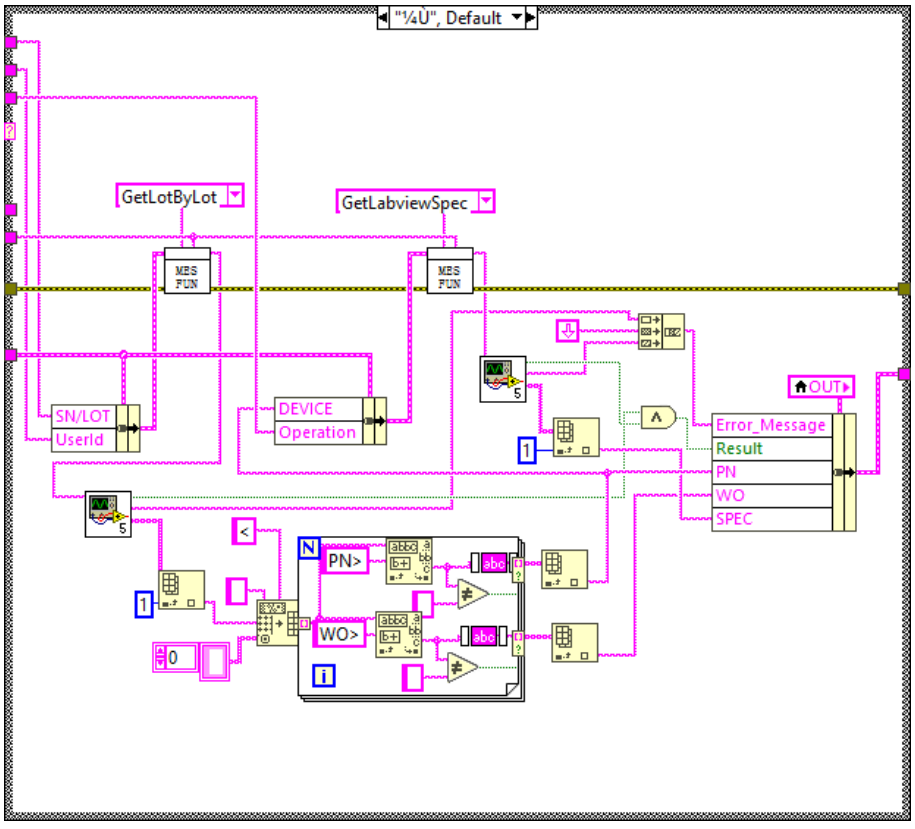

"GoldenSample_Save_Data"
InsertTestDataByPcs
MES FUN
OUT
Error_Message
Result
TestNumber
SN/LOT
Operation
Comment
Equipment
UserId
TableName
TestResult
TestValue
TestStatus
TestReason
ToolName
TestItem
FixtureID
GOLDENSAMPLE
Pass
0
Fail

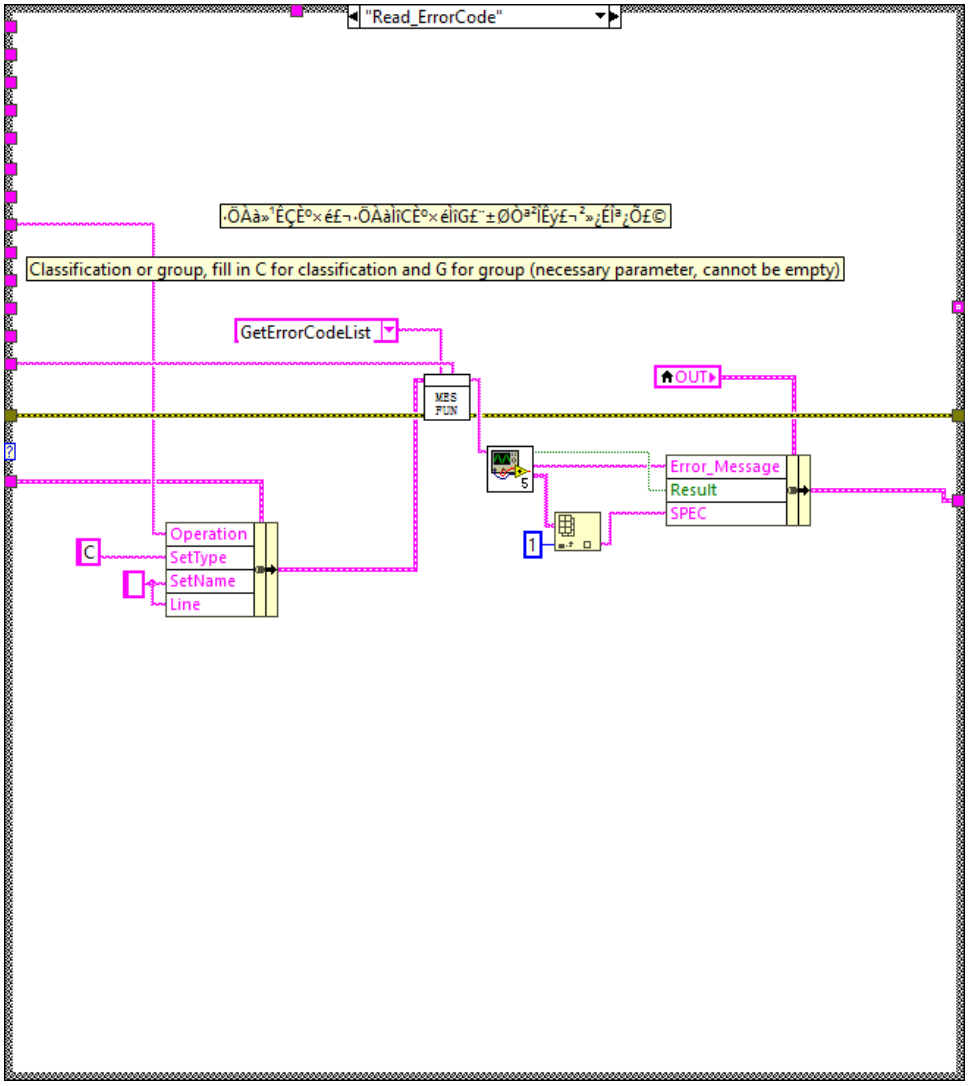

"Read_Date"
GetSysDateTime
MBS FUN
OUT
Error_Message
Result
Date
5
1

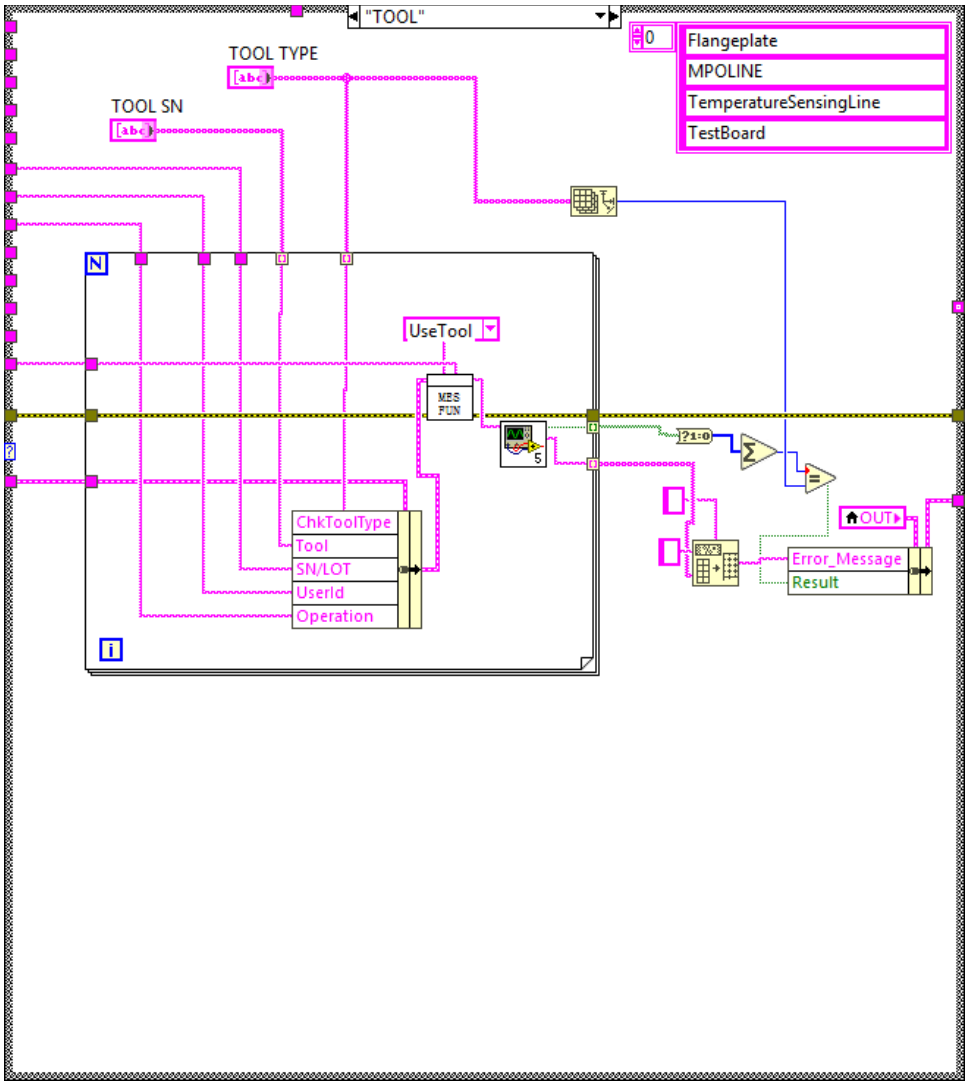

"Read_Test_Times"
"FQC"
10G_SFP_Test

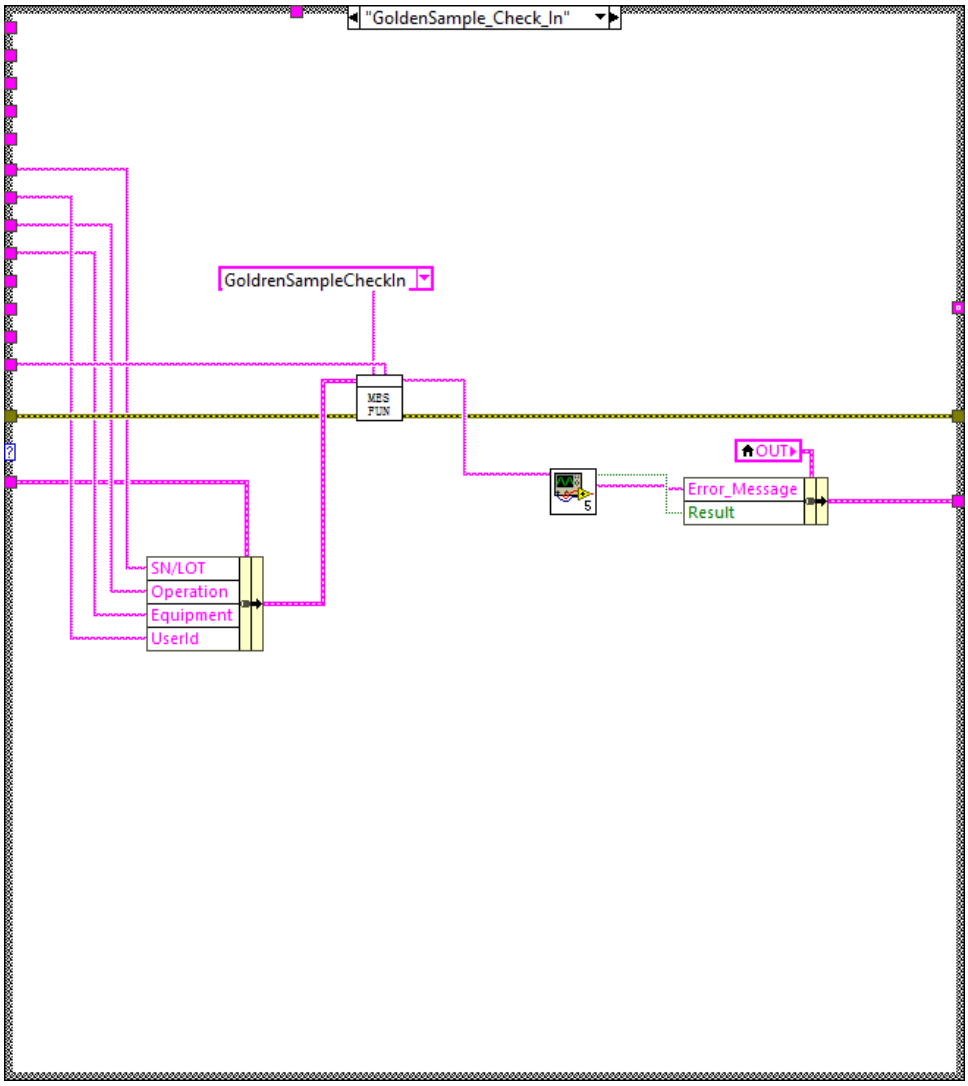

"¼Ù", Default
GetSysDateTime
MES FUN
OUT
SN/LOT
UserId
Operation
5
1
Error_Message
Result
Test_Times

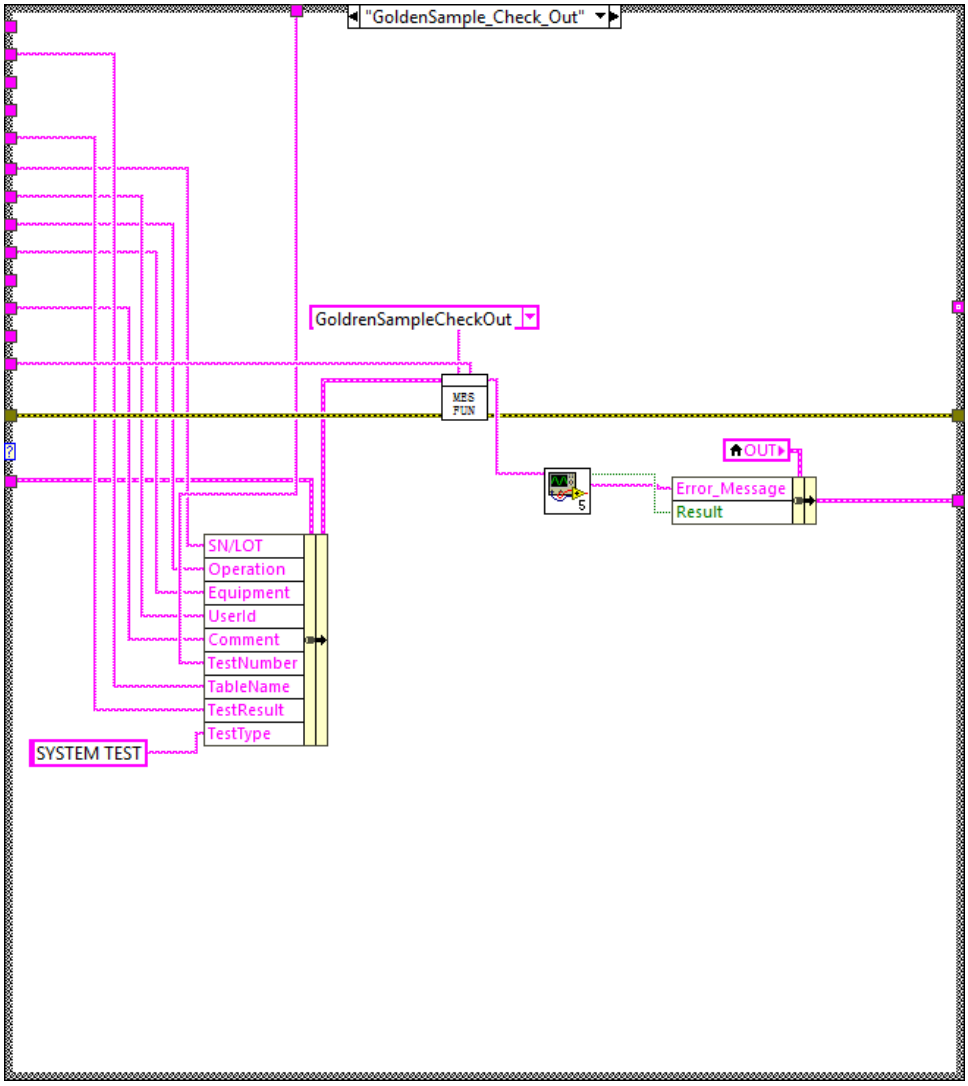

"Read_Spec"
"FQC"
GetQCTestSpec
MES FUN
OUT
Error_Message
Result
PN
WO
SN/LOT
UserId
BatchID
FQC

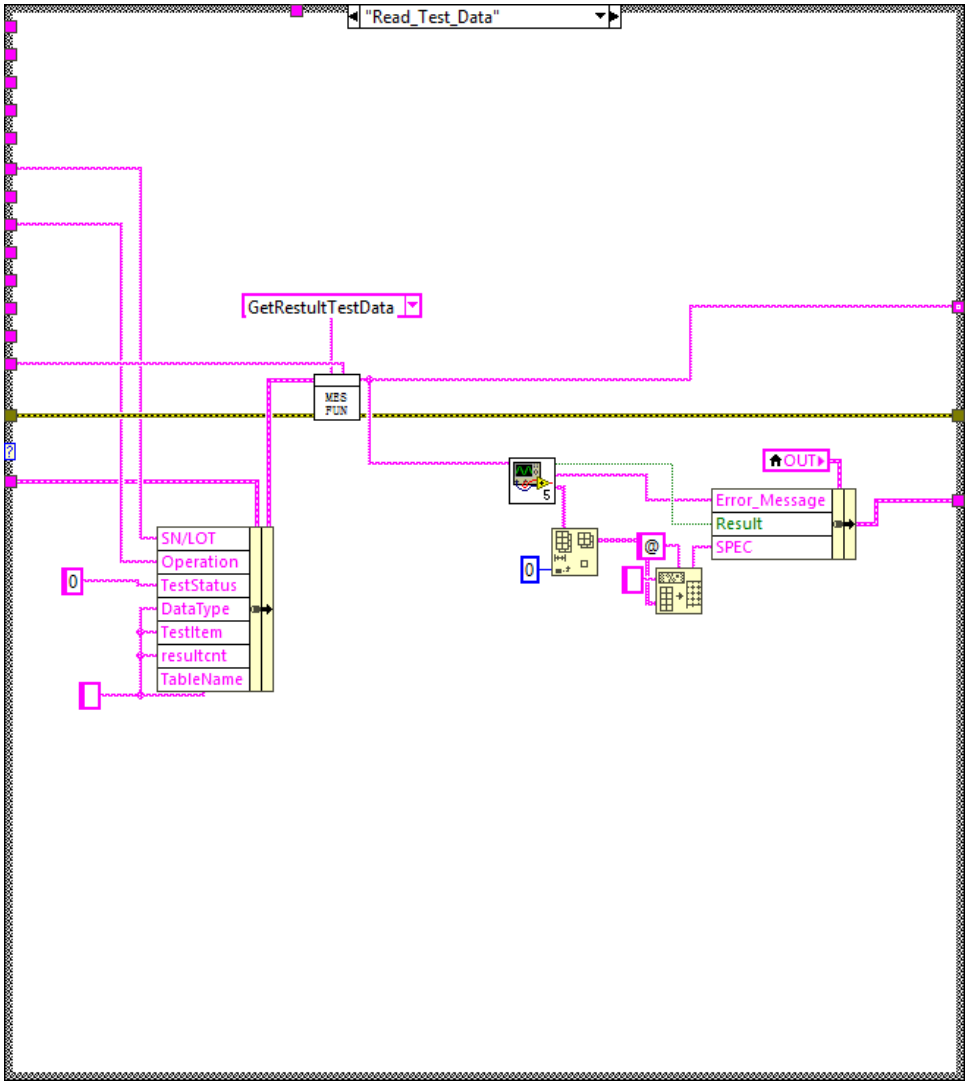

"¼Ù", Default
GetLotByLot
GetLabviewSpec
MES FUN
SN/LOT
UserId
DEVICE
Operation
OUT
Error_Message
Result
PN
WO
SPEC
PN>
WO>
N
i

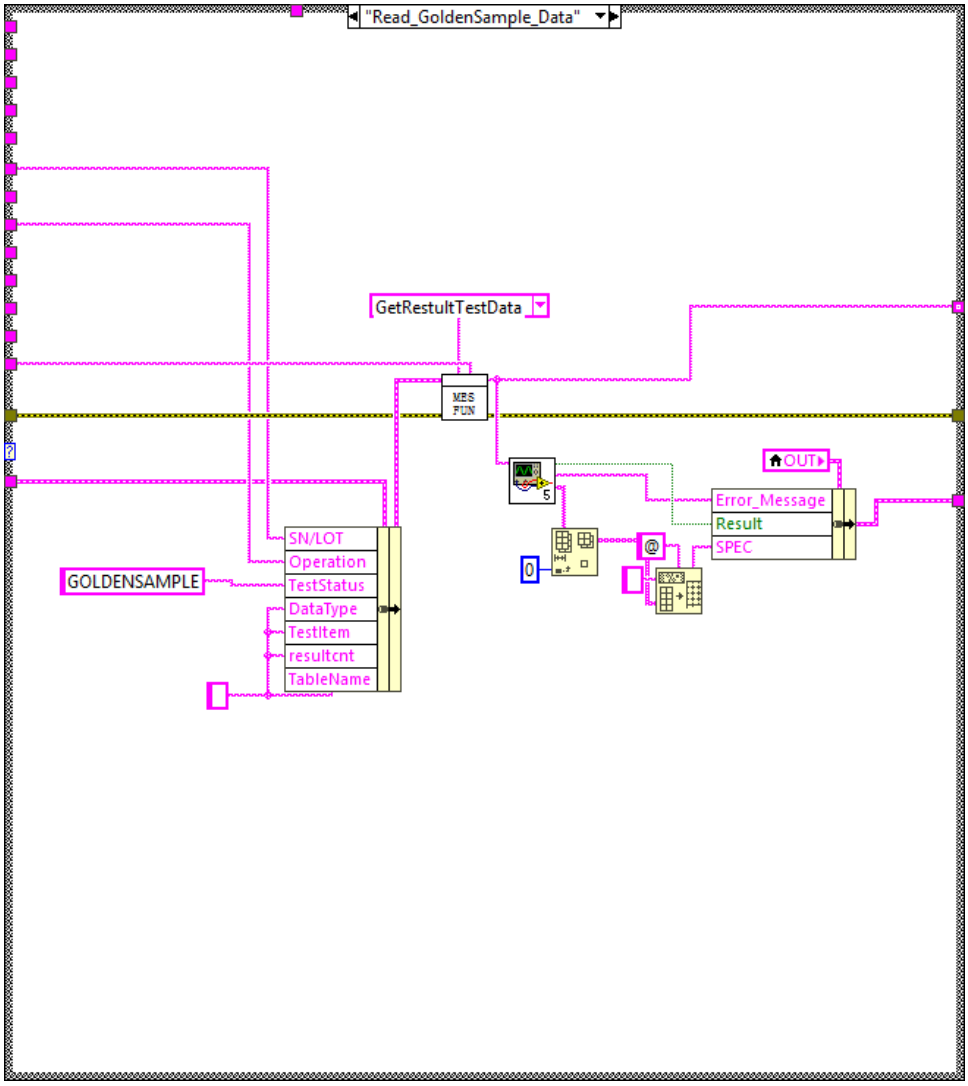

"Read_ErrorCode"
·ÖÀà»ˆÊÇÈº×é£¬·ÖÀàÌîCÈº×élïG£¨±ØÒª³ÌÐòÊý£¬²»¿ÉÎª¿Õ£©
Classification or group, fill in C for classification and G for group (necessary parameter, cannot be empty)
GetErrorCodeList
MES FUN
OUT
Error_Message
Result
SPEC
Operation
SetType
SetName
Line
C
5
1


"TOOL"
TOOL TYPE
TOOL SN
0
Flangeplate
MPOLINE
TemperatureSensingLine
TestBoard
UseTool
MBS FUN
ChkToolType
Tool
SN/LOT
UserId
Operation
OUT
Error_Message
Result


"GoldenSample_Check_In"
GoldrenSampleCheckIn
MES FUN
OUT
Error_Message
Result
SN/LOT
Operation
Equipment
UserId


"GoldenSample_Check_Out"
GoldrenSampleCheckOut
MES FUN
OUT
Error_Message
Result
SN/LOT
Operation
Equipment
UserId
Comment
TestNumber
TableName
TestResult
TestType
SYSTEM TEST


"Read_Test_Data"
GetRestultTestData
MES FUN
SN/LOT
Operation
TestStatus
DataType
TestItem
resultcnt
TableName
0
5
0
OUT
Error_Message
Result
SPEC



List of SubVIs and Express VIs with Configuration Information

Mes Interface.vi

C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\Mes Interface.vi

Trim Whitespace.vi

C:\Program Files (x86)\National Instruments\LabVIEW 2025\vi.lib\Utility\error.llb\Trim Whitespace.vi

Space Constant.vi

C:\Program Files (x86)\National Instruments\LabVIEW 2025\vi.lib\dlg_ctls.llb\Space Constant.vi

Cimes SQL Result.vi

C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\Cimes SQL Result.vi

Data_in.ctl

C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\Data_in.ctl

InPut KeyValue.ctl

C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\InPut KeyValue.ctl

Step.ctl

C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\Step.ctl

OUT.ctl

C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\OUT.ctl

IN.ctl

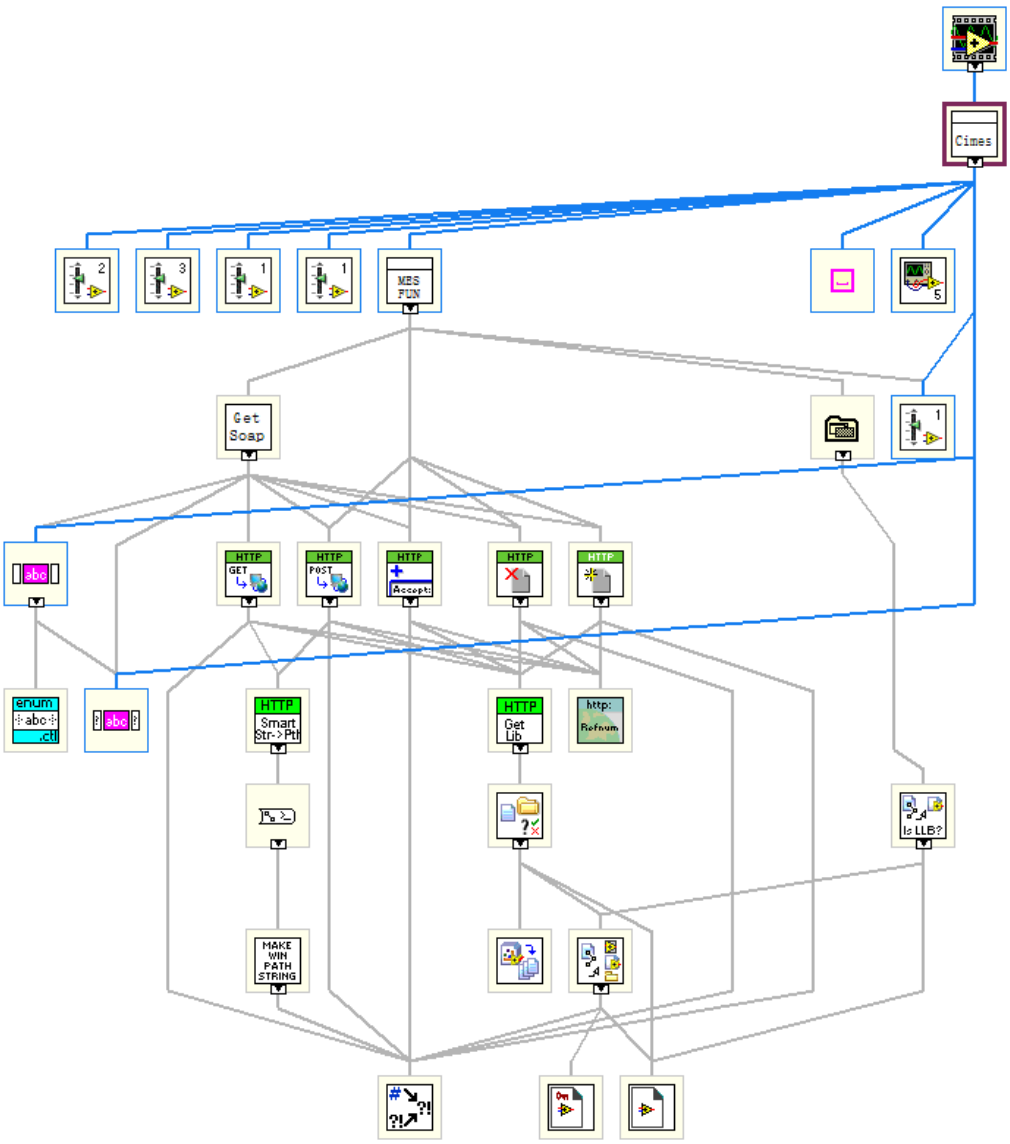
C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\IN.ctl

VI Revision History

"Cimes_All.vi History"

Current Revision: 70


Position in Hierarchy



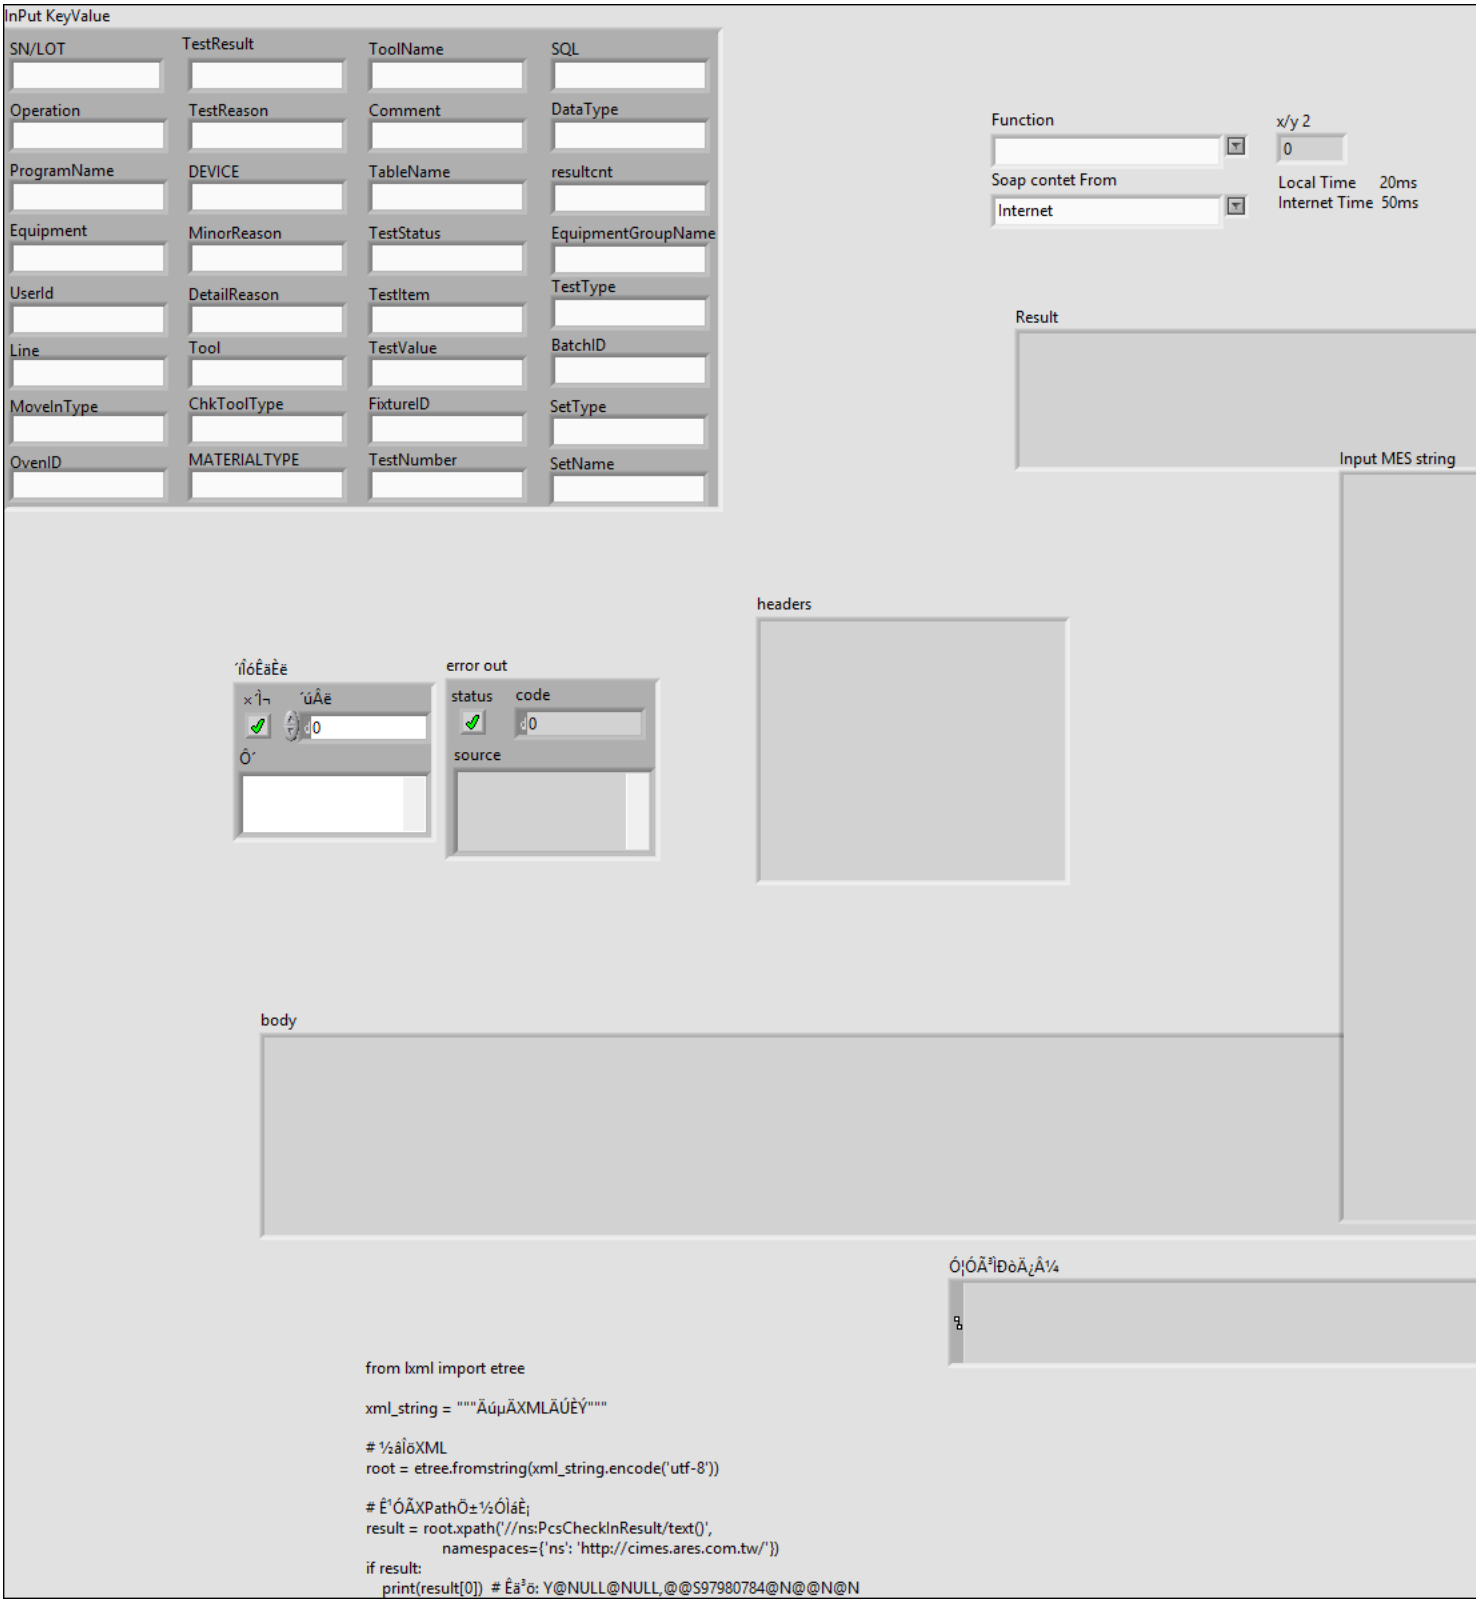
Iconified Cluster Constants

Mes Interface.vi

Connector Pane



Front Panel



Controls and Indicators

错误输入[Error In]

错误输入可接收来自前一个被调用VI的错误信息。当其它VI发生错误时，根据该信息决定是否需跳过执行某些功能。

关于错误的更多信息，请右键单击前面板上的**错误输入**输入控件并从快捷菜单中选择**解释错误**或**解释警告**。

状态[status]

状态为TRUE（叉）时表示错误，为FALSE（勾）时表示警告或无错误。

关于错误的更多信息，请右键单击前面板上的**错误输入**输入控件，并从快捷菜单中选择**解释错误**或**解释警告**。

代码[code]

代码表示错误或警告代码。

关于错误的更多信息，请右键单击前面板上的**错误输入**输入控件，并从快捷菜单中选择**解释错误**或**解释警告**。

源[source]

源表示错误或警告源。

关于错误的更多信息，请右键单击前面板上的**错误输入**输入控件，并从快捷菜单中选择**解释错误**或**解释警告**。

InPut KeyValue

- **SN/LOT**
- **Operation**
- **ProgramName**
- **Equipment**
- **UserId**
- **Line**
- **TestResult**
- **TestReason**
- **DEVICE**
- **MinorReason**
- **DetailReason**
- **MoveInType**
- **OvenID**
- **ToolName**
- **Comment**
- **TableName**
- **TestStatus**
- **TestItem**
- **TestValue**
- **FixtureID**
- **TestNumber**
- **Tool**
- **ChkToolType**
- **SQL**
- **DataType**
- **resultcnt**
- **EquipmentGroupName**
- **TestType**
- **MATERIALTYPE**
- **BatchID**
- **SetType**
- **SetName**

Function

Soap contet From

body

body returns body data returned by the server.

error out

error out contains error information. This output provides standard error out functionality.

status

status is TRUE (X) if an error occurred or FALSE (checkmark) to indicate a warning or that no error occurred.

code

code is the error or warning code.

source

source describes the origin of the error or warning and is, in most cases, the name of the node that produced the error or warning.

headers

headers returns the header fields returned by the server. Refer to the World Wide Web Consortium website at www.w3.org for more information about header field definitions including available headers, descriptions, and syntax.

Result

Input MES string

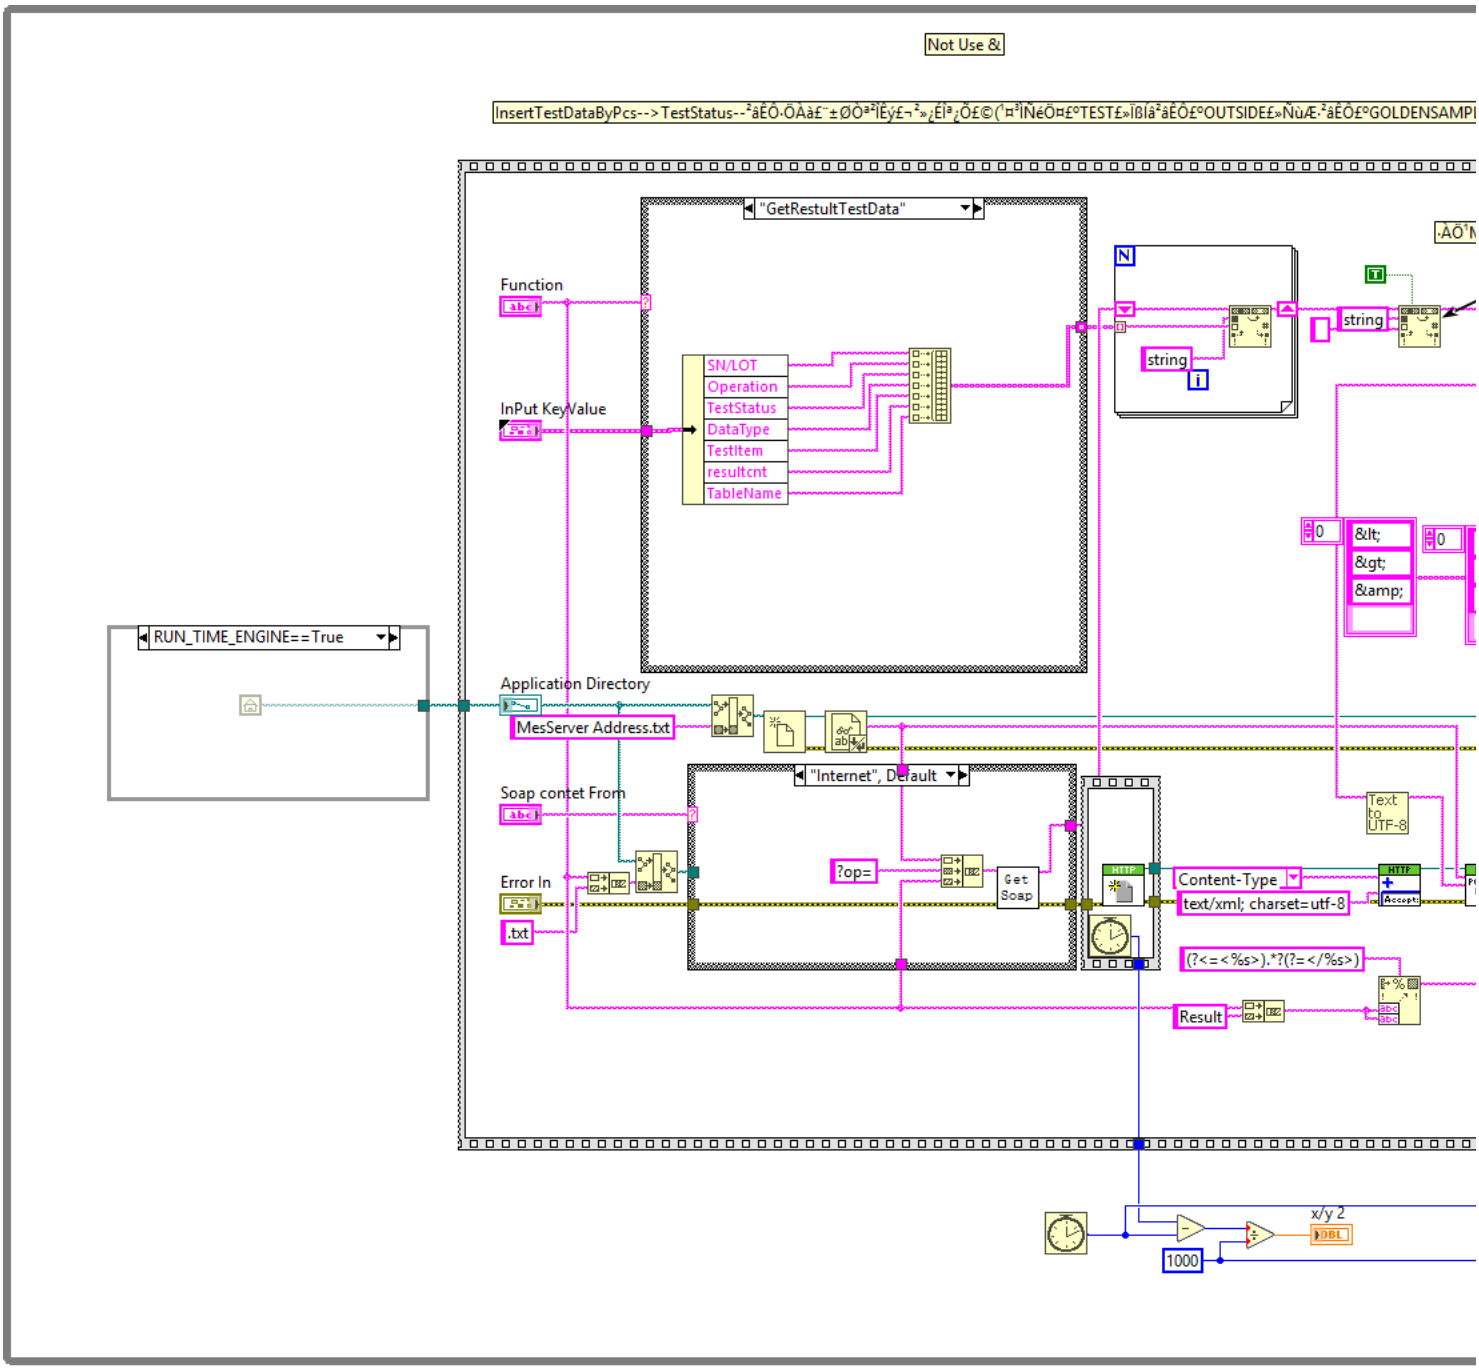
x/y

x/y 2

应用程序目录[Application Directory]

应用程序目录是运行VI的目录。


Block Diagram




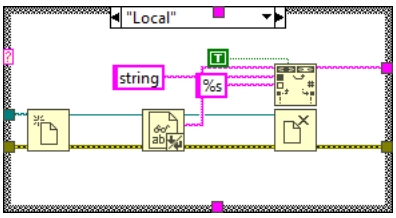
& 是 HTML 中 & 的表示方法.即在html中用&

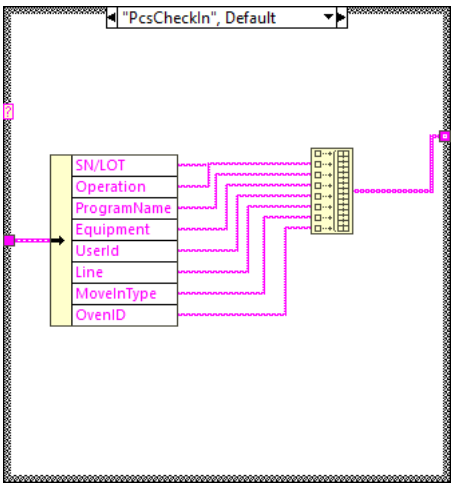
显示结果	描述
	空格
<	小于号
>	大于号
&	与号
"	引号
'	撇号
×	乘号
÷	除号

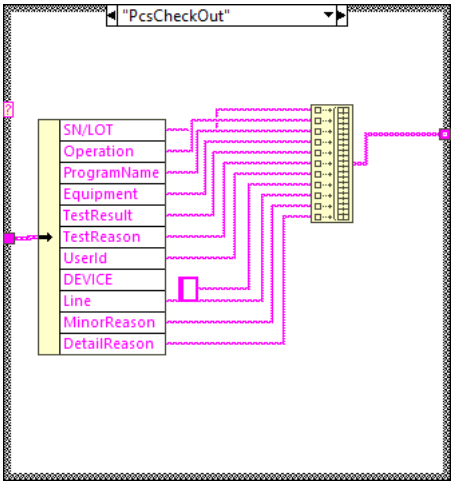
http://blog.csd

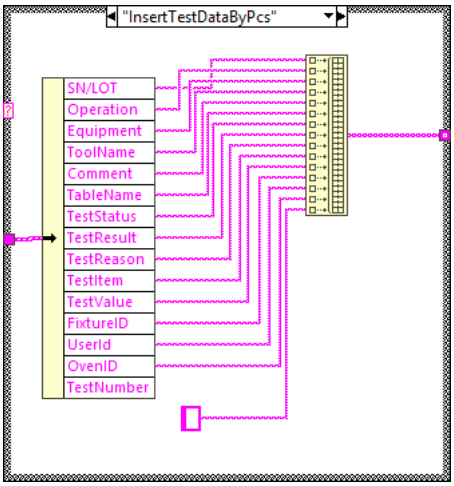

False

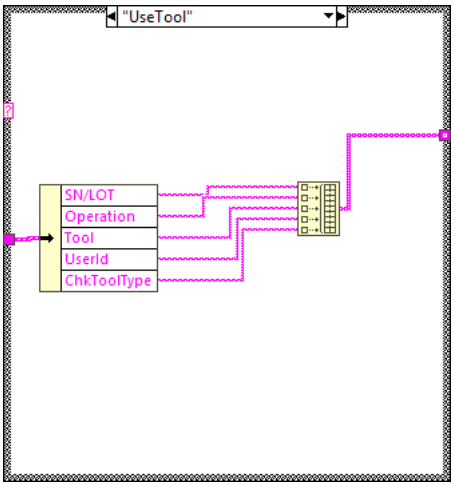

False
M

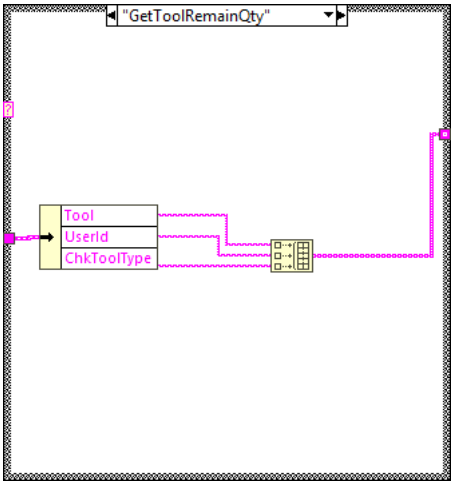

"Local"
string
%s

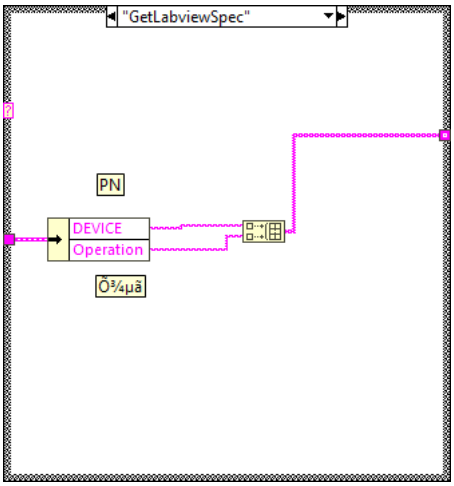

"PcsCheckIn", Default
SN/LOT
Operation
ProgramName
Equipment
UserId
Line
MoveInType
OvenID

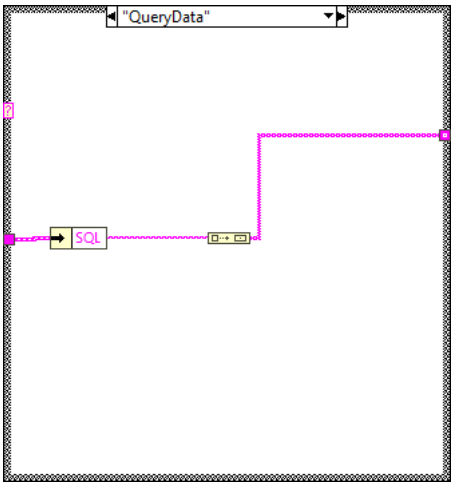

"PcsCheckOut"
SN/LOT
Operation
ProgramName
Equipment
TestResult
TestReason
UserId
DEVICE
Line
MinorReason
DetailReason

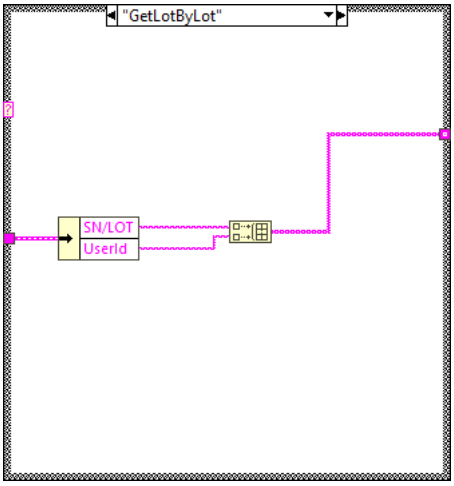

"InsertTestDataByPcs"
SN/LOT
Operation
Equipment
ToolName
Comment
TableName
TestStatus
TestResult
TestReason
TestItem
TestValue
FixtureID
UserId
OvenID
TestNumber

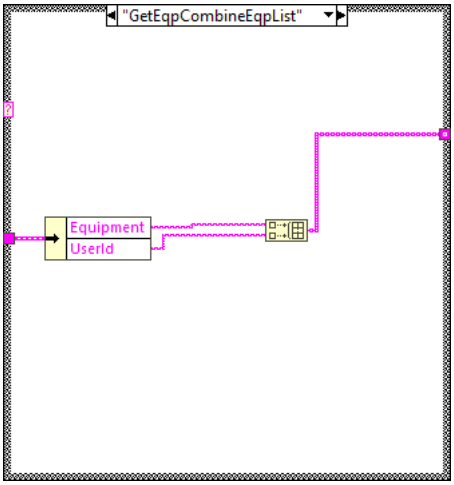

"UseTool"
SN/LOT
Operation
Tool
UserId
ChkToolType

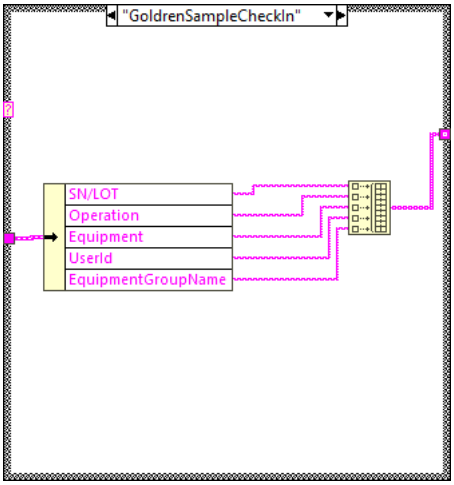

"GetToolRemainQty"
Tool
UserId
ChkToolType

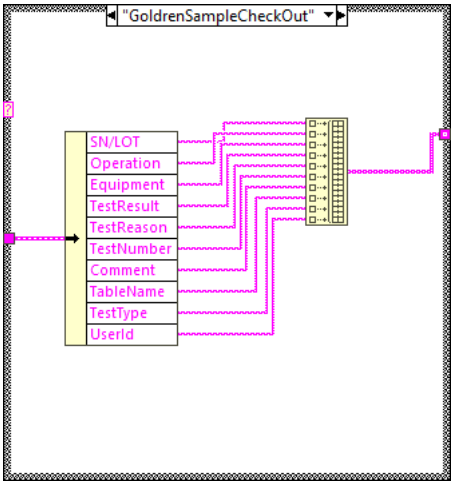

"GetLabviewSpec"
PN
DEVICE
Operation
Õ¾µã

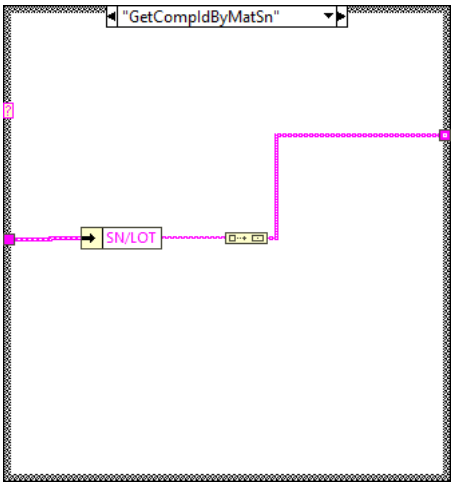

"QueryData"
SQL

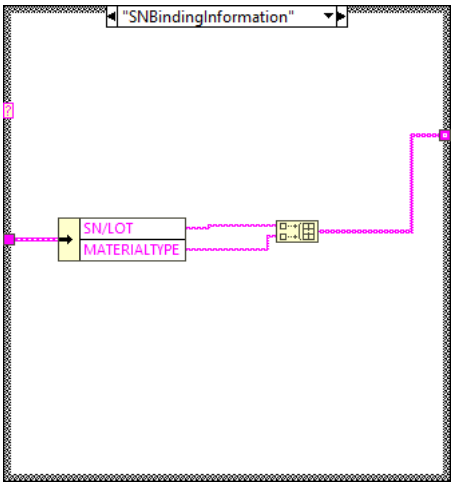

"GetLotByLot"
SN/LOT
UserId

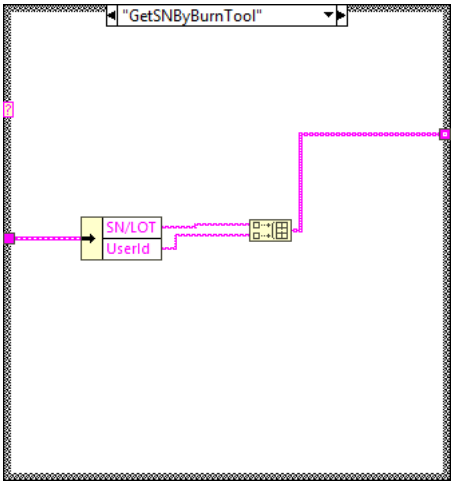

"GetEqpCombineEqpList"
Equipment
UserId

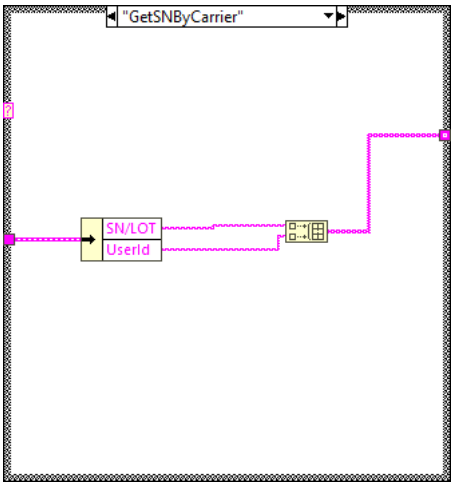

"GoldrenSampleCheckIn"
SN/LOT
Operation
Equipment
UserId
EquipmentGroupName

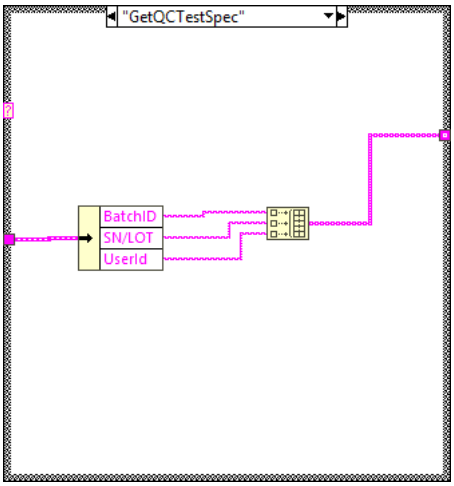

"GoldrenSampleCheckOut"
SN/LOT
Operation
Equipment
TestResult
TestReason
TestNumber
Comment
TableName
TestType
UserId

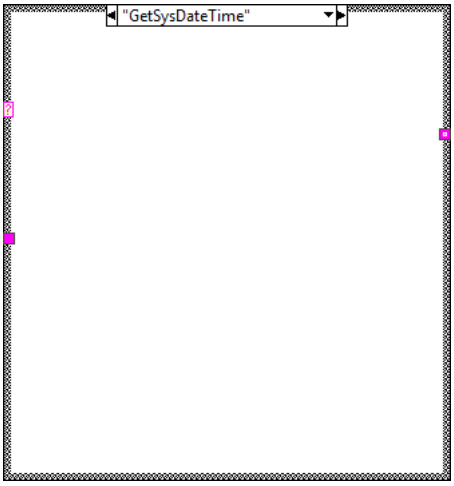

"GetCompIdByMatSn"
SN/LOT

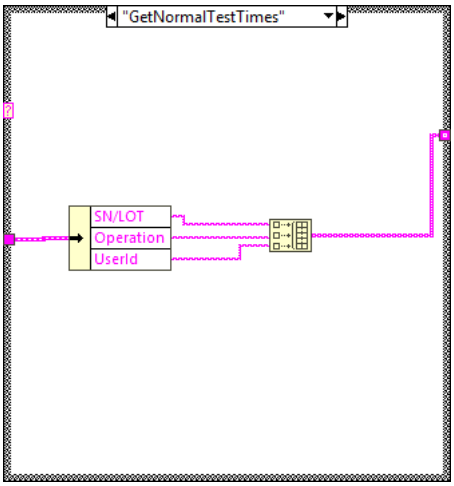

"SNBindingInformation"
SN/LOT
MATERIALTYPE

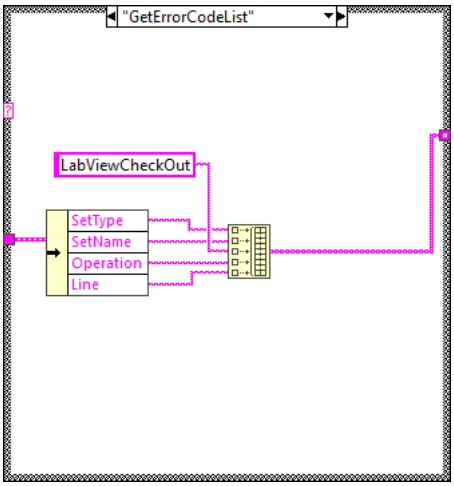

"GetSNByBurnTool"
SN/LOT
UserId



"GetSNByCarrier"
SN/LOT
UserId


"GetQCTestSpec"
BatchID
SN/LOT
UserId


"GetSysDateTime"







List of SubVIs and Express VIs with Configuration Information

InPut KeyValue.ctl

C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\InPut KeyValue.ctl

Get Soap content.vi

C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\Get Soap content.vi

LabVIEWHTTPClient.lvlib:POSTBuffer.vi

C:\Program Files (x86)\National Instruments\LabVIEW 2025\vi.lib\httpClient\POSTBuffer.vi

LabVIEWHTTPClient.lvlib:OpenHandle.vi

C:\Program Files (x86)\National Instruments\LabVIEW 2025\vi.lib\httpClient\OpenHandle.vi

Application Directory.vi

C:\Program Files (x86)\National Instruments\LabVIEW 2025\vi.lib\Utility\file.llb\Application Directory.vi

LabVIEWHTTPClient.lvlib:CloseHandle.vi

C:\Program Files (x86)\National Instruments\LabVIEW 2025\vi.lib\httpClient\CloseHandle.vi

LabVIEWHTTPClient.lvlib:AddHeader.vi

C:\Program Files (x86)\National Instruments\LabVIEW 2025\vi.lib\httpClient\AddHeader.vi

---

VI Revision History

"Mes Interface.vi History"

Current Revision: 79

rev. 64 Thu, Nov 13, 2025 2:11:15 AM Yixuan_Shi

The name of the VI changed to "D:\labview\TEC\400G_TEC_TP2_TP3_TEST1.1.llb\Mes Interface.vi" from "D:\labview\MES\Mes_Function_Interface\Mes Interface.vi".

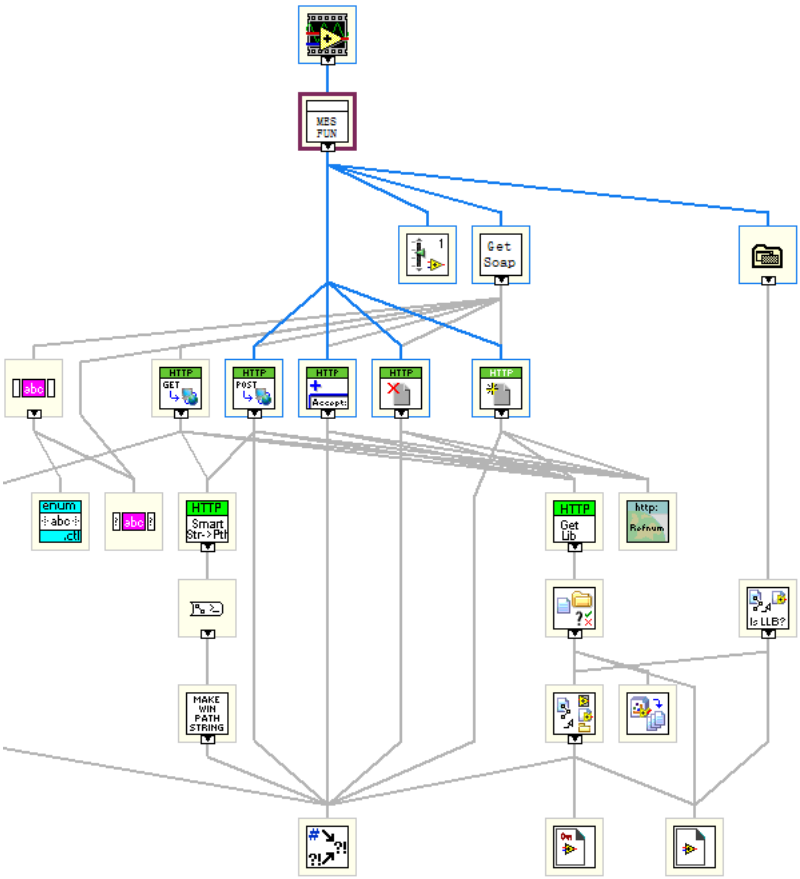
rev. 62 Sun, Nov 9, 2025 11:27:47 PM Yixuan_Shi

Type Definitions used by this VI were modified.

rev. 62 Sun, Nov 9, 2025 8:07:56 PM Yixuan_Shi

VI was converted from LabVIEW version 14.0 to LabVIEW version 20.0.1.


Position in Hierarchy



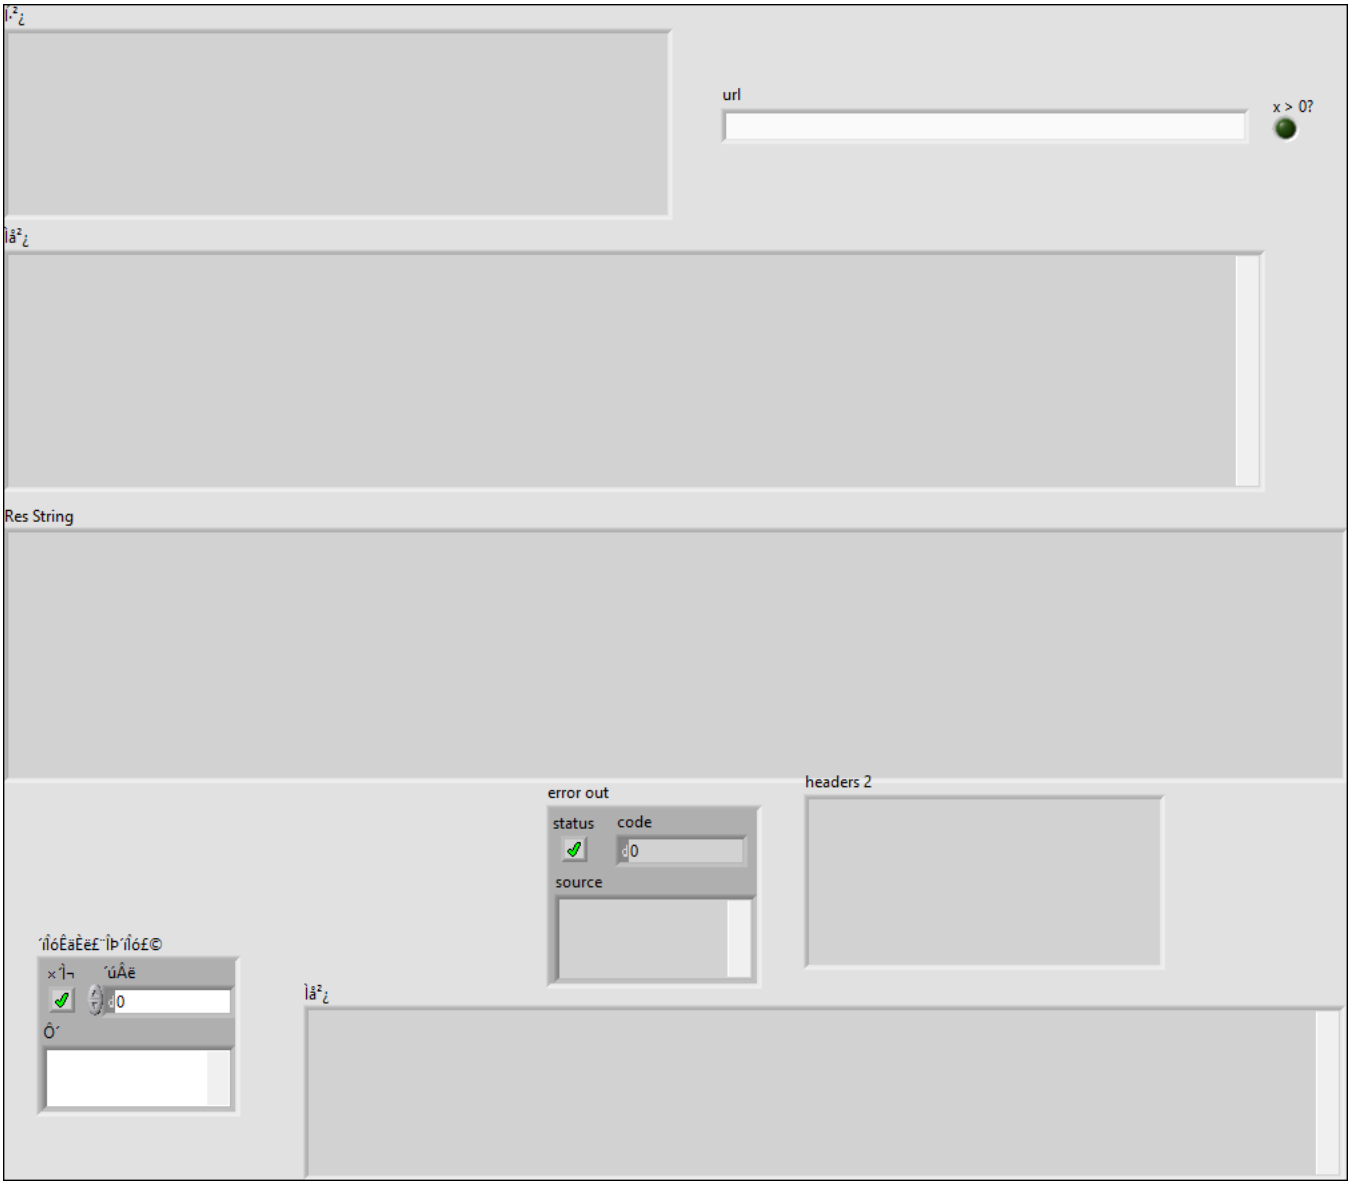
Iconified Cluster Constants

Get Soap content.vi

Connector Pane



Front Panel



Controls and Indicators

url[url]

URL指定VI发送Web请求的服务器、Web页面或LabVIEW Web服务的URL。

错误输入（无错误）[error in]

错误输入表明节点运行前发生的错误。该输入提供标准错误输入。

状态[status]

状态的值为TRUE（叉）时表示在节点运行前已发生错误，值为FALSE（勾）时表示警告或无错误。默认值为FALSE。

代码[code]

代码是错误或警告代码。默认值为0。

源[source]

源表示错误或警告的源，大多数情况下表示出现错误或警告的节点名称。默认值为空字符串。

头部[headers]

头部返回服务器返回的header信息。关于头定义（包括可用头、说明和语法），见World Wide Web Consortium的网站www.w3.org。

体部[body]

体部返回服务器返回的体部(body)数据。

Res String

error out

error out contains error information. This output provides standard error out functionality.

status

status is TRUE (X) if an error occurred or FALSE (checkmark) to indicate a warning or that no error occurred.

code

code is the error or warning code.

source

source describes the origin of the error or warning and is, in most cases, the name of the node that produced the error or warning.

headers 2

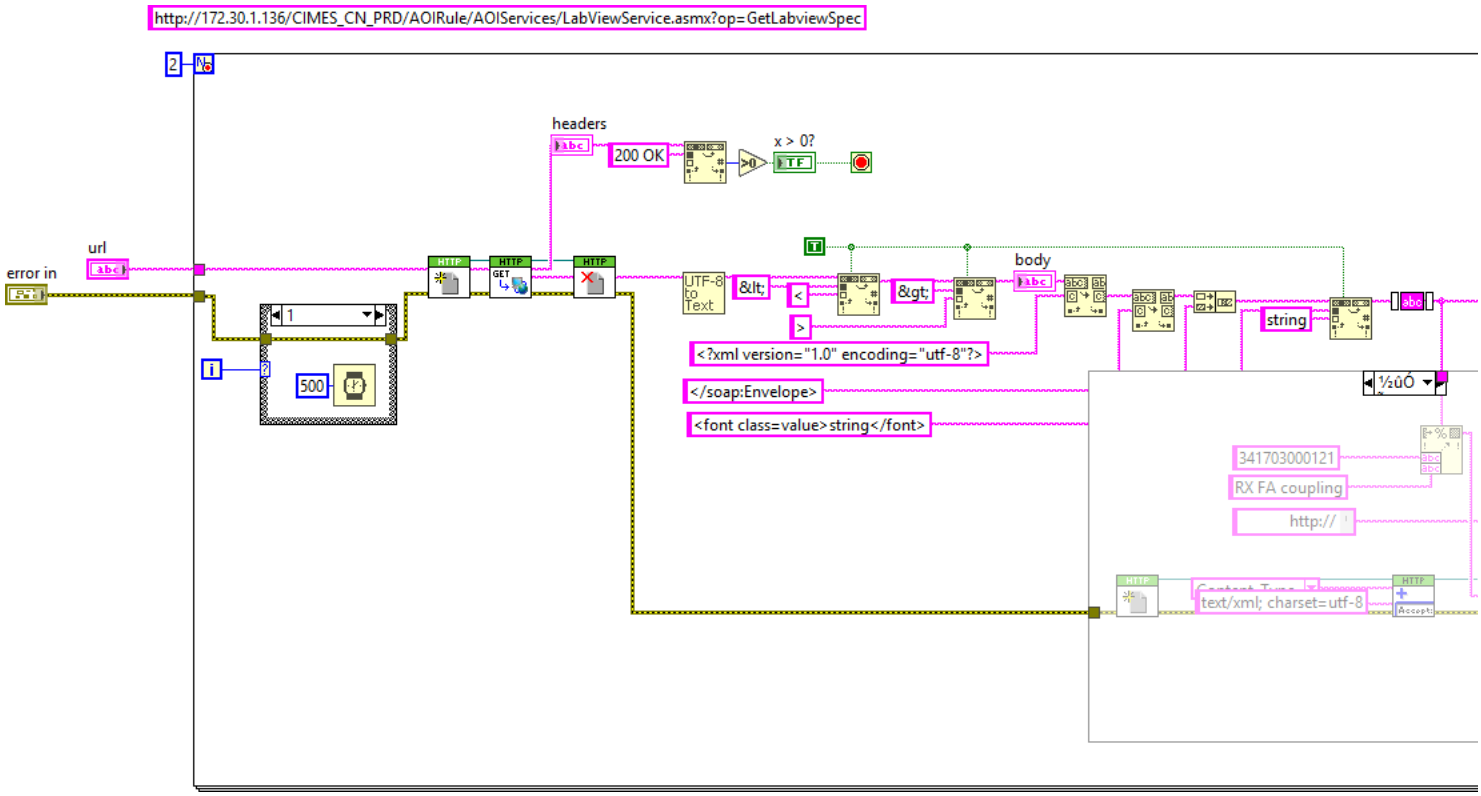
headers returns the header fields returned by the server. Refer to the World Wide Web Consortium website at www.w3.org for more information about header field definitions including available headers, descriptions, and syntax.

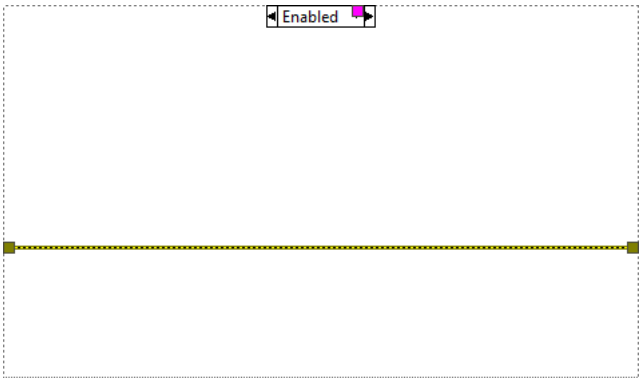
体部[body 2]


体部返回服务器返回的体部(body)数据。

x > 0?

Block Diagram







List of SubVIs and Express VIs with Configuration Information

LabVIEWHTTPClient.lvlib:GET.vi

C:\Program Files (x86)\National Instruments\LabVIEW 2025\vi.lib\httpClient\GET.vi

LabVIEWHTTPClient.lvlib:OpenHandle.vi

C:\Program Files (x86)\National Instruments\LabVIEW 2025\vi.lib\httpClient\OpenHandle.vi

LabVIEWHTTPClient.lvlib:CloseHandle.vi

C:\Program Files (x86)\National Instruments\LabVIEW 2025\vi.lib\httpClient\CloseHandle.vi

Trim Whitespace.vi

C:\Program Files (x86)\National Instruments\LabVIEW 2025\vi.lib\Utility\error.llb\Trim Whitespace.vi

LabVIEWHTTPClient.lvlib:POSTBuffer.vi

C:\Program Files (x86)\National Instruments\LabVIEW 2025\vi.lib\httpClient\POSTBuffer.vi

LabVIEWHTTPClient.lvlib:AddHeader.vi

C:\Program Files (x86)\National Instruments\LabVIEW 2025\vi.lib\httpClient\AddHeader.vi

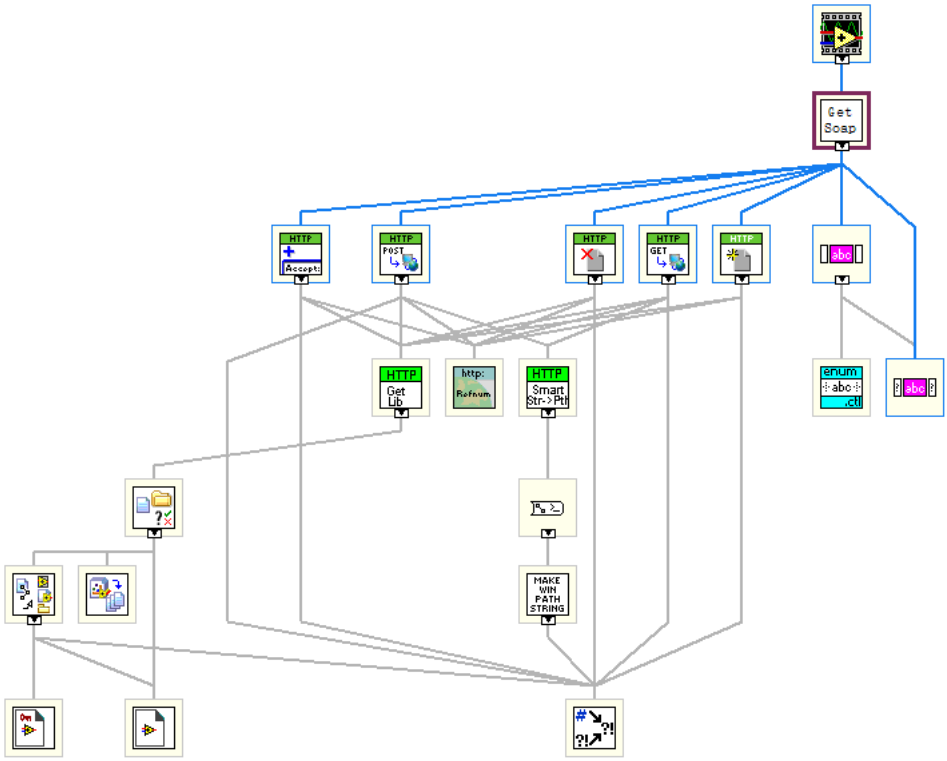
---

VI Revision History

"Get Soap content.vi History"

Current Revision: 14

Position in Hierarchy



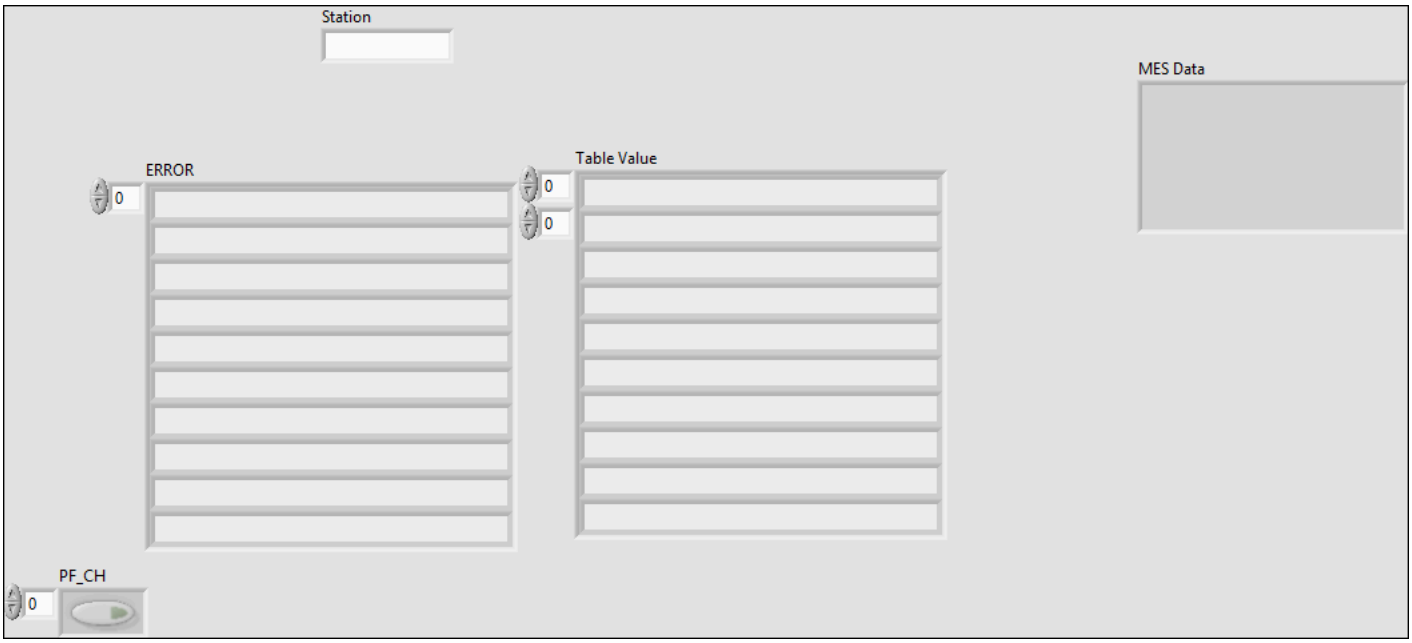
Iconified Cluster Constants

Table Value to MES Data.vi

Connector Pane



Front Panel



Controls and Indicators

ERROR

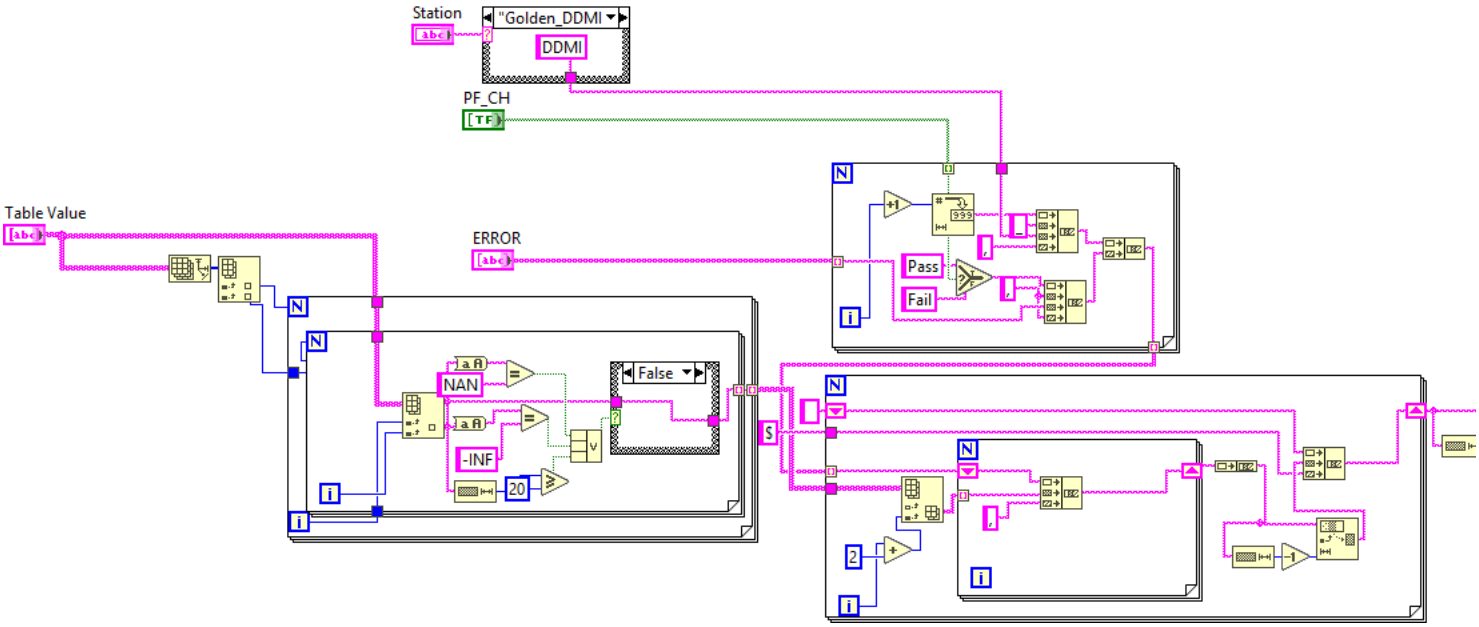
PF_CH


Station


Table Value


MES Data

Block Diagram









List of SubVIs and Express VIs with Configuration Information


---

VI Revision History

"Table Value to MES Data.vi History"

Current Revision: 2


Position in Hierarchy




Iconified Cluster Constants

Save Record.vi

Connector Pane



Front Panel



Controls and Indicators

一维数据[1D data]

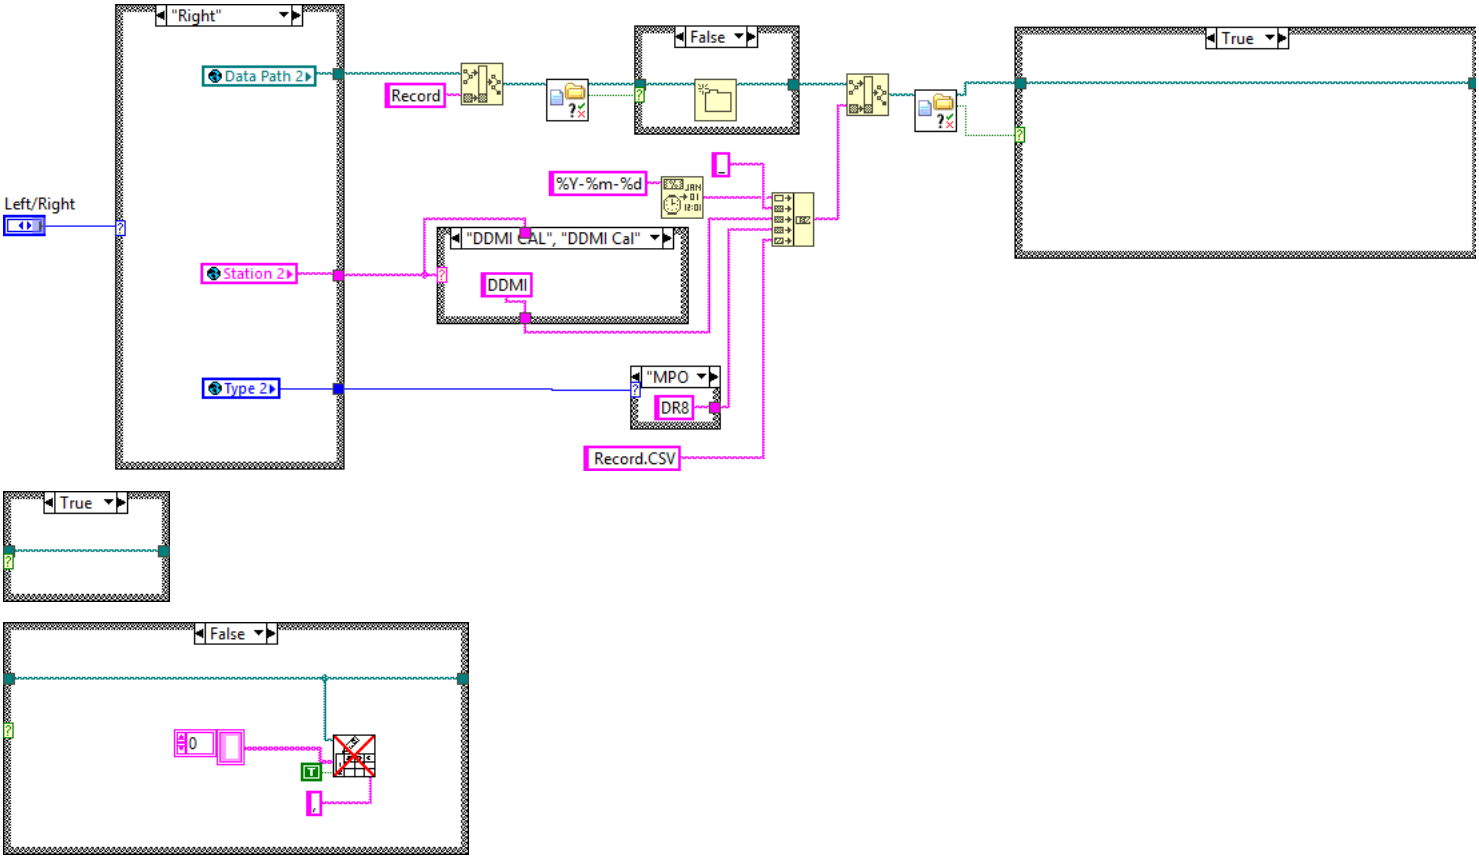
1D data contains the data the VI writes to the file if this input is not empty.

[]


1D data contains the data the VI writes to the file if this input is not empty. The VI converts the 1D array into a 2D array before proceeding. If **transpose?** is FALSE, each call to this VI creates a new line or row in the file.

Left/Right


Block Diagram










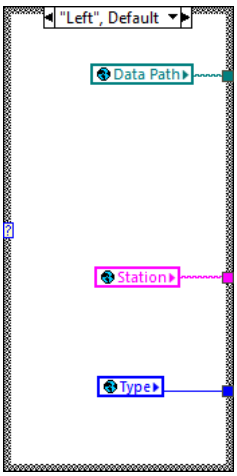












List of SubVIs and Express VIs with Configuration Information

Check if File or Folder Exists.vi

C:\Program Files (x86)\National Instruments\LabVIEW 2025\vi.lib\Utility\libraryn.llb\Check if File or Folder Exists.vi

Write To Spreadsheet File (string).vi

C:\Program Files (x86)\National Instruments\LabVIEW 2025\vi.lib\Utility\file.llb\Write To Spreadsheet File (string).vi

G_100G.vi

C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\G_100G.vi

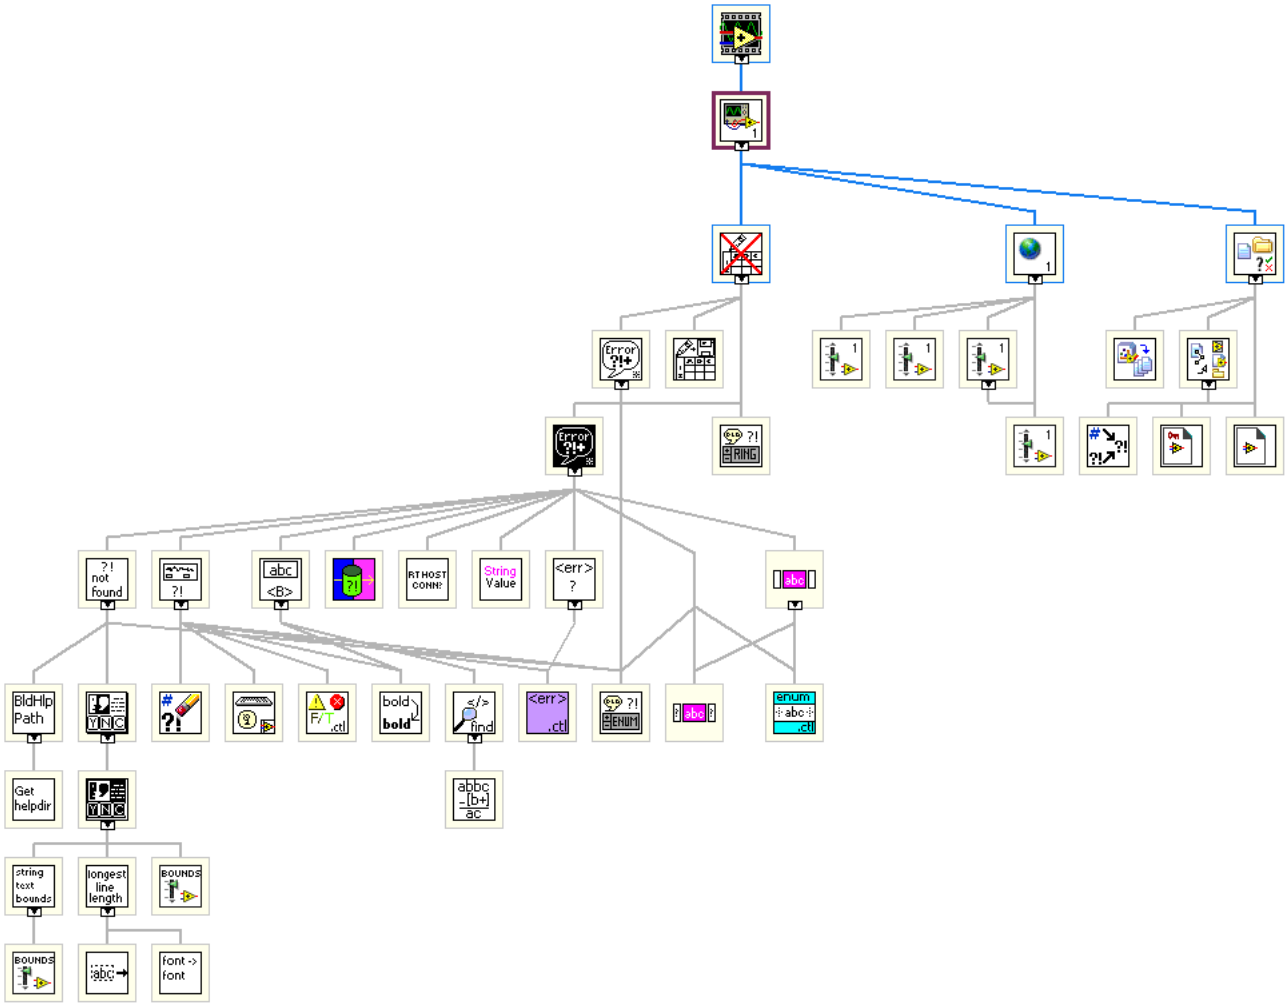
---

VI Revision History

"Save Record.vi History"

Current Revision: 6


Position in Hierarchy



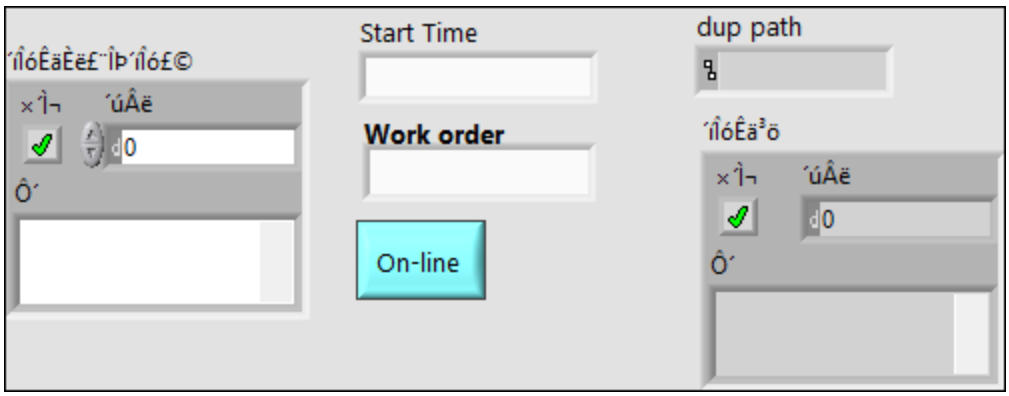
Iconified Cluster Constants

Save Picture.vi

Connector Pane



Front Panel



Controls and Indicators

Work order[Work order 2]

字符串是输入字符串。

Start Time

Start Test[L]

错误输入（无错误）[error in (no error)]

错误输入表明节点运行前发生的错误。该输入提供标准错误输入。

状态[status]

状态的值为TRUE（叉）时表示在VI或函数运行前已发生错误，值为FALSE（勾）时表示警告或无错误。默认值为FALSE。

代码[code]

代码是错误或警告代码。默认值为0。

源[source]

源表示错误或警告的源，大多数情况下表示出现错误或警告的VI或函数名。默认值为空字符串。

dup path

错误输出[error out]

错误输出包含错误信息。该输出提供标准错误输出功能。

状态[status]

状态的值为TRUE（叉）时表示错误，为FALSE（勾）时表示警告或无错误。

代码[code]

代码是错误或警告代码。

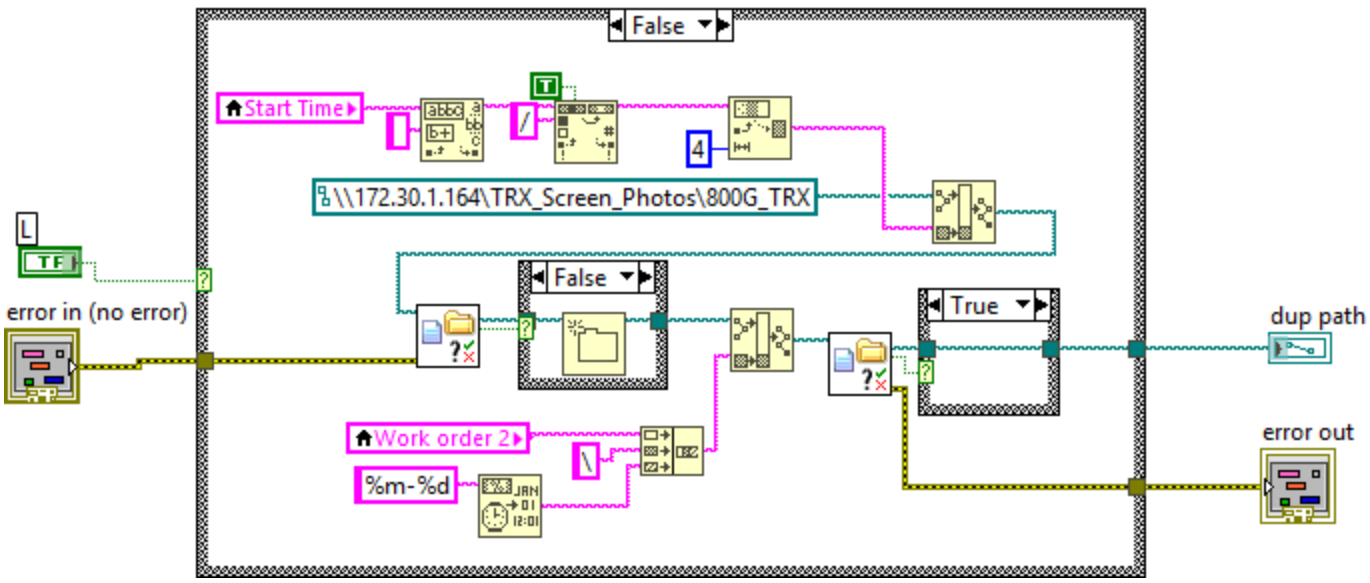
源[source]


源表示错误或警告的源，大多数情况下表示出现错误或警告的节点名。


Block Diagram

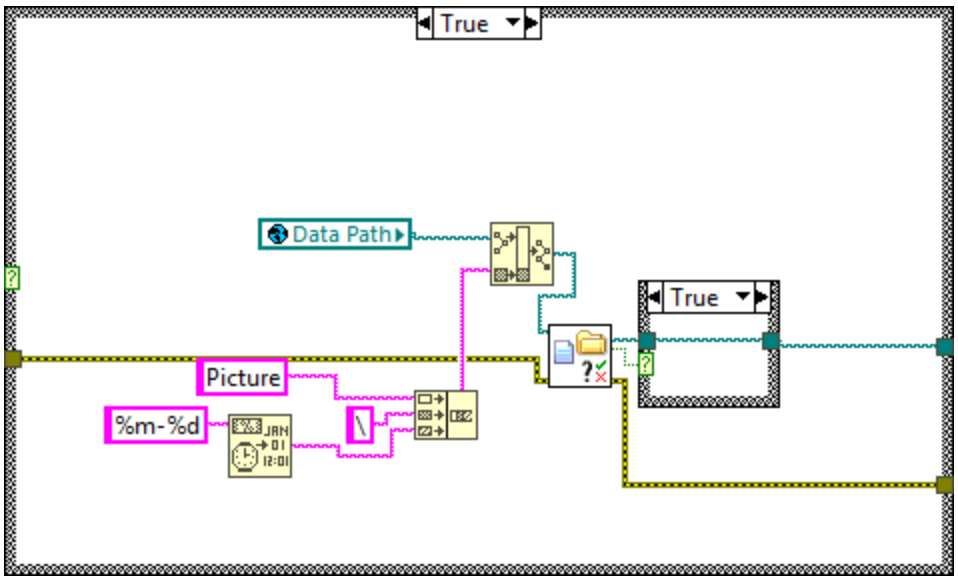
Work order 2


Start Time











List of SubVIs and Express VIs with Configuration Information

G_100G.vi

C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\G_100G.vi

Check if File or Folder Exists.vi

C:\Program Files (x86)\National Instruments\LabVIEW 2025\vi.lib\Utility\libraryn.llb\Check if File or Folder Exists.vi

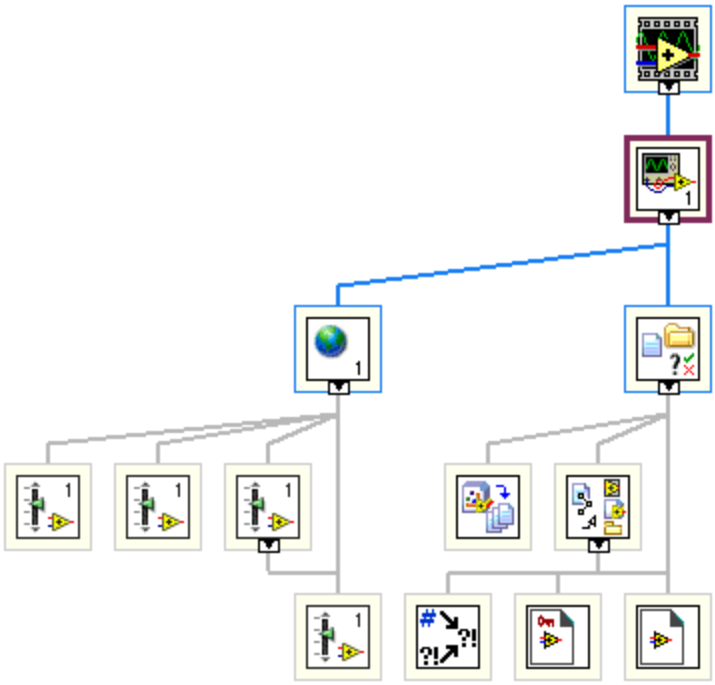
---

VI Revision History

"Save Picture.vi History"

Current Revision: 14

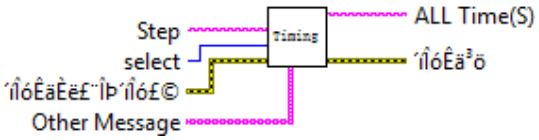
Position in Hierarchy



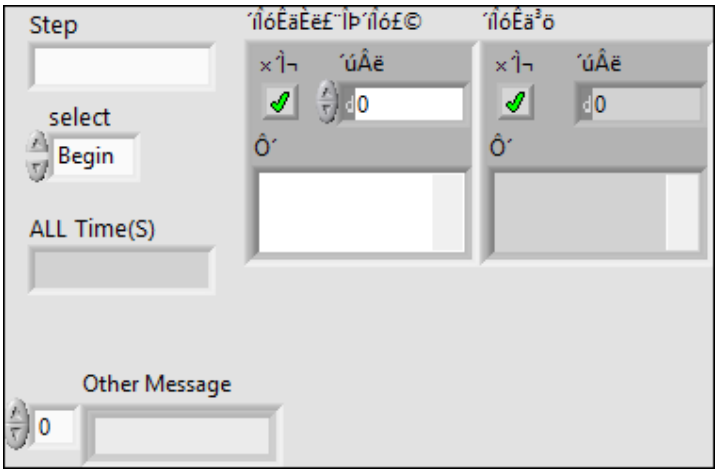
Iconified Cluster Constants

Timing.vi

Connector Pane



Front Panel



Controls and Indicators

select

Step

错误输入（无错误）[error in]

错误输入表明节点运行前发生的错误。该输入提供标准错误输入。

状态[status]

状态的值为TRUE（叉）时表示在节点运行前已发生错误，值为FALSE（勾）时表示警告或无错误。默认值为FALSE。

代码[code]

代码是错误或警告代码。默认值为0。

源[source]

源表示错误或警告的源，大多数情况下表示出现错误或警告的节点名称。默认值为空字符串。

Other Message

字符串

错误输出[error out]

错误输出包含错误信息。此输出提供标准错误输出功能。默认情况下，**错误输出**返回无错误。如连线值到**清除指定错误代码**和**错误输入**，包含的错误与连线的错误代码不匹配，**错误输出**将返回错误。

状态[status]

状态的值为TRUE（叉）时表示错误，为FALSE（勾）时表示警告或无错误。

代码[code]

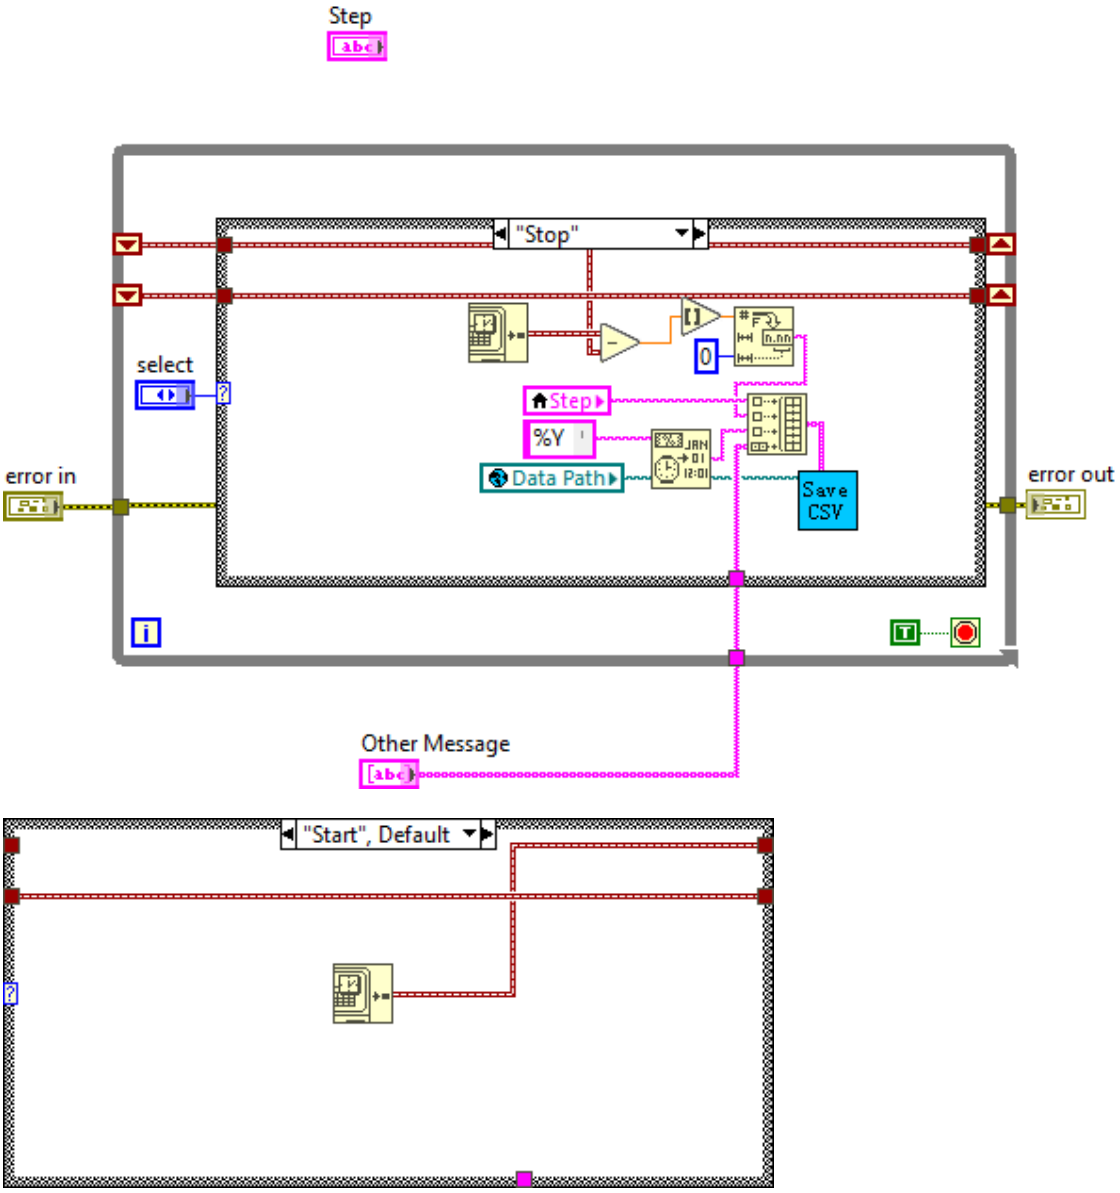
代码是错误或警告代码。

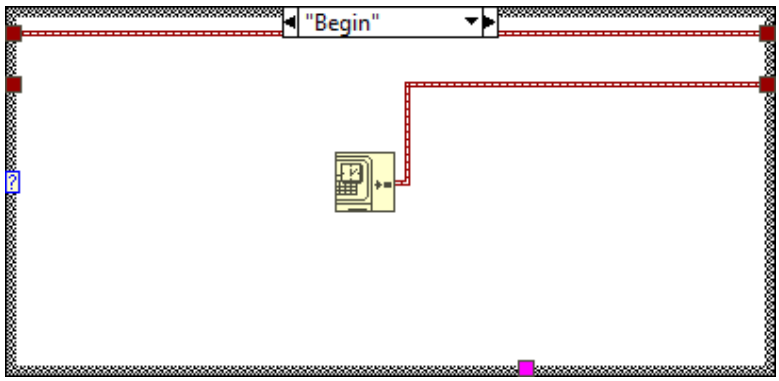
源[source]

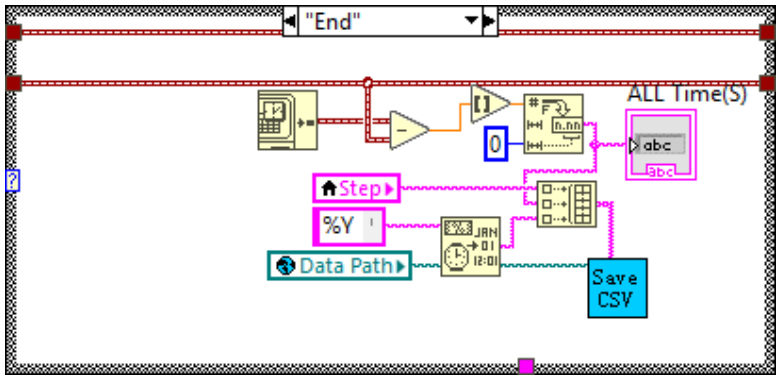
源表示错误或警告的源，大多数情况下表示出现错误或警告的节点名。

ALL Time(S)

Block Diagram







List of SubVIs and Express VIs with Configuration Information

save csv.vi

C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\save csv.vi

G_100G.vi

C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\G_100G.vi

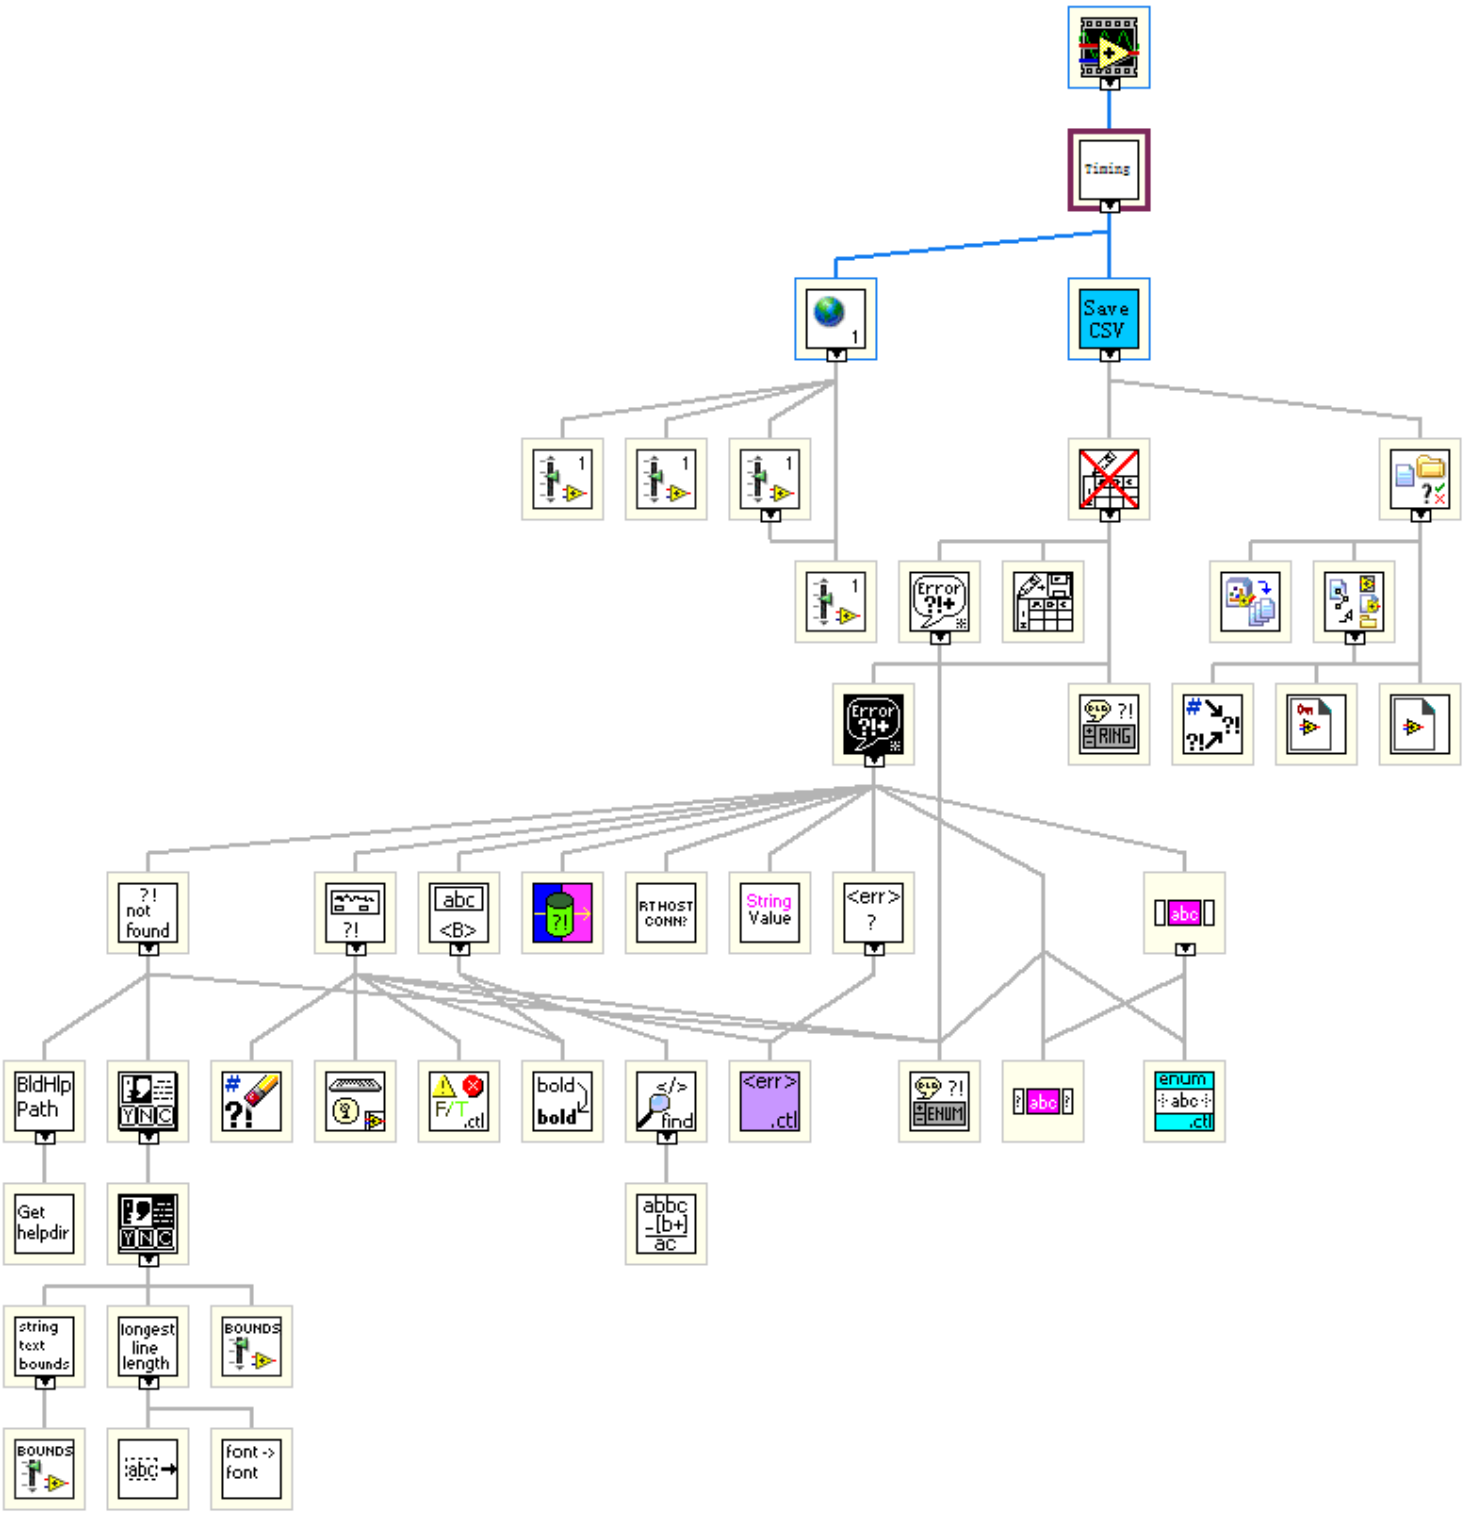
---

VI Revision History

"Timing.vi History"

Current Revision: 19


Position in Hierarchy



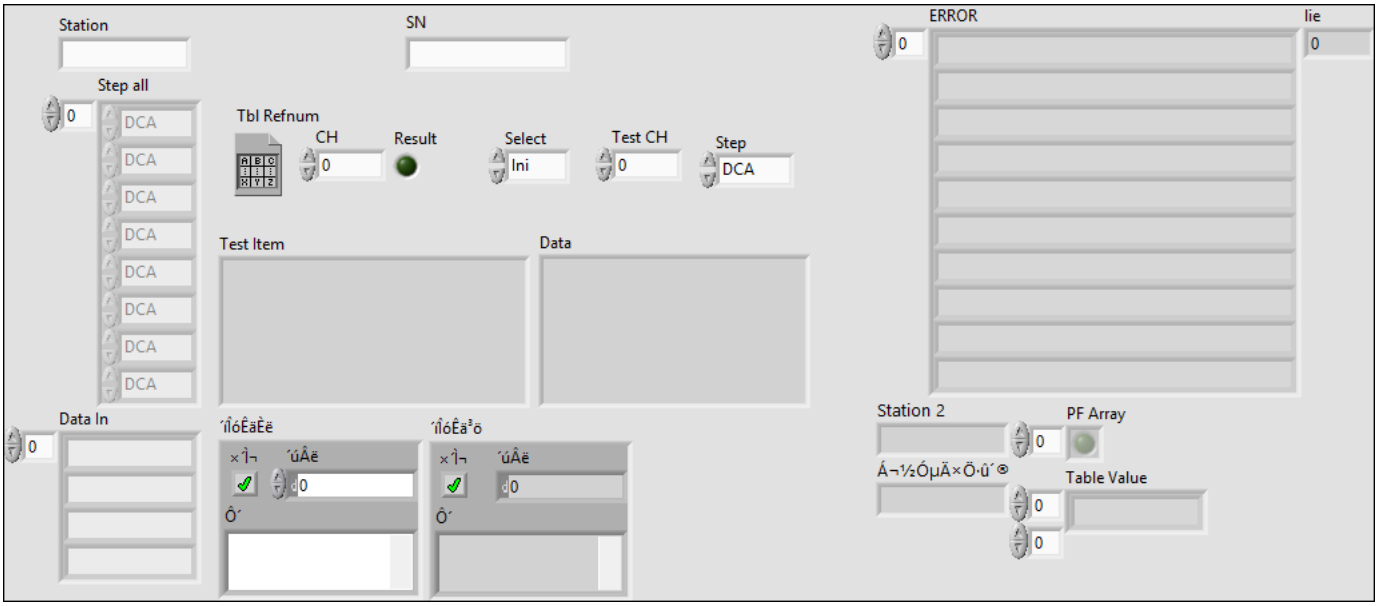
Iconified Cluster Constants

Dispaly.vi

Connector Pane



Front Panel



Controls and Indicators

Tbl Refnum
CH
Step all

Step

Station
错误输入[error in]

错误输入可接收来自前一个被调用VI的错误信息。当其它VI发生错误时，根据该信息决定是否需跳过执行某些功能。

关于错误的更多信息，请右键单击前面板上的**错误输入**输入控件并从快捷菜单中选择**解释错误**或**解释警告**。

状态[status]

状态为TRUE（叉）时表示错误，为FALSE（勾）时表示警告或无错误。

关于错误的更多信息，请右键单击前面板上的**错误输入**输入控件，并从快捷菜单中选择**解释错误**或**解释警告**。

代码[code]

代码表示错误或警告代码。

关于错误的更多信息，请右键单击前面板上的**错误输入**输入控件，并从快捷菜单中选择**解释错误**或**解释警告**。

源[source]

源表示错误或警告源。

关于错误的更多信息，请右键单击前面板上的**错误输入**输入控件，并从快捷菜单中选择**解释错误**或**解释警告**。

Select
SN
Data In

String

Step[Step]
Test CH
Test Item
Result
Data
错误输出[error out]

错误输出可将VI的错误或警告信息传递至其他VI。

关于错误的更多信息，请右键单击前面板上的**错误输出**显示控件，并从快捷菜单中选择**解释错误**或**解释警告**。

状态[status]

状态为TRUE（叉）时表示错误，为FALSE（勾）时表示警告或无错误。

关于错误的更多信息，请右键单击前面板上的**错误输出**显示控件，并从快捷菜单中选择**解释错误**或**解释警告**。

代码[code]

代码表示错误或警告代码。

关于错误的更多信息，请右键单击前面板上的**错误输出**显示控件，从快捷菜单中选择**解释错误**或**解释警告**。

源[source]

源字符串表示错误或警告源。

关于错误的更多信息，请右键单击前面板上的**错误输入**输入控件，并从快捷菜单中选择**解释错误**或**解释警告**。

ERROR

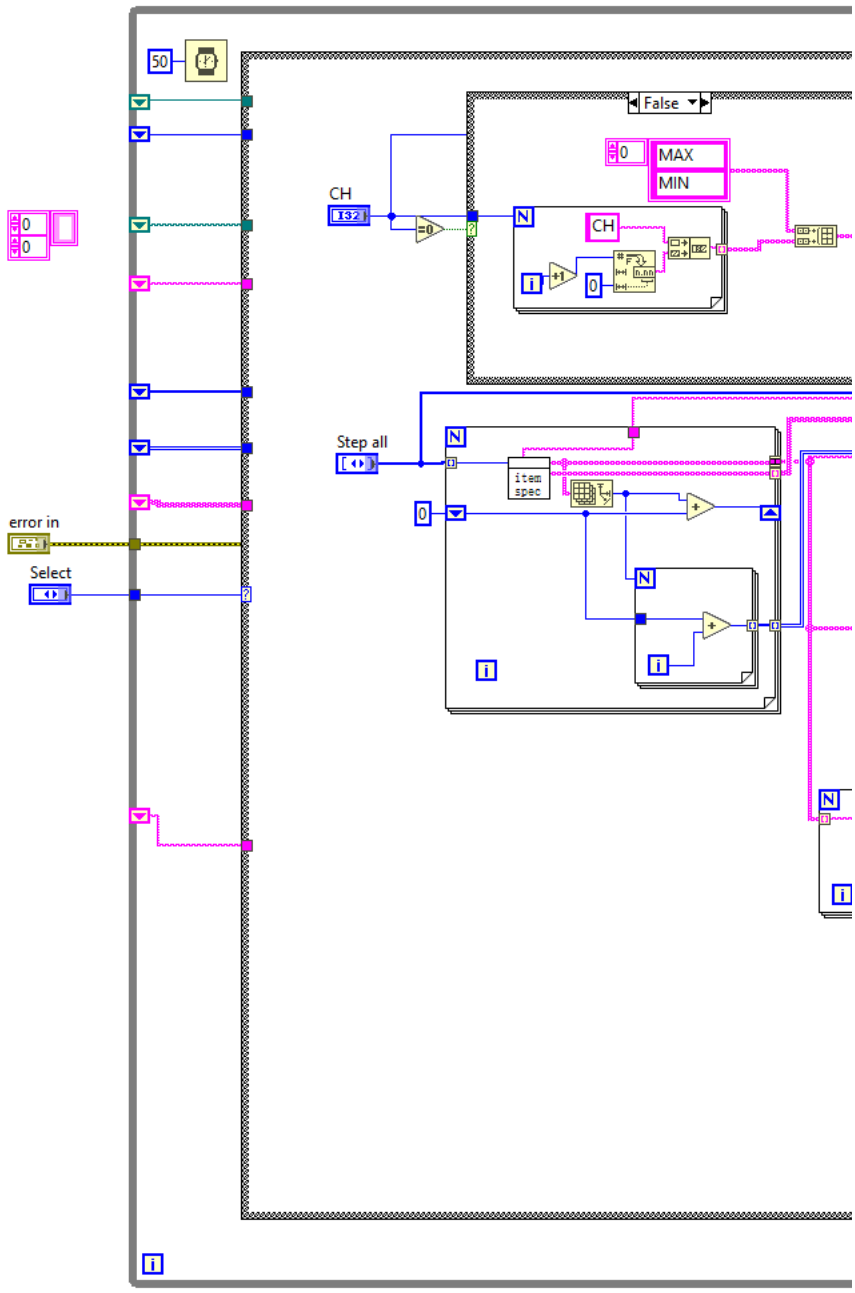
Station 2
连接的字符串
PF Array

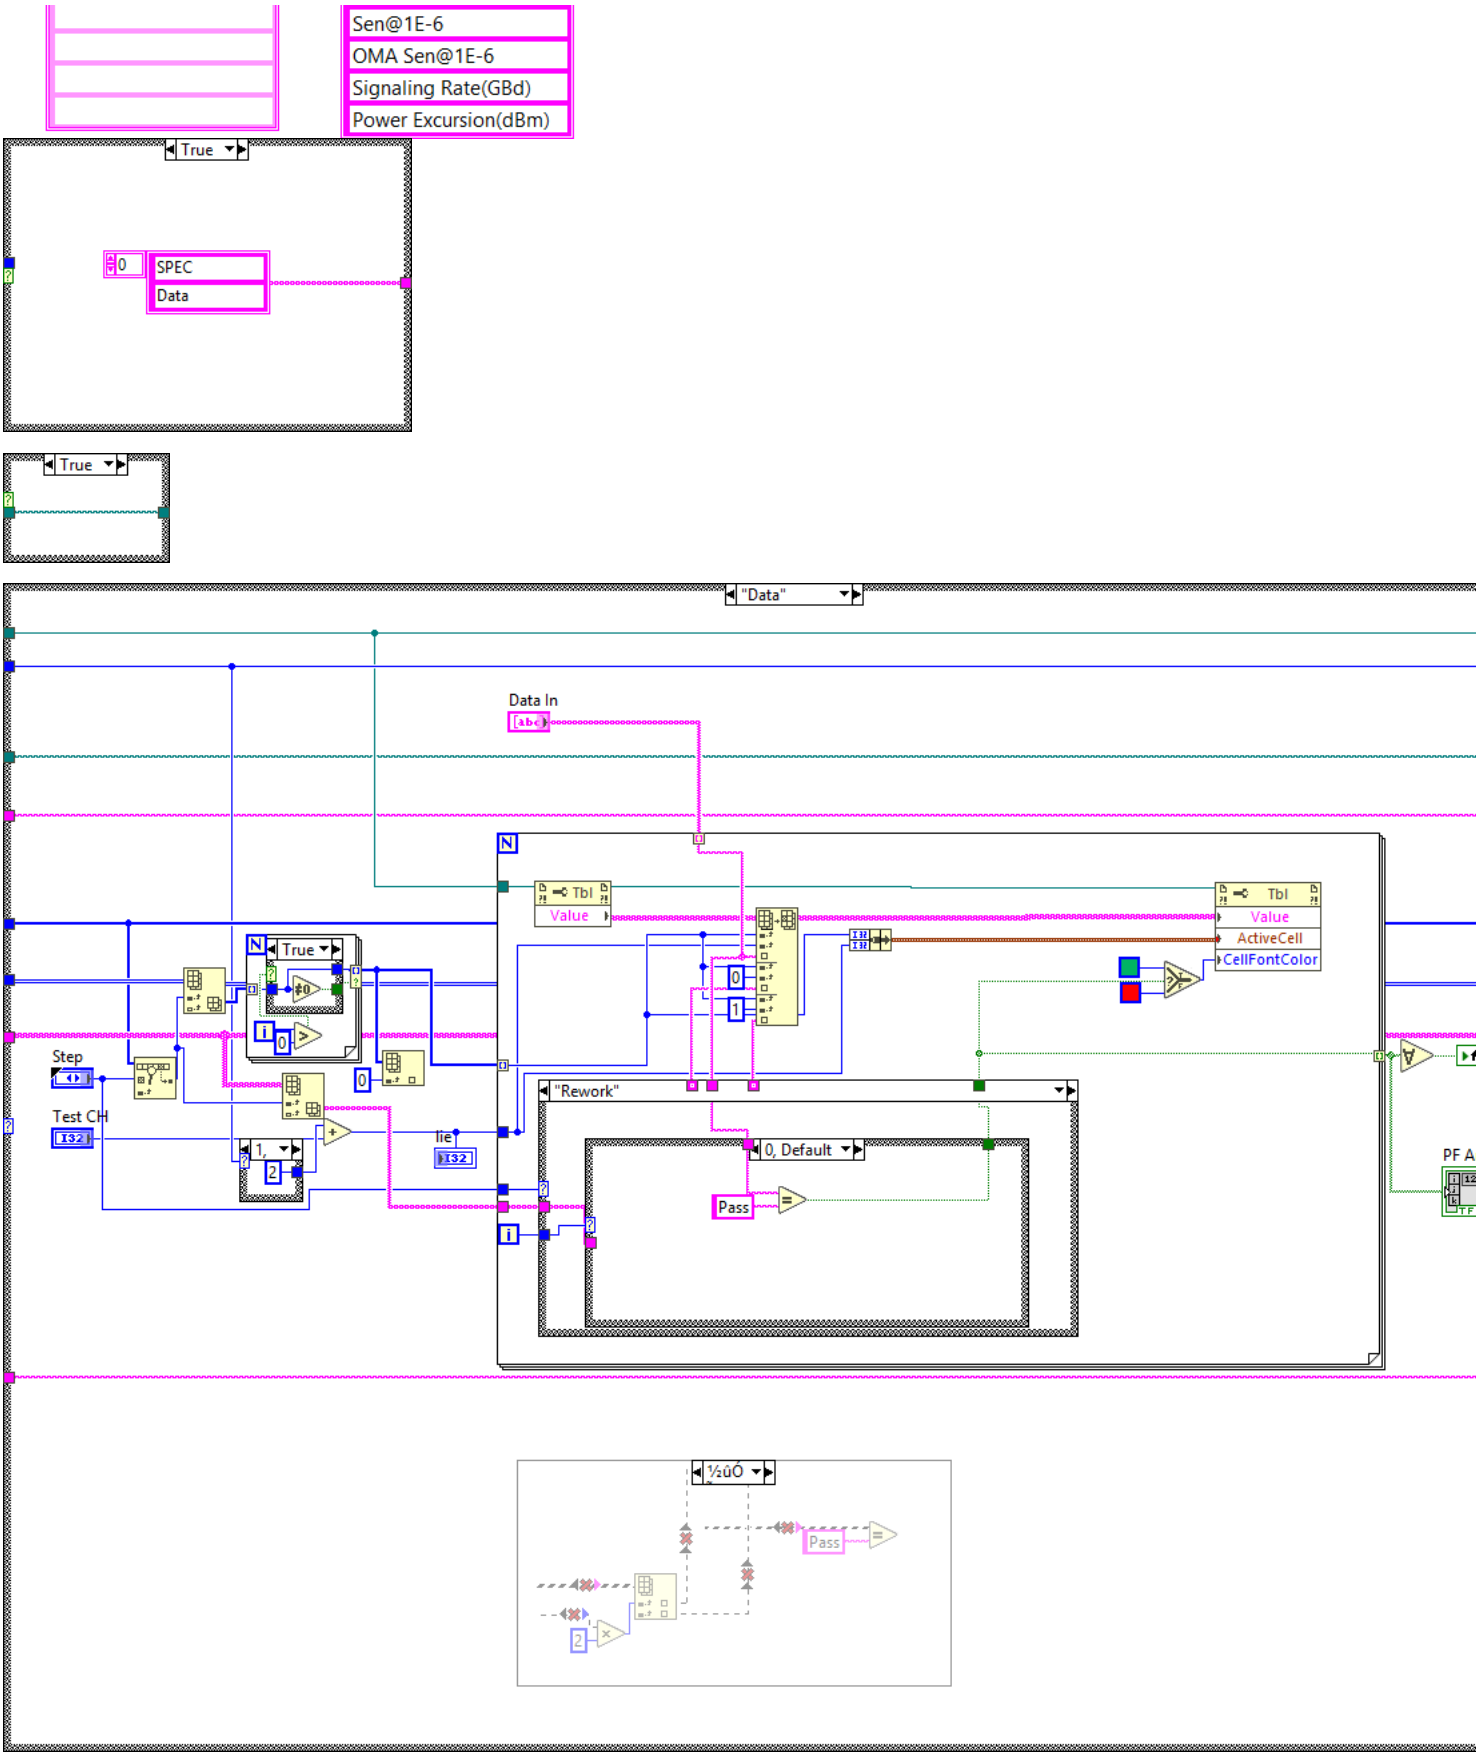
lie
Table Value

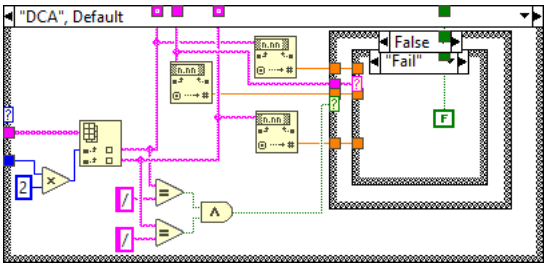
Block Diagram


0
Power (dBm)
Outer OMA(dB)
Outer ER(dB)
TDECQ(dB)
OMA-TDECQ(dB)
RLM
Ceq(dB)
TDECQ ¨C Ceq(dB)
Rise Time(ps)
Fall Time(ps)
Overshoot(%)
Undershoot(%)
WL(nm)
error WL(nm)
ndB Width(nm)
SMSR(dB)
Sen
OMA Sen
LOS A
LOS D
LOS Hys
Case Temp.
DD Temp.
dTemp
Vcc Tx
DD Vcc
dVcc(%)
DD BIAS(mA)
DD TxP
dTxP
RxP1
DD RxP1
dRxP1
RxP2
DD RxP2
dRxP2
RxP3
DD RxP3
dRxP3
RxP4
DD RxP4
dRxP4
RxP5
DD RxP5
dRxP5
Tx Power Off(dBm)
Icc LP Mode(mA)
HP Consumption(W)
LP Consumption(W)


0
Power (dBm)
Outer OMA(dB)
Outer ER(dB)
TDECQ(dB)
OMA-TDECQ(dB)
RLM
Ceq(dB)
TDECQ ¨C Ceq(dB)
Rise Time(ps)
Fall Time(ps)
Overshoot(%)
Undershoot(%)
WL(nm)
error WL(nm)
ndB Width(nm)
SMSR(dB)
ICC
Overload
Sen
OMA Sen
LOS A
LOS D
LOS Hys
Case Temp.
DD Temp.
dTemp
Vcc Tx
DD Vcc
dVcc(%)
DD BIAS(mA)
DD TxP
dTxP
DD TEC TEMP
DD TEC Curr
DD Laser WL (nm)
d WL (nm)
RxP1
DD RxP1
dRxP1
RxP2
DD RxP2
dRxP2
RxP3
DD RxP3
dRxP3
RxP4
DD RxP4
dRxP4
RxP5
DD RxP5
dRxP5
DD No RxP
DD No TxB
DD No TxP
Drop VCC
P/F
Fail Item
Tx Power Off(dBm)
Icc LP Mode(mA)
HP Consumption(W)
LP Consumption(W)




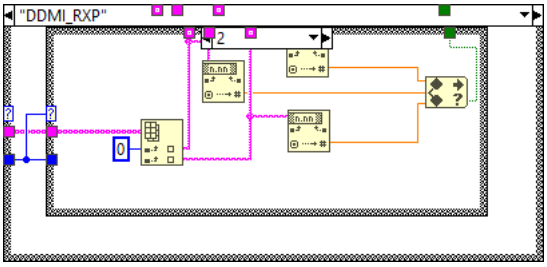

Sen@1E-6
OMA Sen@1E-6
Signaling Rate(GBd)
Power Excursion(dBm)
True
0
SPEC
Data
True
"Data"
Data In
Tbl
Value
Tbl
Value
ActiveCell
CellFontColor
True
Step
Test CH
"Rework"
0, Default
Pass
PF A
Pass

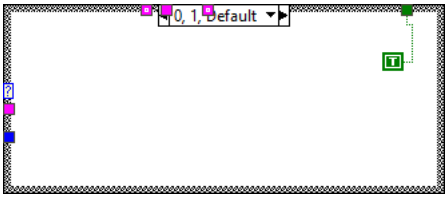

"DCA", Default
False
"Fail"
2

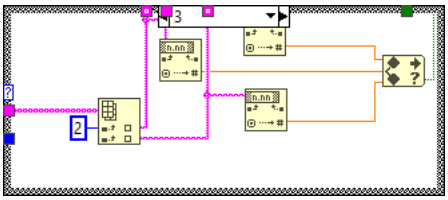

Default

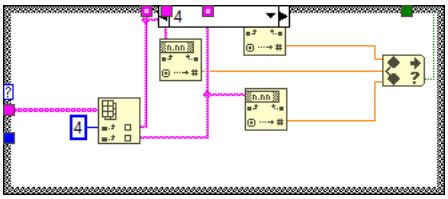

"Pass"

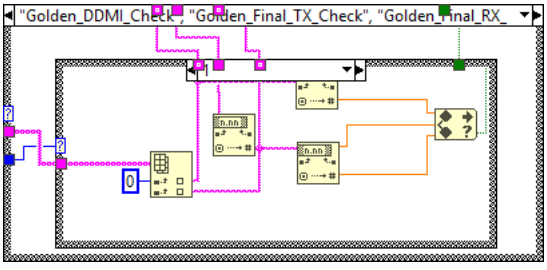

True

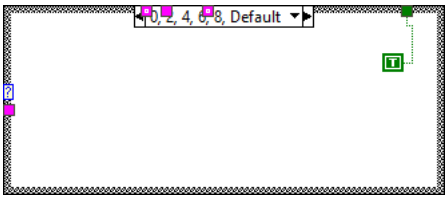

"DDMI_RXP"
2
0

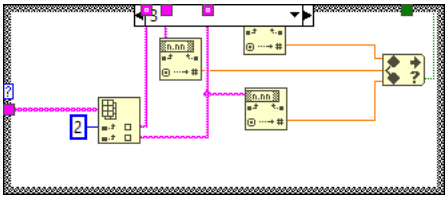

0, 1, Default

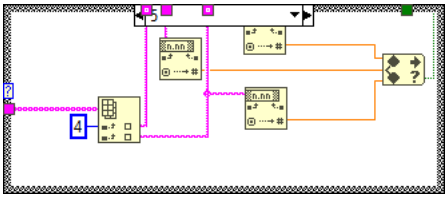

3
2

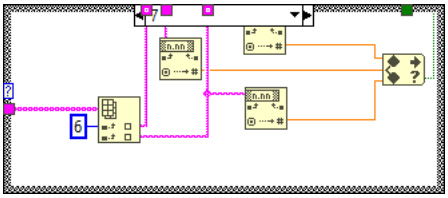

4
4

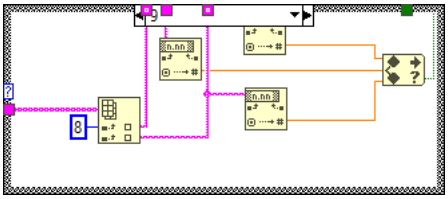

"Golden_DDMI_Check", "Golden_Final_TX_Check", "Golden_Final_RX_
1
0


0, 2, 4, 6, 8, Default


2

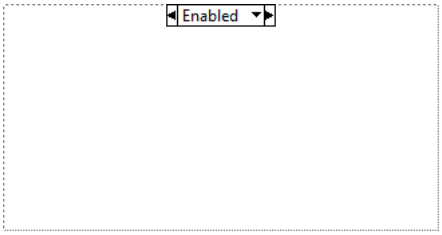

4

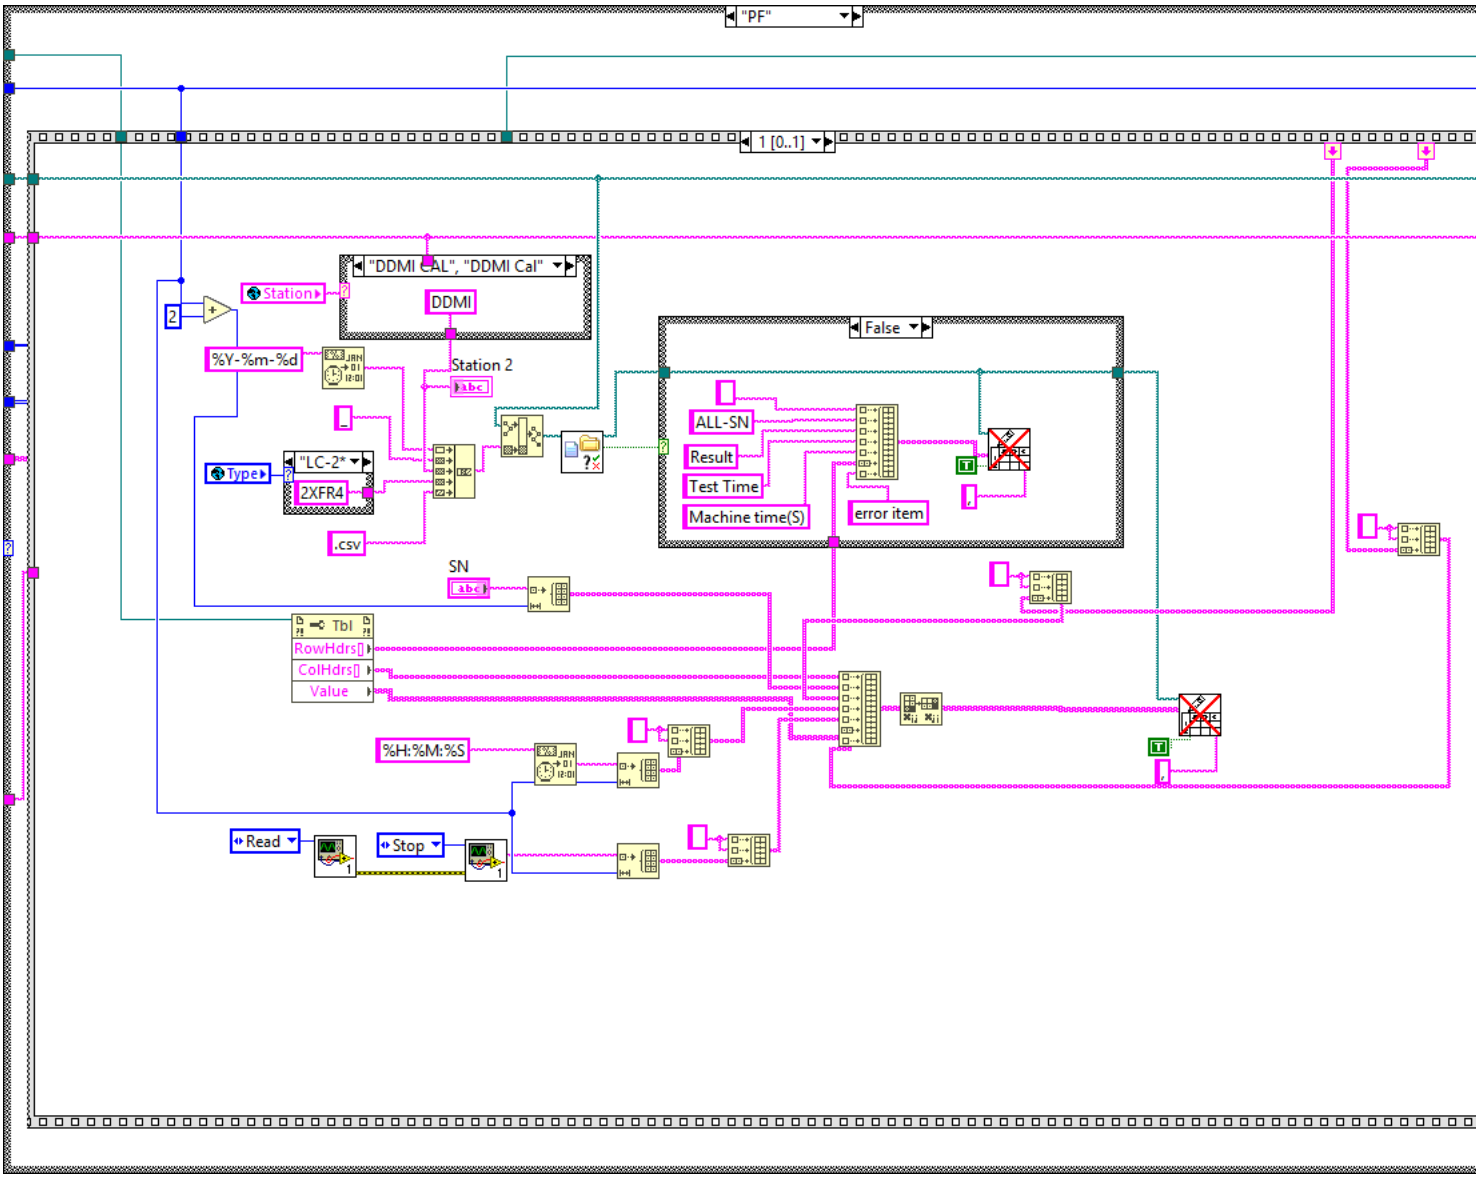

6

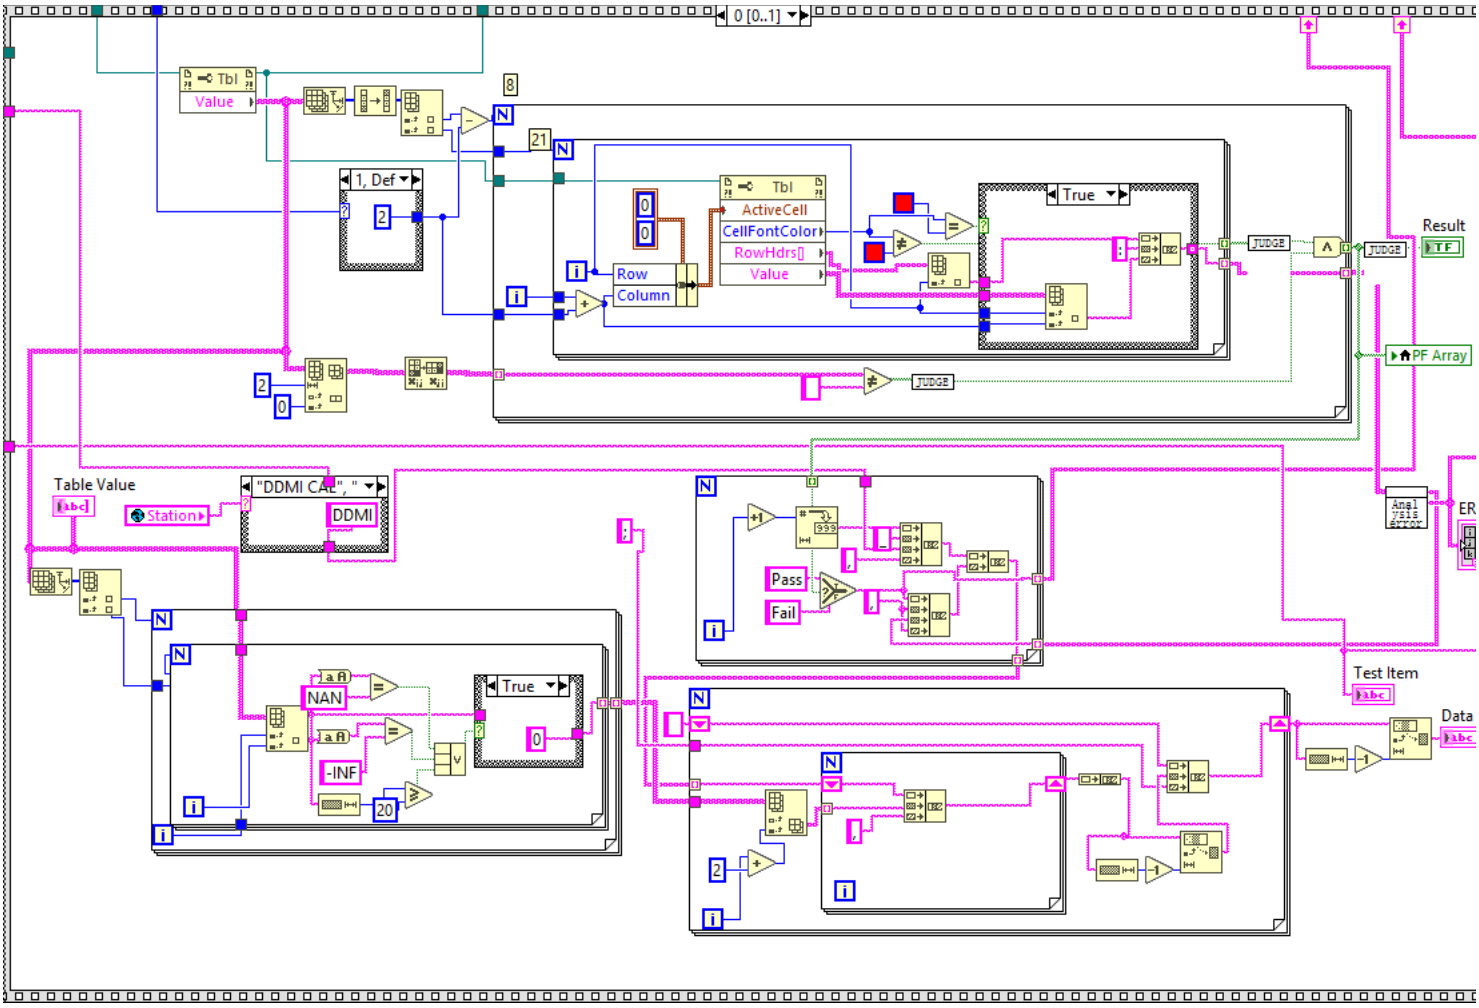

8



0
1



Fals



Enabled



"PF"
1 [0..1]
"DDMI CAL", "DDMI Cal"
DDMI
Station
2
%Y-%m-%d
Station 2
Type
"LC-2*
2XFR4
.csv
SN
False
ALL-SN
Result
Test Time
Machine time(S)
error item
Tbl
RowHdrs[]
ColHdrs[]
Value
%H:%M:%S
Read
Stop



0 [0..1]
Tbl
Value
8
21
1, Def
2
Tbl
ActiveCell
CellFontColor
RowHdrs[]
Value
Row
Column
True
JUDGE
Result
TF
PF Array
Table Value
Station
"DDMI CAL", "
DDMI
NAN
-INF
20
True
0
Pass
Fail
Test Item
Data
ER



False



0
1



False



"¼Ù", Default

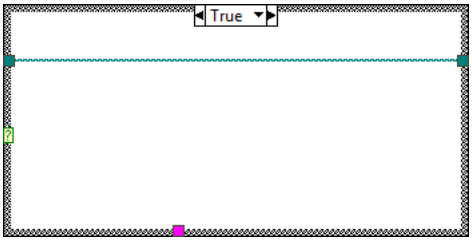

"Golden_Final_
ATS


"Golden_Final_
ATS



"Golden_DDMI
DDMI



"Golden_DDMI
DDMI






















List of SubVIs and Express VIs with Configuration Information

Display_Step.ctl

C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\Display_Step.ctl

Step_To_Item.vi

C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\Step_To_Item.vi

G_100G.vi

C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\G_100G.vi

Analysis_error.vi

C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\Analysis_error.vi

Write To Spreadsheet File (string).vi

C:\Program Files (x86)\National Instruments\LabVIEW 2025\vi.lib\Utility\file.llb\Write To Spreadsheet File (string).vi

Trim Whitespace.vi

C:\Program Files (x86)\National Instruments\LabVIEW 2025\vi.lib\Utility\error.llb\Trim Whitespace.vi

Time.vi

C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\Time.vi

Check if File or Folder Exists.vi

C:\Program Files (x86)\National Instruments\LabVIEW 2025\vi.lib\Utility\libraryn.llb\Check if File or Folder Exists.vi

Check_light.vi

C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\Check_light.vi

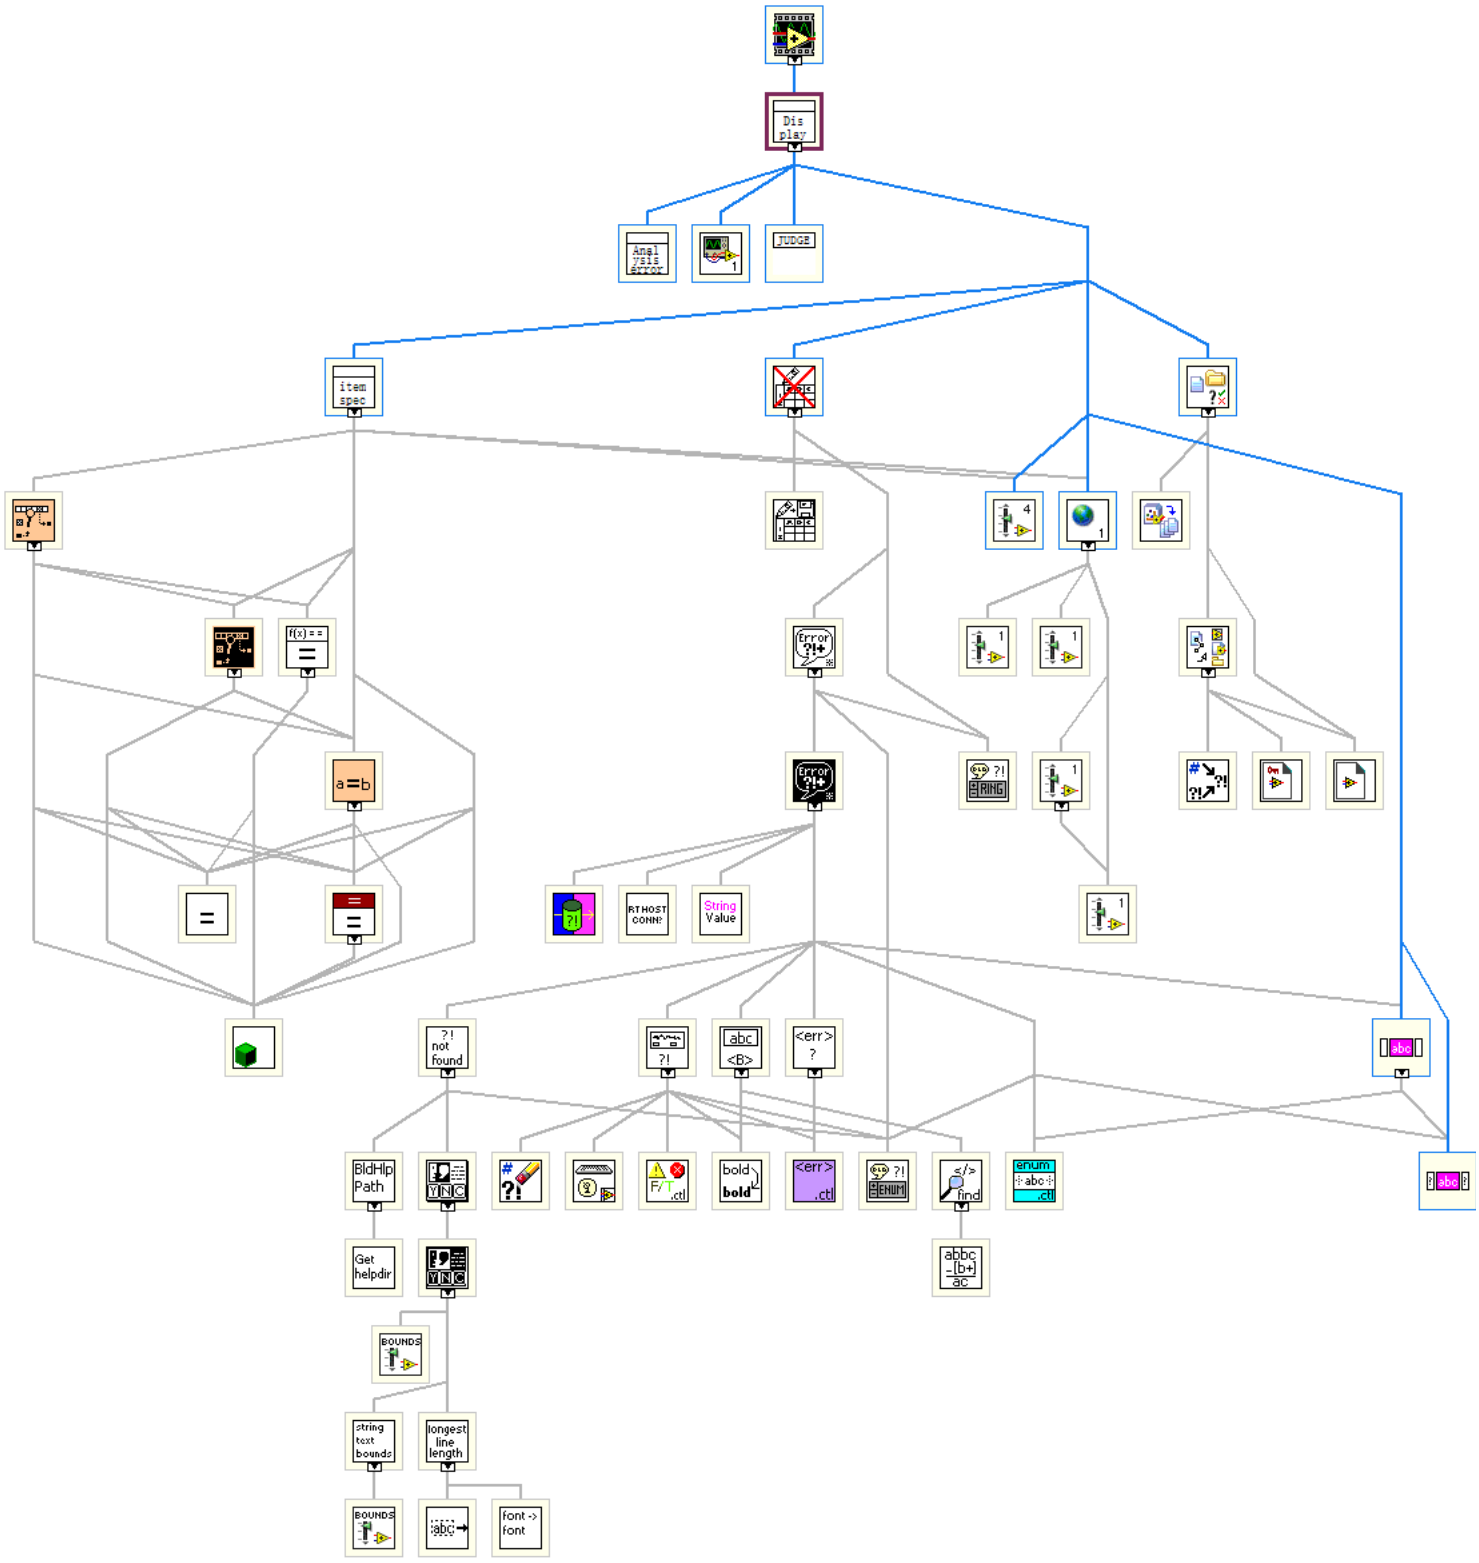
---

VI Revision History

"Dispaly.vi History"

Current Revision: 178


Position in Hierarchy



Iconified Cluster Constants

CH RxP To Att.vi

Connector Pane



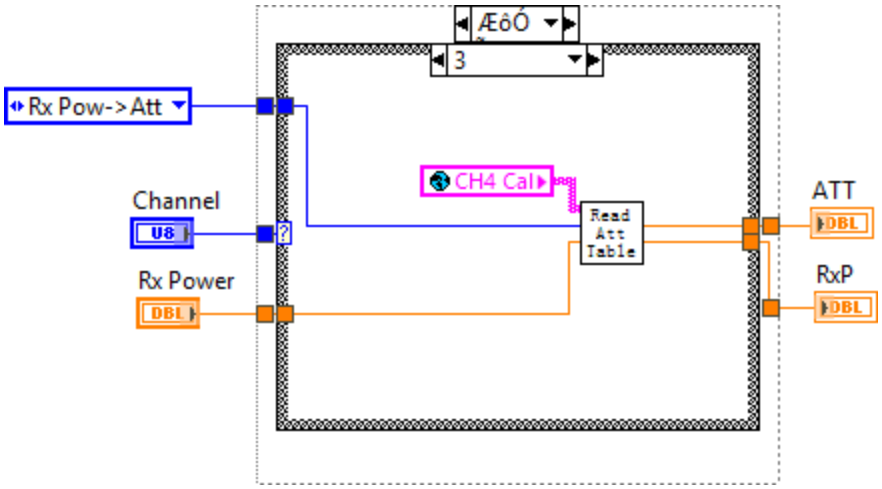
Front Panel

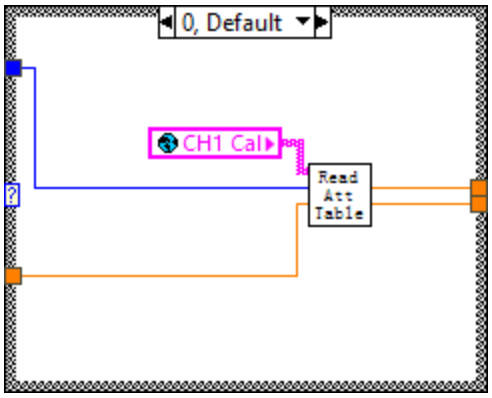


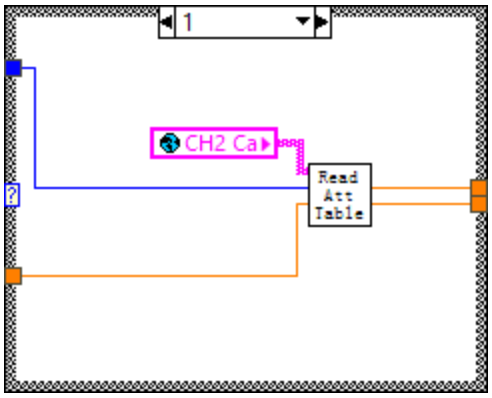
Controls and Indicators

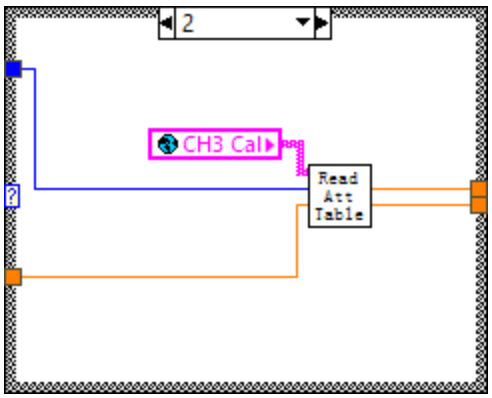
- **Channel**
- **Rx Power**
- **ATT**
- **RxP**

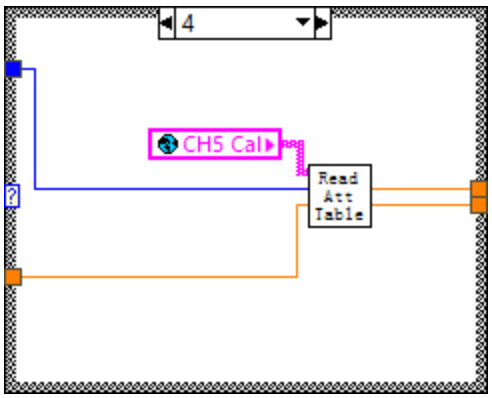
Block Diagram

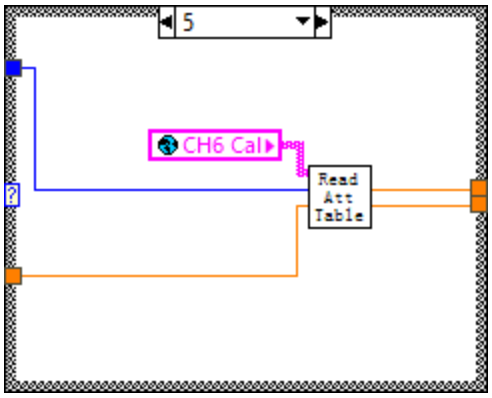


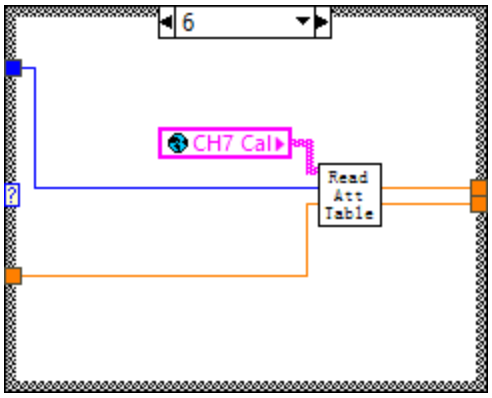

0, Default
CH1 Cal
Read
Att
Table

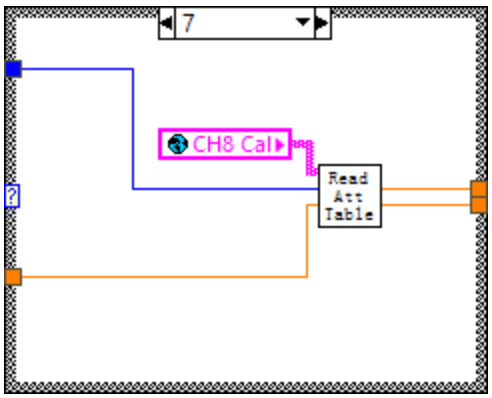

1
CH2 Ca
Read
Att
Table

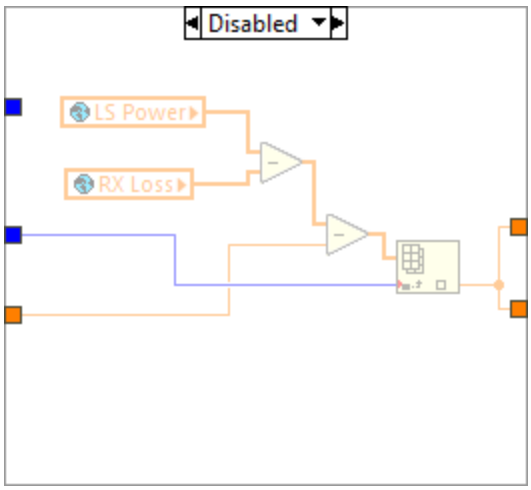

2
CH3 Cal
Read
Att
Table


4
CH5 Cal
Read
Att
Table









List of SubVIs and Express VIs with Configuration Information

G_100G.vi

C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\G_100G.vi

Read ATT Table_400G.vi

C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\Read ATT Table_400G.vi

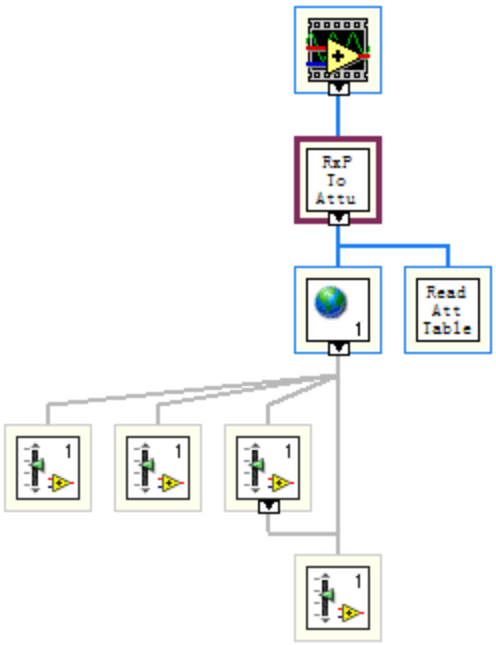
---

VI Revision History

"CH RxP To Att.vi History"

Current Revision: 17


Position in Hierarchy



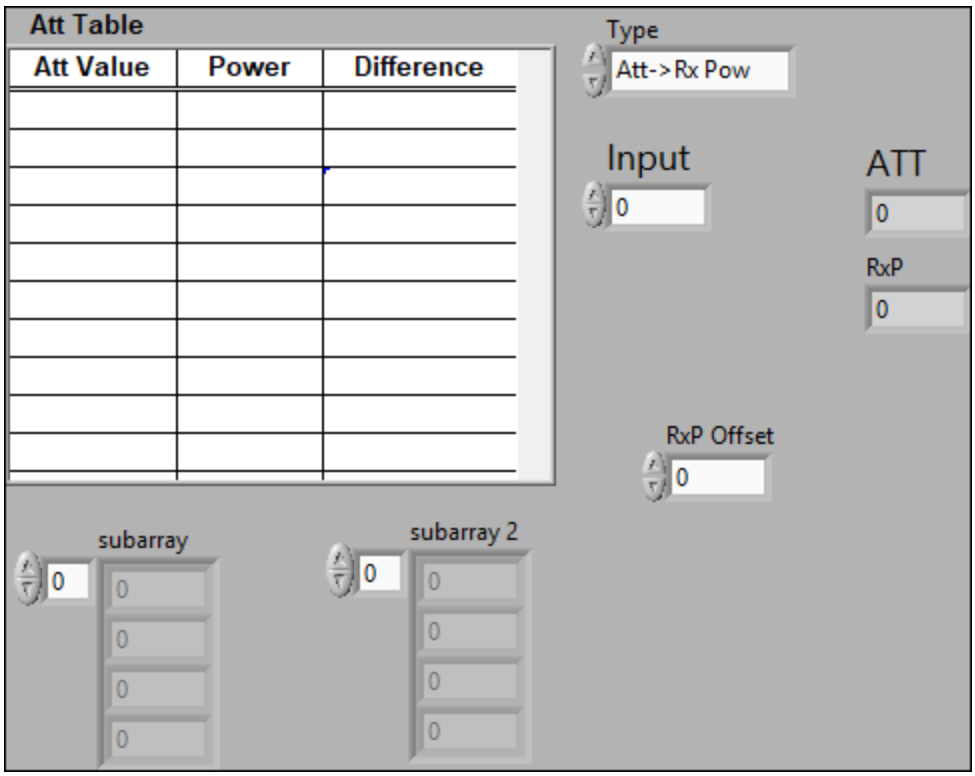
Iconified Cluster Constants

Read ATT Table_400G.vi

Connector Pane



Front Panel



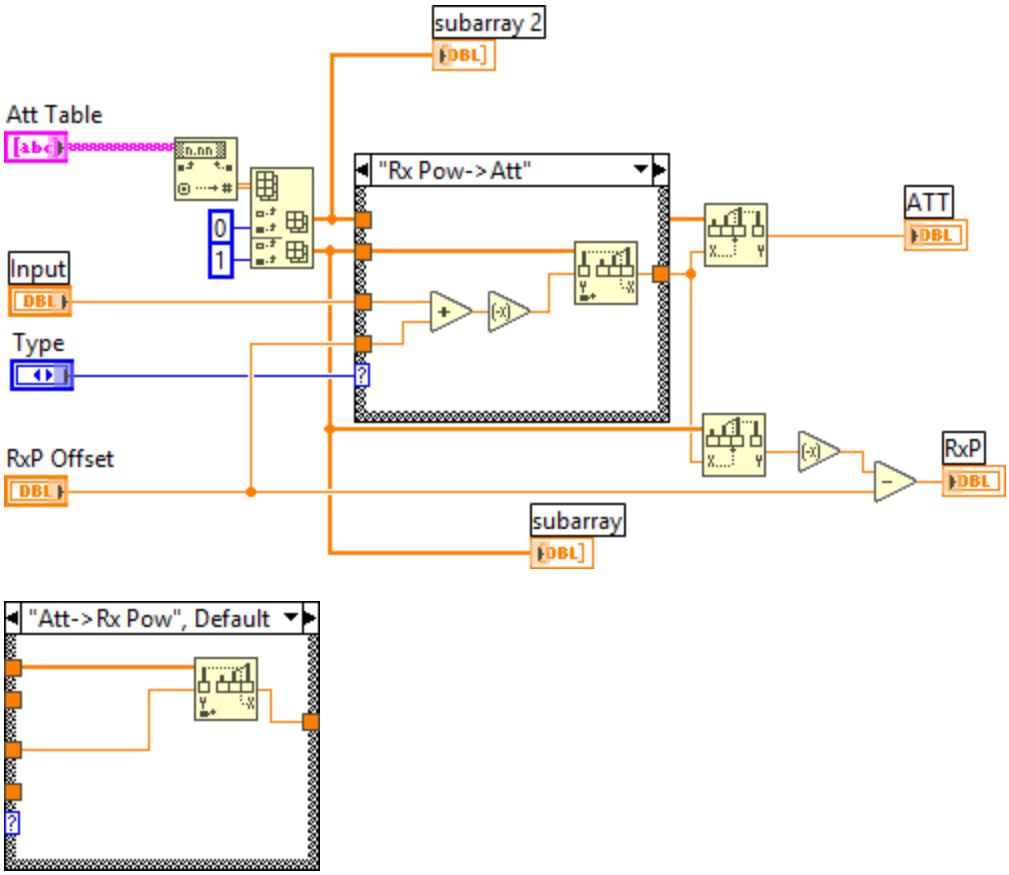
Controls and Indicators

Input
Att Table
Type
RxP Offset
ATT
subarray

subarray 2

RxP

Block Diagram




List of SubVIs and Express VIs with Configuration Information

VI Revision History

"Read ATT Table_400G.vi History"

Current Revision: 31


Position in Hierarchy



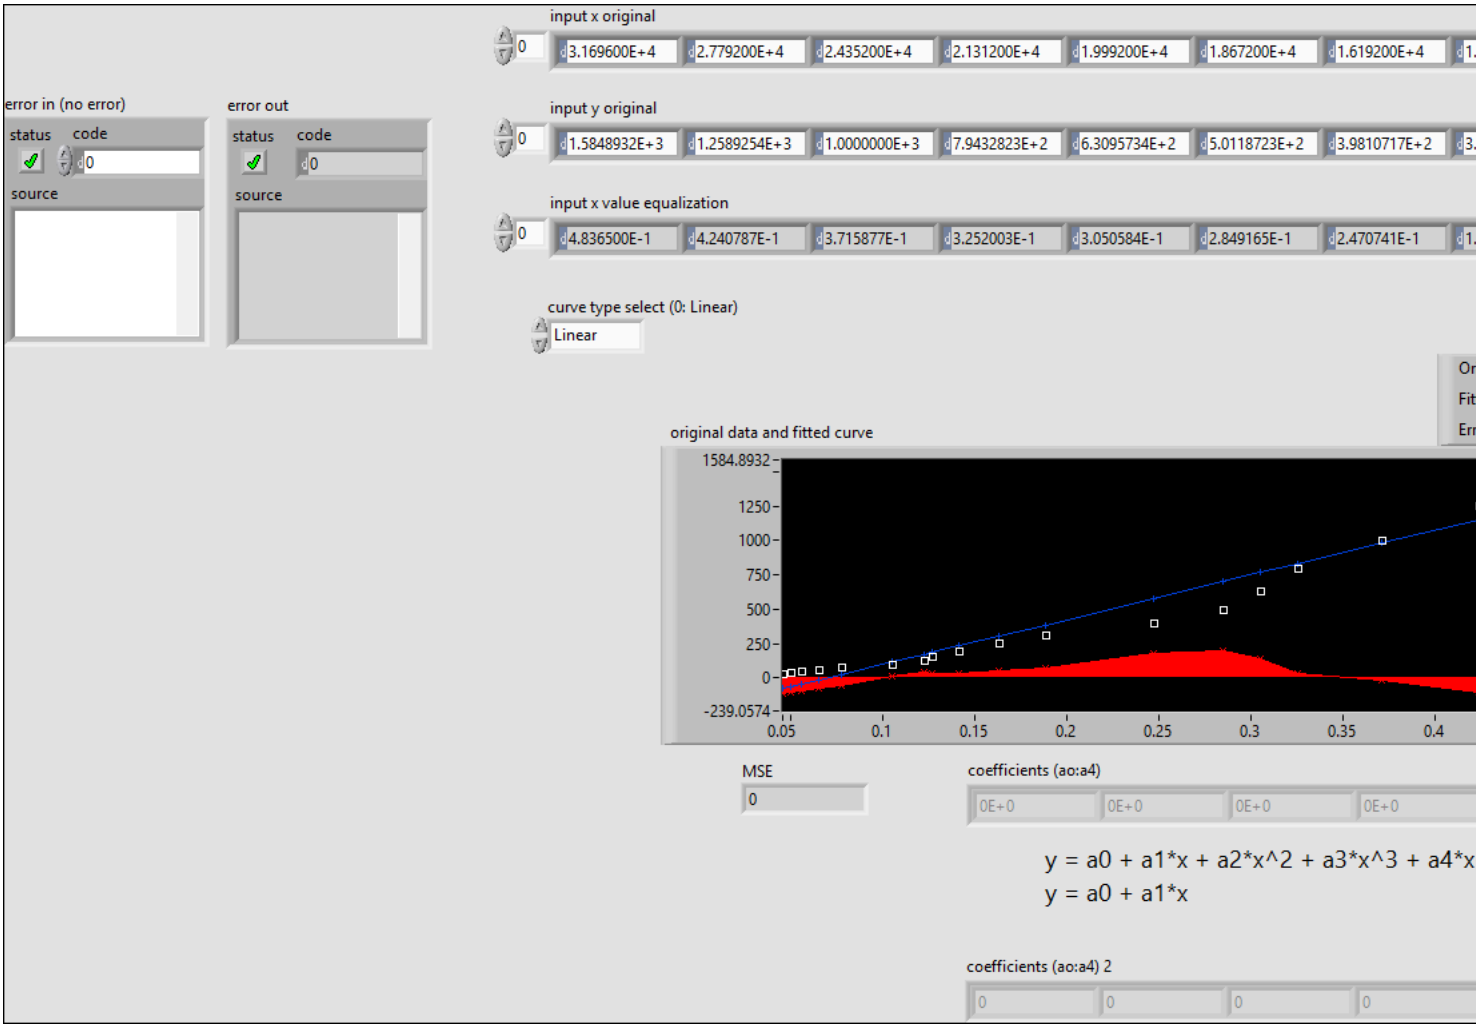
Iconified Cluster Constants

Calulate_Curve Fit Coefficient.vi

Connector Pane



Front Panel



Controls and Indicators

input x original

Numeric

input y original

Numeric

error in (no error)

error in can accept error information wired from VIs previously called. Use this information to decide if any functionality should be bypassed in the event of errors from other VIs.

Right-click the **error in** control on the front panel and select **Explain Error** or **Explain Warning** from the shortcut menu for more information about the error.

status

status is TRUE (X) if an error occurred or FALSE (checkmark) to indicate a warning or that no error occurred.

Right-click the **error in** control on the front panel and select **Explain Error** or **Explain Warning** from the shortcut menu for more information about the error.

code

code is the error or warning code.

Right-click the **error in** control on the front panel and select **Explain Error** or **Explain Warning** from the shortcut menu for more information about the error.

source

source describes the origin of the error or warning.

Right-click the **error in** control on the front panel and select **Explain Error** or **Explain Warning** from the shortcut menu for more information about the error.

curve type select (0: Linear)

input x value equalization

Numeric

error out

error out passes error or warning information out of a VI to be used by other VIs.

Right-click the **error out** indicator on the front panel and select **Explain Error** or **Explain Warning** from the shortcut menu for more information about the error.

status

status is TRUE (X) if an error occurred or FALSE (checkmark) to indicate a warning or that no error occurred.

Right-click the **error out** indicator on the front panel and select **Explain Error** or **Explain Warning** from the shortcut menu for more information about the error.

code

code is the error or warning code.

Right-click the **error out** indicator on the front panel and select **Explain Error** or **Explain Warning** from the shortcut menu for more information about the error.

source

source string describes the origin of the error or warning.

Right-click the **error out** indicator on the front panel and select **Explain Error** or **Explain Warning** from the shortcut menu for more information about the error.

original data and fitted curve

MSE

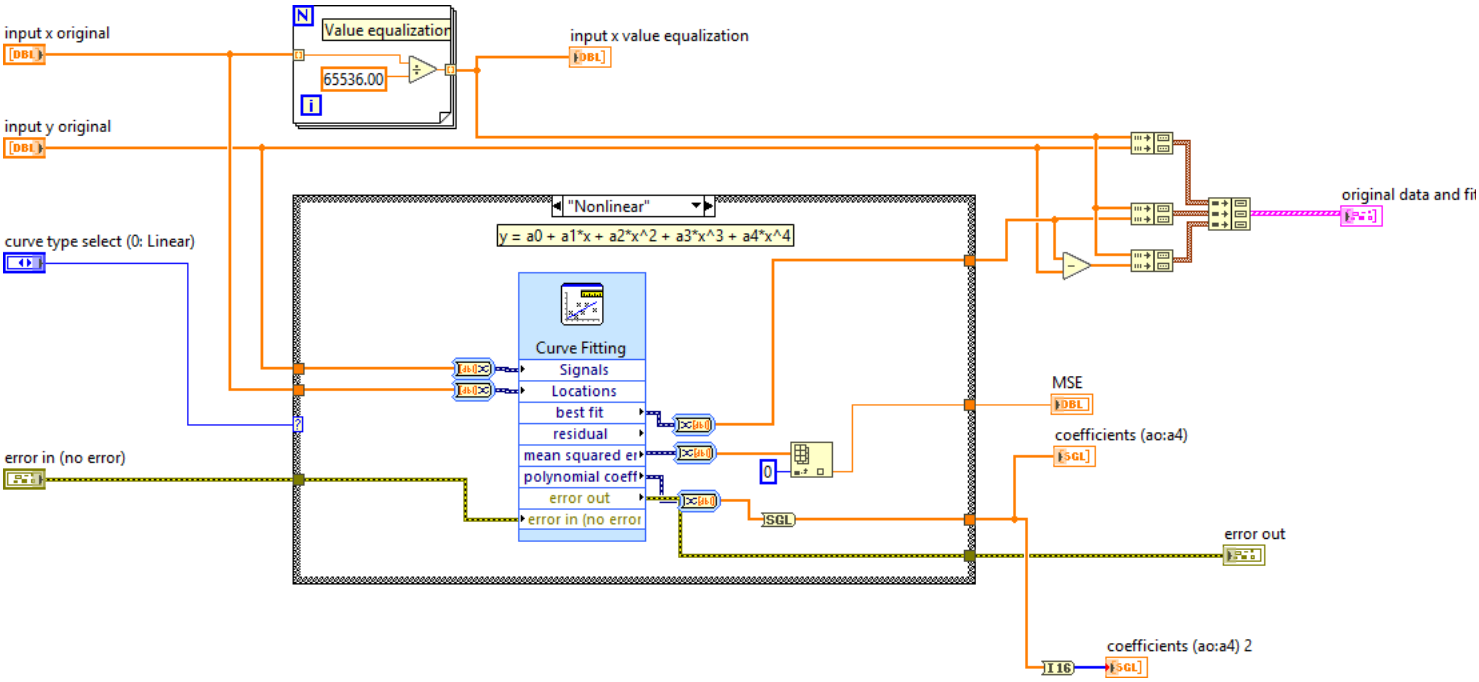
coefficients (ao:a4)

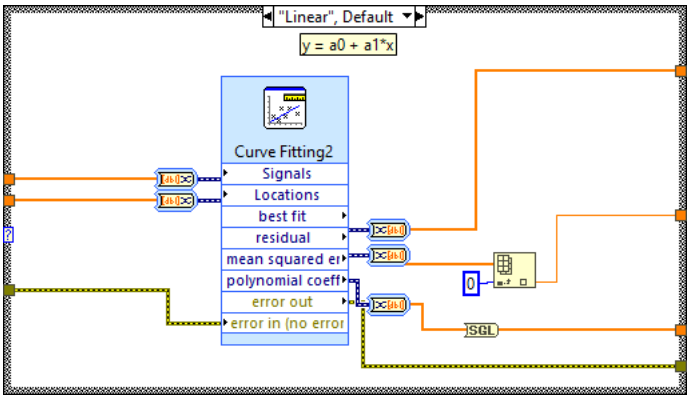
Numeric

coefficients (ao:a4) 2

Numeric

Block Diagram





List of SubVIs and Express VIs with Configuration Information

Waveform Array To Dynamic.vi

C:\Program Files (x86)\National Instruments\LabVIEW 2025\vi.lib\express\express shared\transition.llb\Waveform Array To Dynamic.vi

Dynamic To Waveform Array.vi

C:\Program Files (x86)\National Instruments\LabVIEW 2025\vi.lib\express\express shared\transition.llb\Dynamic To Waveform Array.vi

subCurveFitting.vi

C:\Program Files (x86)\National Instruments\LabVIEW 2025\vi.lib\express\express analysis\CurveFittingBlock.llb\subCurveFitting.vi


---

VI Revision History

"Calulate_Curve Fit Coefficient.vi History"

Current Revision: 33


Position in Hierarchy



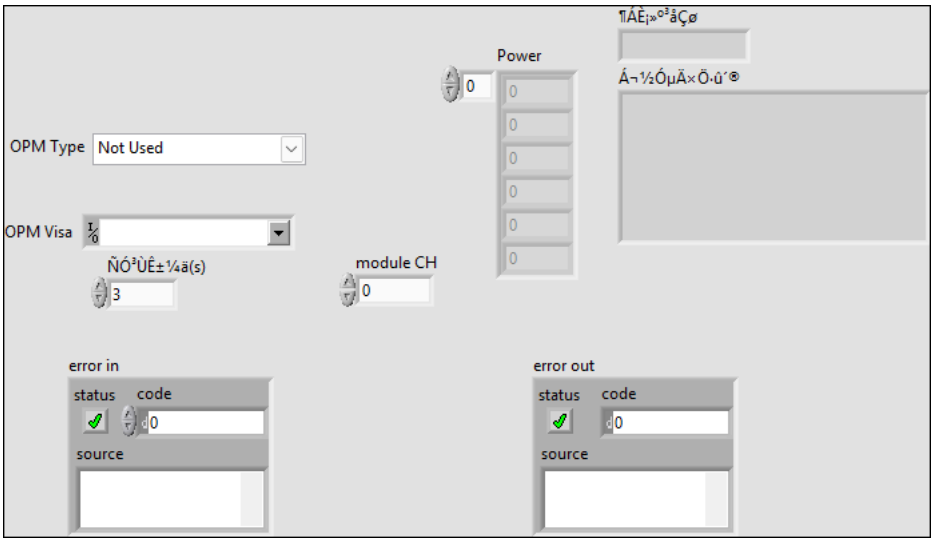
Iconified Cluster Constants

OPM Read Chs Power.vi

Connector Pane



Front Panel



Controls and Indicators

error in

error in can accept error information wired from VIs previously called. Use this information to decide if any functionality should be bypassed in the event of errors from other VIs.

Right-click the **error in** control on the front panel and select **Explain Error** or **Explain Warning** from the shortcut menu for more information about the error.

status

status is TRUE (X) if an error occurred or FALSE (checkmark) to indicate a warning or that no error occurred.

Right-click the **error in** control on the front panel and select **Explain Error** or **Explain Warning** from the shortcut menu for more information about the error.

code

code is the error or warning code.

Right-click the **error in** control on the front panel and select **Explain Error** or **Explain Warning** from the shortcut menu for more information about the error.

source

source describes the origin of the error or warning.

Right-click the **error in** control on the front panel and select **Explain Error** or **Explain Warning** from the shortcut menu for more information about the error.

module CH

[OPM Visa]

OPM Type

延迟时间(s)[Delay Time (s)]

指定等待的秒数。输入值可覆盖在配置对话框中设置的值。

error out

error in can accept error information wired from VIs previously called. Use this information to decide if any functionality should be bypassed in the event of errors from other VIs.

Right-click the **error in** control on the front panel and select **Explain Error** or **Explain Warning** from the shortcut menu for more information about the error.

status

status is TRUE (X) if an error occurred or FALSE (checkmark) to indicate a warning or that no error occurred.

Right-click the **error in** control on the front panel and select **Explain Error** or **Explain Warning** from the shortcut menu for more information about the error.

code

code is the error or warning code.

Right-click the **error in** control on the front panel and select **Explain Error** or **Explain Warning** from the shortcut menu for more information about the error.

source

source describes the origin of the error or warning.

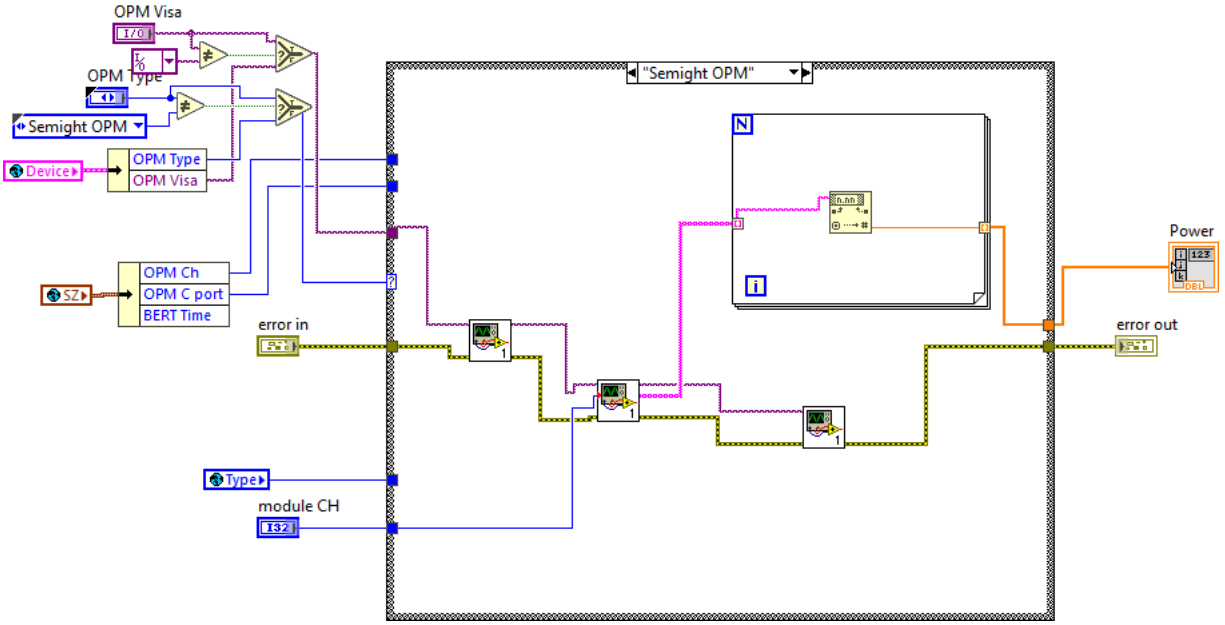
Right-click the **error in** control on the front panel and select **Explain Error** or **Explain Warning** from the shortcut menu for more information about the error.

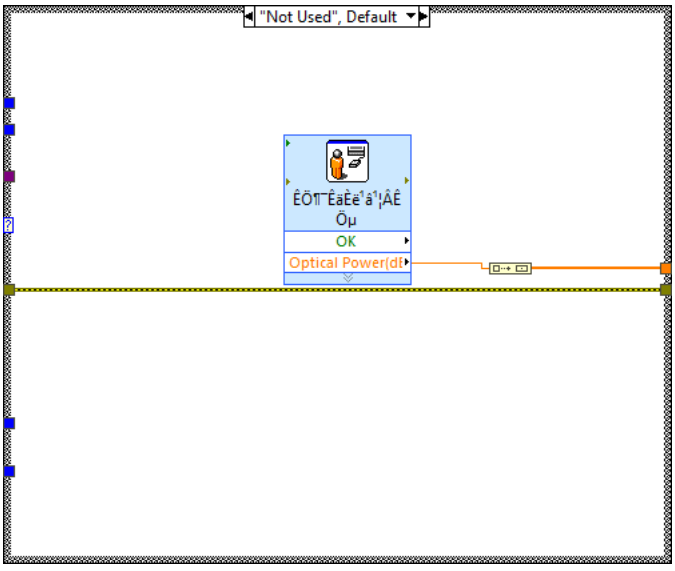
读取缓冲区

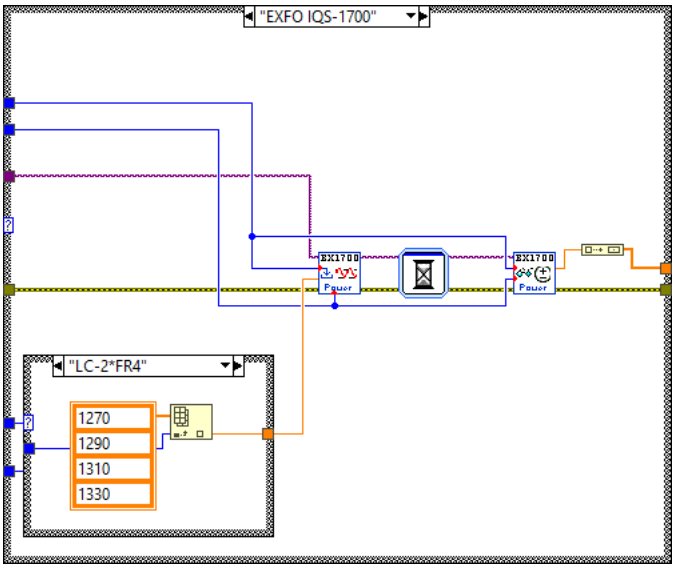
连接的字符串


Power


Block Diagram




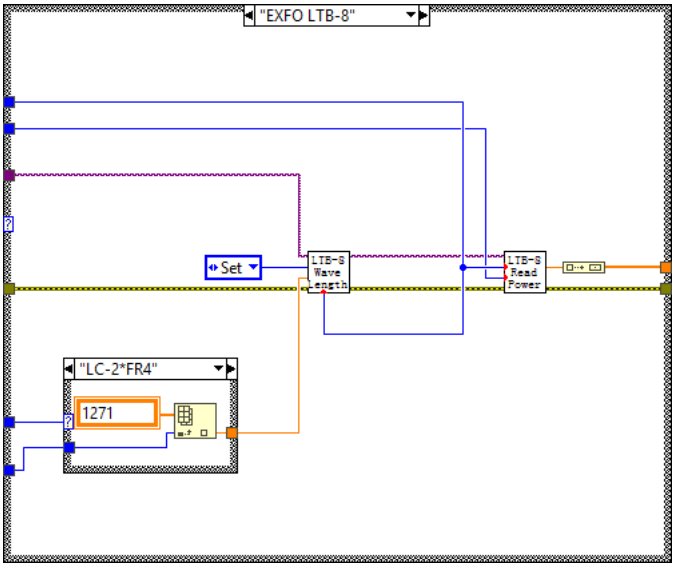




"EXFO IQS-1700"
EX1700
Power
EX1700
Power
"LC-2*FR4"
1270
1290
1310
1330



"MPO-DR8", Default
1311



"MPO-SR8"
850

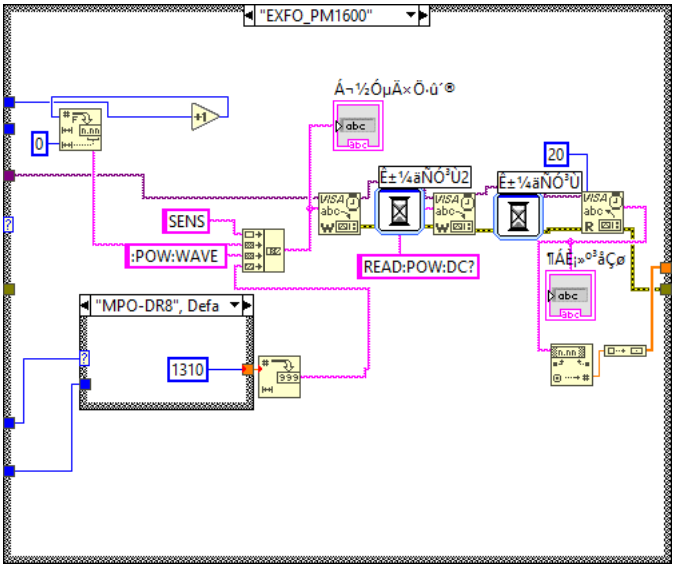

"LC-LR8"
1295.56



"EXFO LTB-8"
Set
LTB-8
Wave
ength
LTB-8
Read
Power
"LC-2*FR4"
1271



"MPO-DR8", Defa
1311



"MPO-SR8"
850

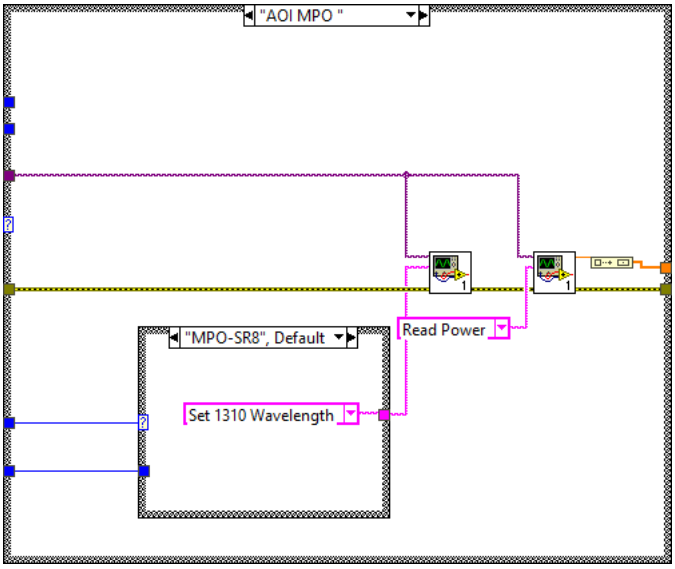

"LC-LR8"
1295.56



"EXFO_PM1600"
Á¬½ÓµÃ×Õ·û´®
0
+1
SENS
:POW:WAVE
READ:POW:DC?
20
"MPO-DR8", Defa
1310



"MPO-SR8"
850



"LC-2*FR4"
1271



"LC-LR8"
1295.56



"AOI MPO "
"MPO-SR8", Default
Read Power
Set 1310 Wavelength



"MPO-DR8"
Set 1310 Wavelength

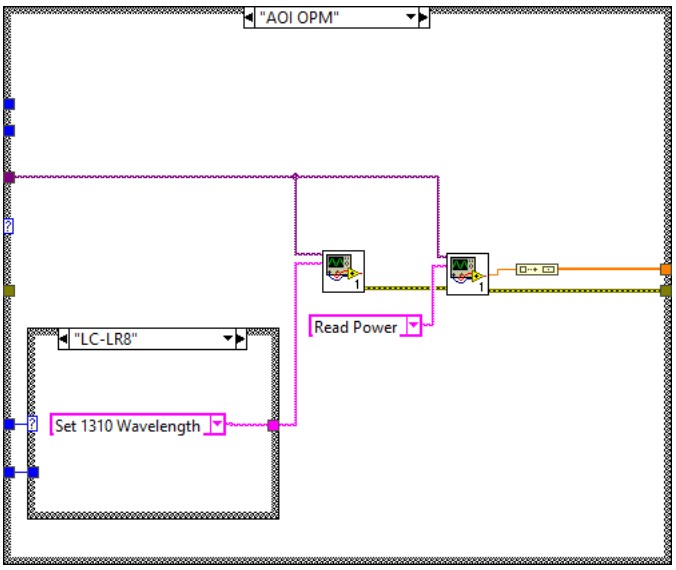

"LC-LR8"
Set 1310 Wavelength



"LC-2*FR4"
3, 7
Set 1330 Wavelength



0, 4, Default
Set 1270 Wavelength



1, 5
Set 1290 Wavelength



2, 6
Set 1310 Wavelength



"AOI OPM"
"LC-LR8"
Set 1310 Wavelength
Read Power



"MPO-SR8", Default
Set 1310 Wavelength

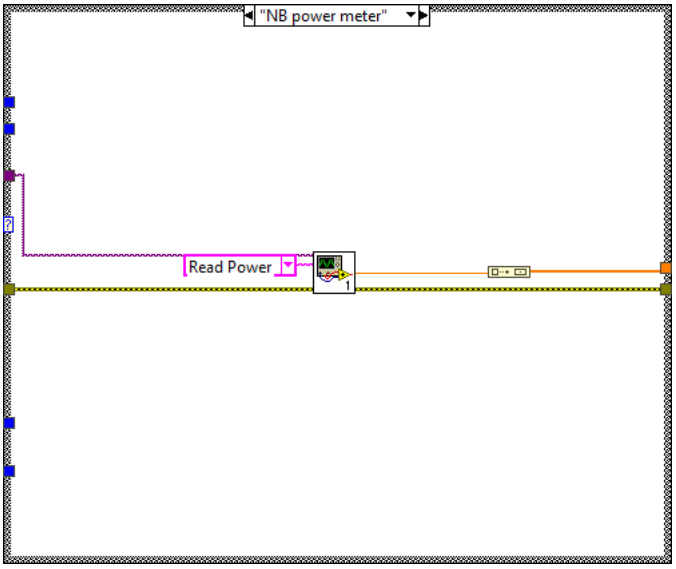

"MPO-DR8"
Set 1310 Wavelength

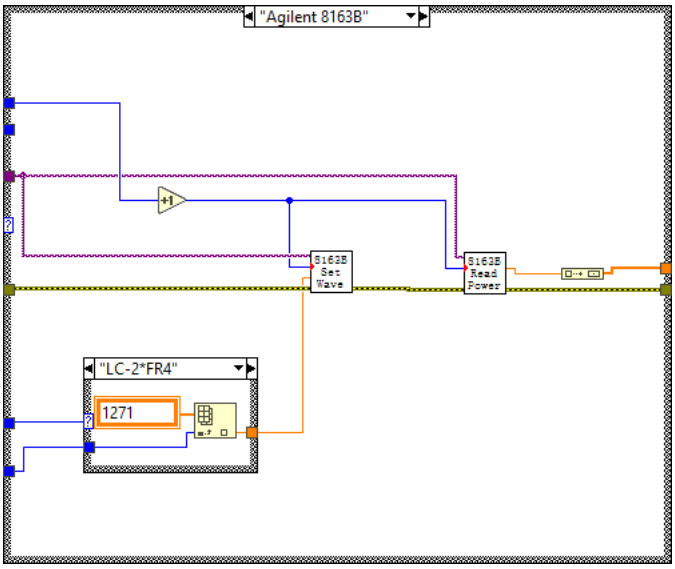

"LC-2*FR4"
1
Set 1290 Wavelength



0, Default
Set 1270 Wavelength



2
Set 1310 Wavelength



3
Set 1330 Wavelength

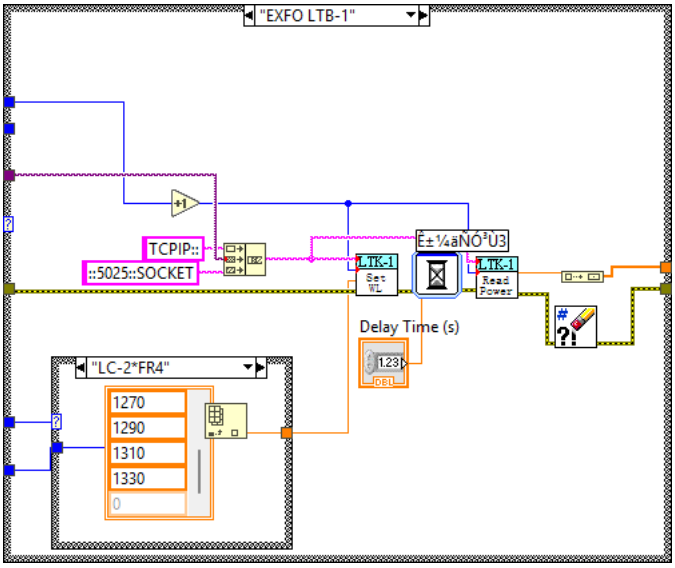

"NB power meter"
Read Power



"Agilent 8163B"
+1
8163B Set Wave
8163B Read Power
"LC-2*FR4"
1271



"MPO-DR8", Defa
1311



"MPO-SR8"
850

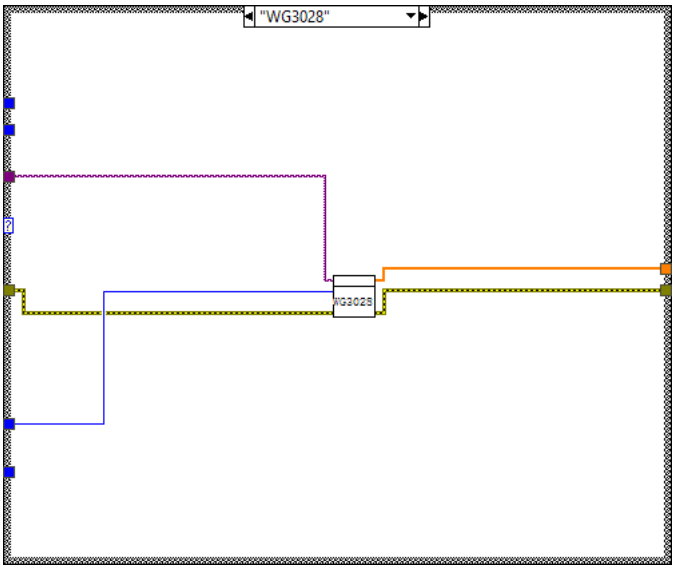

"LC-LR8"
1295.56

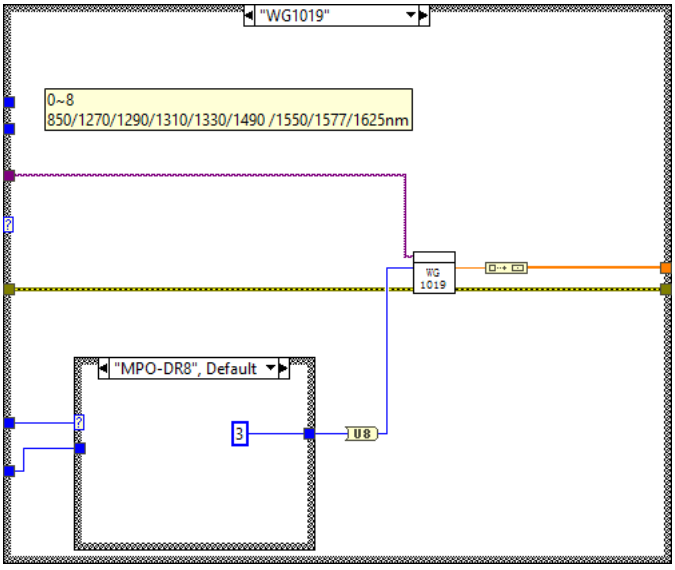

"EXFO LTB-1"
+1
TCPIP::
::5025::SOCKET
LTK-1 Set WL
LTK-1 Read Power
Delay Time (s)
123
"LC-2*FR4"
1270
1290
1310
1330
0



"MPO-DR8", Default
1311



"MPO-SR8"
850


"LC-LR8"
1295.56


"WG3028"
WG3028


"WG1019"
0~8
850/1270/1290/1310/1330/1490 /1550/1577/1625nm
WG 1019
"MPO-DR8", Default
3
U8


"MPO-SR8"
0



List of SubVIs and Express VIs with Configuration Information

OPM Type.ctl
C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\OPM Type.ctl

Clear Errors.vi
C:\Program Files (x86)\National Instruments\LabVIEW 2025\vi.lib\Utility\error.llb\Clear Errors.vi

G_100G.vi
C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\G_100G.vi

EXFO 1700.lvlib:Configure Power Wavelength.vi
C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\Configure Power Wavelength.vi

WG1019Power_Meter.vi
C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\WG1019Power_Meter.vi

8163B Set Wavelength.vi
C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\8163B Set Wavelength.vi

8163B Read Power.vi
C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\8163B Read Power.vi

LTK-1 Set Wavelength.vi
C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\LTK-1 Set Wavelength.vi

CloseCOM.vi
C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\PowerMeter_8.6\CloseCOM.vi

WG3028Power_Meter.vi
C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\WG3028Power_Meter.vi

PowerMeter_InitialCOM.vi
C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\PowerMeter_8.6\PowerMeter_InitialCOM.vi

PowerMeter_ReadChannelPowerList.vi
C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\PowerMeter_8.6\PowerMeter_ReadChannelPowerList.vi

subTimeDelay.vi
C:\Program Files (x86)\National Instruments\LabVIEW 2025\vi.lib\express\express execution control\TimeDelayBlock.llb\subTimeDelay.vi

LTK-1 Read Power.vi
C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\LTK-1 Read Power.vi

MiniOPM Read and Write.vi
C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\MiniOPM Read and Write.vi

NB Mini Power8.6.vi
C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\NB Mini Power8.6.vi

AOI OPM.vi
C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\AOI OPM.vi

EXFO 1700.lvlib:Read Scalar Power Dc.vi
C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\Read Scalar Power Dc.vi

LTB-8 Wavelength.vi
C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\LTB-8 Wavelength.vi

LTB-8 Read Power.vi
C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\LTB-8 Read Power.vi

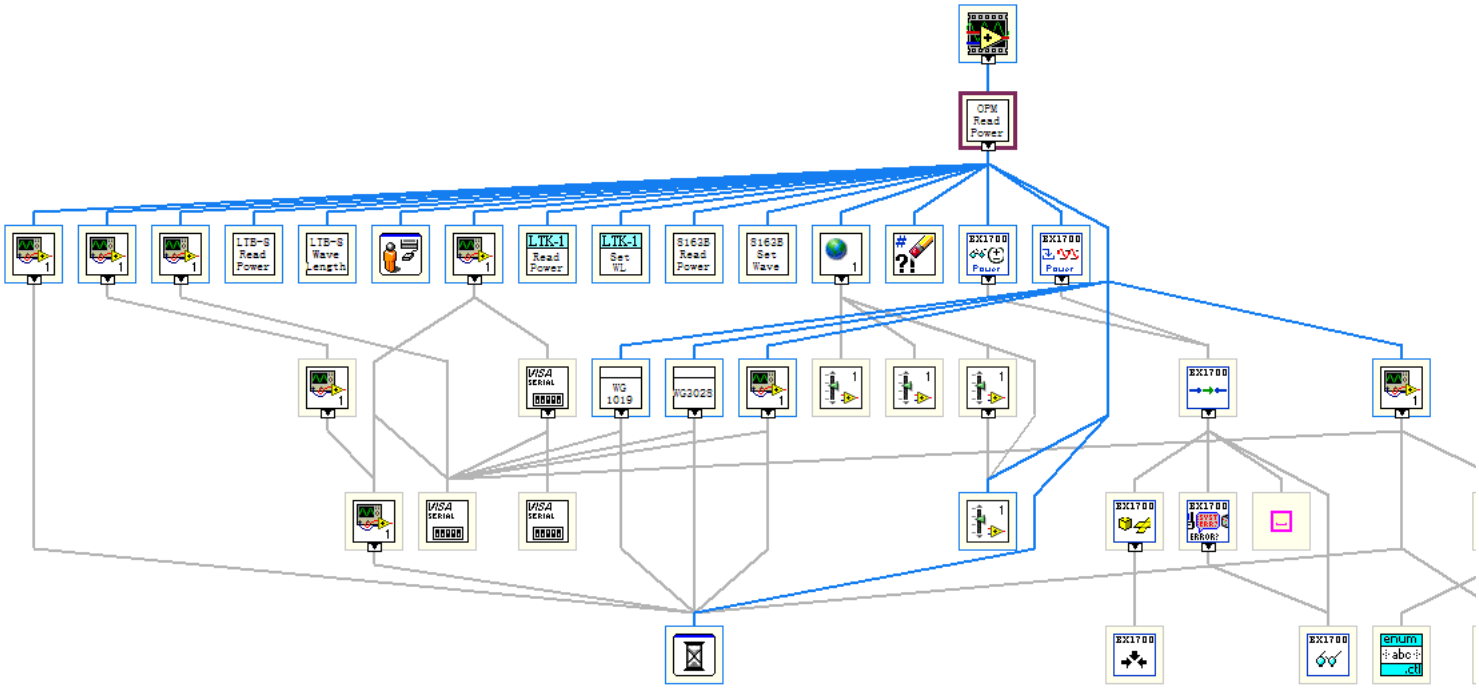
---

VI Revision History

"OPM Read Chs Power.vi History"

Current Revision: 85


Position in Hierarchy



Iconified Cluster Constants

OSW Switch CH.vi

Connector Pane



Front Panel



Controls and Indicators

CH

error in

error in can accept error information wired from VIs previously called. Use this information to decide if any functionality should be bypassed in the event of errors from other VIs.

Right-click the **error in** control on the front panel and select **Explain Error** or **Explain Warning** from the shortcut menu for more information about the error.

status

status is TRUE (X) if an error occurred or FALSE (checkmark) to indicate a warning or that no error occurred.

Right-click the **error in** control on the front panel and select **Explain Error** or **Explain Warning** from the shortcut menu for more information about the error.

code

code is the error or warning code.

Right-click the **error in** control on the front panel and select **Explain Error** or **Explain Warning** from the shortcut menu for more information about the error.

source

source describes the origin of the error or warning.

Right-click the **error in** control on the front panel and select **Explain Error** or **Explain Warning** from the shortcut menu for more information about the error.

4CH_in

数値

error out

error in can accept error information wired from VIs previously called. Use this information to decide if any functionality should be bypassed in the event of errors from other VIs.

Right-click the **error in** control on the front panel and select **Explain Error** or **Explain Warning** from the shortcut menu for more information about the error.

status

status is TRUE (X) if an error occurred or FALSE (checkmark) to indicate a warning or that no error occurred.

Right-click the **error in** control on the front panel and select **Explain Error** or **Explain Warning** from the shortcut menu for more information about the error.

code

code is the error or warning code.

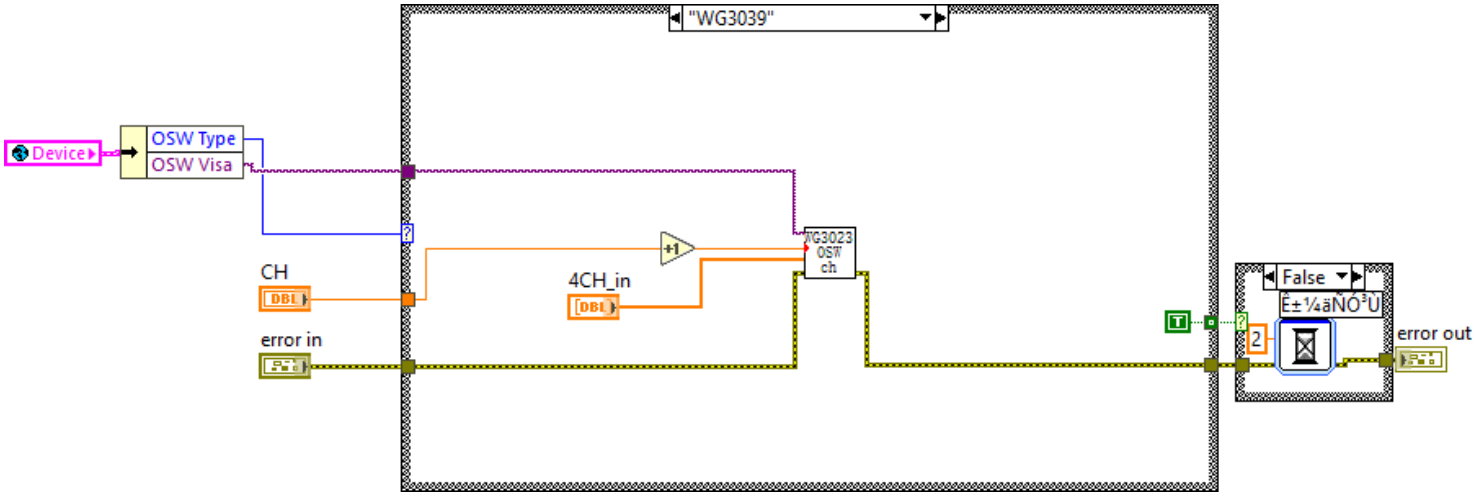
Right-click the **error in** control on the front panel and select **Explain Error** or **Explain Warning** from the shortcut menu for more information about the error.

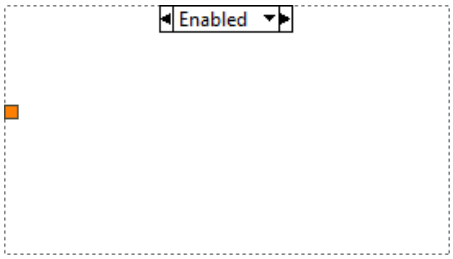
source

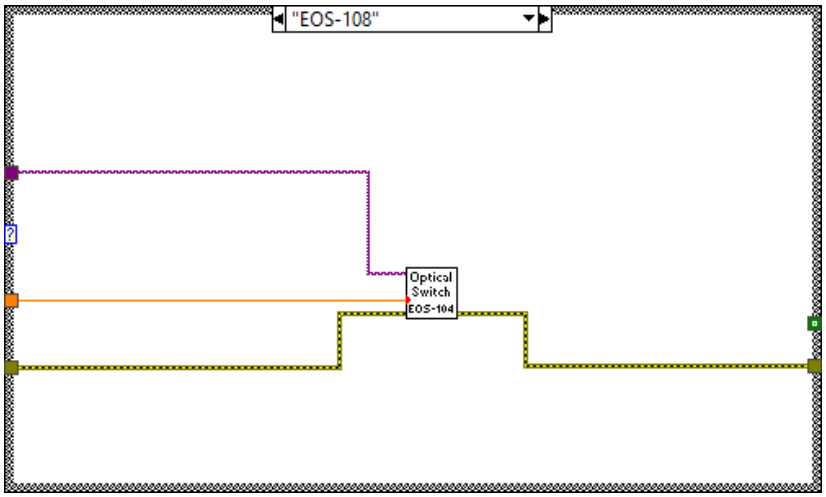
source describes the origin of the error or warning.

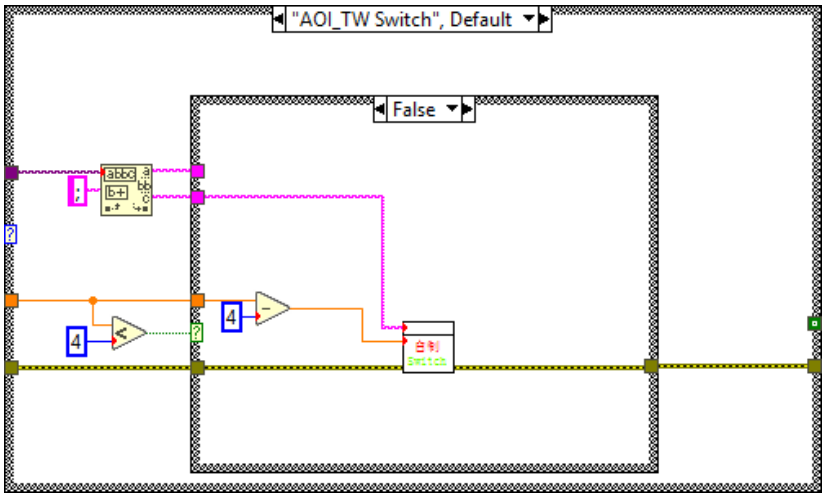
Right-click the **error in** control on the front panel and select **Explain Error** or **Explain Warning** from the shortcut menu for more information about the error.

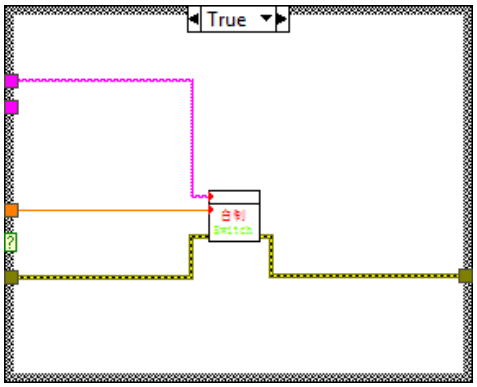
Block Diagram

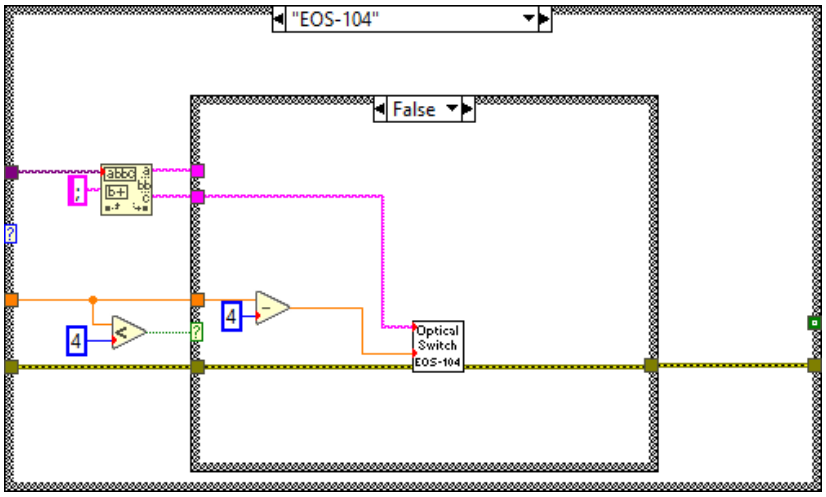


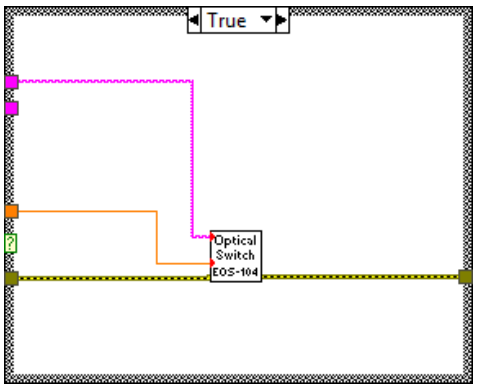

Enabled

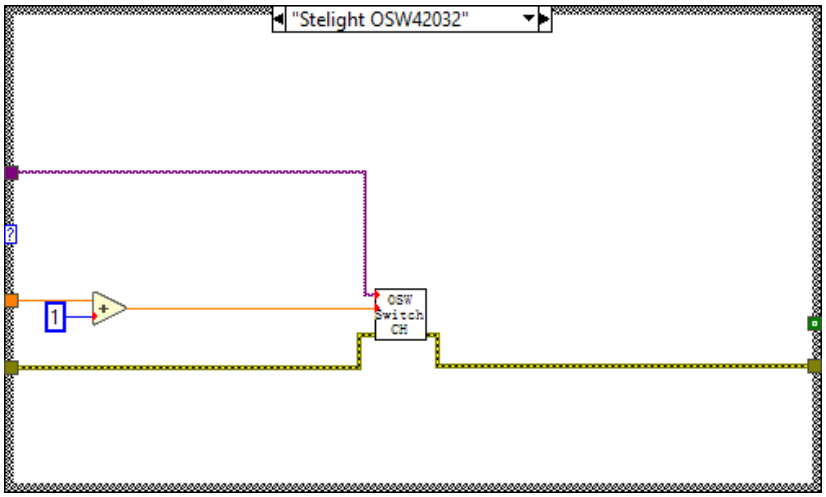

"EOS-108"
Optical
Switch
EOS-104

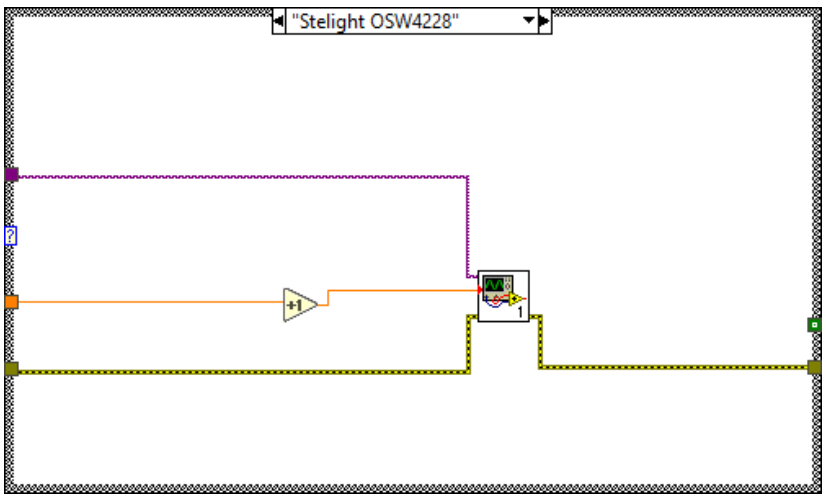

"AOI_TW Switch", Default
False
abc
4
4

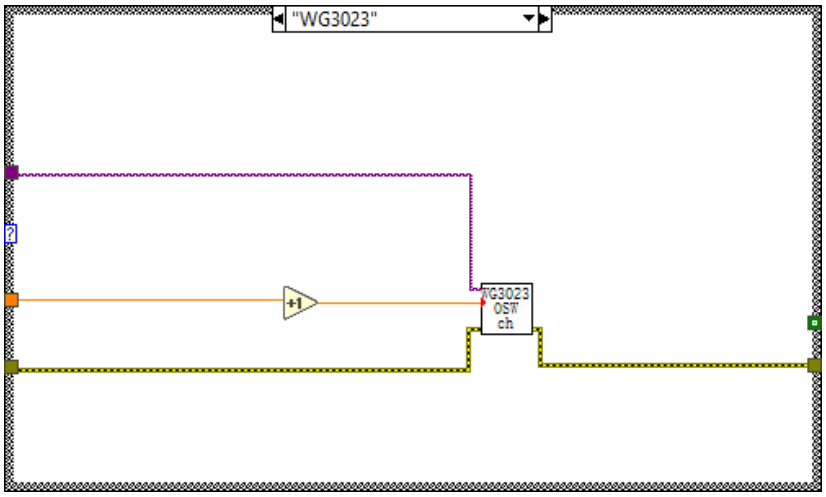

True



"EOS-104"
False
4
4
Optical
Switch
EOS-104


True
Optical
Switch
EOS-104


"Stelight OSW42032"
1
OSW
Switch
CH


"Stelight OSW4228"
+1
1





List of SubVIs and Express VIs with Configuration Information

OQC_EOS-104.vi

C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\OQC_EOS-104.vi

AOI_TW Switch.vi

C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\AOI_TW Switch.vi

WG3023 OSW Swtich Ch.vi

C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\WG3023 OSW Swtich Ch.vi

Stelight_OSW_SetChannel.vi

C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\Stelight_OSW_SetChannel.vi

Stelight OSW Switch Channel.vi

C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\Stelight OSW Switch Channel.vi

WG3039 OSW Swtich Ch.vi

C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\WG3039 OSW Swtich Ch.vi

subTimeDelay.vi

C:\Program Files (x86)\National Instruments\LabVIEW 2025\vi.lib\express\express execution control\TimeDelayBlock.llb\subTimeDelay.vi

G_100G.vi

C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\G_100G.vi

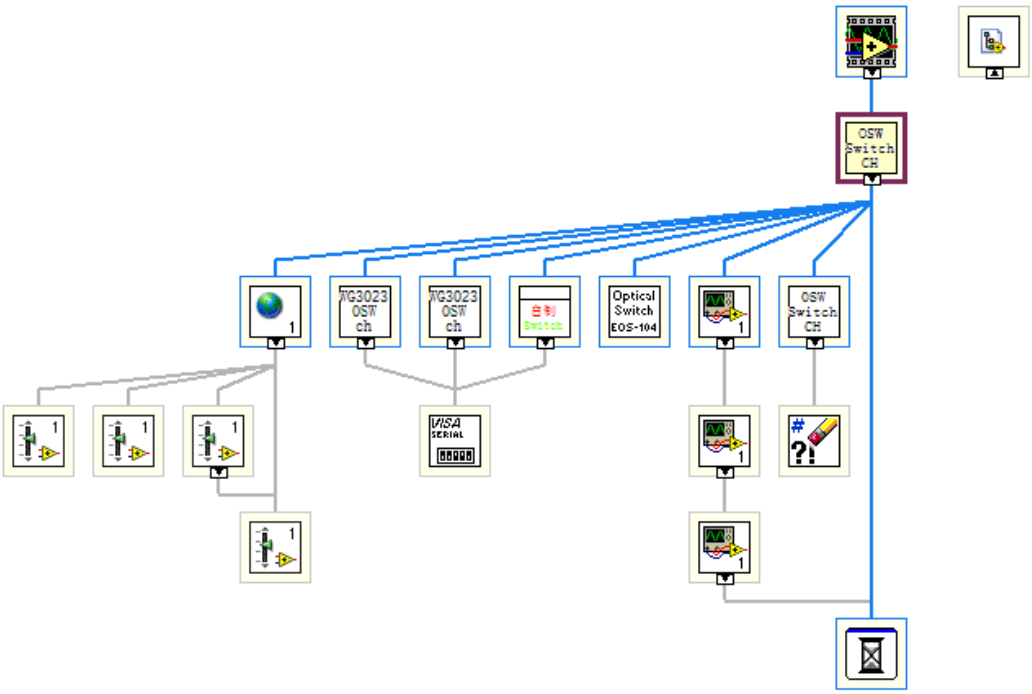
---

VI Revision History

"OSW Switch CH.vi History"

Current Revision: 49

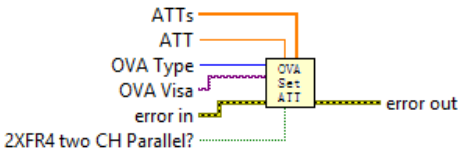
Position in Hierarchy



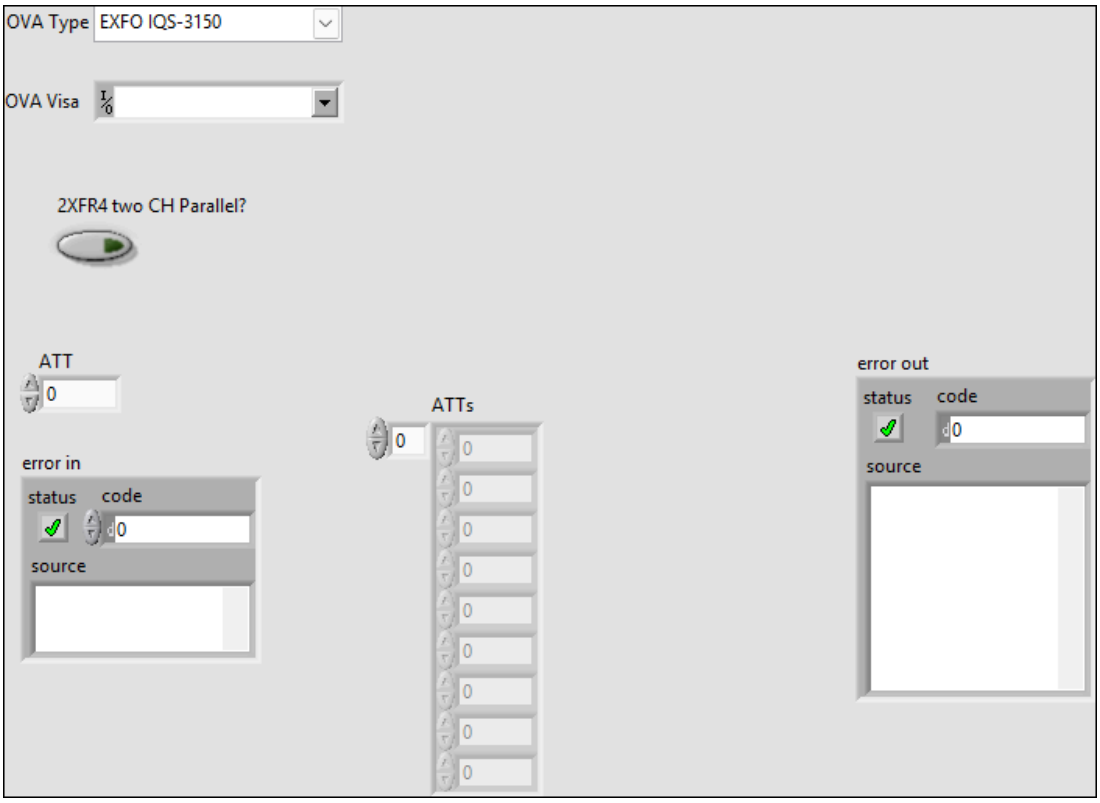
Iconified Cluster Constants

OVA Set Chs Att.vi

Connector Pane



Front Panel



Controls and Indicators

ATT
ATTs

ATT

error in

error in can accept error information wired from VIs previously called. Use this information to decide if any functionality should be bypassed in the event of errors from other VIs.

Right-click the **error in** control on the front panel and select **Explain Error** or **Explain Warning** from the shortcut menu for more information about the error.

status

status is TRUE (X) if an error occurred or FALSE (checkmark) to indicate a warning or that no error occurred.

Right-click the **error in** control on the front panel and select **Explain Error** or **Explain Warning** from the shortcut menu for more information about the error.

code

code is the error or warning code.

Right-click the **error in** control on the front panel and select **Explain Error** or **Explain Warning** from the shortcut menu for more information about the error.

source

source describes the origin of the error or warning.

Right-click the **error in** control on the front panel and select **Explain Error** or **Explain Warning** from the shortcut menu for more information about the error.

[OVA Visa]

[OVA Type]

2XFR4 two CH Parallel?

error out

error in can accept error information wired from VIs previously called. Use this information to decide if any functionality should be bypassed in the event of errors from other VIs.

Right-click the **error in** control on the front panel and select **Explain Error** or **Explain Warning** from the shortcut menu for more information about the error.

status

status is TRUE (X) if an error occurred or FALSE (checkmark) to indicate a warning or that no error occurred.

Right-click the **error in** control on the front panel and select **Explain Error** or **Explain Warning** from the shortcut menu for more information about the error.

code

code is the error or warning code.

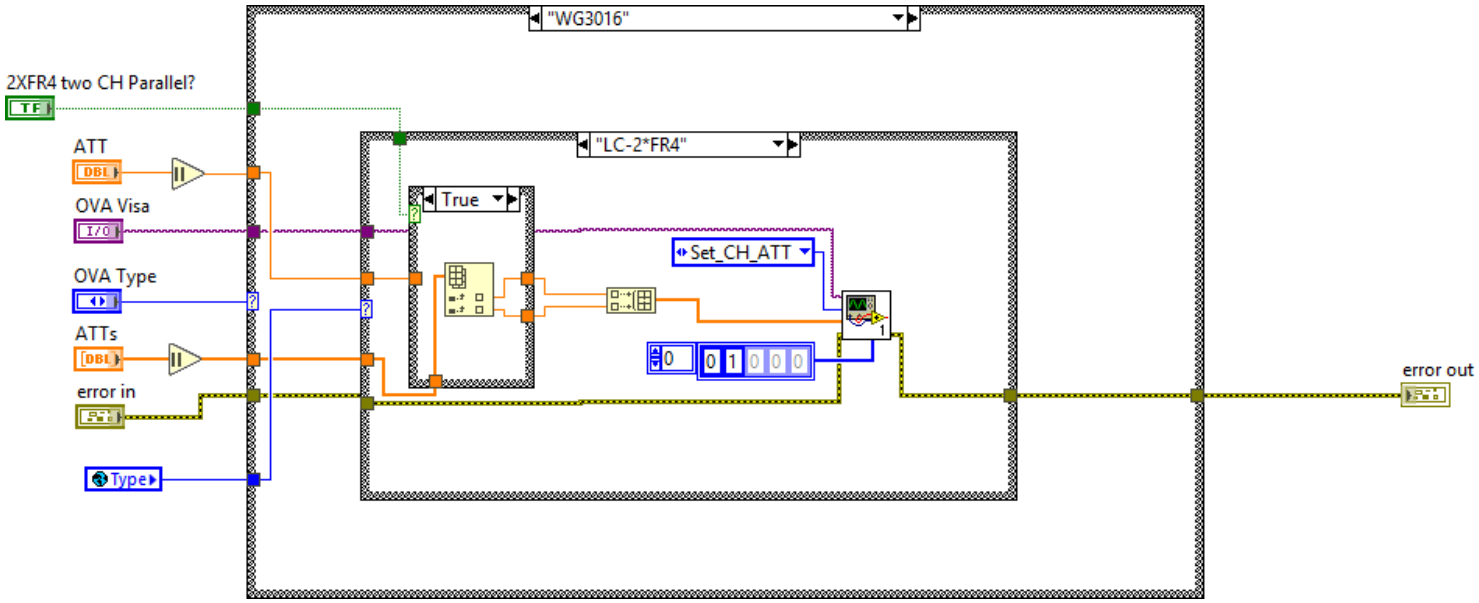
Right-click the **error in** control on the front panel and select **Explain Error** or **Explain Warning** from the shortcut menu for more information about the error.

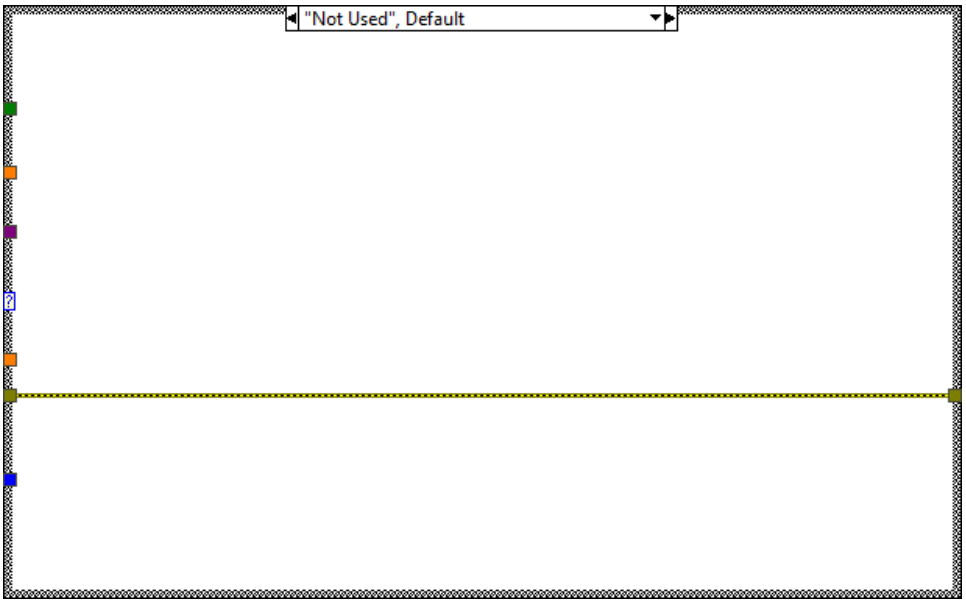
source

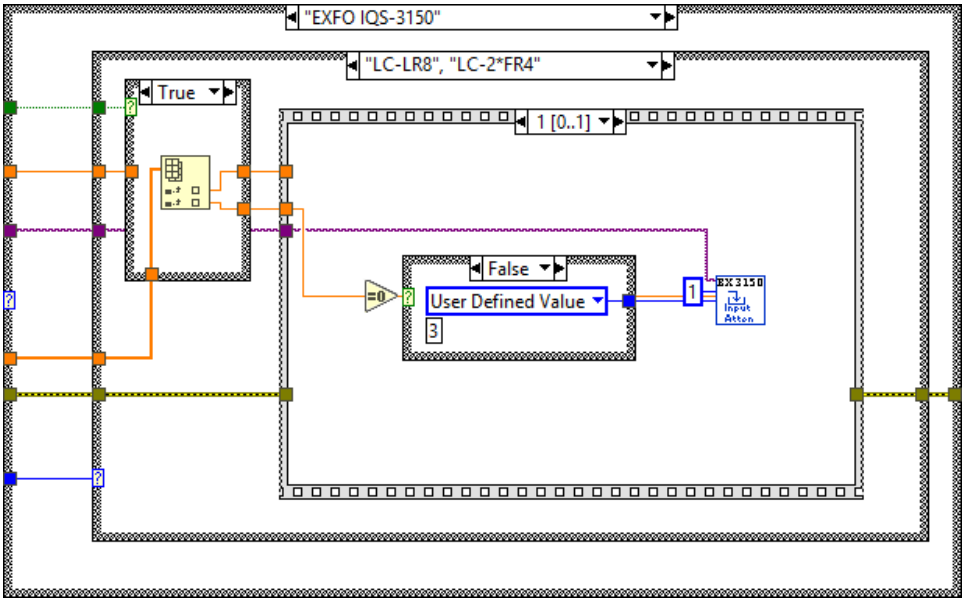
source describes the origin of the error or warning.

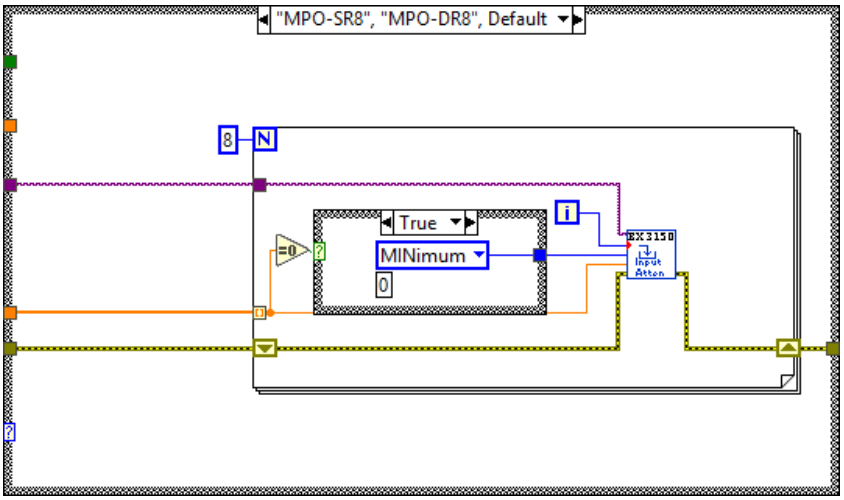
Right-click the **error in** control on the front panel and select **Explain Error** or **Explain Warning** from the shortcut menu for more information about the error.


Block Diagram

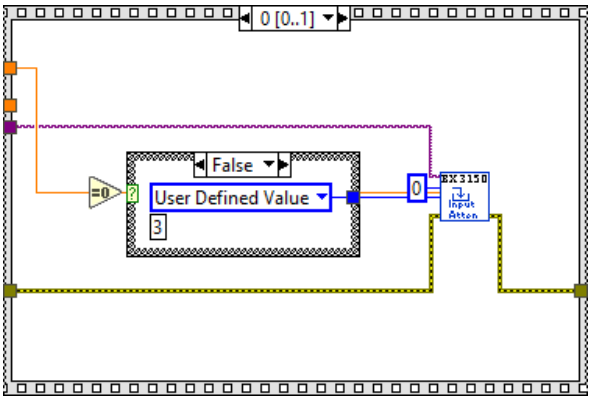




"Not Used", Default



"EXFO IQS-3150"
"LC-LR8", "LC-2*FR4"
True
1 [0..1]
False
User Defined Value
3
=0
1
EX3150
Input Atten



"MPO-SR8", "MPO-DR8", Default
8
N
True
MINimum
0
i
=0
EX3150
Input Atten

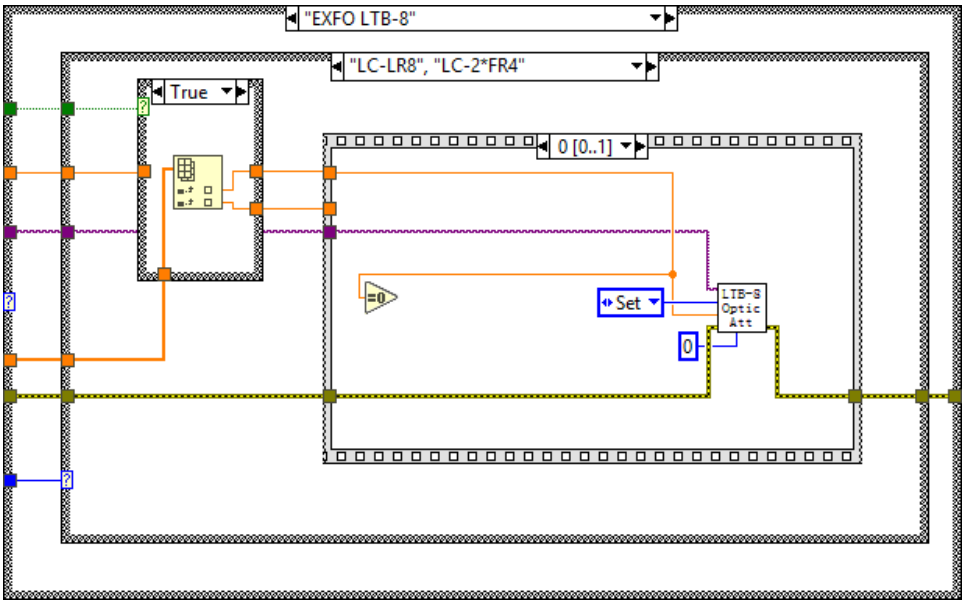

False
User Defined Value
3

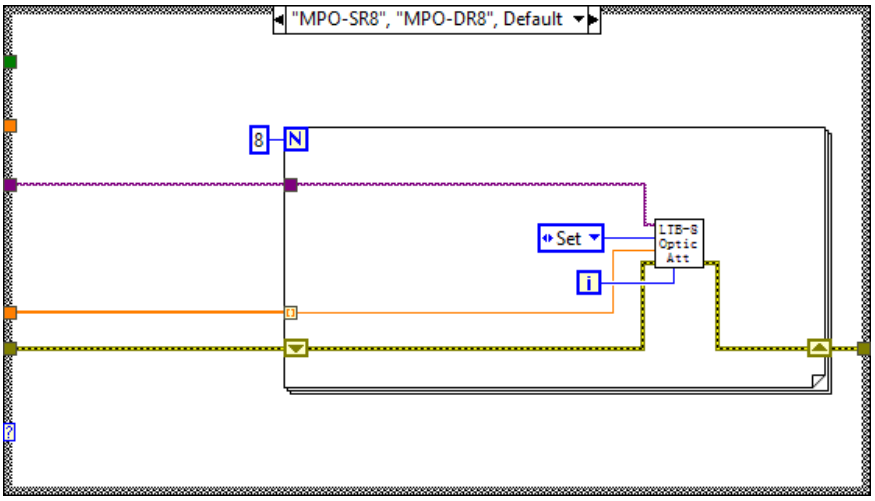

0 [0..1]
False
User Defined Value
3
=0
0
BX 3150
Input
Atten

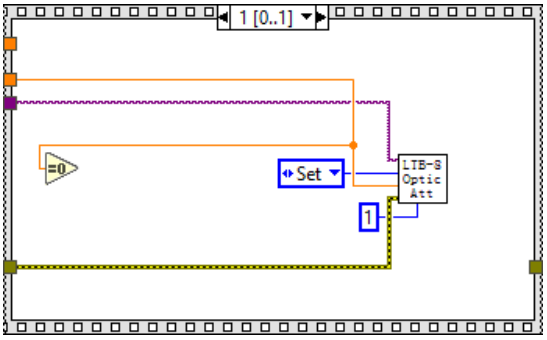

True
MINimum
0



True
MINimum
0

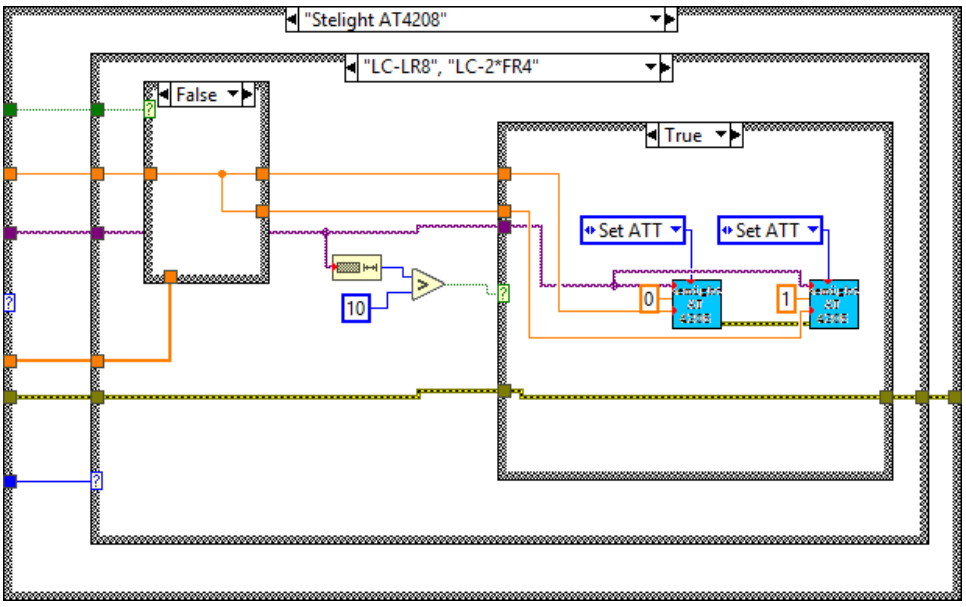

False

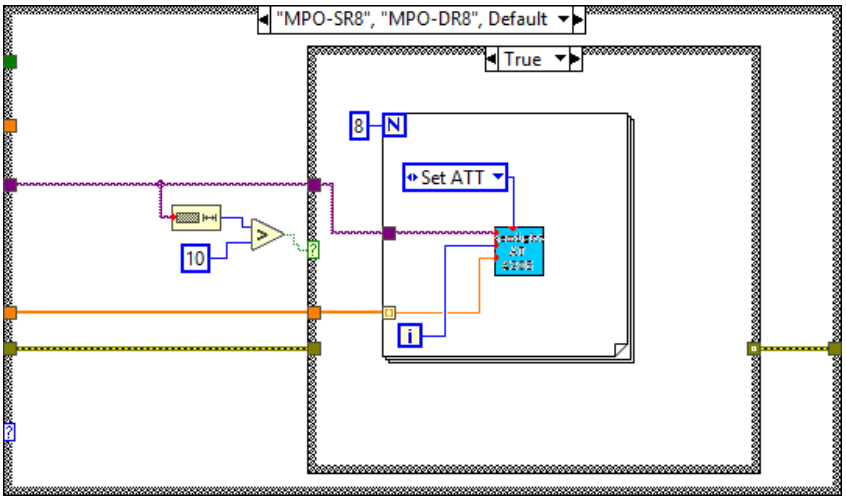

"EXFO LTB-8"
"LC-LR8", "LC-2*FR4"
True
0 [0..1]
=0
Set
LTB-8
Optic
Att
0

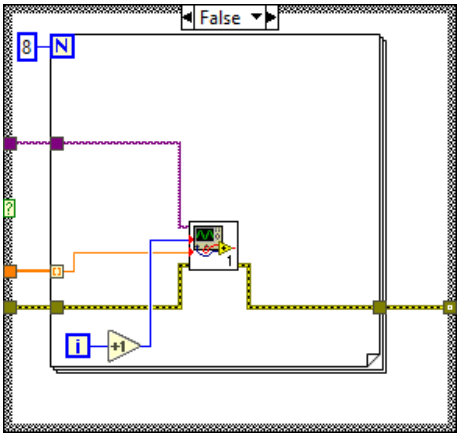

"MPO-SR8", "MPO-DR8", Default
8
N
Set
LTB-8 Optic Att
1

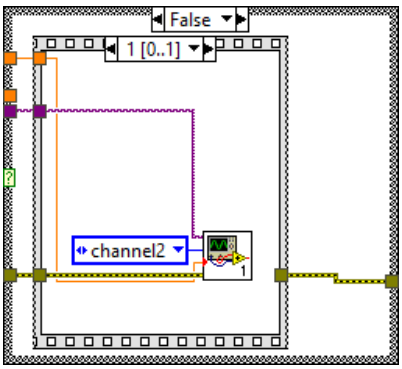

1 [0..1]
=0
Set
LTB-8 Optic Att
1



False



"Stelight AT4208"
"LC-LR8", "LC-2*FR4"
False
True
Set ATT
Set ATT
10
0
1

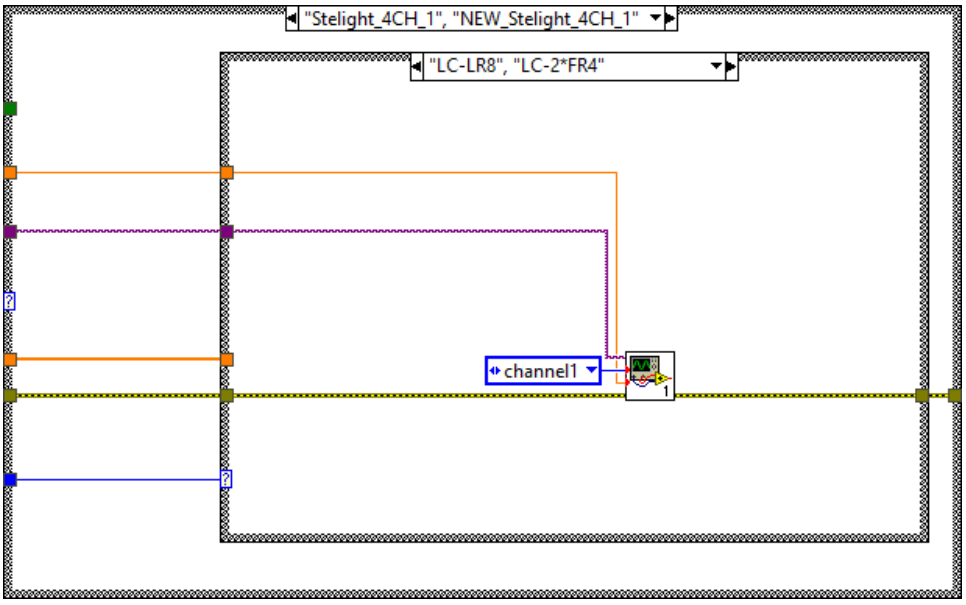

"MPO-SR8", "MPO-DR8", Default
True
8
N
Set ATT
10
i

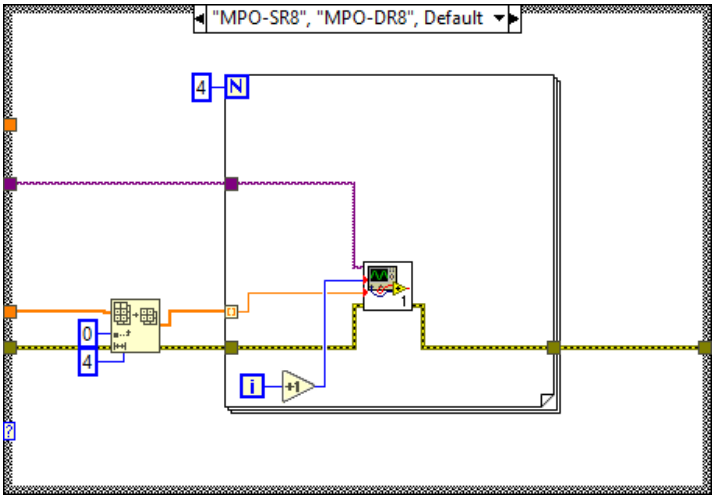

False
8
N
1
i
+1

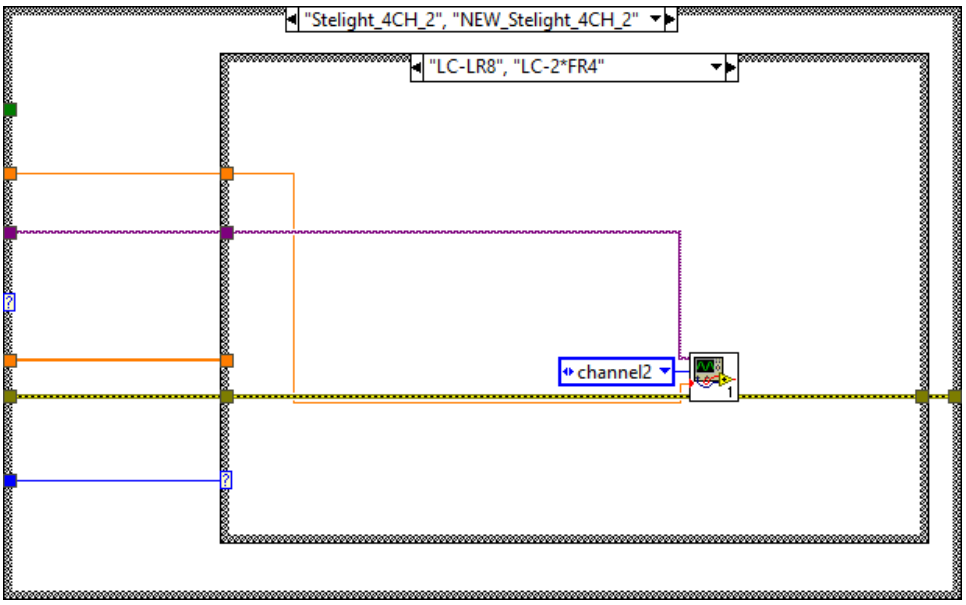

False
1 [0..1]
channel2
1

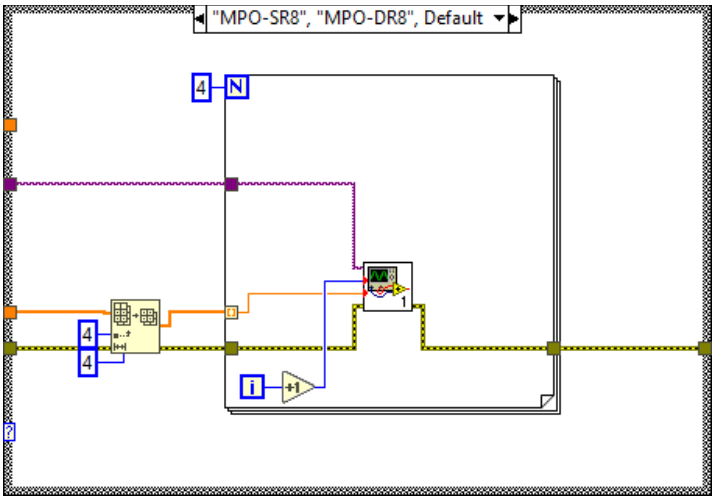

0 [0..1]
channel1
1

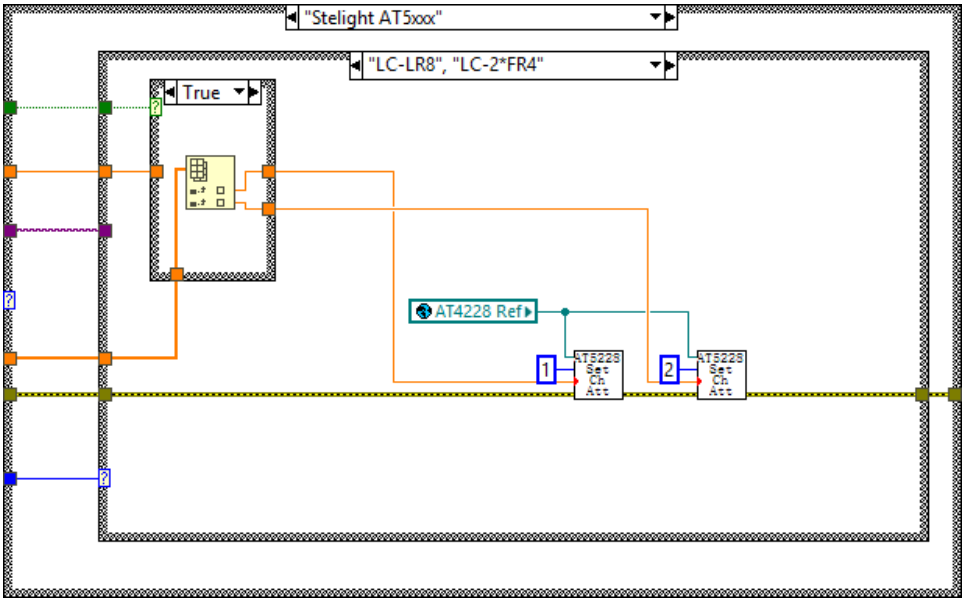

True

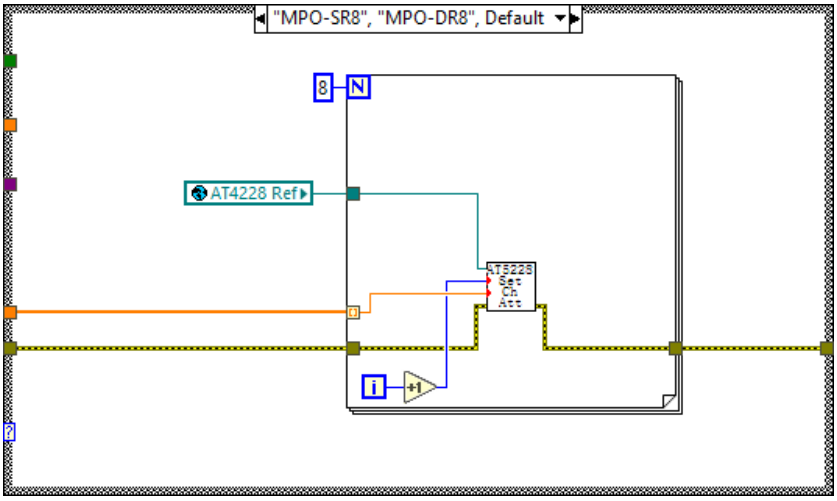

"Stelight_4CH_1", "NEW_Stelight_4CH_1"
"LC-LR8", "LC-2*FR4"
channel1
1



"MPO-SR8", "MPO-DR8", Default
4
N
1
0
4
i
+1

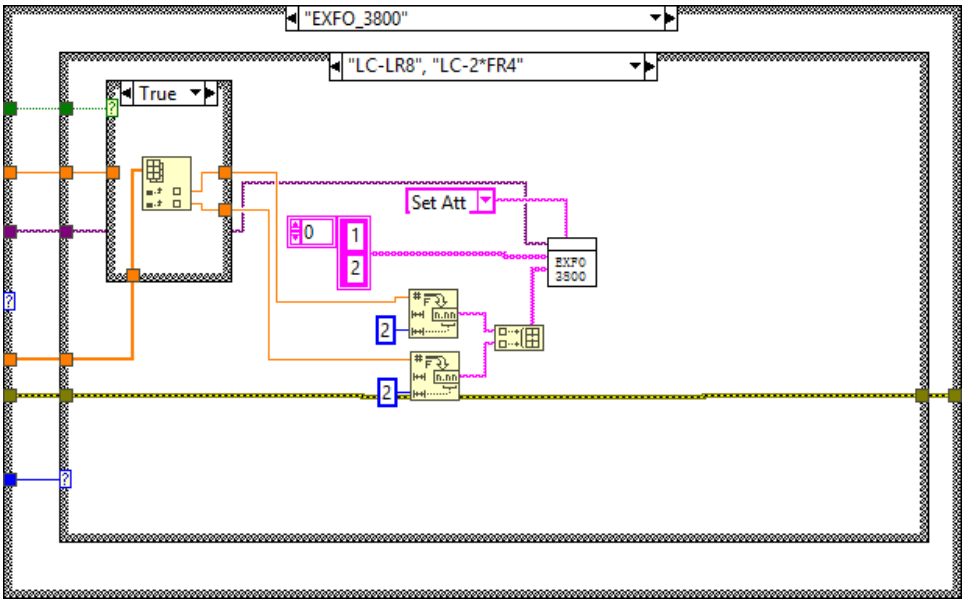

"Stelight_4CH_2", "NEW_Stelight_4CH_2"
"LC-LR8", "LC-2*FR4"
channel2
1

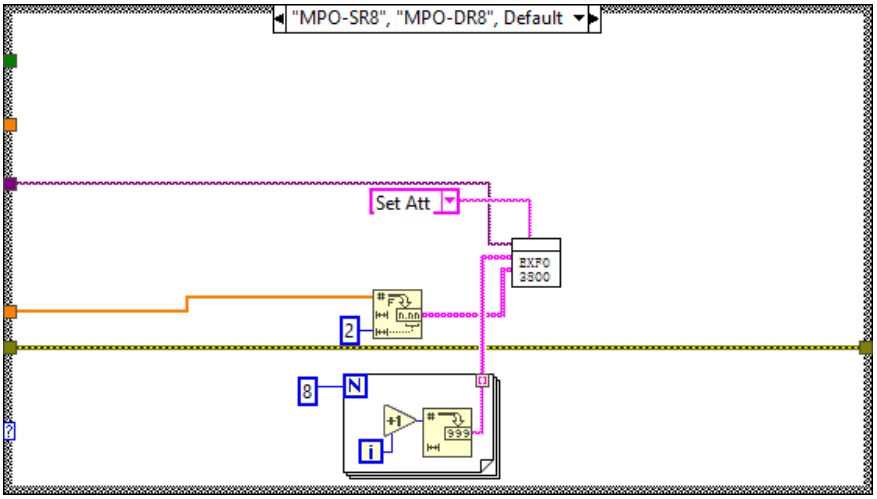

"MPO-SR8", "MPO-DR8", Default
4
N
4
4
1
i
+1



"Stelight AT5xxx"
"LC-LR8", "LC-2*FR4"
True
AT4228 Ref
1
AT5228 Set Ch Att
2
AT5228 Set Ch Att

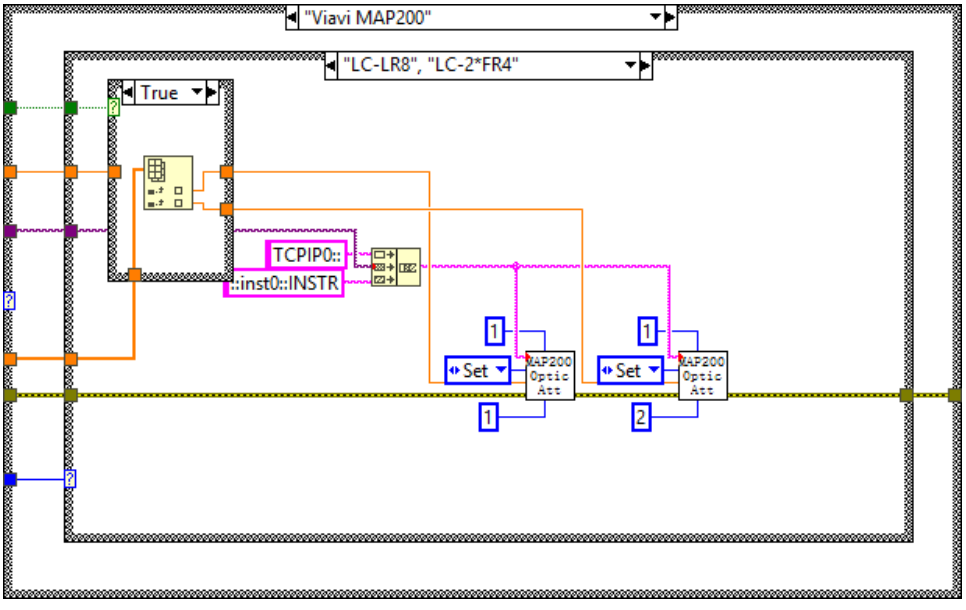

"MPO-SR8", "MPO-DR8", Default
8
N
AT4228 Ref
AT5228 Set Ch Att
i
+1

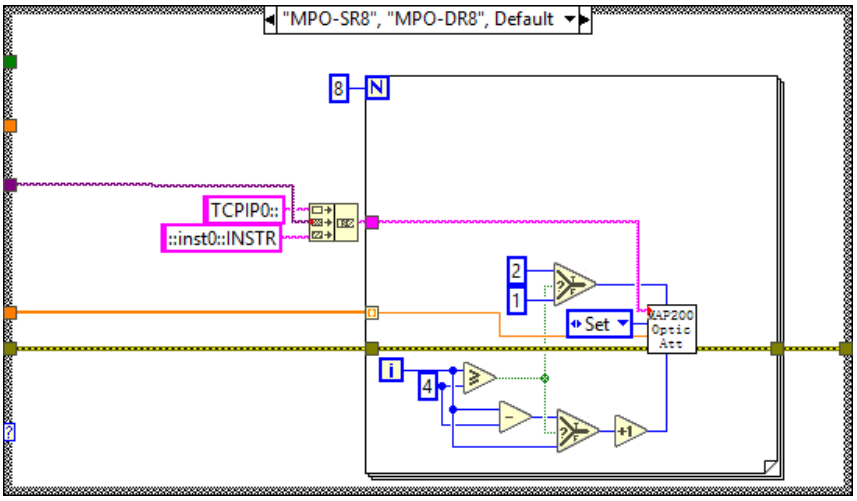

False



"EXFO_3800"
"LC-LR8", "LC-2*FR4"
True
Set Att
0
1
2
EXFO 3800
2
2



"MPO-SR8", "MPO-DR8", Default
Set Att
EXFO 3800
2
8
N
+1
i
999

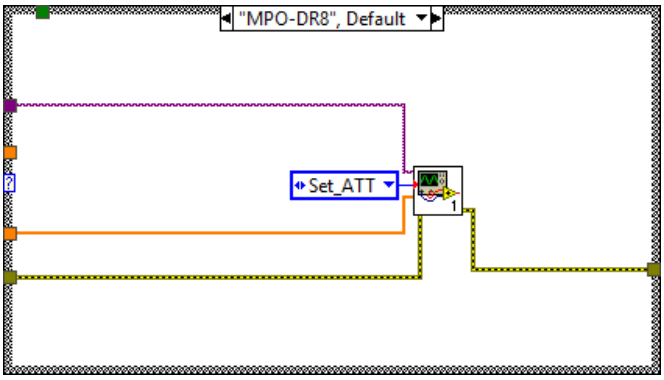

False


"Viavi MAP200"
"LC-LR8", "LC-2*FR4"
True
TCPIP0::
::inst0::INSTR
1
Set
MAP200 Optic Att
1
1
Set
MAP200 Optic Att
2









List of SubVIs and Express VIs with Configuration Information

EXFO 3150.lvlib:Configure Input Attenuation.vi

C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\Configure Input Attenuation.vi

Stelight_VOA_SM_SetChannelAtt.vi

C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\Stelight_VOA_SM_SetChannelAtt.vi

LTB-8 Attenuator.vi

C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\LTB-8 Attenuator.vi

GBIB(G)100G.vi

C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\GBIB(G)100G.vi

MAP200 Attenuator.vi

C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\MAP200 Attenuator.vi

Stelight VOA_5228 Set Ch Att.vi

C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\Stelight VOA_5228 Set Ch Att.vi

WG3016.vi

C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\WG3016.vi

G_100G.vi

C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\G_100G.vi

EXFO MOA-3800.vi

C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\EXFO MOA-3800.vi

Semight AT4208 IP Control.vi

C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\Semight AT4208 IP Control.vi

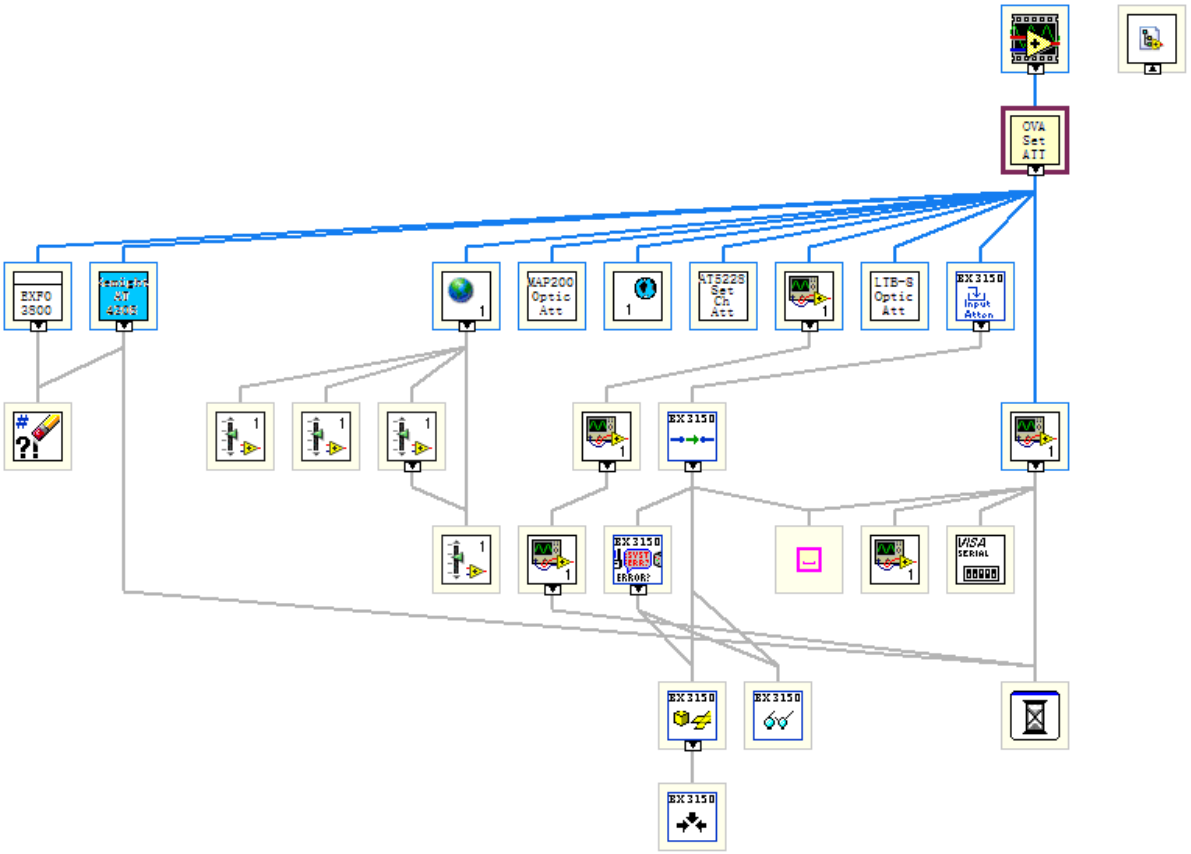
---

VI Revision History

"OVA Set Chs Att.vi History"

Current Revision: 98


Position in Hierarchy



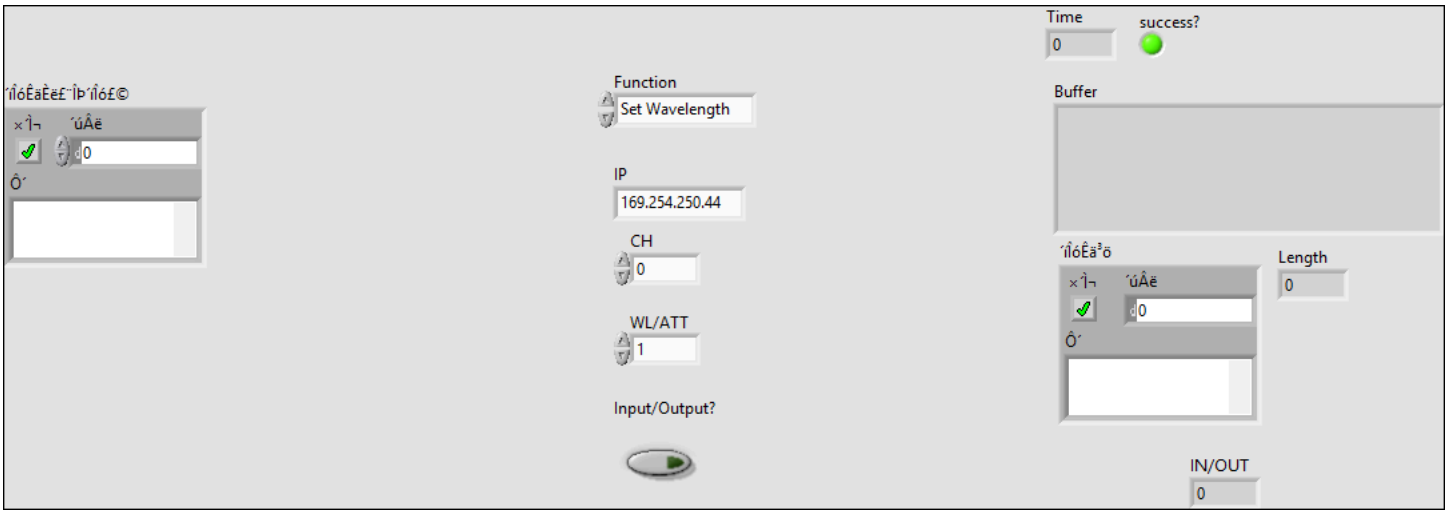
Iconified Cluster Constants

Semight AT4208 IP Control.vi

Connector Pane



Front Panel



Controls and Indicators

IP
Function
CH
WL/ATT
错误输入（无错误）[错误输入（无错误）]

错误输入可接收来自前一个被调用VI的错误信息。当其它VI发生错误时，根据该信息决定是否需跳过执行某些功能。

关于错误的更多信息，请右键单击前面板上的**错误输入**输入控件并从快捷菜单中选择**解释错误**或**解释警告**。

状态[status]

状态为TRUE（叉）时表示错误，为FALSE（勾）时表示警告或无错误。

关于错误的更多信息，请右键单击前面板上的**错误输入**输入控件，并从快捷菜单中选择**解释错误**或**解释警告**。

代码[code]

代码表示错误或警告代码。

关于错误的更多信息，请右键单击前面板上的**错误输入**输入控件，并从快捷菜单中选择**解释错误**或**解释警告**。

源[source]

源表示错误或警告源。

关于错误的更多信息，请右键单击前面板上的**错误输入**输入控件，并从快捷菜单中选择**解释错误**或**解释警告**。

shutter? 2
success?
Buffer
Length
错误输出[错误输出]

错误输入可接收来自前一个被调用VI的错误信息。当其它VI发生错误时，根据该信息决定是否需跳过执行某些功能。

关于错误的更多信息，请右键单击前面板上的**错误输入**输入控件并从快捷菜单中选择**解释错误**或**解释警告。**

状态[status]

状态为TRUE（叉）时表示错误，为FALSE（勾）时表示警告或无错误。

关于错误的更多信息，请右键单击前面板上的**错误输入**输入控件，并从快捷菜单中选择**解释错误**或**解释警告。**

代码[code]

代码表示错误或警告代码。

关于错误的更多信息，请右键单击前面板上的**错误输入**输入控件，并从快捷菜单中选择**解释错误**或**解释警告。**

源[source]

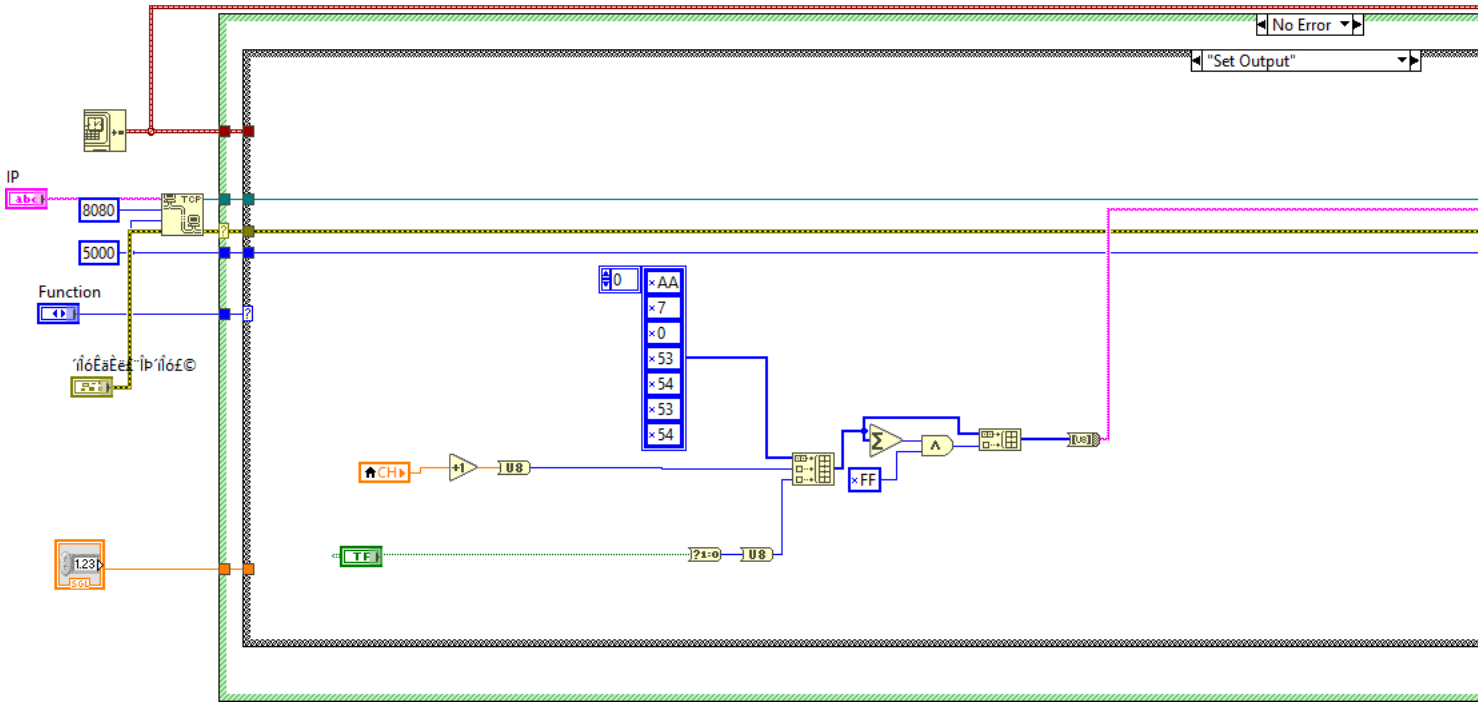
源表示错误或警告源。

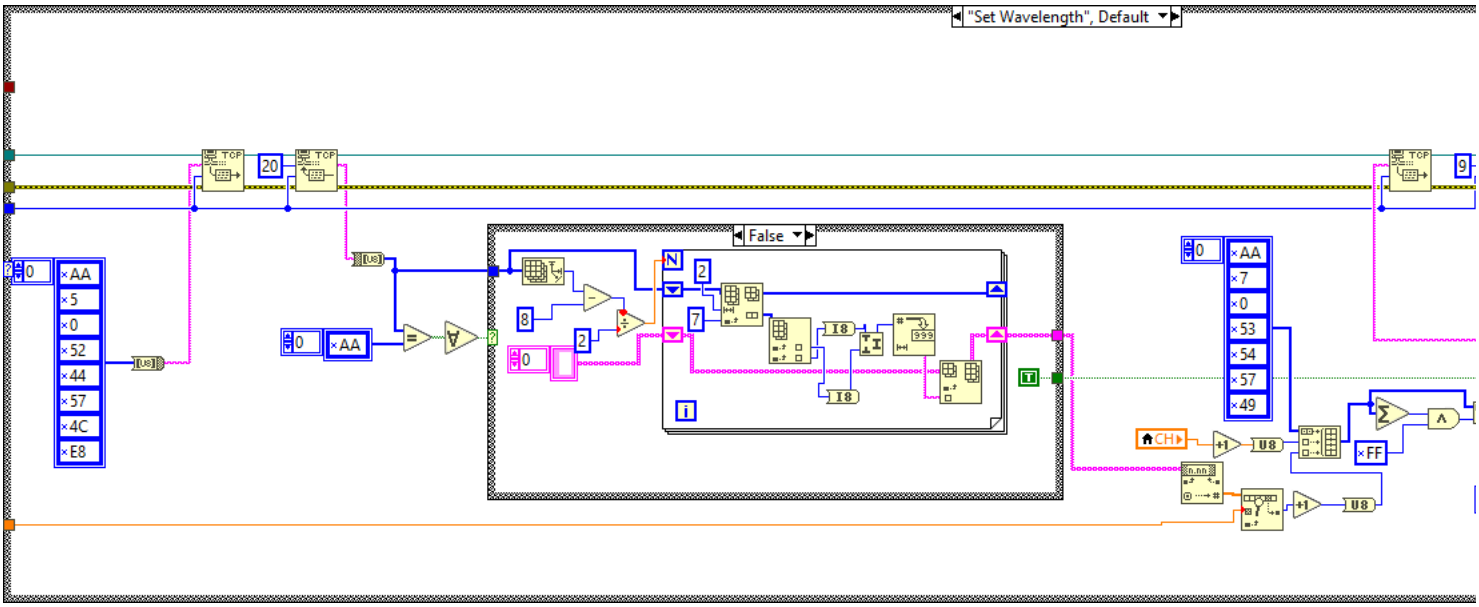
关于错误的更多信息，请右键单击前面板上的**错误输入**输入控件，并从快捷菜单中选择**解释错误**或**解释警告。**

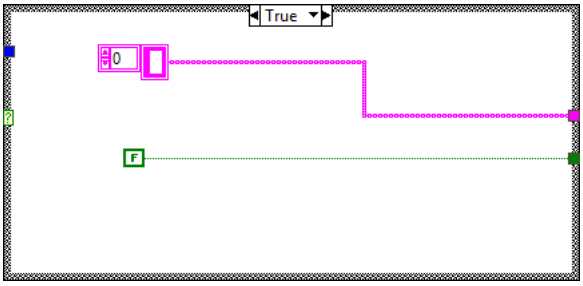
IN/OUT


Time

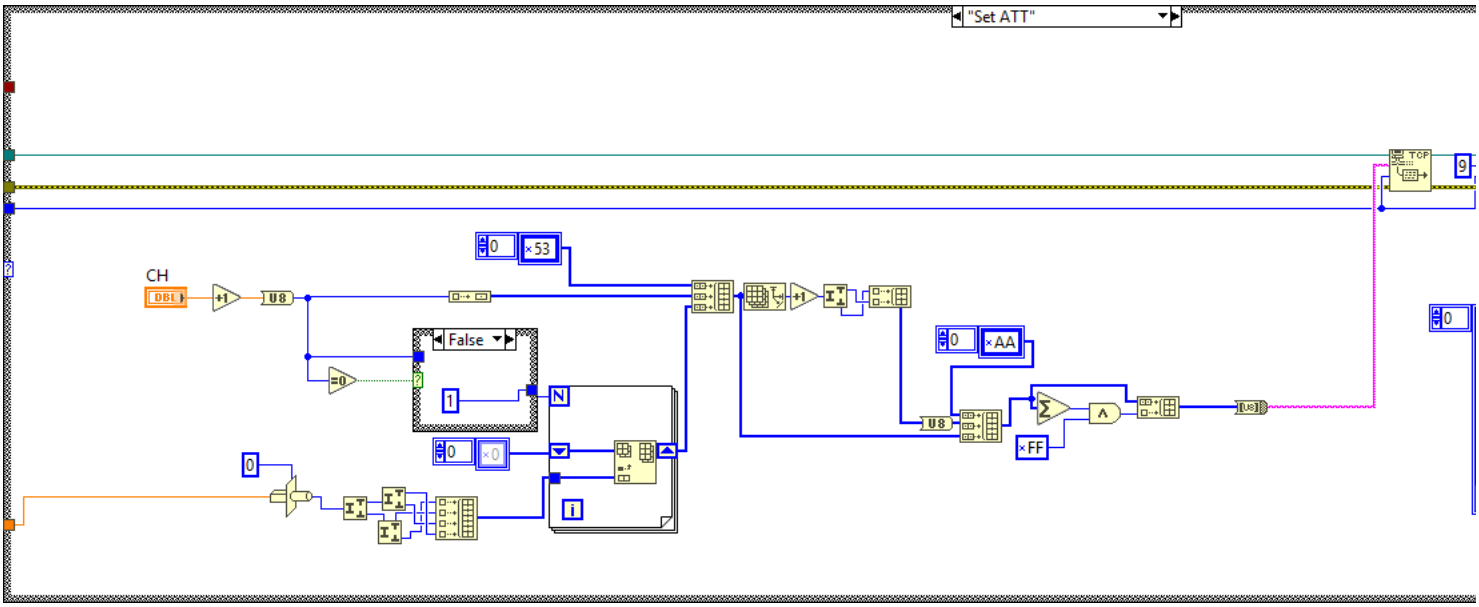
Block Diagram






"Set Wavelength", Default
TCP
20
9
0
×AA
×5
×0
×52
×44
×57
×4C
×E8
U8
False
N
2
8
7
I8
999
i
T
×AA
×7
×0
×53
×54
×57
×49
CH
+1
×FF



True
0
F

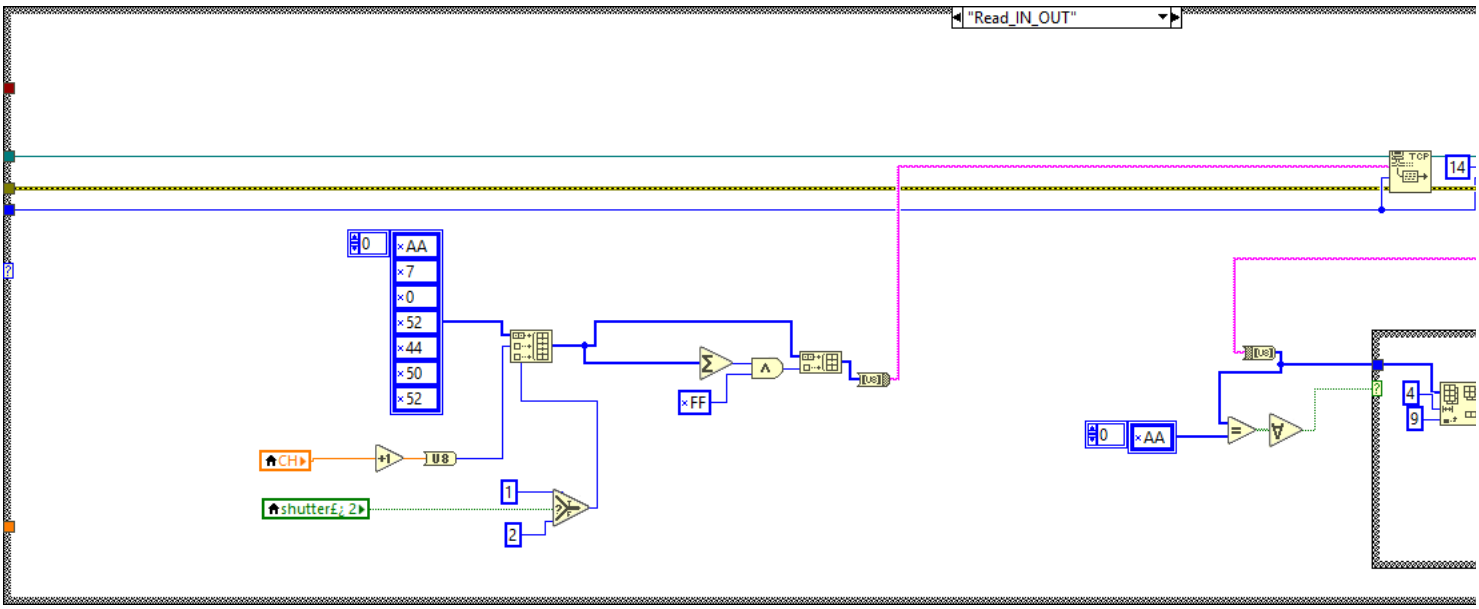

True
F

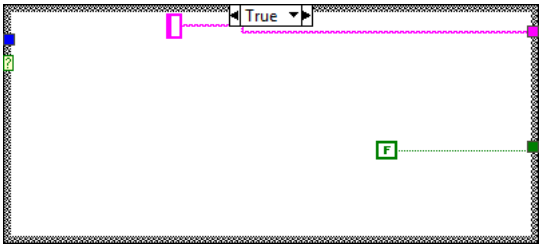

"Set ATT"
TCP
9
CH
DBL
+1
U8
0
×53
False
=0
N
i
×0
×AA
×FF

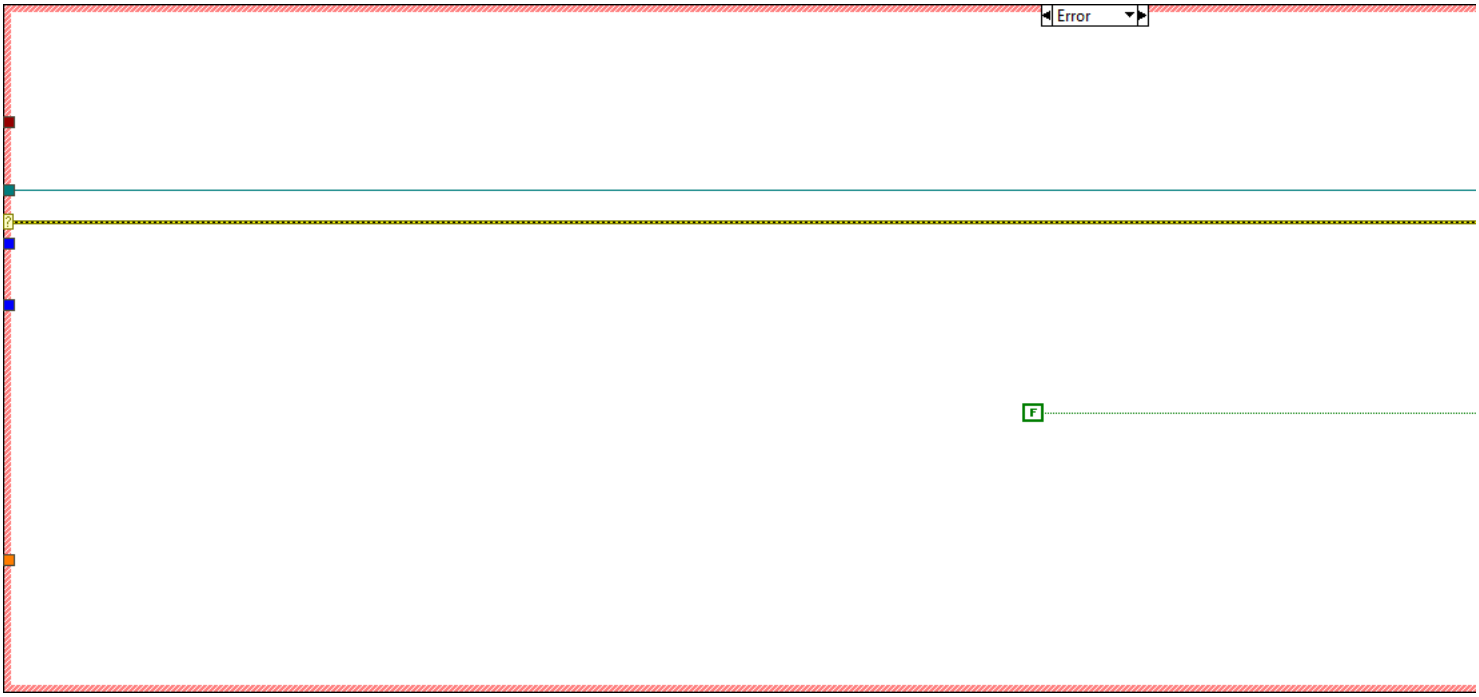

True
F


True
8


False
8
FE
0


"Read_IN_OUT"
TCP
14
0
AA
7
0
52
44
50
52
CH
I8
shutter£; 2
1
2
FF
0
AA
4
9


True
F


Error
F

List of SubVIs and Express VIs with Configuration Information



Clear Errors.vi

C:\Program Files (x86)\National Instruments\LabVIEW 2025\vi.lib\Utility\error.llb\Clear Errors.vi



subTimeDelay.vi

C:\Program Files (x86)\National Instruments\LabVIEW 2025\vi.lib\express\express execution control\TimeDelayBlock.llb\subTimeDelay.vi


---

VI Revision History

"Semight AT4208 IP Control.vi History"

Current Revision: 26


Position in Hierarchy



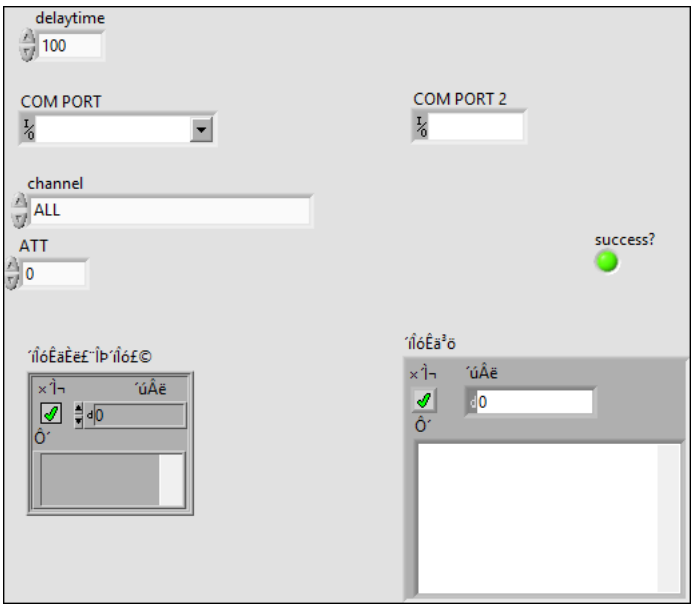
Iconified Cluster Constants

Stelight_VOA_SM_SetChannelAtt.vi

Connector Pane



Front Panel



Controls and Indicators

COM PORT

错误输入（无错误）[error in (no error) 2]

错误输入表明节点运行前发生的错误。该输入提供标准错误输入。

状态[status]

状态的值为TRUE（叉）时表示在节点运行前已发生错误，值为FALSE（勾）时表示警告或无错误。默认值为FALSE。

代码[code]

代码是错误或警告代码。默认值为0。

源[source]

源表示错误或警告的源，大多数情况下表示出现错误或警告的节点名称。默认值为空字符串。

channel

ATT

delaytime

错误输出[错误输出 2]

错误输入可接收来自前一个被调用VI的错误信息。当其它VI发生错误时，根据该信息决定是否需跳过执行某些功能。

关于错误的更多信息，请右键单击前面板上的**错误输入**输入控件并从快捷菜单中选择**解释错误**或**解释警告**。

状态[status]

状态为TRUE（叉）时表示错误，为FALSE（勾）时表示警告或无错误。

关于错误的更多信息，请右键单击前面板上的**错误输入**输入控件，并从快捷菜单中选择**解释错误**或**解释警告**。

代码[code]

代码表示错误或警告代码。

关于错误的更多信息，请右键单击前面板上的**错误输入**输入控件，并从快捷菜单中选择**解释错误**或**解释警告**。

源[source]

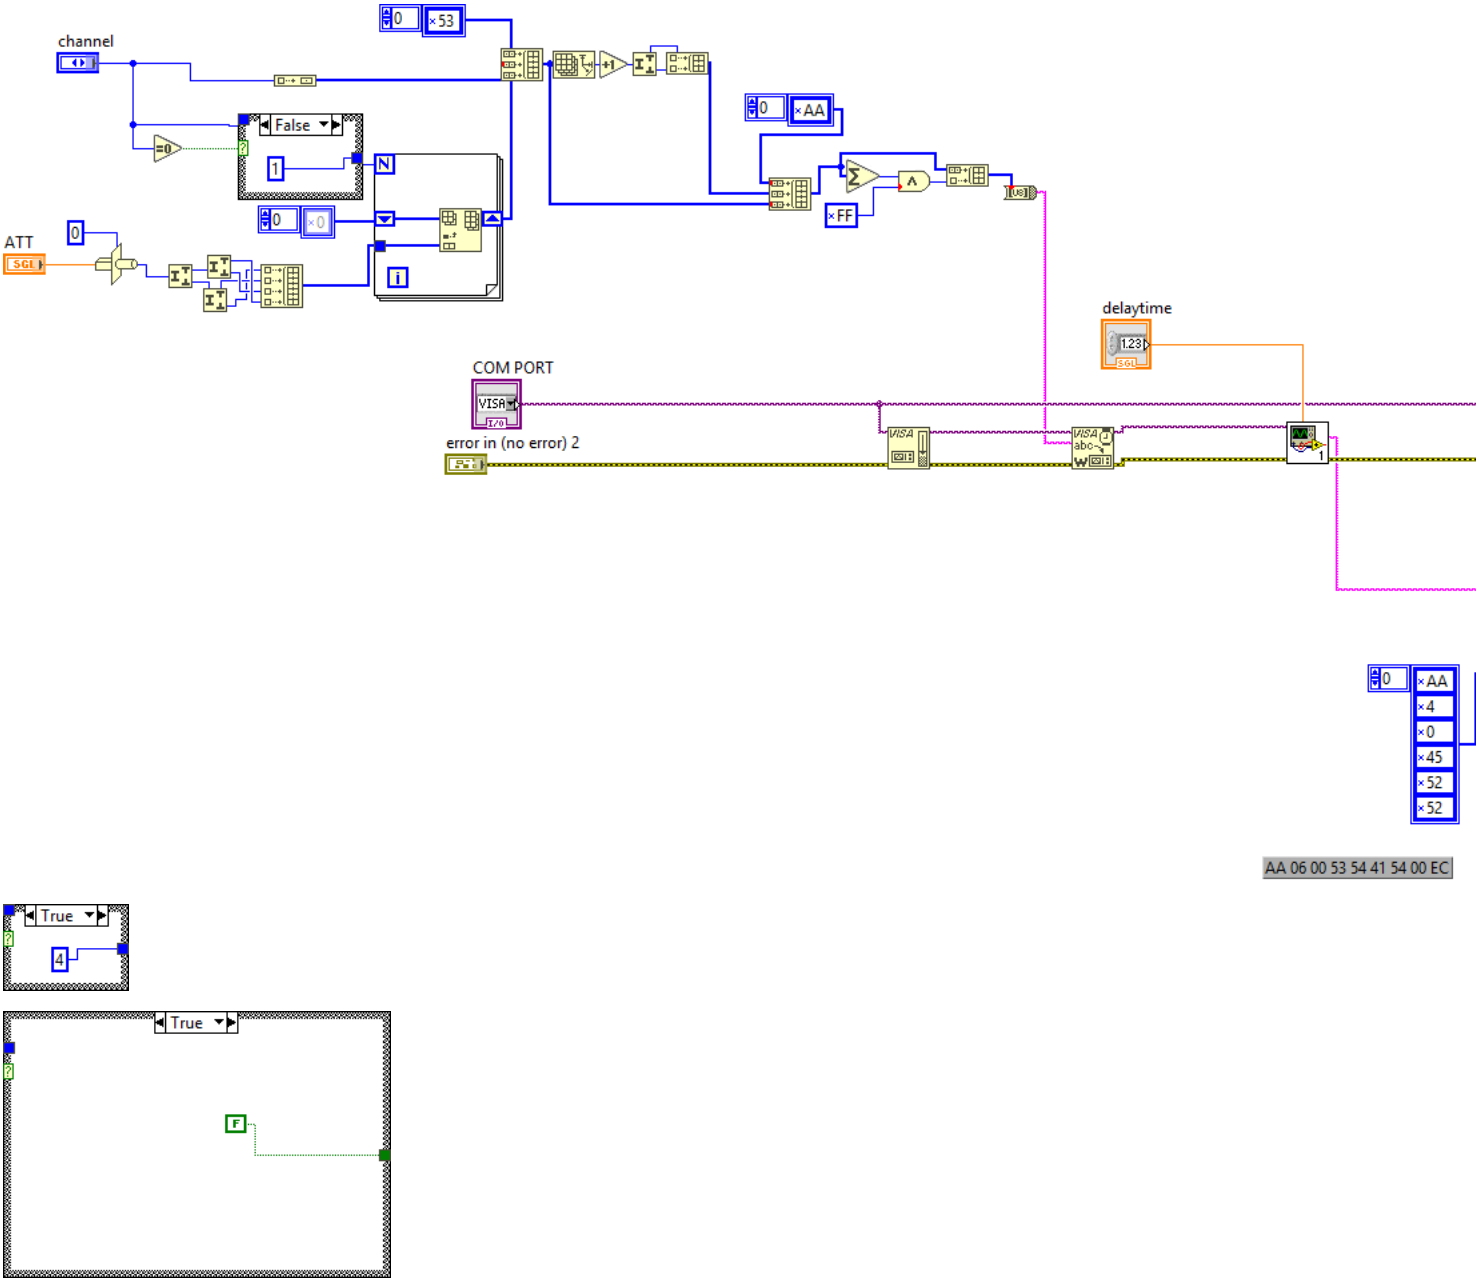
源表示错误或警告源。

关于错误的更多信息，请右键单击前面板上的**错误输入**输入控件，并从快捷菜单中选择**解释错误**或**解释警告**。

COM PORT 2

success?

Block Diagram



List of SubVIs and Express VIs with Configuration Information

Stelight_VOA_SM_ReadData.vi

C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\Stelight_VOA_SM_ReadData.vi


---

VI Revision History

"Stelight_VOA_SM_SetChannelAtt.vi History"

Current Revision: 42

Position in Hierarchy



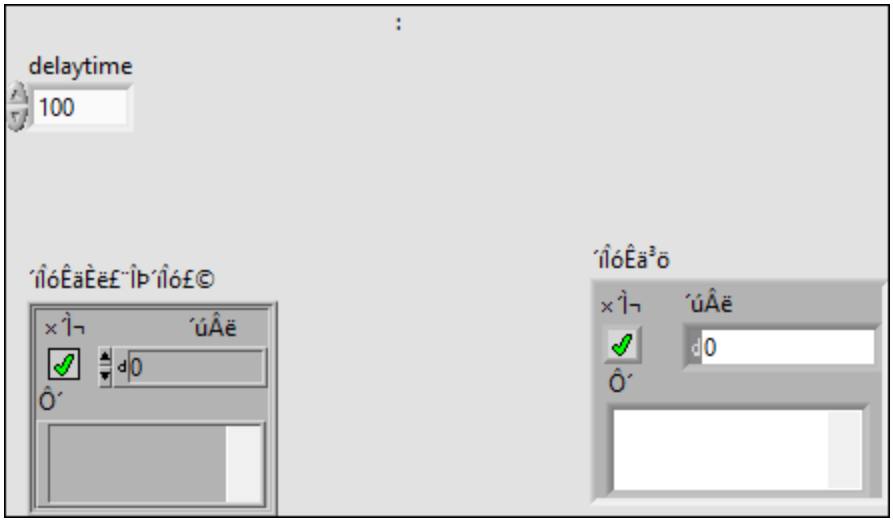
Iconified Cluster Constants

Stelight_VOA_SM_delaytime.vi

Connector Pane



Front Panel



Controls and Indicators

错误输入（无错误）[error in (no error) 2]

错误输入表明节点运行前发生的错误。该输入提供标准错误输入。

状态[status]

状态的值为TRUE（叉）时表示在节点运行前已发生错误，值为FALSE（勾）时表示警告或无错误。默认值为FALSE。

代码[code]

代码是错误或警告代码。默认值为0。

源[source]

源表示错误或警告的源，大多数情况下表示出现错误或警告的节点名称。默认值为空字符串。

delaytime

错误输出[错误输出 2]

错误输入可接收来自前一个被调用VI的错误信息。当其它VI发生错误时，根据该信息决定是否需跳过执行某些功能。

关于错误的更多信息，请右键单击前面板上的**错误输入**输入控件并从快捷菜单中选择**解释错误**或**解释警告**。

状态[status]

状态为TRUE（叉）时表示错误，为FALSE（勾）时表示警告或无错误。

关于错误的更多信息，请右键单击前面板上的**错误输入**输入控件，并从快捷菜单中选择**解释错误**或**解释警告**。

代码[code]

代码表示错误或警告代码。

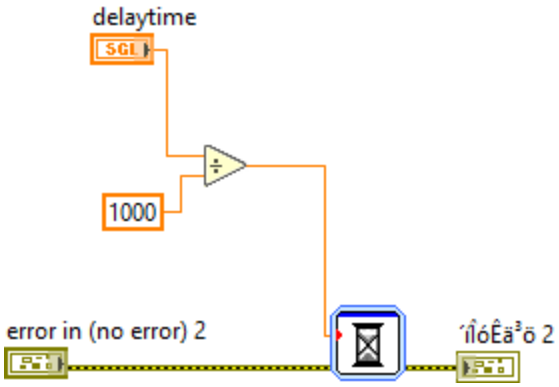
关于错误的更多信息，请右键单击前面板上的**错误输入**输入控件，并从快捷菜单中选择**解释错误**或**解释警告**。

源[source]

源表示错误或警告源。

关于错误的更多信息，请右键单击前面板上的**错误输入**输入控件，并从快捷菜单中选择**解释错误**或**解释警告**。

Block Diagram



List of SubVIs and Express VIs with Configuration Information

subTimeDelay.vi

C:\Program Files (x86)\National Instruments\LabVIEW 2025\vi.lib\express\express execution control\TimeDelayBlock.llb\subTimeDelay.vi

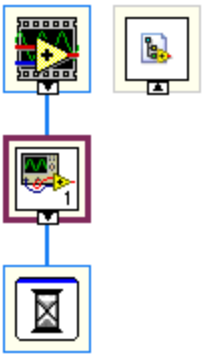
---

VI Revision History

"Stelight_VOA_SM_delaytime.vi History"

Current Revision: 40

Position in Hierarchy



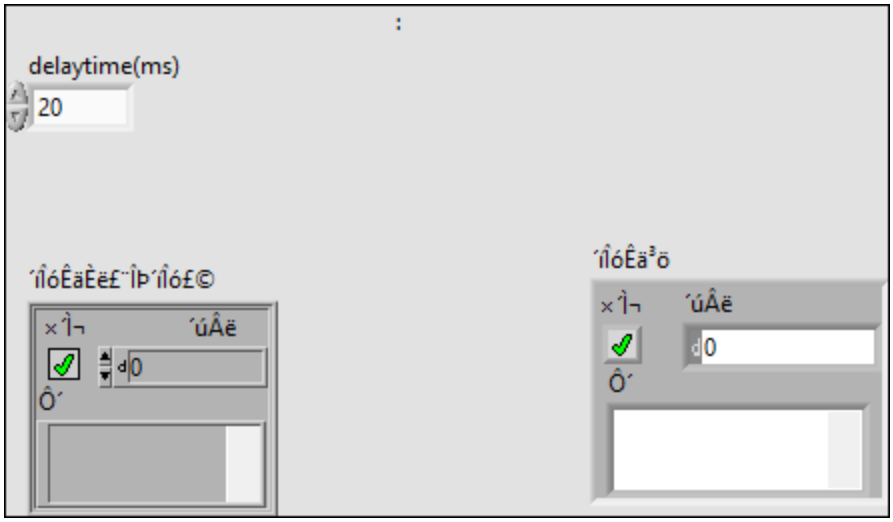
Iconified Cluster Constants

delaytime.vi

Connector Pane



Front Panel



Controls and Indicators

错误输入（无错误）[error in (no error) 2]

错误输入表明节点运行前发生的错误。该输入提供标准错误输入。

状态[status]

状态的值为TRUE（叉）时表示在节点运行前已发生错误，值为FALSE（勾）时表示警告或无错误。默认值为FALSE。

代码[code]

代码是错误或警告代码。默认值为0。

源[source]

源表示错误或警告的源，大多数情况下表示出现错误或警告的节点名称。默认值为空字符串。

delaytime(ms)

错误输出[错误输出 2]

错误输入可接收来自前一个被调用VI的错误信息。当其它VI发生错误时，根据该信息决定是否需跳过执行某些功能。

关于错误的更多信息，请右键单击前面板上的**错误输入**输入控件并从快捷菜单中选择**解释错误**或**解释警告**。

状态[status]

状态为TRUE（叉）时表示错误，为FALSE（勾）时表示警告或无错误。

关于错误的更多信息，请右键单击前面板上的**错误输入**输入控件，并从快捷菜单中选择**解释错误**或**解释警告**。

代码[code]

代码表示错误或警告代码。

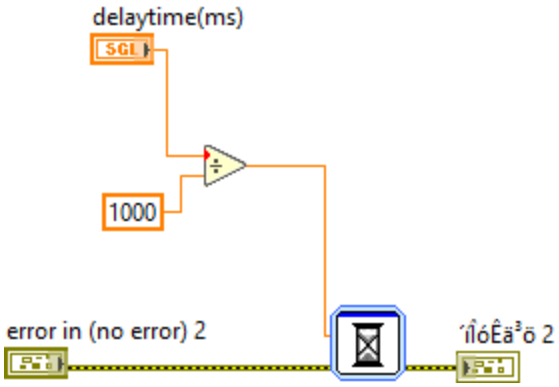
关于错误的更多信息，请右键单击前面板上的**错误输入**输入控件，并从快捷菜单中选择**解释错误**或**解释警告**。

源[source]

源表示错误或警告源。

关于错误的更多信息，请右键单击前面板上的**错误输入**输入控件，并从快捷菜单中选择**解释错误**或**解释警告**。

Block Diagram



List of SubVIs and Express VIs with Configuration Information

subTimeDelay.vi

C:\Program Files (x86)\National Instruments\LabVIEW 2025\vi.lib\express\express execution control\TimeDelayBlock.llb\subTimeDelay.vi

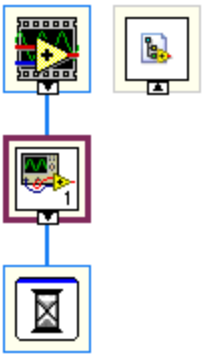
---

VI Revision History

"delaytime.vi History"

Current Revision: 32


Position in Hierarchy



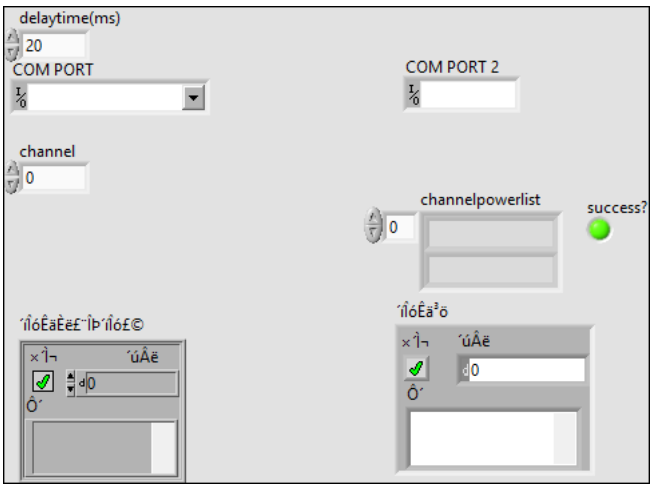
Iconified Cluster Constants

PowerMeter_ReadChannelPowerList.vi

Connector Pane



Front Panel



Controls and Indicators

COM PORT

错误输入（无错误）[error in (no error) 2]

错误输入表明节点运行前发生的错误。该输入提供标准错误输入。

状态[status]

状态的值为TRUE（叉）时表示在节点运行前已发生错误，值为FALSE（勾）时表示警告或无错误。默认值为FALSE。

代码[code]

代码是错误或警告代码。默认值为0。

源[source]

源表示错误或警告的源，大多数情况下表示出现错误或警告的节点名称。默认值为空字符串。

channel

delaytime(ms)

错误输出[错误输出 2]

错误输入可接收来自前一个被调用VI的错误信息。当其它VI发生错误时，根据该信息决定是否需跳过执行某些功能。

关于错误的更多信息，请右键单击前面板上的**错误输入**输入控件并从快捷菜单中选择**解释错误**或**解释警告**。

状态[status]

状态为TRUE（叉）时表示错误，为FALSE（勾）时表示警告或无错误。

关于错误的更多信息，请右键单击前面板上的**错误输入**输入控件，并从快捷菜单中选择**解释错误**或**解释警告**。

代码[code]

代码表示错误或警告代码。

关于错误的更多信息，请右键单击前面板上的**错误输入**输入控件，并从快捷菜单中选择**解释错误**或**解释警告**。

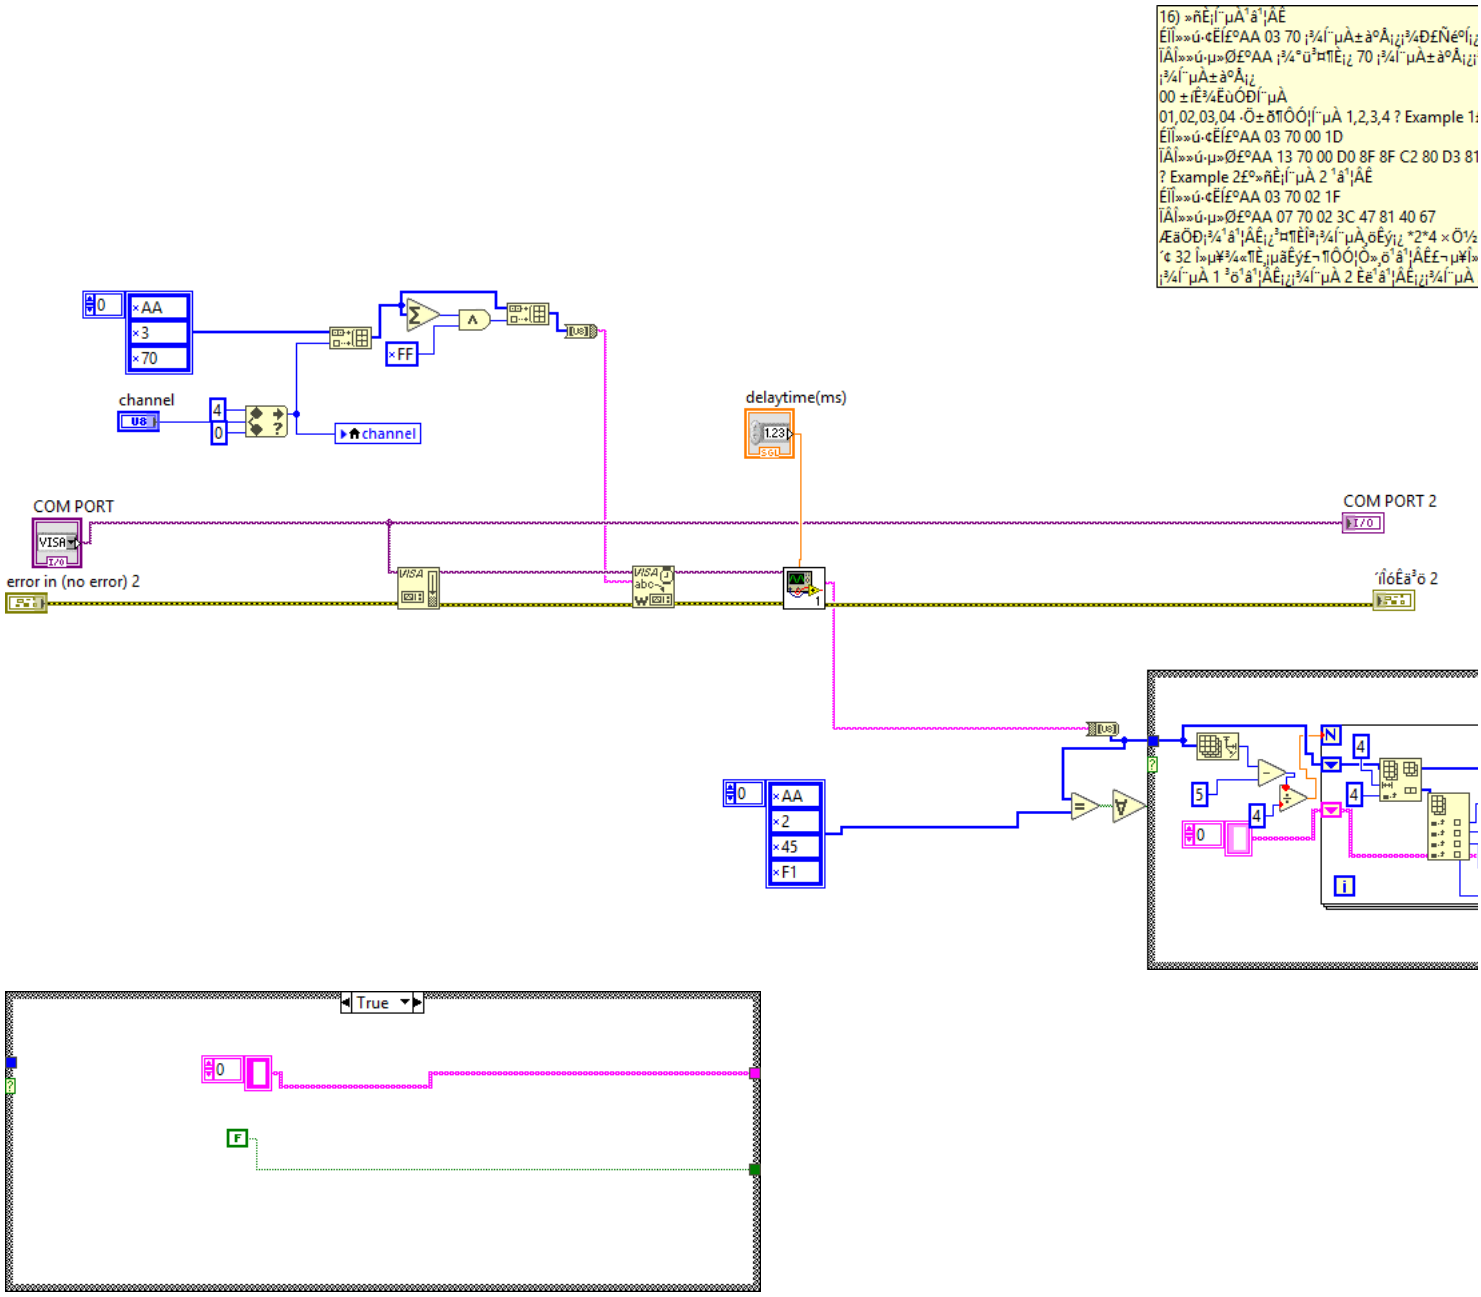
源[source]

源表示错误或警告源。

关于错误的更多信息，请右键单击前面板上的**错误输入**输入控件，并从快捷菜单中选择**解释错误**或**解释警告**。

COM PORT 2
success?
channelpowerlist

Block Diagram



List of SubVIs and Express VIs with Configuration Information

ReadData.vi

C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\PowerMeter_8.6\ReadData.vi


---

VI Revision History

"PowerMeter_ReadChannelPowerList.vi History"

Current Revision: 38


Position in Hierarchy



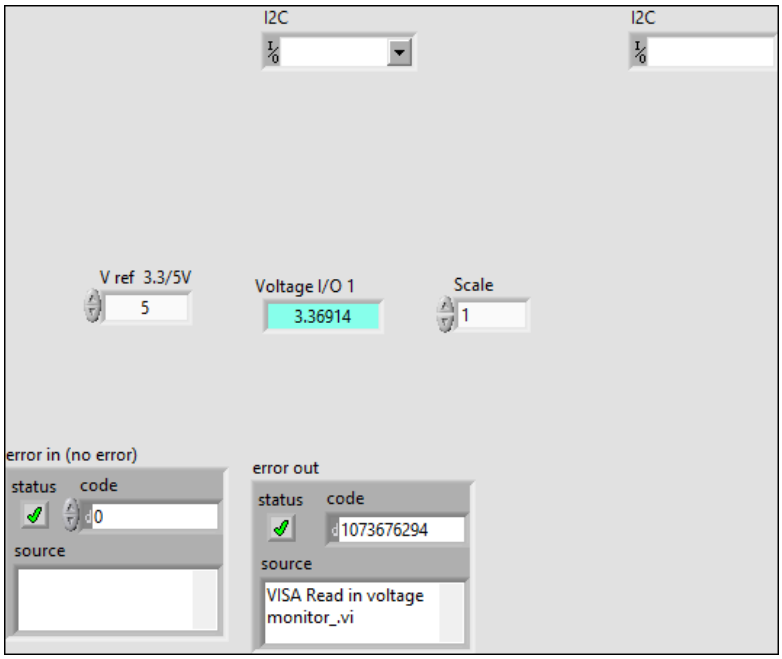
Iconified Cluster Constants

I2C Read Vcc.vi

Connector Pane



Front Panel



Controls and Indicators

error in (no error)

error in can accept error information wired from VIs previously called. Use this information to decide if any functionality should be bypassed in the event of errors from other VIs.

Right-click the **error in** control on the front panel and select **Explain Error** or **Explain Warning** from the shortcut menu for more information about the error.

status

status is TRUE (X) if an error occurred or FALSE (checkmark) to indicate a warning or that no error occurred.

Right-click the **error in** control on the front panel and select **Explain Error** or **Explain Warning** from the shortcut menu for more information about the error.

code

code is the error or warning code.

Right-click the **error in** control on the front panel and select **Explain Error** or **Explain Warning** from the shortcut menu for more information about the error.

source

source describes the origin of the error or warning.

Right-click the **error in** control on the front panel and select **Explain Error** or **Explain Warning** from the shortcut menu for more information about the error.

V ref 3.3/5V

I2C

Scale

error out

error in can accept error information wired from VIs previously called. Use this information to decide if any functionality should be bypassed in the event of errors from other VIs.

Right-click the **error in** control on the front panel and select **Explain Error** or **Explain Warning** from the shortcut menu for more information about the error.

status

status is TRUE (X) if an error occurred or FALSE (checkmark) to indicate a warning or that no error occurred.

Right-click the **error in** control on the front panel and select **Explain Error** or **Explain Warning** from the shortcut menu for more information about the error.

code

code is the error or warning code.

Right-click the **error in** control on the front panel and select **Explain Error** or **Explain Warning** from the shortcut menu for more information about the error.

source

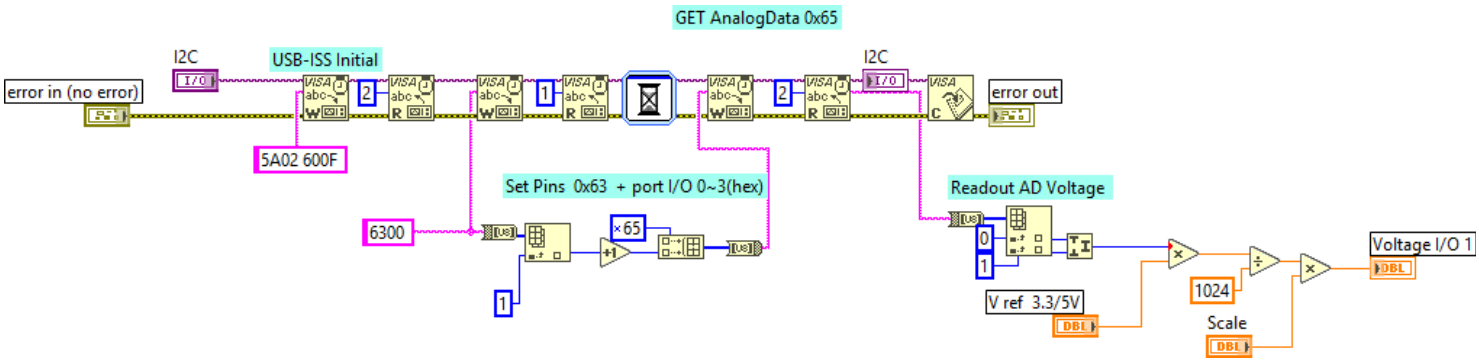
source describes the origin of the error or warning.

Right-click the **error in** control on the front panel and select **Explain Error** or **Explain Warning** from the shortcut menu for more information about the error.

Voltage I/O 1

I2C

Block Diagram



List of SubVIs and Express VIs with Configuration Information

subTimeDelay.vi

C:\Program Files (x86)\National Instruments\LabVIEW 2025\vi.lib\express\express execution control\TimeDelayBlock.llb\subTimeDelay.vi


---

VI Revision History

"I2C Read Vcc.vi History"

Current Revision: 24


Position in Hierarchy



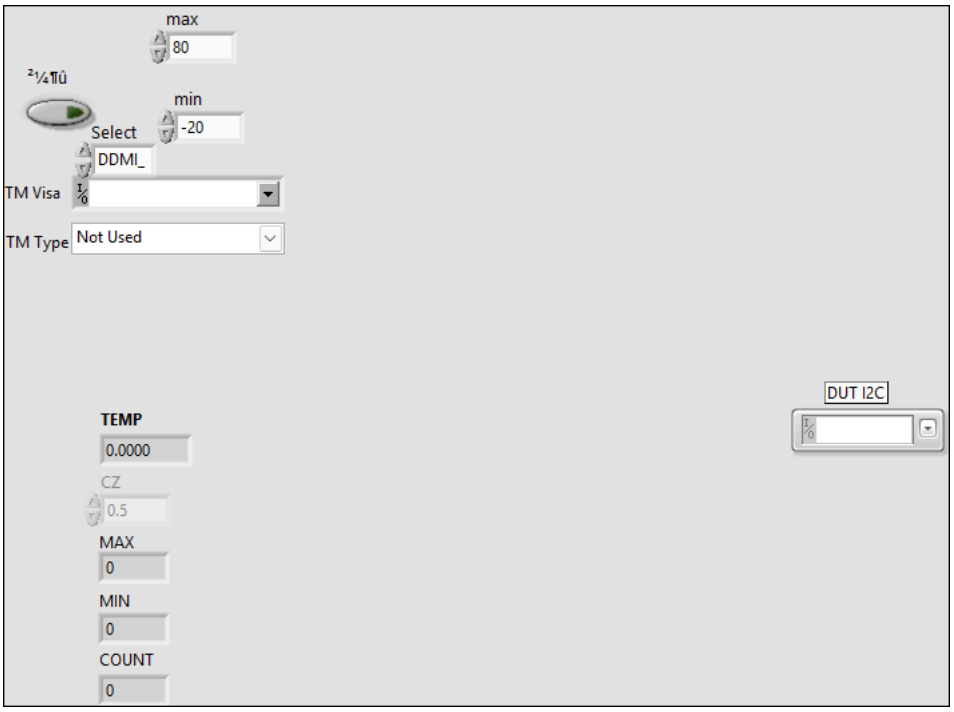
Iconified Cluster Constants

Wait_Temp.vi

Connector Pane



Front Panel



Controls and Indicators

DUT I2C[DUT I2C]
CZ
[TM Type]
[TM Visa]
Select
max
min
布尔
COUNT
MAX
MIN
TEMP

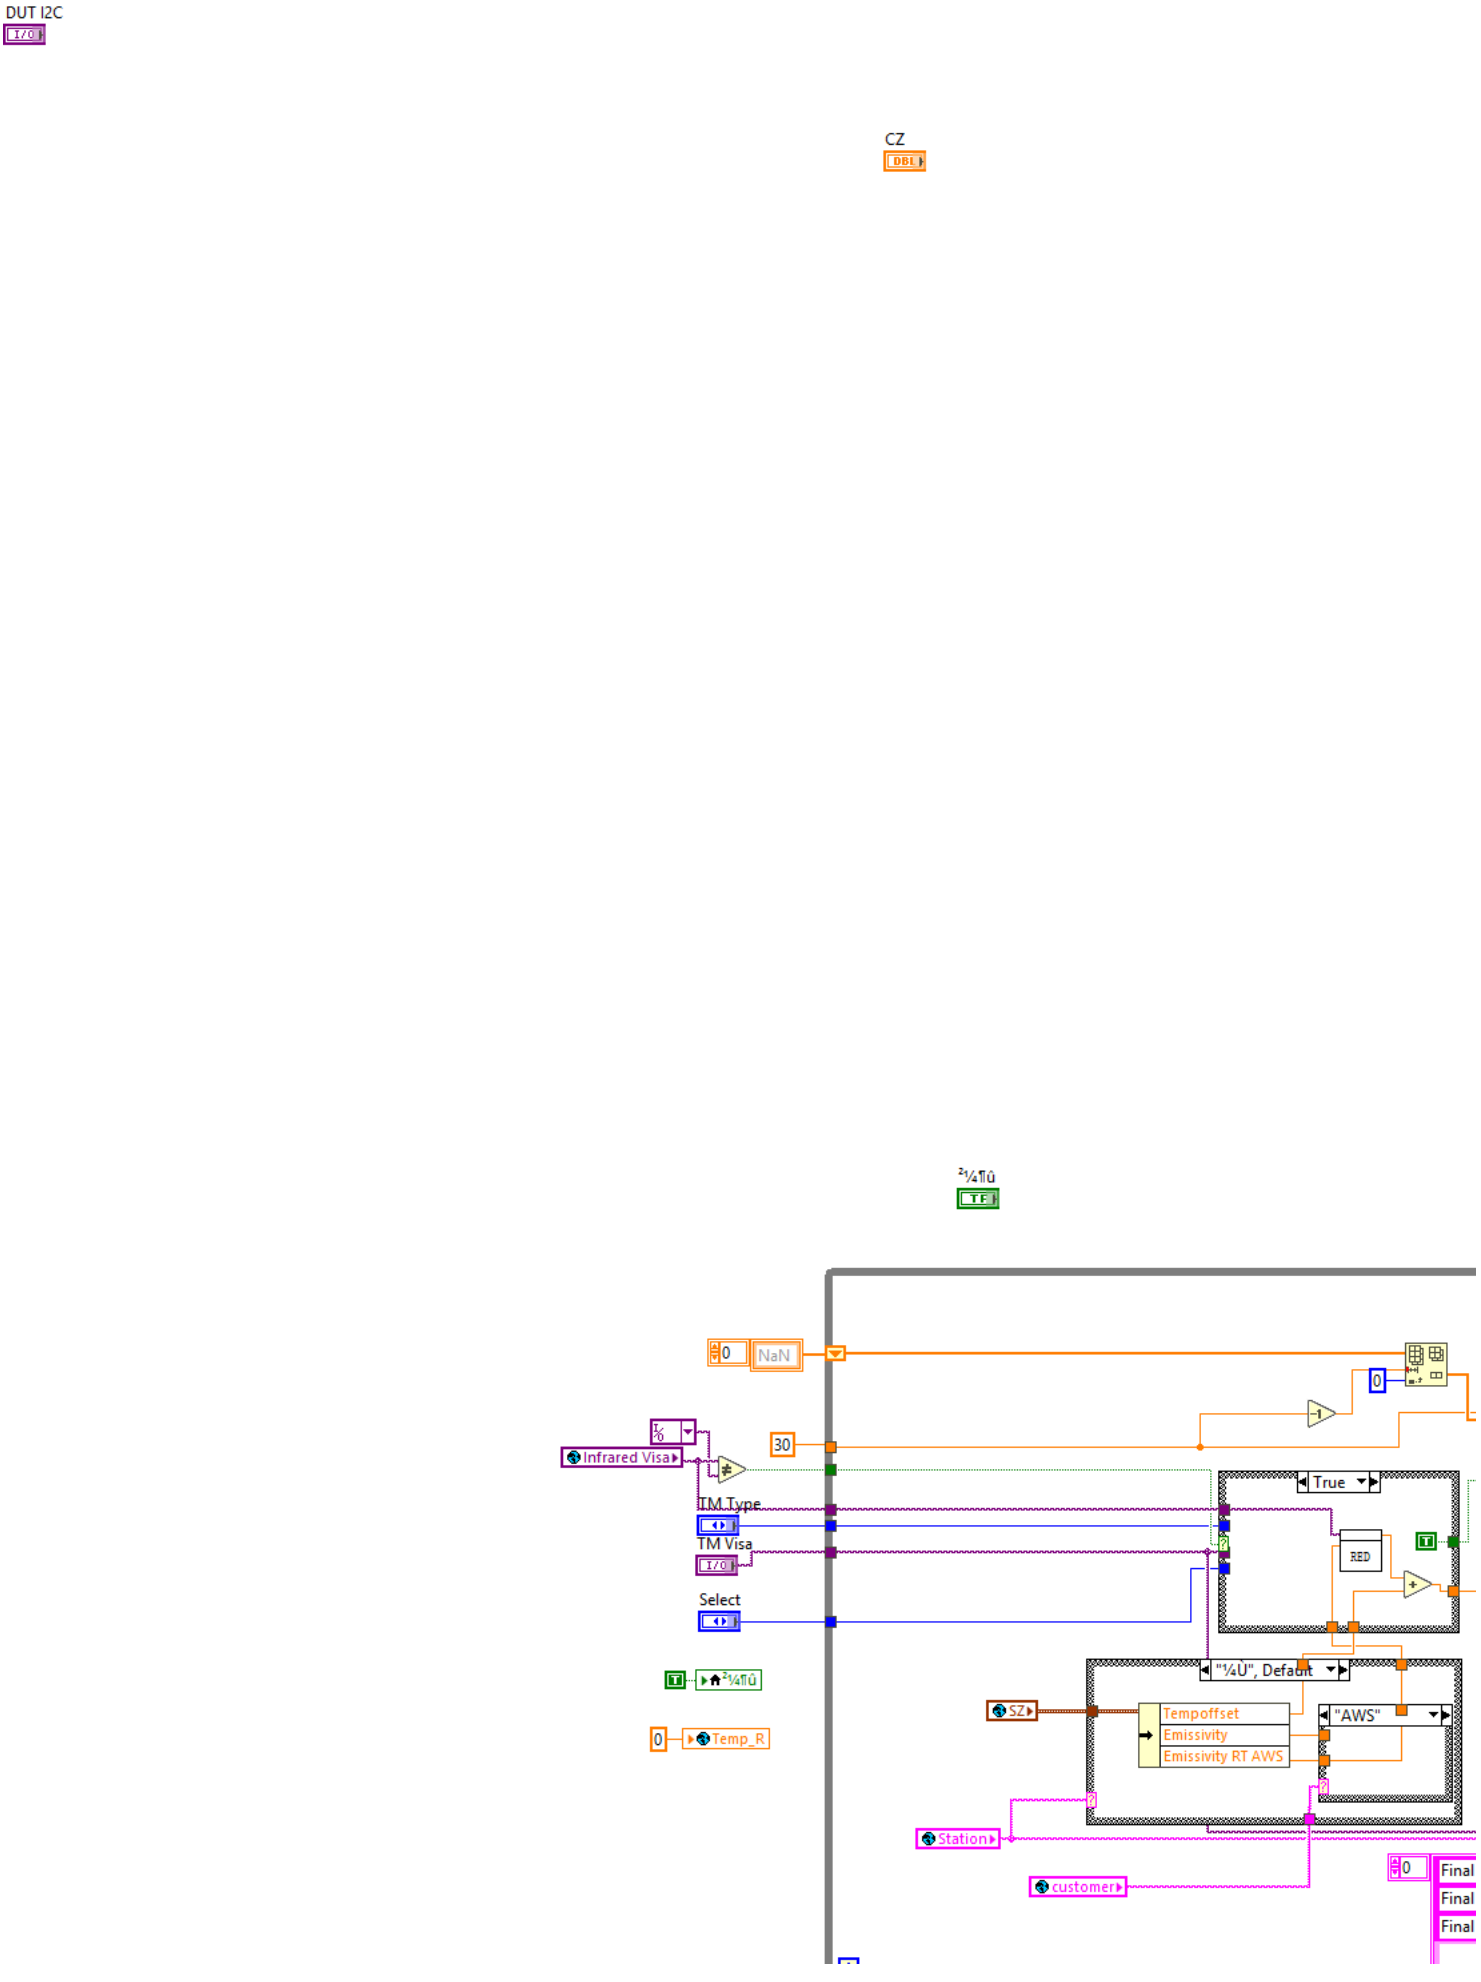
(double)

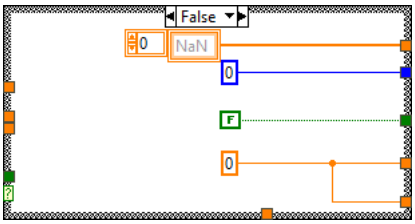
This is a converted value.

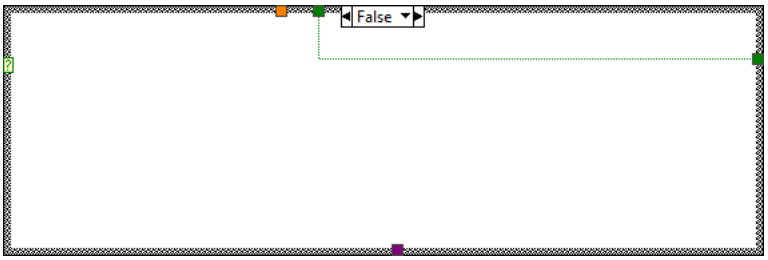
Valid Range: not applicable


Default Value: 0.0000


Block Diagram



DUT I2C
I/O
CZ
DBL
²¼ĺû
TF
0
NaN
30
Infrared Visa
TM Type
TM Visa
I/O
Select
²¼ĺû
0
Temp_R
True
RED
"¼Ù", Default
SZ
Tempoffset
Emissivity
Emissivity RT AWS
"AWS"
Station
customer
0
Final
Final
Final



False
0
NaN
0
F
0



False

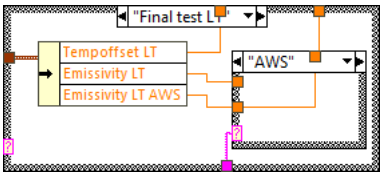

Disabled
43.5
1
Thermostream
Set
HT



Disabled

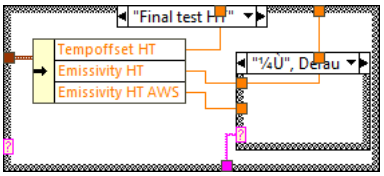

False
"Case_Temp"
IM
Read
Temp



"DDMI_Temp", Def
R_DTEMP
IIC


"¼Ù", Derau


"Final test LT"
Tempoffset LT
Emissivity LT
Emissivity LT AWS
"AWS"


"¼Ù", Derau


"Final test HT"
Tempoffset HT
Emissivity HT
Emissivity HT AWS
"¼Ù", Derau



List of SubVIs and Express VIs with Configuration Information

I2C_Step.ctl

C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\I2C_Step.ctl

G_100G.vi

C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\G_100G.vi

Read Temp from Temp Sensor.vi

C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\Read Temp from Temp Sensor.vi

Set Temp.vi

C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\Set Temp.vi

IIC.vi

C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\IIC.vi

TM Read Temp.vi

C:\Users\Syed_Ali\Desktop\Programs\800G_DDMI_Cal V6.8\800G_DDMI_Cal V6.8\TM Read Temp.vi

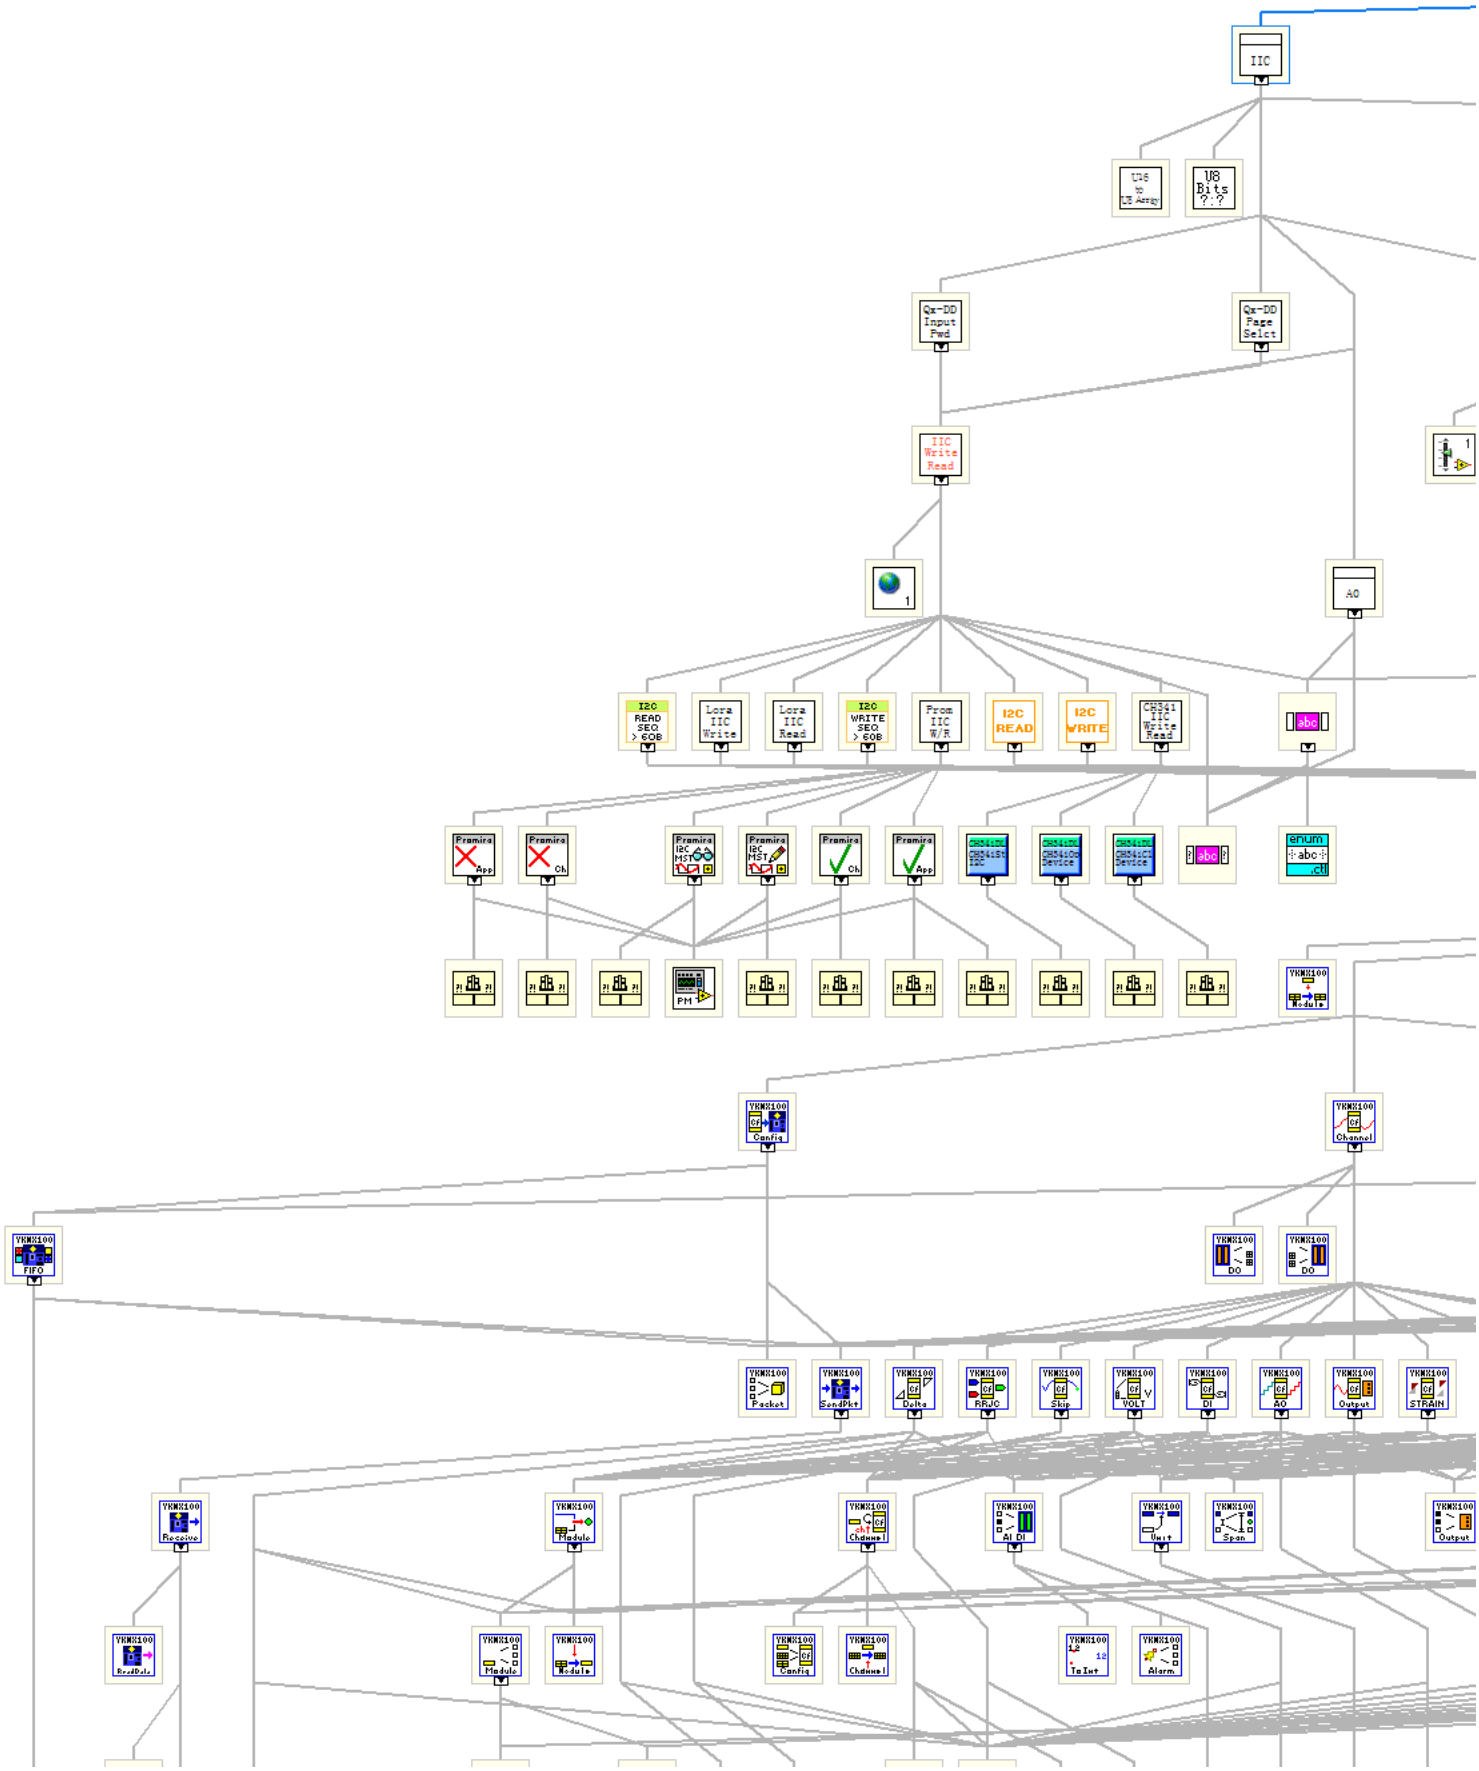
---

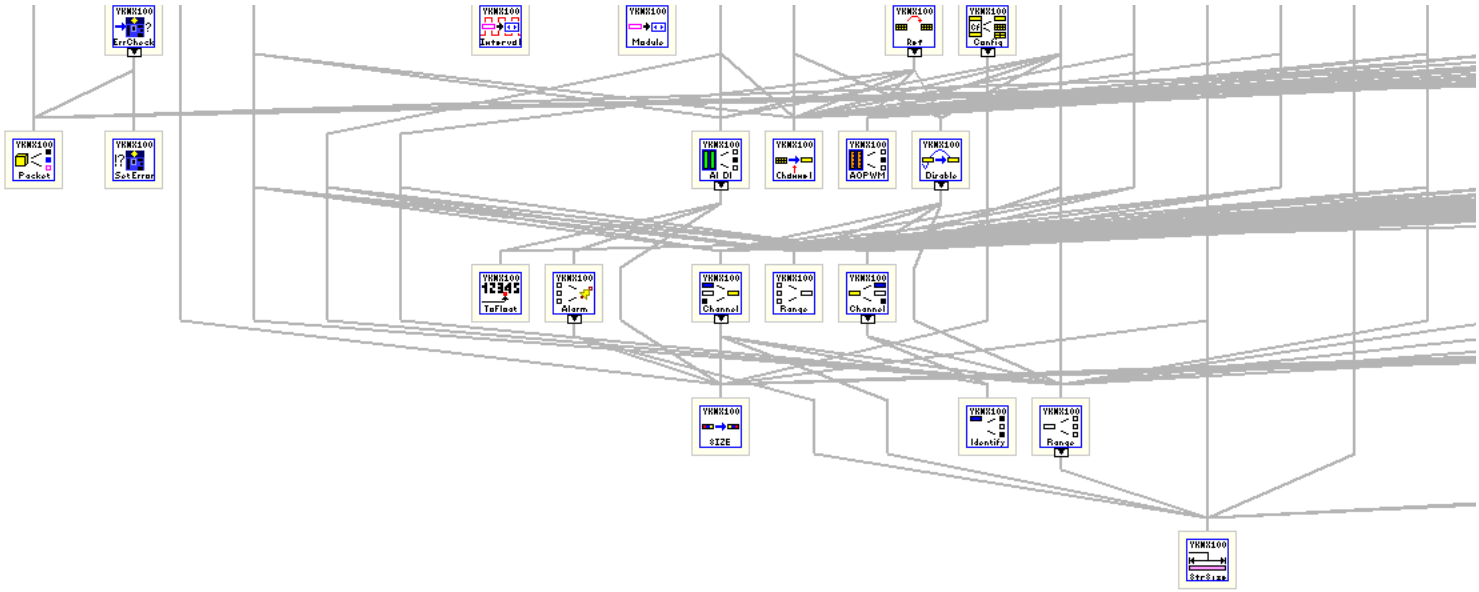
VI Revision History

"Wait_Temp.vi History"

Current Revision: 41

Position in Hierarchy


IIC
U16 to U8 Array
U8 Bits ?..?
Qx-DD Input Fwd
Qx-DD Page Selct
IIC Write Read
1
A0
I2C READ SEQ > 60B
Lora IIC Write
Lora IIC Read
I2C WRITE SEQ > 60B
From IIC W/R
I2C READ
I2C WRITE
CH341 IIC Write Read
abc
Framira App
Framira Ch
Framira I2C MST
Framira I2C MST
Framira Ch
Framira App
CH341DLL I2C
CH341DLL Device
CH341DLL Device
CH341DLL Device
abc
enum .ctl
PM
YHMX100 Module
YHMX100 Config
YHMX100 Channel
YHMX100 FIFO
YHMX100 DO
YHMX100 DO
YHMX100 Packet
YHMX100 SendPkt
YHMX100 Delta
YHMX100 RRJC
YHMX100 Skip
YHMX100 VOLT
YHMX100 DI
YHMX100 AO
YHMX100 Output
YHMX100 STRAIN
YHMX100 Receive
YHMX100 Module
YHMX100 Channel
YHMX100 AI DI
YHMX100 Unit
YHMX100 Span
YHMX100 Output
YHMX100 ReadDat
YHMX100 Module
YHMX100 Module
YHMX100 Config
YHMX100 Channel
YHMX100 ToInt
YHMX100 Alarm



Iconified Cluster Constants