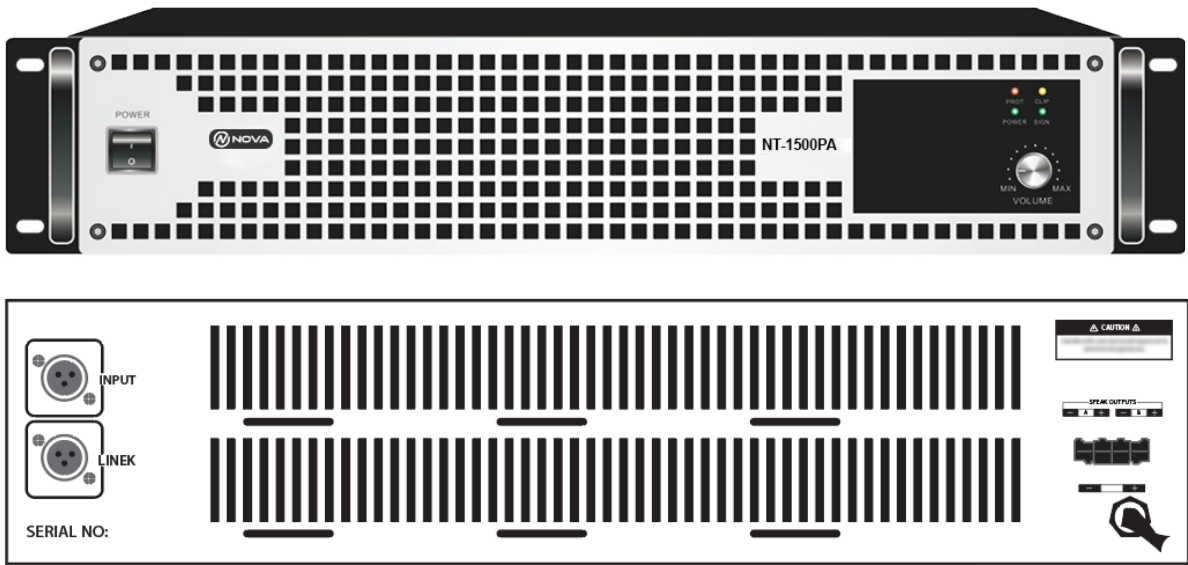# PA Amplifier
NT - 1500PA

NOVA

PA Amplifier (NT-1500PA)

This professional audio power amplifier delivers high-performance sound with transformer-isolated 100V, 70V, and 4-16Ω speaker outputs (balanced, no grounding) in 2 or 4-channel configurations. It features clear LED status indicators, flexible input options (XLR and 6.35mm jack), and robust protection against short circuits, overheating, and output faults. Designed for scalability, it supports series connections for increased power output, making it ideal for professional sound systems, live events, and installations.

TECHNICAL DATA SPECIFICATION

Model	NT-1500PA
Frequency response:	20Hz-20KHz
Sensitivity:	230mv/15mV>80dB
Harmonic distortion:	<0.3%
Rated Power:	1500W
Fuse:	F10AL
Line Voltage:	AC220V/50Hz
Weight:	10.2 KG
Gross weight:	13.64 KG
Dimention:	480 x 480 x 90
Panel Colour:	Black

KEY FEATURES

This professional-grade audio power amplifier features transformer-isolated 100V, 70V, and 4-16Ω speaker outputs in balanced configurations without grounding, available in both 2-channel and 4-channel versions for versatile system integration. Clear operational status is displayed through 2.5 LED indicators, while flexible connectivity options include XLR and 6.35mm jack inputs for seamless amplifier linking.

QUICK GUIDE

This professional audio amplifier delivers transformer-isolated 100V/70V and 4-16 Ω outputs (balanced, no grounding) in 2 or 4-channel configurations. Connect via XLR or 6.35mm jack inputs, monitor status via LED indicators, and enjoy protection against short circuits, overheating, and output faults.

C E