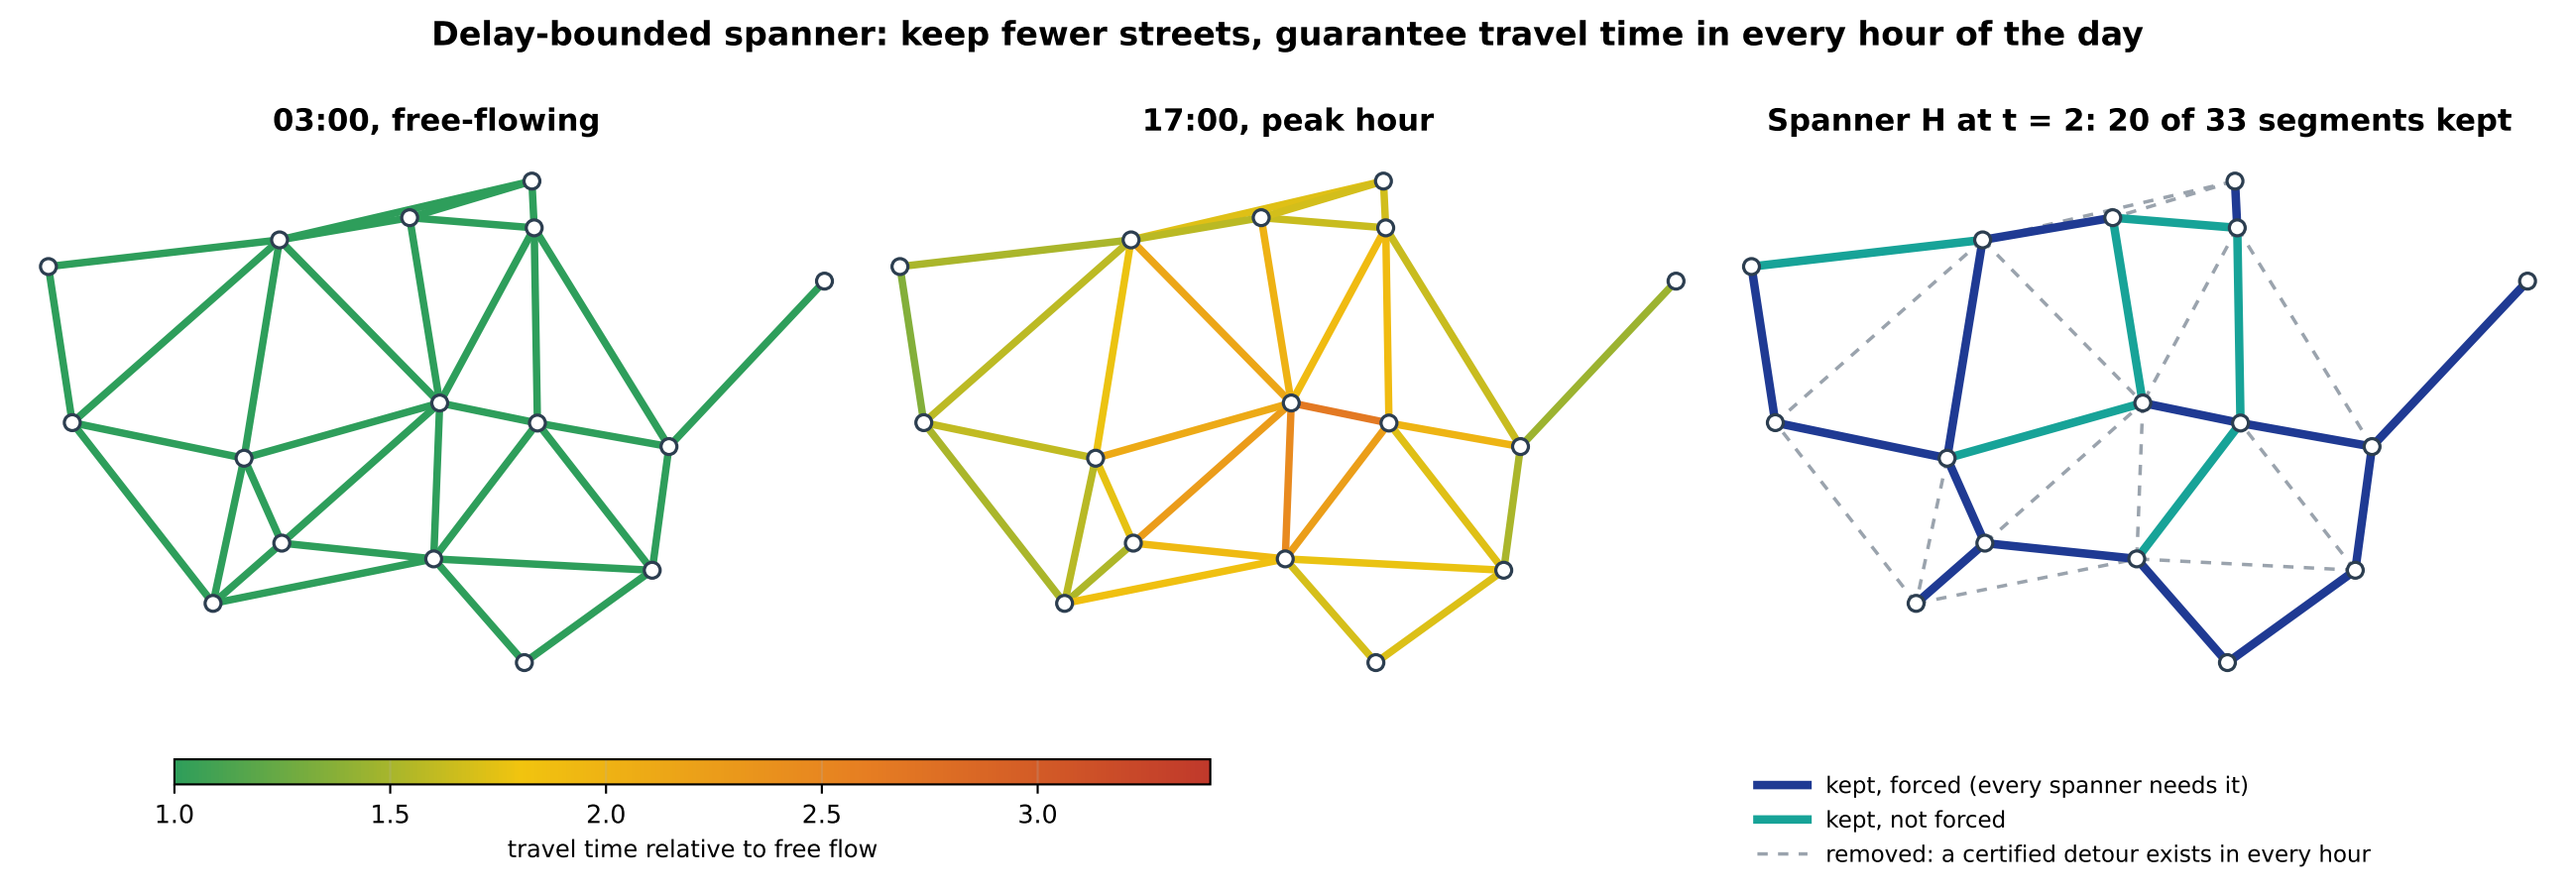
Delay-bounded spanner: keep fewer streets, guarantee travel time in every hour of the day
03:00, free-flowing
17:00, peak hour
Spanner H at t = 2: 20 of 33 segments kept
1.0
1.5
2.0
2.5
3.0
travel time relative to free flow
kept, forced (every spanner needs it)
kept, not forced
removed: a certified detour exists in every hour