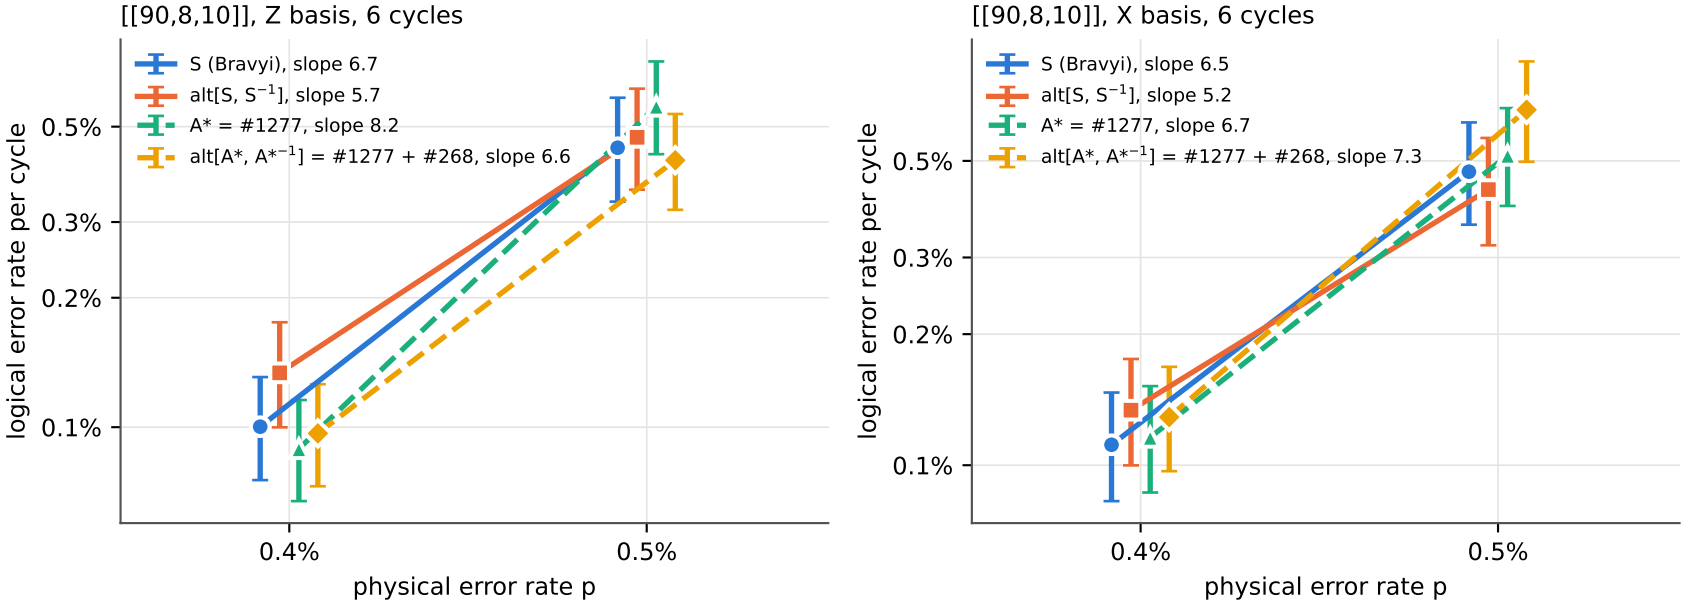

Method 3 extra stage: stim circuit, full circuit-level depolarising noise, BP-OSD (min-sum 0.625, OSD-CS 7); 95% Clopper-Pearson ranges; >= 50 failures per point (hollow marker = still running).