

UbuntuNet Alliance Women Hackathon 2026

Phase I - Week 2 Submission

SOLARTRACE

Chapter 2: Technical Architecture & Design

Team South Sudan



Name	Role
Alek Madut Malual	Lead Developer
Clementina Agiu Gual Koch	UI/UX & Documentation
Abuk Santino Garang Chan	Testing & Logistics

Document Type: Week 2 Submission Package

Includes: System Architecture, UML Diagrams,
Technical Specifications, Component Design, Interface Design

Submission Date: July 31, 2026

Contents

1	INTRODUCTION TO SYSTEM DESIGN	5
2	ALTERNATIVE SYSTEMS ANALYSIS	6
2.1	Overview	6
2.2	Existing System 1: Abid (2017) - Arduino Based Blind Solar Tracking Controller	6
2.3	Existing System 2: Mahmood et al. (2025) - Hybrid Solar Cooker	6
2.4	Existing System 3: Rashid et al. (2025) - Hybrid Solar Geyser-Stove System . .	7
2.5	Key Findings and SolarTrace Positioning	7
3	SYSTEM ARCHITECTURE	8
3.1	High-Level Architecture	8
3.2	ESP32-DEVKIT Microcontroller	8
3.3	ESP32-DEVKIT Specifications	9
3.4	System Architecture Diagram	9
3.5	Component Descriptions	10
4	SYSTEM SCHEMATIC & WIRING DIAGRAM	11
4.1	Complete System Schematic	11
4.2	Wiring Diagram	12
5	PARABOLIC DISH DESIGN	13
5.1	Parabolic Dish Geometry	13
5.2	Parabolic Dish Specifications	14
5.3	How the Parabolic Dish Works	14
5.4	Parabolic Dish Construction	14
6	CONTEXT DIAGRAM	16
7	DATA FLOW DIAGRAM	17
7.1	Level 0 DFD: Main System Functions	17
7.2	Process Descriptions	17
8	USE CASE DIAGRAM	18
8.1	System Actors	18
8.2	Use Case Diagram	18
8.3	Use Case Descriptions	19

9	ACTIVITY DIAGRAMS	20
9.1	Cooking Cycle Activity Diagram	20
9.2	Sterilization Mode Activity Diagram	21
10	SEQUENCE DIAGRAMS	22
10.1	Mode Selection Sequence	22
10.2	Temperature Alert Sequence	22
11	CLASS DIAGRAM	23
11.1	Logical Class Structure	23
11.2	Class Descriptions	23
12	PACKAGE DIAGRAM	24
12.1	Package Descriptions	24
13	TECHNICAL SPECIFICATIONS	25
13.1	Hardware Specifications	25
13.2	Pin Configuration for ESP32-DEVKIT	25
13.3	Tracking Algorithm Specification	26
13.4	Cooking Mode Specifications	26
13.5	Communication Protocol	26
14	INTERFACE DESIGN	27
14.1	Blynk Dashboard Layout	27
14.2	User Interaction Flow	27
15	SUMMARY AND NEXT STEPS	28
15.1	Design Summary	28
15.2	ESP32-DEVKIT Advantages for SolarTrace	28
15.3	NEXT STEPS: Week 3 - Core Development	28
15.4	Design Decision Justification	29
16	REFERENCES	30

List of Figures

1	ESP32-DEVKIT Pinout Diagram	8
2	SolarTrace System Architecture Diagram	9
3	Complete System Schematic Diagram	11
4	SolarTrace Wiring Diagram (Fritzing)	12
5	Parabolic Dish Geometry and Sunlight Concentration	13
6	Simplified Parabolic Dish Operation	14
7	SolarTrace Context Diagram	16
8	Level 0 Data Flow Diagram	17
9	SolarTrace Use Case Diagram	18
10	Activity Diagram: Cooking Cycle	20
11	Activity Diagram: Sterilization Mode	21
12	Sequence Diagram: Mode Selection	22
13	Sequence Diagram: Temperature Alert	22
14	Class Diagram: Logical Structure	23
15	Package Diagram: Module Organization	24
16	User Interaction Flow	27

List of Tables

1	Analysis: Abid (2017) Solar Tracking System	6
2	Analysis: Mahmood et al. (2025) Hybrid Solar Cooker	6
3	Analysis: Rashid et al. (2025) Hybrid Solar System	7
4	ESP32-DEVKIT Technical Specifications	9
5	System Component Description	10
6	Parabolic Dish Technical Specifications	14
7	DFD Process Descriptions	17
8	Use Case Descriptions	19
9	Class Descriptions and Responsibilities	23
10	Package Descriptions	24
11	Hardware Technical Specifications	25
12	ESP32-DEVKIT Pin Configuration	25
13	Tracking Algorithm Parameters	26
14	Cooking Mode Parameters	26
15	Blynk IoT Communication Parameters	26
16	Blynk Widget Configuration	27
17	ESP32-DEVKIT Advantages	28
18	Key Design Decisions and Justifications	29

1 INTRODUCTION TO SYSTEM DESIGN

This chapter presents the comprehensive technical architecture and design of the SolarTrace system. Following the foundation established in Chapter 1, this document translates the problem statement and objectives into a detailed technical blueprint. The design phase is critical for ensuring that the prototype development proceeds efficiently and that all components work together harmoniously.

The chapter is organized as follows:

- **Alternative Systems Analysis:** Examination of existing solutions
- **System Architecture:** High-level and detailed component interactions
- **Context Diagram:** External entity interactions
- **Data Flow Diagrams:** Information flow through the system
- **Use Case Diagram:** User-system interactions
- **Activity Diagrams:** Process workflows
- **Sequence Diagrams:** Object interactions over time
- **Class Diagrams:** Logical code structure
- **Package Diagrams:** Module organization
- **Technical Specifications:** Component-level details

2 ALTERNATIVE SYSTEMS ANALYSIS

2.1 Overview

Before finalizing the SolarTrace design, an analysis of existing solar tracking systems was conducted to identify strengths, weaknesses, and opportunities for innovation.

2.2 Existing System 1: Abid (2017) - Arduino Based Blind Solar Tracking Controller

Table 1: Analysis: Abid (2017) Solar Tracking System

Aspect	Details
Technology	Arduino-based blind tracking (no light sensors)
Tracking Method	Time-based algorithm using RTC
Target Application	General solar panel tracking
Strengths	Low cost, no sensors required, predictable operation
Weaknesses	Not designed for cooking applications, no temperature control, no IoT
Relevance to SolarTrace	Validation of RTC-based approach; SolarTrace extends with cooking modes, IoT, and sterilization

2.3 Existing System 2: Mahmood et al. (2025) - Hybrid Solar Cooker

Table 2: Analysis: Mahmood et al. (2025) Hybrid Solar Cooker

Aspect	Details
Technology	Hybrid solar cooker with tracking
Tracking Method	Light sensor-based automatic tracking
Target Application	Cooking in Iraq
Strengths	Demonstrated temperature improvement with tracking (95°C vs 86°C), hybrid design
Weaknesses	No IoT integration, no mobile application, no sterilization mode
Relevance to SolarTrace	Confirms tracking benefits; SolarTrace adds IoT, mobile app, and sterilization

2.4 Existing System 3: Rashid et al. (2025) - Hybrid Solar Geyser-Stove System

Table 3: Analysis: Rashid et al. (2025) Hybrid Solar System

Aspect	Details
Technology	IoT-enabled solar geyser-stove system
Target Application	Water heating and cooking
Strengths	IoT integration, real-time monitoring
Weaknesses	No automatic tracking, limited to specific geography
Relevance to SolarTrace	Validates IoT approach; SolarTrace adds automatic tracking and sterilization

2.5 Key Findings and SolarTrace Positioning

The analysis reveals that while individual components of SolarTrace exist in various systems, no single solution combines all the following features:

1. RTC-based automatic sun tracking
2. IoT integration with mobile application
3. Multiple cooking modes including sterilization
4. Offline data logging capability
5. Safety mechanisms for overheating protection
6. Design specifically for the South Sudan context

SolarTrace fills this gap by integrating all these features into a cohesive, low-cost system.

3 SYSTEM ARCHITECTURE

3.1 High-Level Architecture

The SolarTrace system follows a three-tier architecture:

1. **Physical Layer:** Hardware components including the parabolic reflector, servo motor, sensors, and microcontroller
2. **Control Layer:** Embedded firmware that processes sensor data, controls actuators, and manages communication
3. **Application Layer:** Blynk-based mobile application for user interaction, data visualization, and remote monitoring

3.2 ESP32-DEVKIT Microcontroller

The ESP32-DEVKIT serves as the main processing unit for the SolarTrace system. Figure 1 shows the ESP32-DEVKIT pinout diagram.

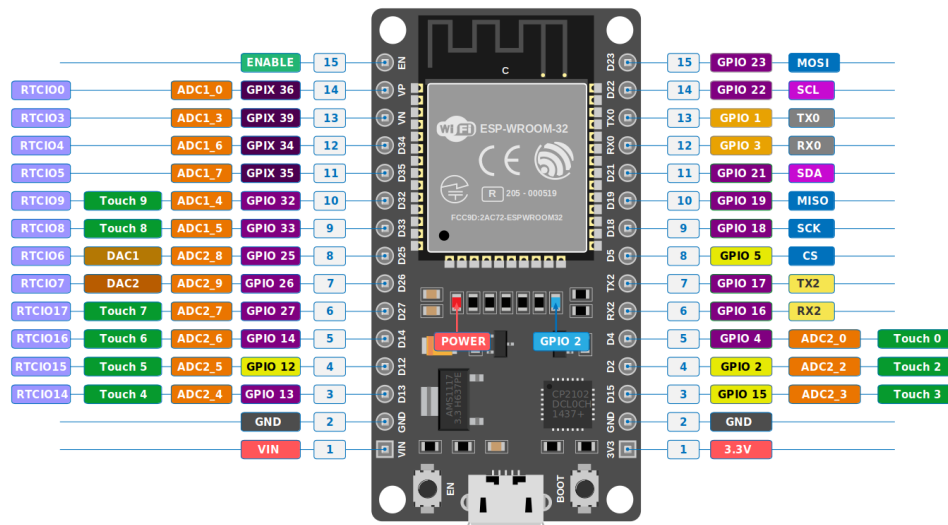


Figure 1: ESP32-DEVKIT Pinout Diagram

3.3 ESP32-DEVKIT Specifications

Table 4: ESP32-DEVKIT Technical Specifications

Specification	Value
Microcontroller	Tensilica Xtensa LX6 Dual-Core
Clock Speed	Up to 240 MHz
SRAM	520 KB
Flash Memory	4 MB (External)
WiFi	802.11 b/g/n (2.4 GHz)
Bluetooth	BLE 4.2
Operating Voltage	3.3V
Input Voltage	5V (via USB) / 7-12V (via VIN)
GPIO Pins	38 (25 usable)
ADC Channels	18 (12-bit)
DAC Channels	2 (8-bit)
USB-to-Serial	CP2102 or CH340
Board Dimensions	52mm x 28mm

3.4 System Architecture Diagram

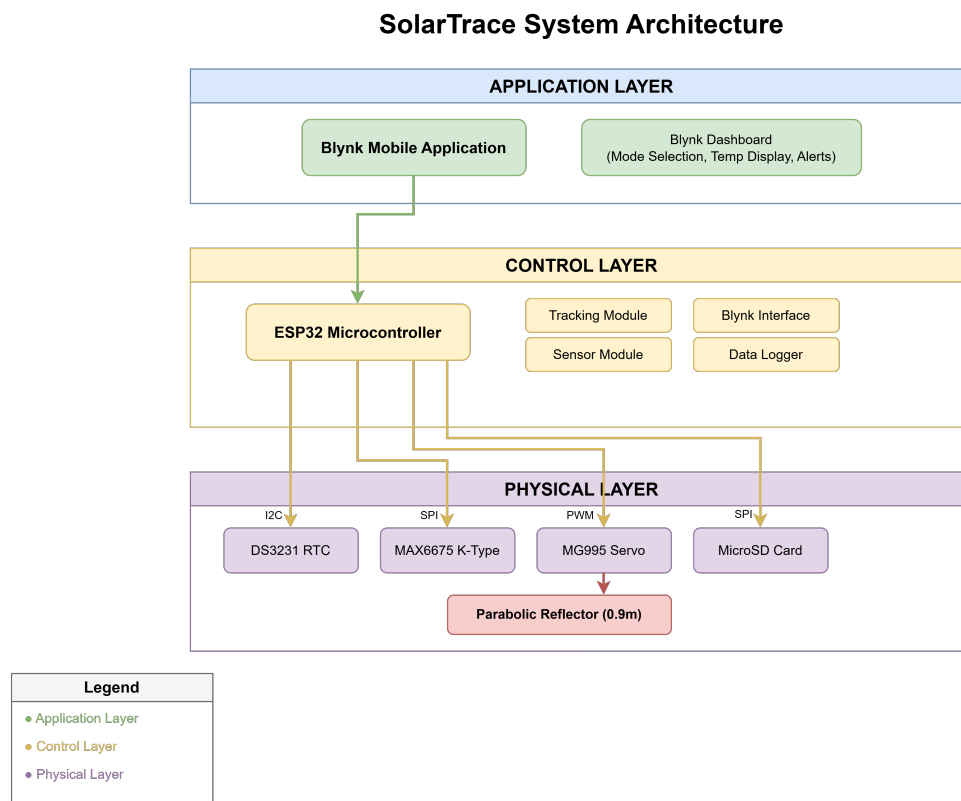


Figure 2: SolarTrace System Architecture Diagram

3.5 Component Descriptions

Table 5: System Component Description

Component	Model	Purpose
Microcontroller	ESP32-DEVKIT	Main processing unit; Wi-Fi/BLE connectivity; runs control logic
RTC Module	DS3231	Maintains accurate time; enables time-based sun tracking even when powered off
Temperature Sensor	MAX6675 + K-type	Measures cooking temperature up to 500°C; critical for mode control and safety
Servo Motor	MG995	Positions parabolic reflector; high torque (15kg/cm) for reliable movement
SD Card Module	MicroSD	Offline data logging; stores session data without internet connectivity
Power System	5V Panel + 18650	Provides off-grid power; battery backup for RTC and continuous operation

4 SYSTEM SCHEMATIC & WIRING DIAGRAM

4.1 Complete System Schematic

Figure 3 shows the complete electrical schematic of the SolarTrace system, including all components and their interconnections.

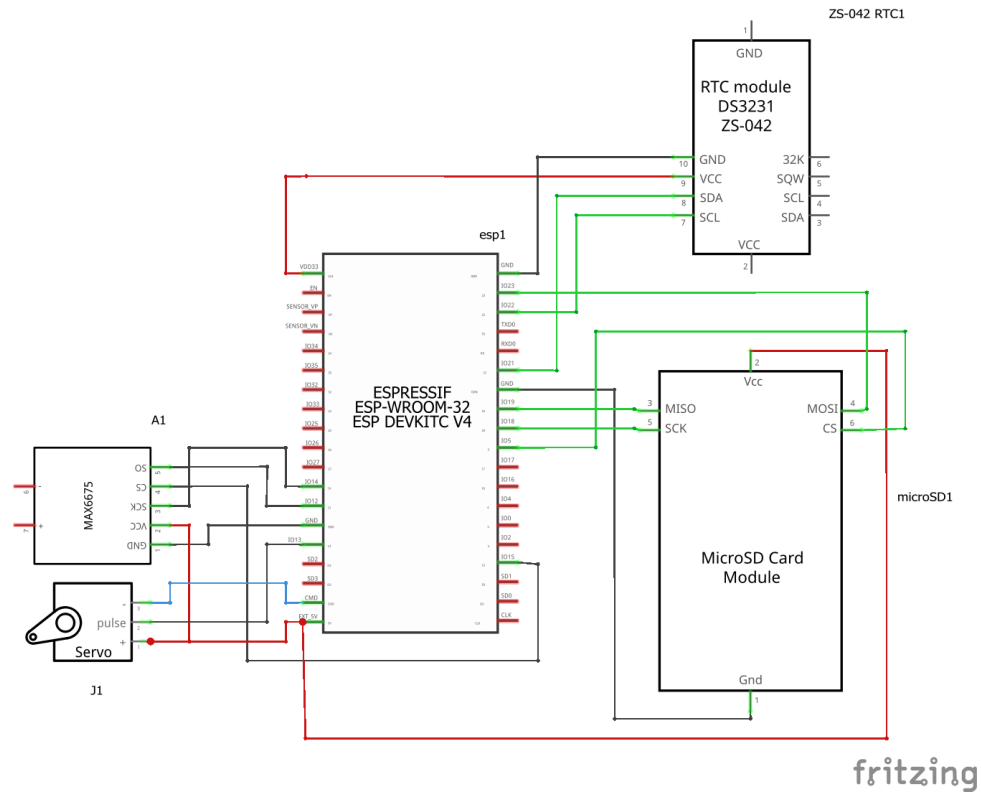


Figure 3: Complete System Schematic Diagram

4.2 Wiring Diagram

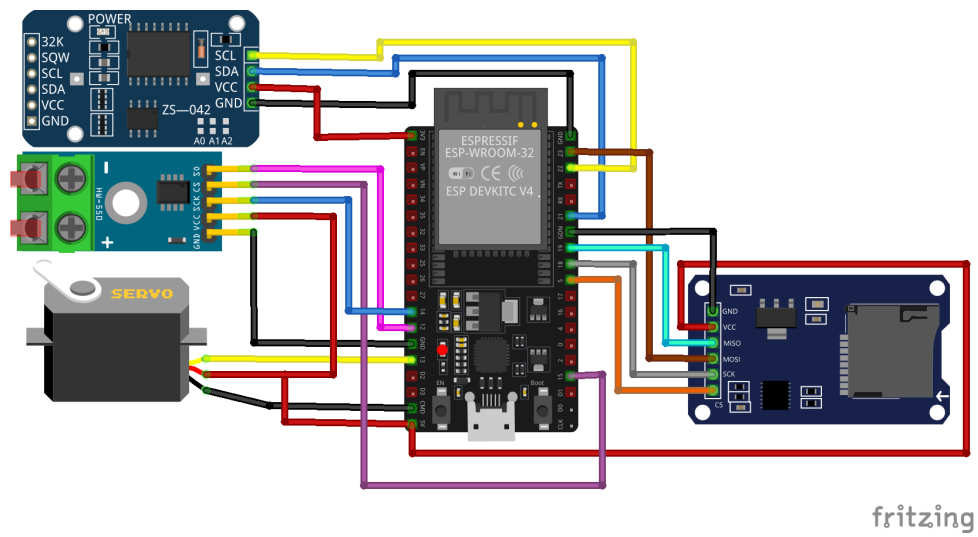


Figure 4: SolarTrace Wiring Diagram (Fritzing)

5 PARABOLIC DISH DESIGN

The parabolic dish is the core optical component of the SolarTrace system. It concentrates sunlight onto a focal point where the cooking pot or sterilization chamber is positioned. Figure 5 illustrates the parabolic dish geometry and sunlight concentration.

5.1 Parabolic Dish Geometry

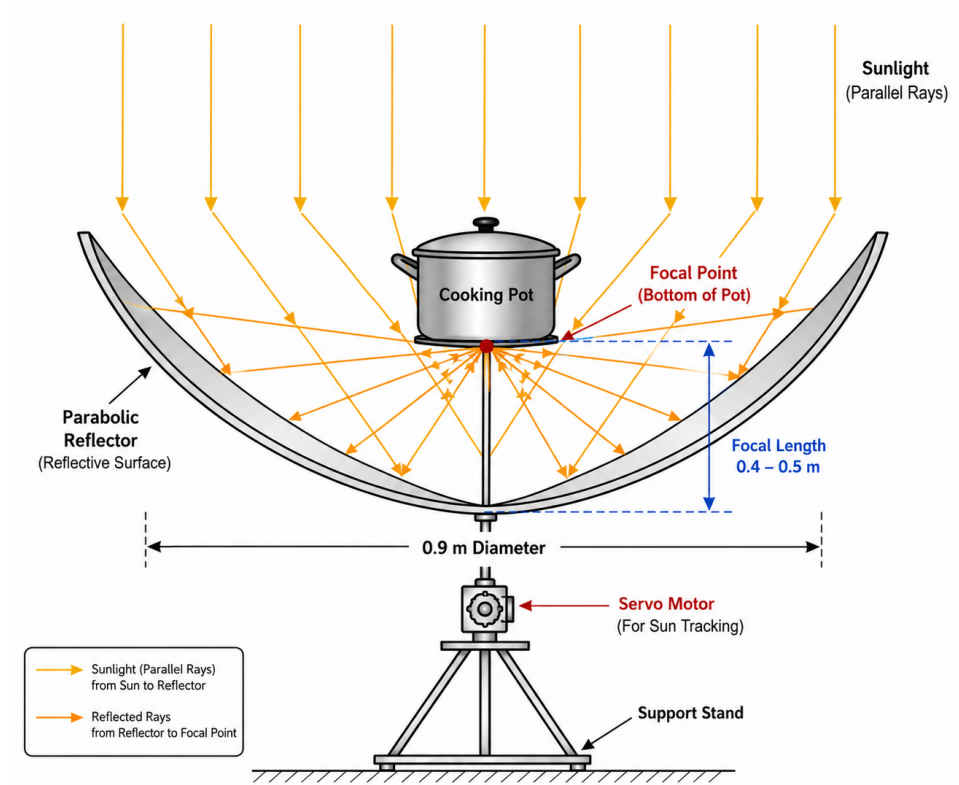


Figure 5: Parabolic Dish Geometry and Sunlight Concentration

5.2 Parabolic Dish Specifications

Table 6: Parabolic Dish Technical Specifications

Parameter	Specification
Diameter	0.9 m (90 cm)
Material	Aluminum sheet (or stainless steel)
Coating	Reflective aluminum foil or mirror finish
Focal Length	0.4 m to 0.5 m
Focal Point Diameter	5-10 cm (for cooking pot placement)
Thickness	1-2 mm
Weight	2-3 kg
Operating Temperature	Up to 300°C (at focal point)
Reflectivity	≥ 85%
Tracking Range	0° to 120° (East to West)

5.3 How the Parabolic Dish Works

The parabolic dish operates on the following principles:

1. **Reflection:** Sunlight rays hit the reflective surface of the dish
2. **Concentration:** The parabolic shape reflects all rays to a single focal point
3. **Heat Generation:** The concentrated sunlight generates intense heat at the focal point
4. **Cooking:** The cooking pot placed at the focal point absorbs the heat for cooking
5. **Tracking:** The servo motor rotates the dish to follow the sun throughout the day

5.4 Parabolic Dish Construction

The parabolic dish can be constructed using the following method:

1. **Forming:** A parabolic curve is cut from an aluminum sheet using a template
2. **Shaping:** The sheet is pressed or hammered into a parabolic mold
3. **Coating:** The inner surface is coated with reflective material (aluminum foil or mirror finish)
4. **Support:** A metal frame or stand is attached for stability
5. **Mounting:** The dish is mounted on a pivot mechanism connected to the servo motor

6 CONTEXT DIAGRAM

The Context Diagram shows SolarTrace as a single process and its interactions with external entities.

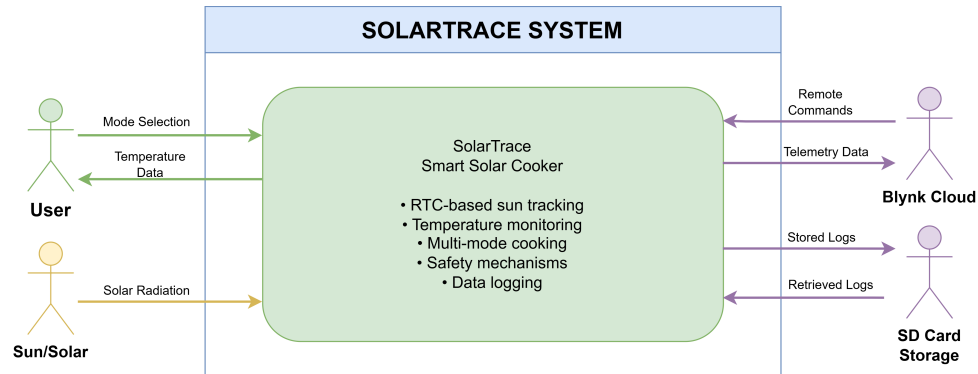


Figure 6: SolarTrace Context Diagram

External Entity Interactions:

- **User:** Selects cooking mode, receives temperature information and notifications
- **Sun:** Provides solar radiation for cooking and power
- **Blynk Cloud:** Facilitates remote monitoring and control
- **SD Card:** Stores session data for offline logging

7 DATA FLOW DIAGRAM

7.1 Level 0 DFD: Main System Functions

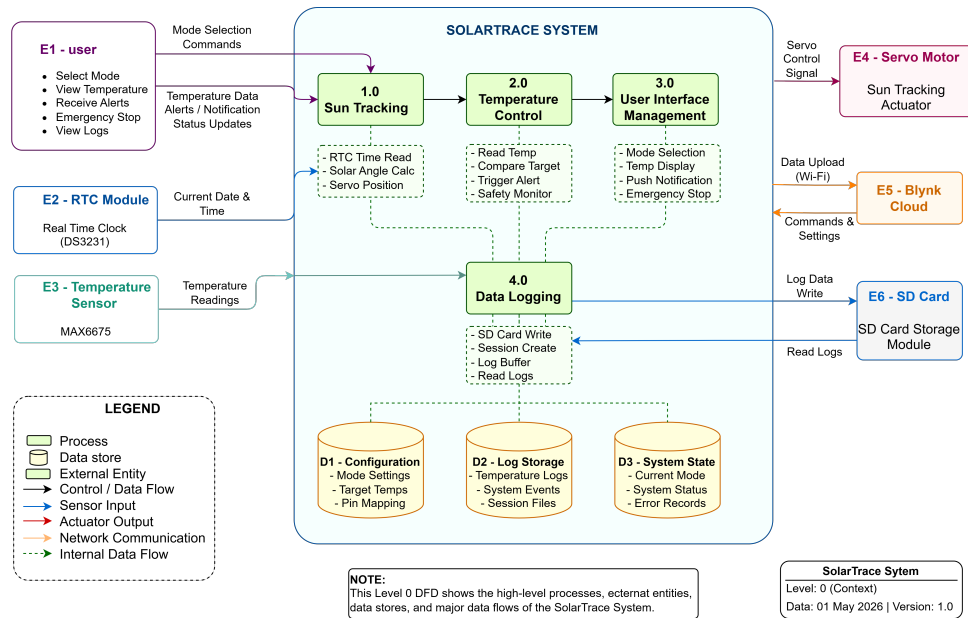


Figure 7: Level 0 Data Flow Diagram

7.2 Process Descriptions

Table 7: DFD Process Descriptions

Process	ID	Description
Sun Tracking	1.0	Reads RTC time, calculates solar angle, positions servo motor accordingly
Temperature Control	2.0	Reads thermocouple data, compares to target temperature, triggers alerts
User Interface Management	3.0	Handles mode selection, displays temperature, sends notifications via Blynk
Data Logging	4.0	Records session data to SD card for offline analysis

8 USE CASE DIAGRAM

8.1 System Actors

- **Primary Actor:** User (rural household, clinic staff)
- **Secondary Actors:** Blynk Cloud, SD Card
- **System:** SolarTrace

8.2 Use Case Diagram

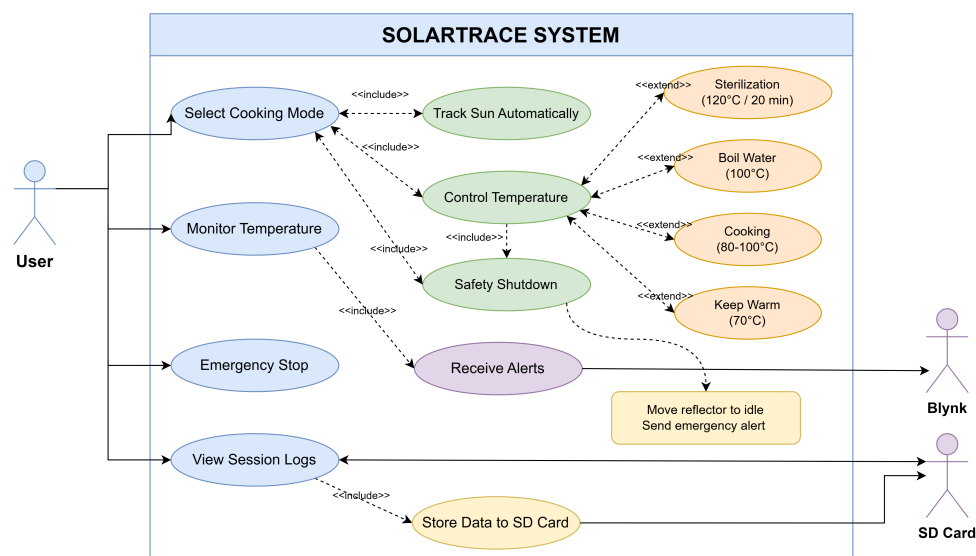


Figure 8: SolarTrace Use Case Diagram

8.3 Use Case Descriptions

Table 8: Use Case Descriptions

Use Case	Actor	Description
Select Mode	User	Choose between Cooking, Sterilization, Boil Water, or Warming modes
Monitor Temperature	User	View real-time temperature from thermocouple on mobile app
Receive Alerts	User	Get push notifications when target temperature is reached or safety triggered
View Logs	User	Access historical session data stored on SD card
Track Sun	System	Automatically position reflector based on RTC time
Log Data	System	Record session data including temperature and duration
Safety Mode	System	Move reflector to idle position when temperature exceeds 130°C

9 ACTIVITY DIAGRAMS

9.1 Cooking Cycle Activity Diagram

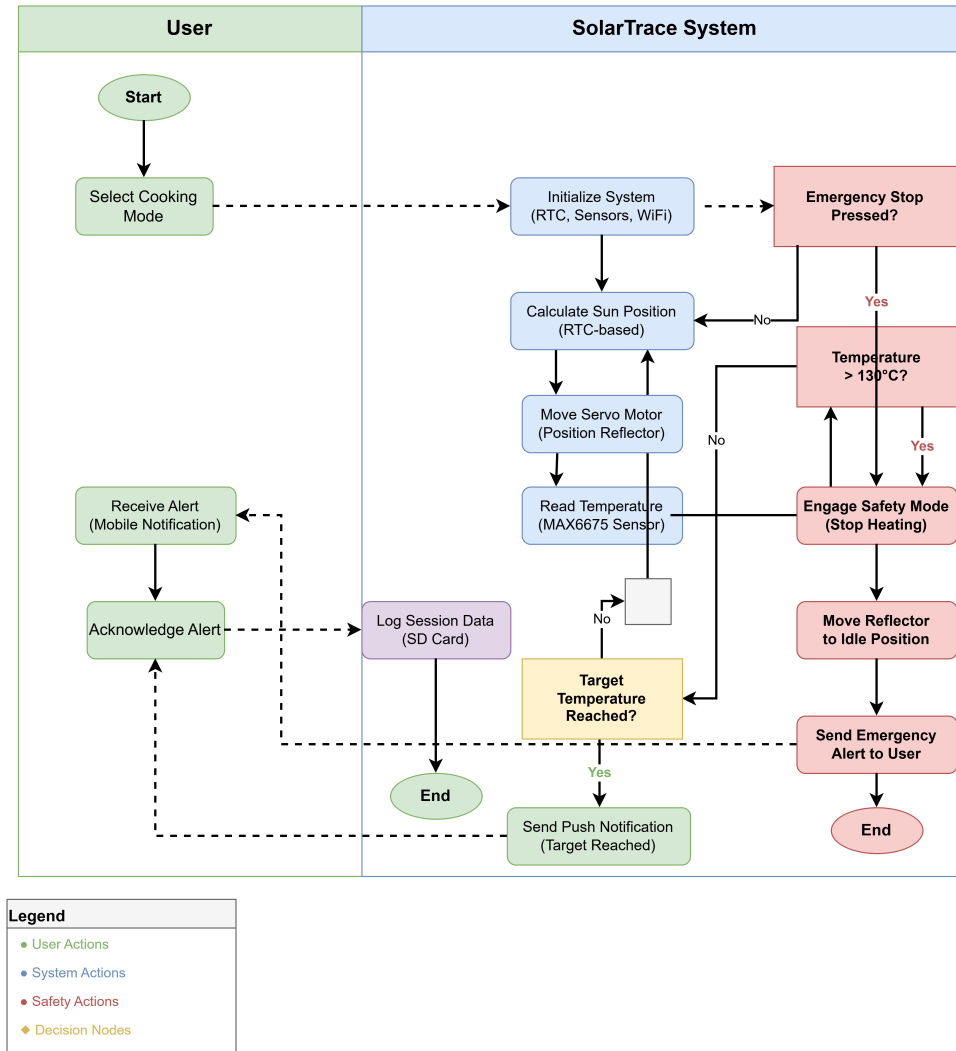


Figure 9: Activity Diagram: Cooking Cycle

9.2 Sterilization Mode Activity Diagram

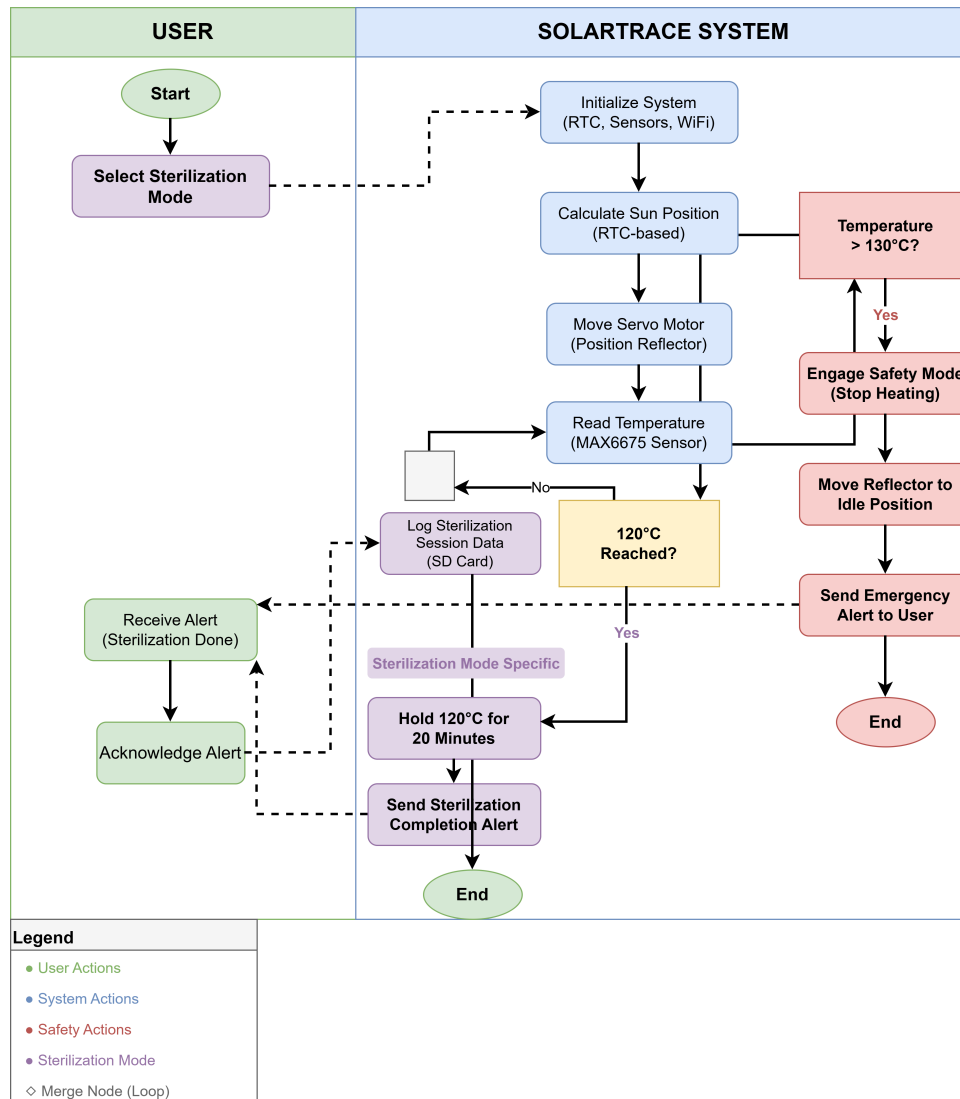


Figure 10: Activity Diagram: Sterilization Mode

10 SEQUENCE DIAGRAMS

10.1 Mode Selection Sequence

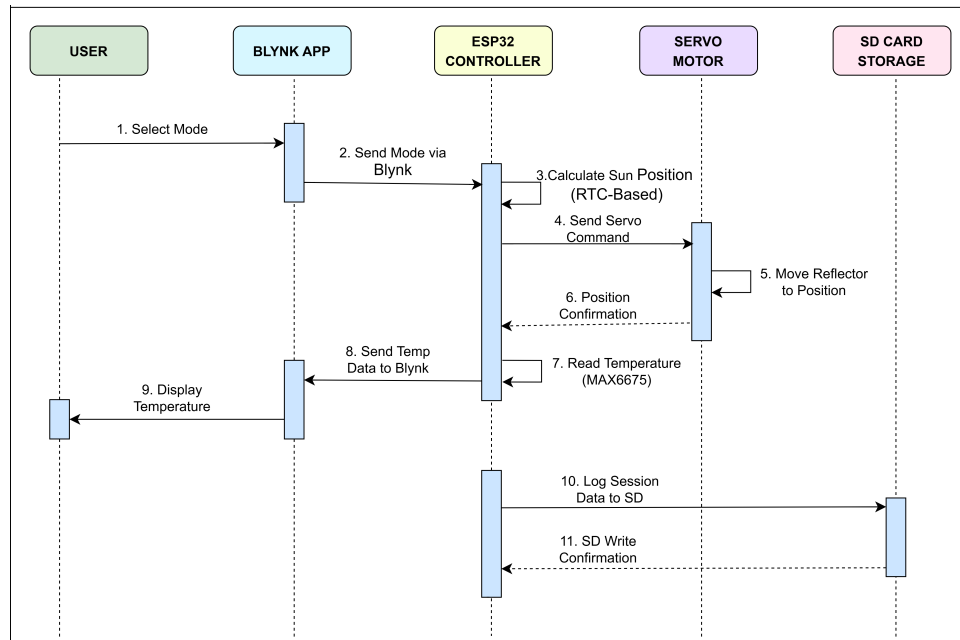


Figure 11: Sequence Diagram: Mode Selection

10.2 Temperature Alert Sequence

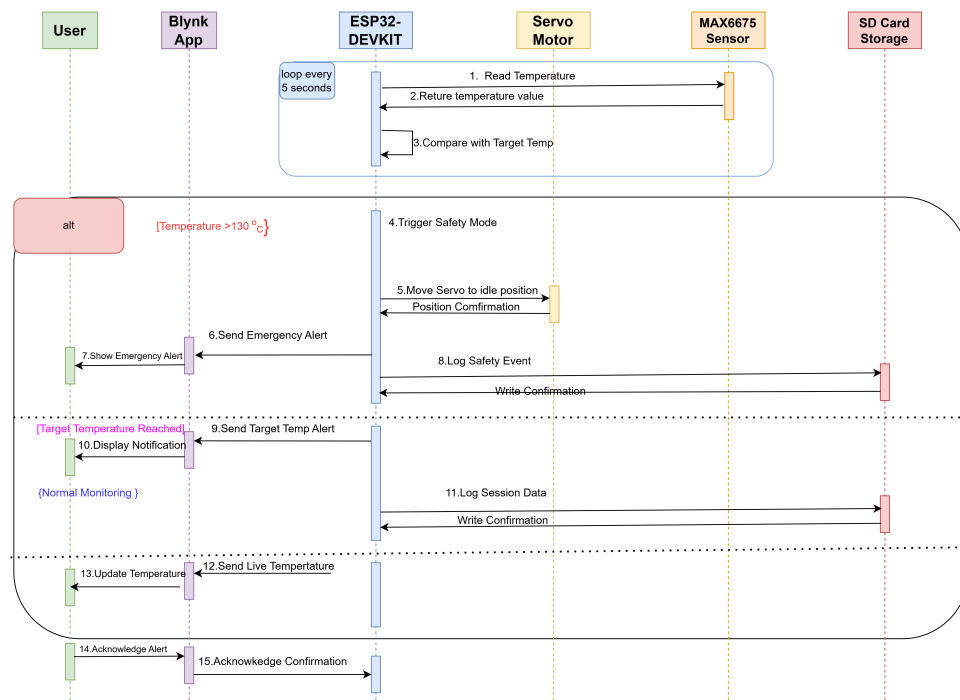


Figure 12: Sequence Diagram: Temperature Alert

11 CLASS DIAGRAM

11.1 Logical Class Structure

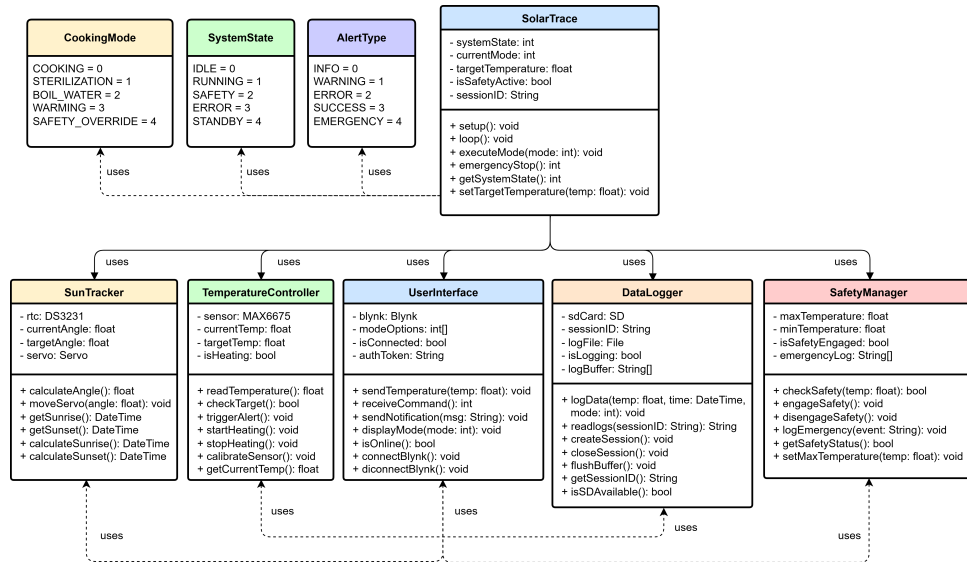


Figure 13: Class Diagram: Logical Structure

11.2 Class Descriptions

Table 9: Class Descriptions and Responsibilities

Class	Responsibilities
SolarTrace	Main controller; manages system state and mode execution
SunTracker	Handles RTC communication; calculates solar angle; controls servo motor
TemperatureController	Reads thermocouple data; checks target temperatures; triggers alerts
DataLogger	Manages SD card operations; logs session data; retrieves historical logs
UserInterface	Handles Blynk communication; sends temperature data; receives user commands

12 PACKAGE DIAGRAM

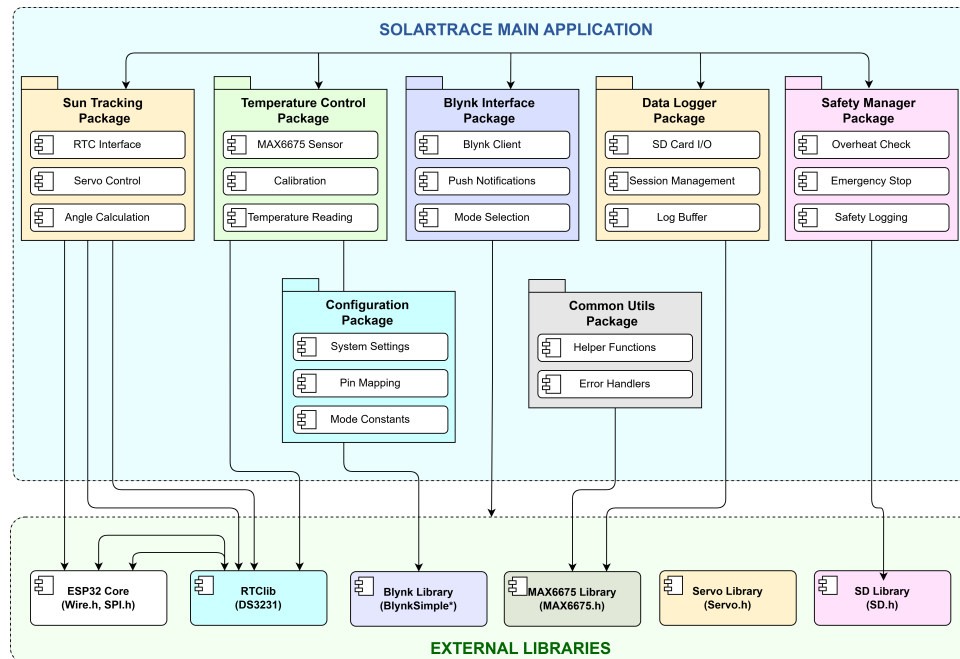


Figure 14: Package Diagram: Module Organization

12.1 Package Descriptions

Table 10: Package Descriptions

Package	Contents
Main Application	Main entry point; initialization; system loop; state management
Tracking	RTC communication; solar angle calculation; servo positioning
Sensors	MAX6675 interface; temperature conversion; error handling
Communication	Blynk integration; push notifications; mode selection; data streaming
Data Storage	SD card operations; session creation; data logging; log retrieval

13 TECHNICAL SPECIFICATIONS

13.1 Hardware Specifications

Table 11: Hardware Technical Specifications

Component	Model	Specifications
Microcontroller	ESP32-DEVKIT	Dual-core Xtensa LX6, 240MHz, 520KB SRAM, 4MB Flash, Wi-Fi/BLE
RTC Module	DS3231	±2ppm accuracy, I2C interface, battery backup, 0-70°C range
Temperature Sensor	MAX6675	12-bit resolution, 0.25°C accuracy, 0-500°C range, SPI interface
Thermocouple	K-Type	Chromel-Alumel, -200 to 1350°C range, 41 µV/°C sensitivity
Servo Motor	MG995	15kg/cm torque, 0.2s/60° speed, 4.8-7.2V, metal gears
Parabolic Dish	Custom	0.9m diameter, aluminum reflector, focal length 0.4-0.5m
Power System	5V Panel + 18650	5W panel, 3.7V 3000mAh battery, TP4056 charger
Data Storage	MicroSD Card	Up to 32GB, FAT32 format, SPI interface

13.2 Pin Configuration for ESP32-DEVKIT

Table 12: ESP32-DEVKIT Pin Configuration

ESP32-DEVKIT Pin	Function	Component	Notes
GPIO21	I2C Data (SDA)	DS3231 RTC	4.7kΩ pull-up required
GPIO22	I2C Clock (SCL)	DS3231 RTC	4.7kΩ pull-up required
GPIO13	PWM Output	MG995 Servo	50Hz signal, 0-180° control
GPIO15	SPI Chip Select	MAX6675	Active low
GPIO14	SPI Clock	MAX6675	
GPIO12	SPI Data Out	MAX6675	
GPIO5	SPI Chip Select	MicroSD	
GPIO18	SPI Clock	MicroSD	
GPIO23	SPI Master Out	MicroSD	
GPIO19	SPI Master In	MicroSD	
VIN (5V)	Power Input	MG995 Servo	5V power
3.3V	Power Output	RTC, MAX6675, SD	3.3V power
GND	Ground	All	Common ground

13.3 Tracking Algorithm Specification

Table 13: Tracking Algorithm Parameters

Parameter	Value
Latitude	4.85°N (Juba, South Sudan)
Sunrise Time	6:30 AM (local)
Sunset Time	6:00 PM (local)
Total Daylight	690 minutes (11.5 hours)
Sun Movement	15°per hour
Servo Adjustment Frequency	Every 10 minutes
Servo Step Angle	2.5°per step
Total Tracking Range	0°to 120°
Servo Update Formula	$\text{angle} = (\text{minutes_since_sunrise} / \text{total_daylight}) \times 120^\circ$

13.4 Cooking Mode Specifications

Table 14: Cooking Mode Parameters

Mode	Code	Target Temperature	Special Conditions
Cooking	0	80-100°C	General cooking of staple foods
Sterilization	1	120°C	Hold for 20 minutes; completion alert
Boil Water	2	100°C	Alert when reached; no hold required
Warming	3	70°C	Maintain temperature; keep warm
Safety Override	4	N/A	Move reflector to idle; 130°C trigger

13.5 Communication Protocol

Table 15: Blynk IoT Communication Parameters

Parameter	Value
Platform	Blynk IoT
Protocol	TCP/IP over Wi-Fi
Data Rate	Configurable (default: 1 second interval)
Virtual Pins	V0-Mode Selection, V1-Temperature, V2-Notifications, V3-Logging, V4-Safety
Authentication	Auth Token from Blynk App
Push Notifications	Blynk.notify() function
Offline Operation	SD card logs; sync when reconnected

14 INTERFACE DESIGN

14.1 Blynk Dashboard Layout

Table 16: Blynk Widget Configuration

Widget	Pin	Function
Dropdown	V0	Mode selection: Cooking, Sterilization, Boil Water, Warming
Gauge	V1	Real-time temperature display (0-150°C)
Notification	V2	Push notification alerts
Label	V3	Session logging status display
Button	V4	Emergency stop/override
Label	V5	CO ₂ savings estimate display

14.2 User Interaction Flow

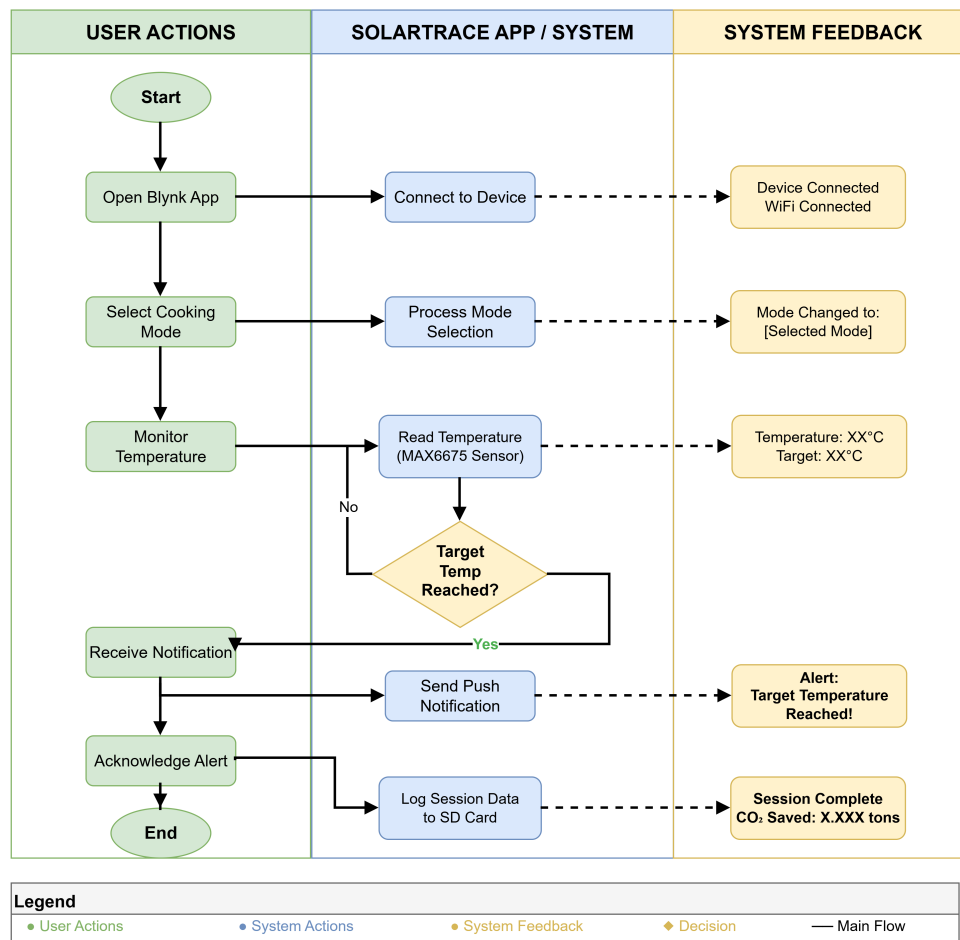


Figure 15: User Interaction Flow

15 SUMMARY AND NEXT STEPS

15.1 Design Summary

This chapter has presented the complete technical architecture and design for the SolarTrace system, including:

- **Alternative Systems Analysis:** Validating the SolarTrace approach against existing solutions
- **ESP32-DEVKIT Microcontroller:** Detailed pinout, specifications, and features
- **System Schematic:** Complete wiring diagram and component connections
- **Parabolic Dish:** Design, geometry, specifications, and construction
- **System Architecture:** Three-tier architecture with physical, control, and application layers
- **UML Diagrams:** Context, data flow, use case, activity, sequence, class, and package diagrams
- **Technical Specifications:** Detailed component, pin, algorithm, and mode specifications
- **Interface Design:** Blynk-based mobile application with intuitive controls

15.2 ESP32-DEVKIT Advantages for SolarTrace

Table 17: ESP32-DEVKIT Advantages

Feature	Benefit for SolarTrace
Built-in WiFi	Enables IoT connectivity without additional modules
Built-in BLE	Supports Bluetooth for local configuration
Dual-core Processor	Handles tracking and communication simultaneously
Low Cost	Under \$25, suitable for rural deployment
Large Community	Extensive documentation and libraries available
Low Power Consumption	Suitable for solar/battery operation

15.3 NEXT STEPS: Week 3 - Core Development

With the design phase complete, the team will proceed to Week 3: Core Development, which includes:

1. Setting up the development environment (Arduino IDE, libraries, Blynk)

2. Implementing RTC initialization and time retrieval
3. Coding servo positioning logic based on time-of-day calculations
4. Integrating temperature monitoring with MAX6675
5. Testing each component independently
6. Basic system integration

15.4 Design Decision Justification

Table 18: Key Design Decisions and Justifications

Decision	Justification
RTC-based tracking vs. Light sensors	More reliable in cloudy conditions; lower cost; predictable operation
ESP32-DEVKIT vs. Arduino Nano	Built-in Wi-Fi reduces external components; more processing power; development board ready
Blynk platform	Free tier suitable for prototype; easy to use; push notification support
K-type thermocouple	Wide temperature range; suitable for high-temperature cooking
SD card logging	Offline capability essential for areas with limited internet connectivity
MG995 servo	High torque sufficient for 0.9m reflector; metal gears for durability

16 REFERENCES

References

- [1] A. J. Abid, “Arduino based blind solar tracking controller,” *IETI Trans. Comput.*, vol. 3, no. 1, pp. 16-30, 2017.
- [2] A. Mahmood et al., “Enhancement of the hybrid solar cooker performance by solar tracking,” *AIP Conf. Proc.*, vol. 3282, p. 050004, 2025.
- [3] M. Rashid et al., “A sustainable energy management evaluation of a hybrid solar geyser-stove system,” *Results Eng.*, 2025.
- [4] J. A. Duffie and W. A. Beckman, *Solar Engineering of Thermal Processes*, 3rd ed. Hoboken, NJ: Wiley, 2006.
- [5] O. Eboh, C. Nwosu, and I. Okonkwo, “Design and manufacturing of a single axis solar tracking system,” *Nigerian J. Eng. Sci. Res.*, 2025.
- [6] G. Shukla et al., “IoT-enabled solar PV systems: Real-time monitoring and efficiency optimization,” *Results Eng.*, 2025.
- [7] R. Swarnkar et al., “Multi-objective genetic algorithm in optimization of performance analysis of IoT based temperature monitoring,” *Int. J. Interact. Des. Manuf.*, vol. 20, no. 6, p. 3173, 2024.
- [8] S. A. Ogalo and K. V. Rop, “Analysis of cooking fuels and cooking energy demand in rural households,” Strathmore University, Nairobi, Kenya, 2024.
- [9] M. M. Alenazi, “IoT and energy,” in *IntechOpen*, 2023.
- [10] Espressif Systems, “ESP32 Series Datasheet,” 2024.

Document Control

Version	Changes	Date	Author
1.0	Initial Week 2 submission package	July 31, 2026	Team South Sudan
1.1	Added ESP32 pinout, system schematic, wiring diagram	July 31, 2026	Team South Sudan
1.2	Updated to ESP32-DEVKIT, added specifications table	August 1, 2026	Team South Sudan
1.3	Removed duplicate pin configuration table	August 2, 2026	Team South Sudan
1.4	Added Parabolic Dish section with figures	August 2, 2026	Team South Sudan

Document Owner: SolarTrace Team - South Sudan

Distribution: UbuntuNet Alliance Mentor

Classification: Submission Document

This document represents the complete Week 2 submission package for the UbuntuNet Alliance Women Hackathon 2026.

TEAM SOUTH SUDAN - SOLARTRACE

Harnessing the sun for a sustainable future