

WhatsOnMyNet


Manual – Network inventory and monitoring

2026-11-12

Contents

1. Installation
2. First steps
3. Inventory
4. Nightly light scan
5. Monitoring
6. Printers, switches and NAS
7. Sensors
8. Proxmox VE and Backup Server
9. Reports
10. Users and rights
11. Scan agent for branch offices
12. Backup and updates
13. Troubleshooting

WhatsOnMyNet finds what runs on your network and keeps only what you adopt in the inventory. It also monitors devices, services and websites, reads printers, switches, NAS and Proxmox, and reports by e-mail, Telegram or webhook when something is wrong.

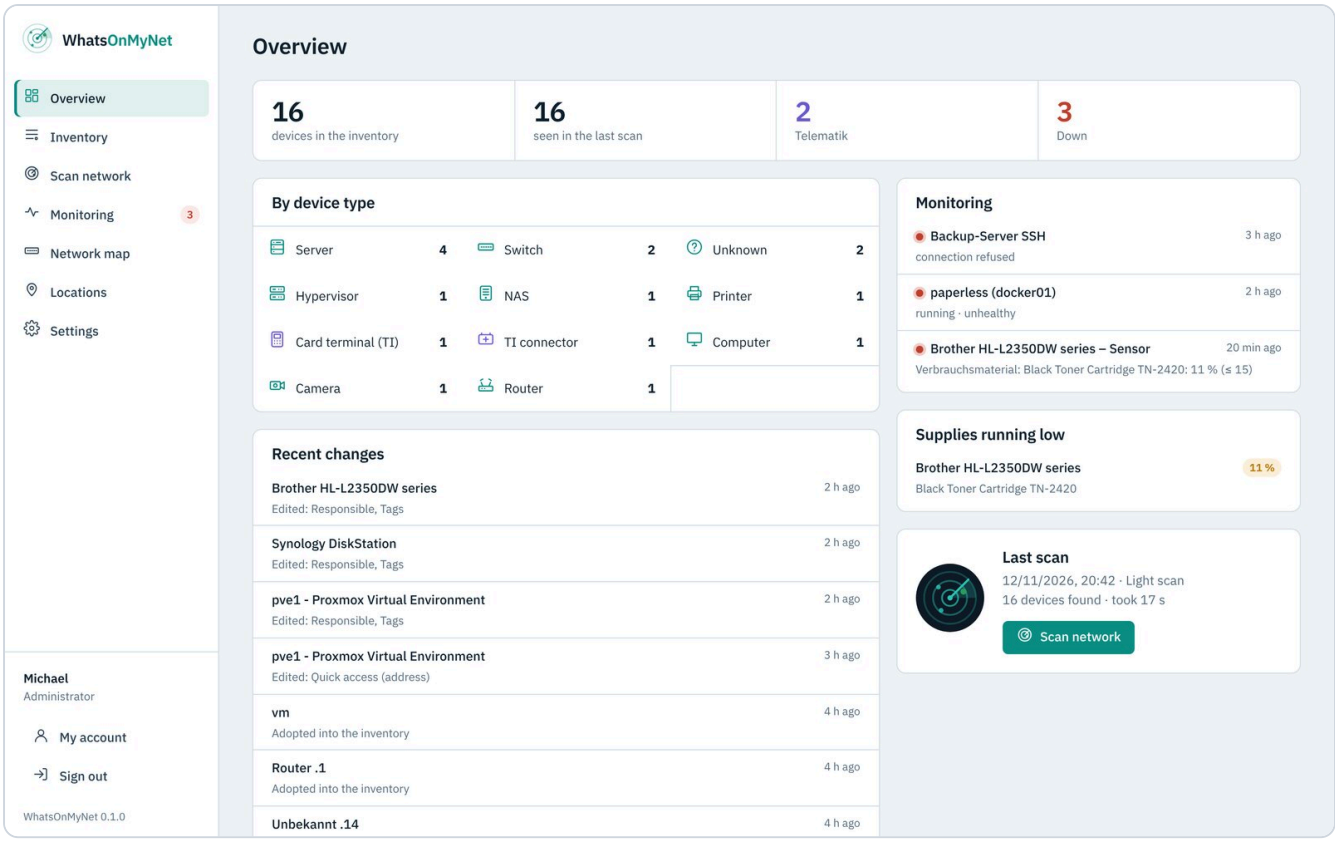

Overview

Installation

WhatsOnMyNet runs as a Docker container with host networking – only this way the scan sees the MAC addresses of the devices.


1. Put `docker-compose.yml` and `env.example` from the release into a folder, rename `env.example` to `.env`.
2. Adjust ports (`WOMN_HTTPS_PORT`, default 8743), time zone (`TZ`) and owner of the data (`PUID` / `PGID`) in `.env` if needed.
3. `docker compose up -d` – or create the stack in Dockhand.
4. Get the **setup code** from the log (`docker compose logs whatsonmynet`) and open `https://<server>:8743/setup`. There you create the first administrator.

The interface always runs over HTTPS. On first start WhatsOnMyNet creates a self-signed certificate; upload your own (PEM or PFX) under *Settings → HTTPS certificate*.

Ping: the container runs without root rights. Ping works if the host allows ICMP for normal users (`net.ipv4.ping_group_range`, default on Debian/Ubuntu/Proxmox; set `0 65535` in LXC containers). Without ping the scan still finds devices via ARP and TCP.

First steps


1. **Add a location** (*Locations*): name and subnets, e.g. "Main building" with `192.168.10.0/24`.
2. **Scan the network** (*Scan network*): tick the location, "Start scan". The radar shows the devices found; the scan is gentle (ARP, about 25 typical ports, SNMP read-only).
3. **Adopt**: in the result under "New" check type and name, tick devices, "Adopt into inventory". What you do not want in the inventory, "Ignore".

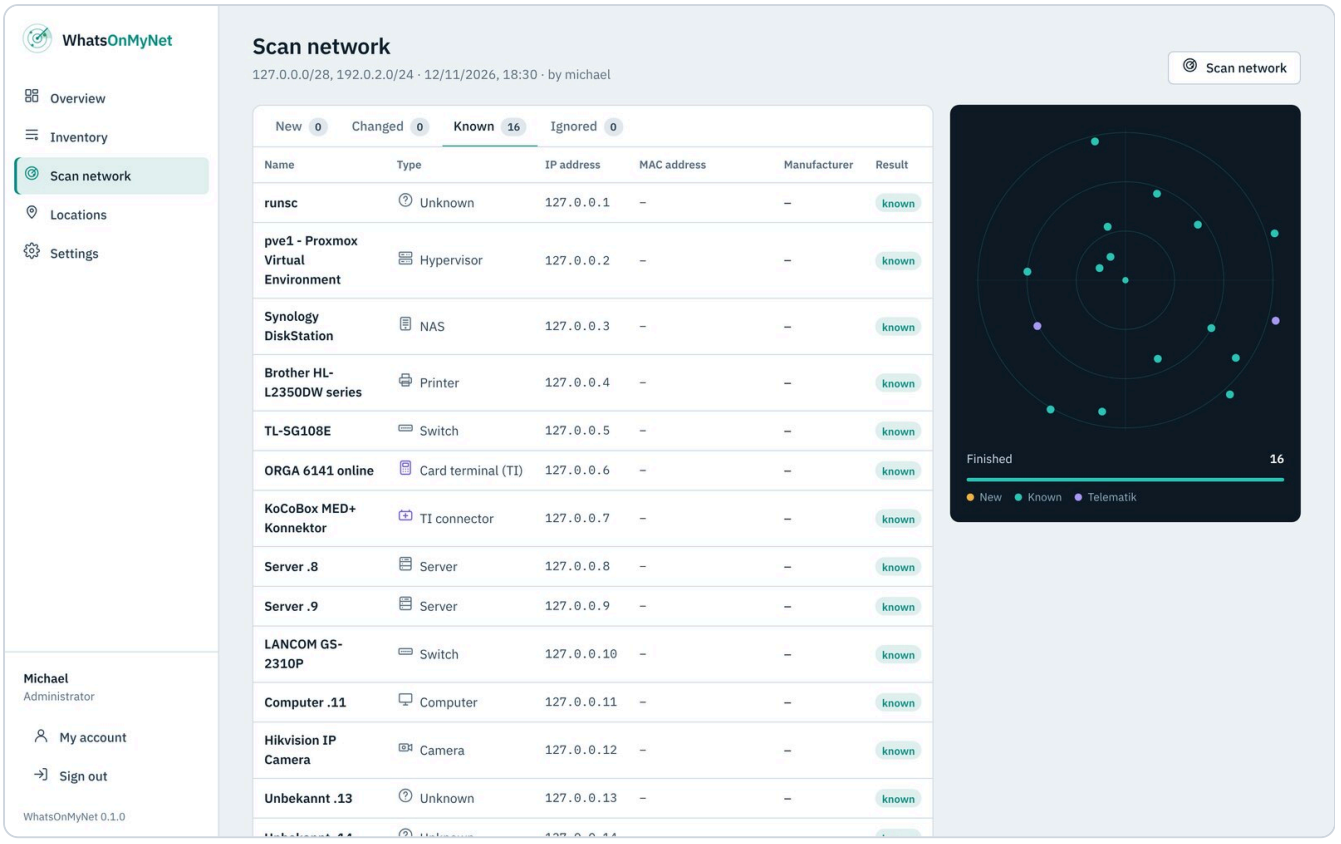

Scan with radar

The MAC address is the identity of a device: if it gets a new IP, the next scan takes it over automatically and records it in the history.

Inventory

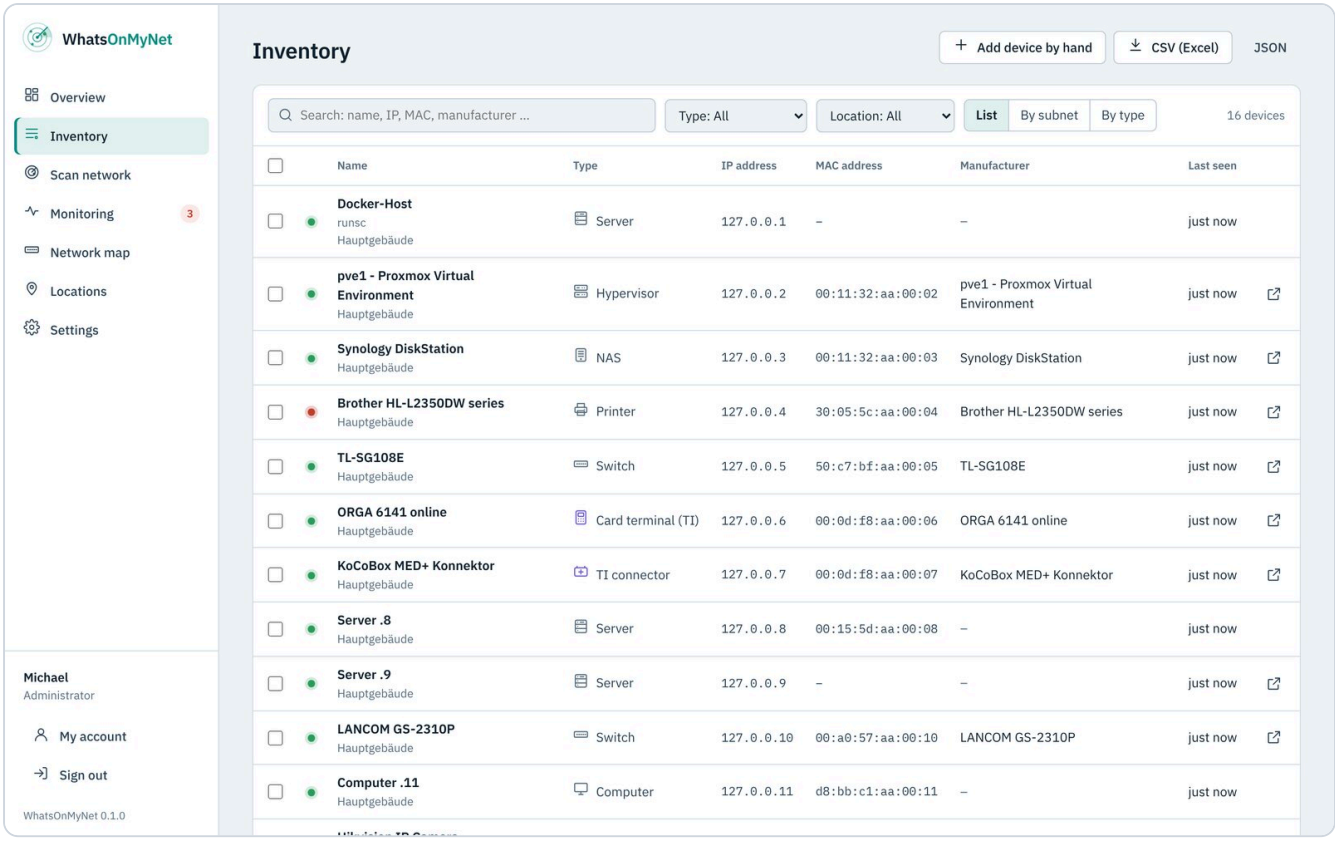


Inventory

- **Search and filter** by name, IP, MAC, manufacturer, type, location or tag; export as CSV or JSON.
- **Device page**: all details, purchase and warranty dates, notes, quick access to the web interface, what the scan detected, history of all changes.
- **Suggestions while typing**: manufacturer, model, operating system, owner, supplier and tags suggest what is already in the inventory. A known model fills in manufacturer and type.
- **Multiple selection**: tick devices and edit them together (type, location, manufacturer, model, dates, tags) or delete them.
- **Deep check**: checks one device with a longer port list. Telematik devices (connector, card terminal) are always checked gently.

Nightly light scan

Every night (default 02:30) WhatsOnMyNet looks for devices in all subnets of your locations – no ports, no SNMP. Known devices get their new IP; a device showing up for the very first time is reported once. Settings, time and "Run now" are under *Settings → Scan*.

Monitoring

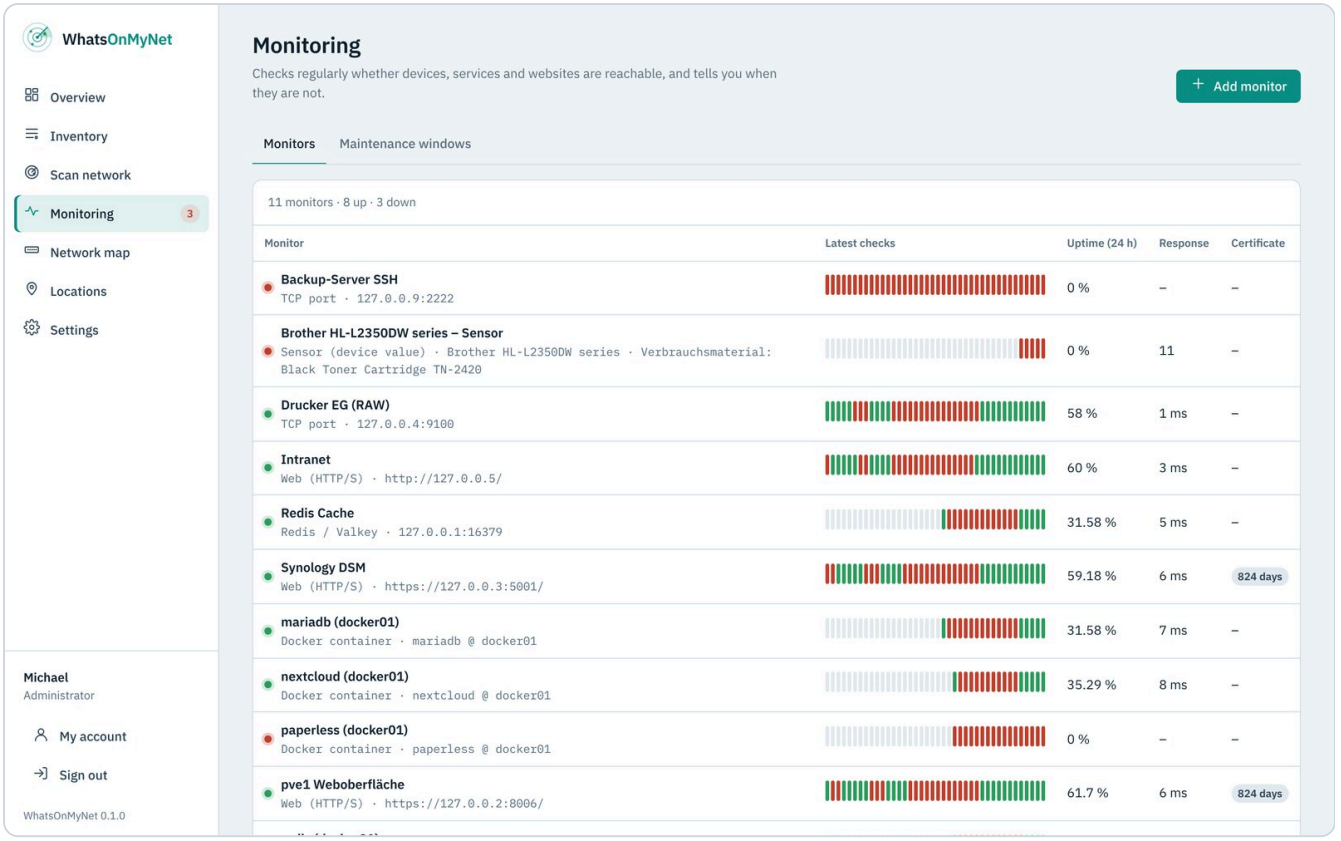


Monitoring

A monitor checks regularly (20 seconds to 24 hours) and reports only after several failures in a row. Kinds:

- **Web (HTTP/S)** with status codes, keyword and certificate expiry (warning e.g. 30, 14 and 7 days before)
- **TCP port** and **ping**
- **Docker container** (through a socket proxy, *Settings → Docker*): running, restarting all the time, health check "unhealthy"
- **Databases**: MariaDB/MySQL, PostgreSQL, Redis/Valkey – sign-in and one harmless query
- **Sensor (device value)**, **SNMP value (OID)** and **Proxmox** – see below

On the device page "Monitor" creates a fitting monitor. If the IP of a device changes, its monitors follow.

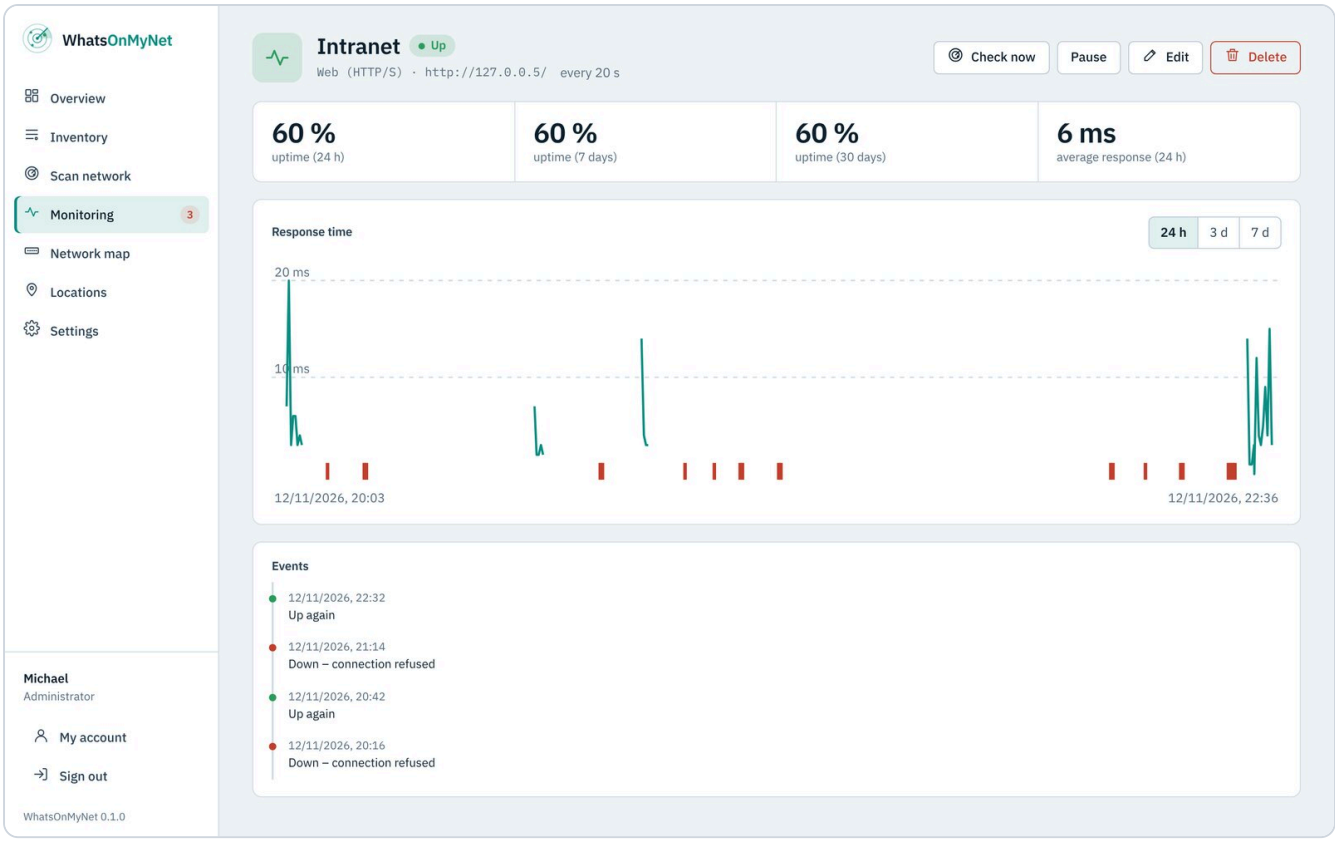


Monitor with history

Notifications (*Settings → Notifications*): e-mail (through the SMTP server), Telegram bot and webhook with your own JSON template. Every channel has a test message. **Maintenance windows** (once or weekly) suppress alarms.


Printers, switches and NAS

Devices of type *Printer*, *Switch* and *NAS* are queried via SNMP (read-only). Set the community under *Settings → Scan*; SNMP v1/v2c has to be on at the device.

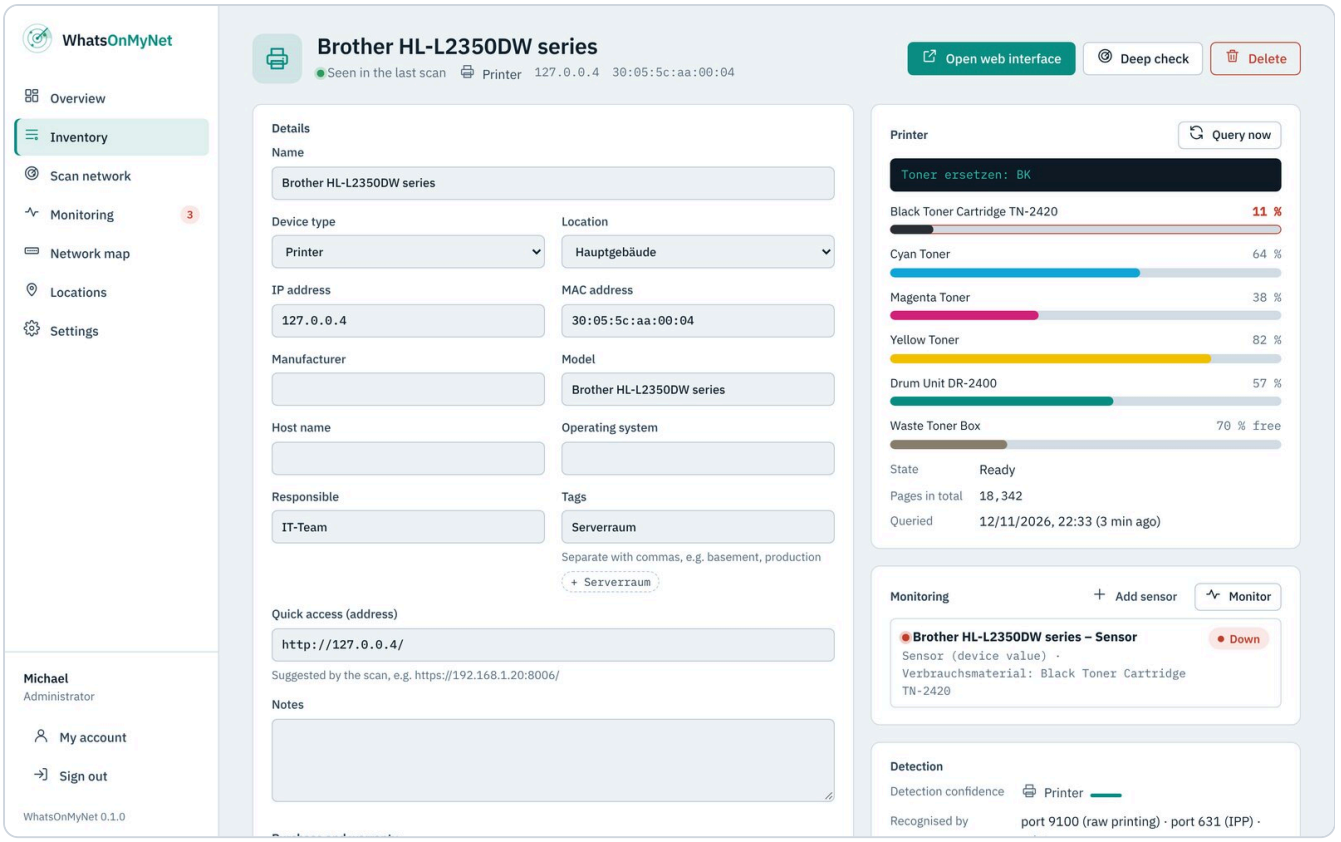


Printer

- **Printer**: toner or ink per colour, drum, waste toner, page counter, faults and display text. Below 15 % a notice is sent – once per cartridge.
- **Switch**: ports as tiles, which devices hang at which port (VLAN-aware), LLDP neighbours, firmware. Every device page shows "Plugged in at".
- **NAS**: volumes; on Synology also disks, RAID, temperature, fans, power supply and DSM update. Problems are reported – and again when everything is fine.

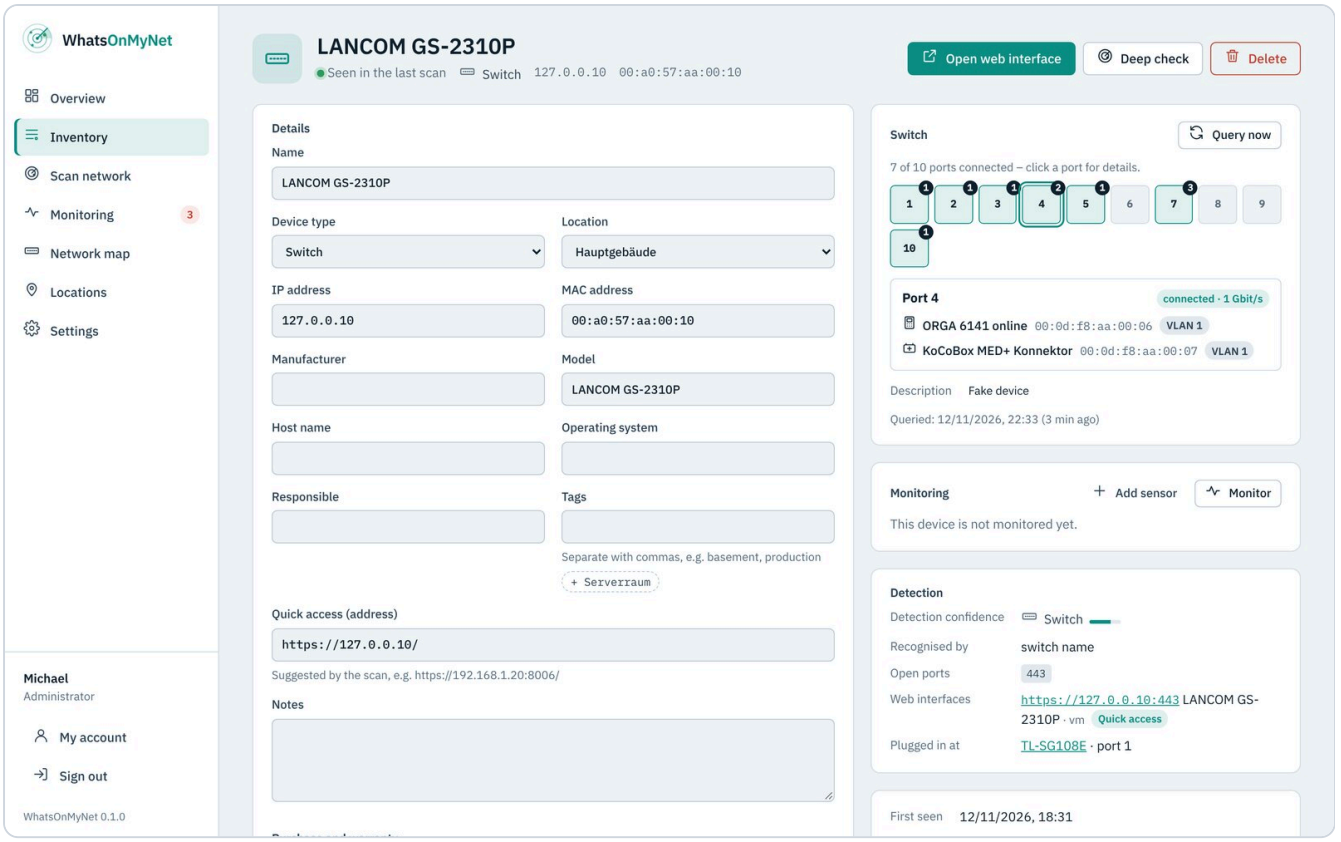
WhatsOnMyNet
Overview
Inventory
Scan network
Monitoring 3
Network map
Locations
Settings
Michael
Administrator
My account
Sign out
WhatsOnMyNet 0.1.0
LANCOM GS-2310P
Seen in the last scan Switch 127.0.0.10 00:a0:57:aa:00:10
Open web interface
Deep check
Delete
Details
Name
LANCOM GS-2310P
Device type
Switch
Location
Hauptgebäude
IP address
127.0.0.10
MAC address
00:a0:57:aa:00:10
Manufacturer
Model
LANCOM GS-2310P
Host name
Operating system
Responsible
Tags
Separate with commas, e.g. basement, production
+ Serverraum
Quick access (address)
https://127.0.0.10/
Suggested by the scan, e.g. https://192.168.1.20:8006/
Notes
Switch
Query now
7 of 10 ports connected – click a port for details.
1 2 3 4 5 6 7 8 9 10
Port 4
connected · 1 Gbit/s
ORGA 6141 online 00:0d:f8:aa:00:06 VLAN 1
KoCoBox MED+ Konnektor 00:0d:f8:aa:00:07 VLAN 1
Description Fake device
Queried: 12/11/2026, 22:33 (3 min ago)
Monitoring
Add sensor
Monitor
This device is not monitored yet.
Detection
Detection confidence Switch
Recognised by switch name
Open ports 443
Web interfaces https://127.0.0.10:443 LANCOM GS-2310P · vm Quick access
Plugged in at TL-SG108E · port 1
First seen 12/11/2026, 18:31


Switch

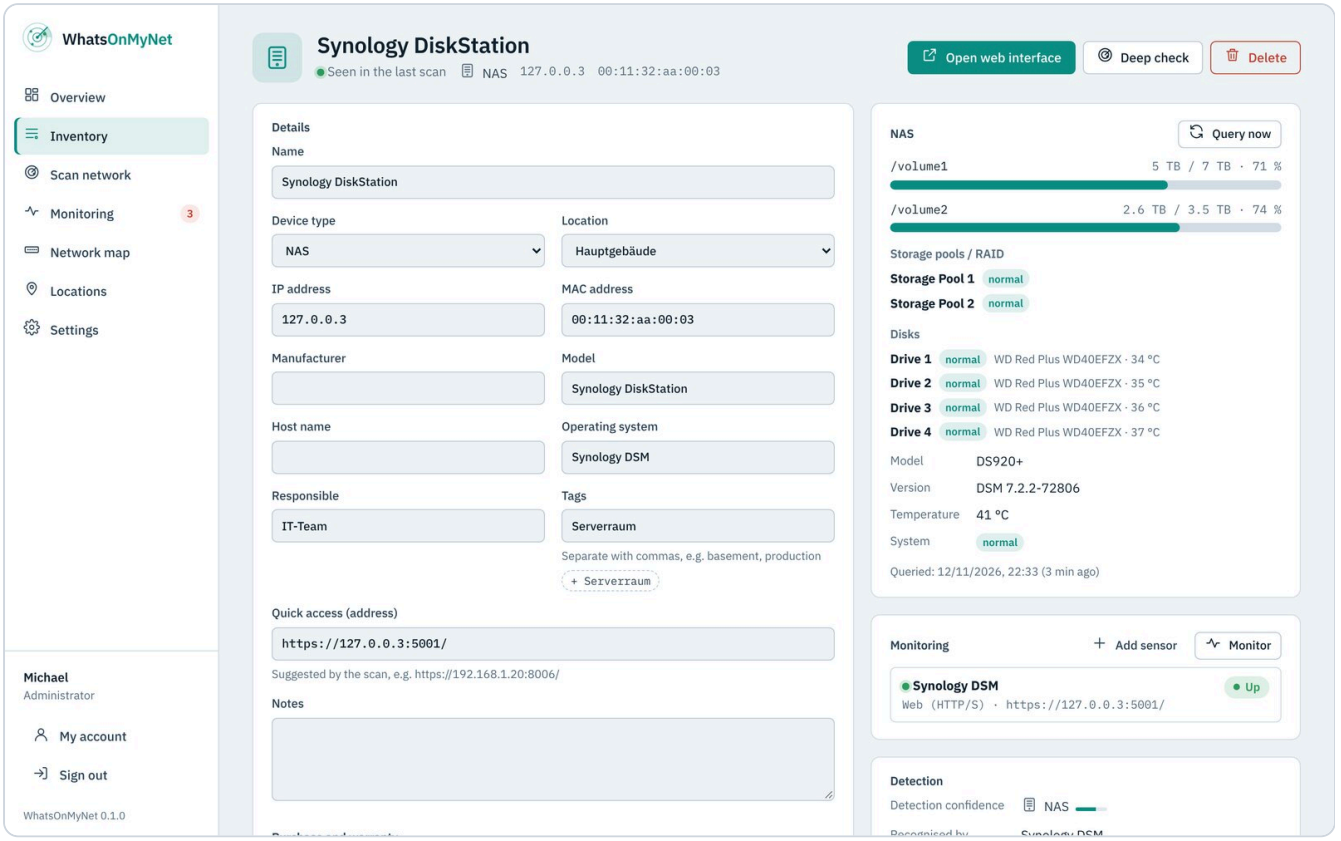
WhatsOnMyNet
Overview
Inventory
Scan network
Monitoring 3
Network map
Locations
Settings
Michael
Administrator
My account
Sign out
WhatsOnMyNet 0.1.0
Synology DiskStation
Seen in the last scan NAS 127.0.0.3 00:11:32:aa:00:03
Open web interface
Deep check
Delete
Details
Name
Synology DiskStation
Device type
NAS
Location
Hauptgebäude
IP address
127.0.0.3
MAC address
00:11:32:aa:00:03
Manufacturer
Model
Synology DiskStation
Host name
Operating system
Synology DSM
Responsible
IT-Team
Tags
Serverraum
Separate with commas, e.g. basement, production
+ Serverraum
Quick access (address)
https://127.0.0.3:5001/
Suggested by the scan, e.g. https://192.168.1.20:8006/
Notes
NAS
Query now
/volume1 5 TB / 7 TB · 71 %
/volume2 2.6 TB / 3.5 TB · 74 %
Storage pools / RAID
Storage Pool 1 normal
Storage Pool 2 normal
Disks
Drive 1 normal WD Red Plus WD40EFZX · 34 °C
Drive 2 normal WD Red Plus WD40EFZX · 35 °C
Drive 3 normal WD Red Plus WD40EFZX · 36 °C
Drive 4 normal WD Red Plus WD40EFZX · 37 °C
Model DS920+
Version DSM 7.2.2-72806
Temperature 41 °C
System normal
Queried: 12/11/2026, 22:33 (3 min ago)
Monitoring
Add sensor
Monitor
Synology DSM
Up
Web (HTTP/S) · https://127.0.0.3:5001/
Detection
Detection confidence NAS

NAS

Network map

The *Network map* shows from MAC tables and LLDP which device hangs at which port and how the switches are connected. Simple switches without SNMP show up as a branch behind the port they are plugged into. Behind routers the scan reads the ARP table of the routers via SNMP, so the MAC address stays the identity there too.

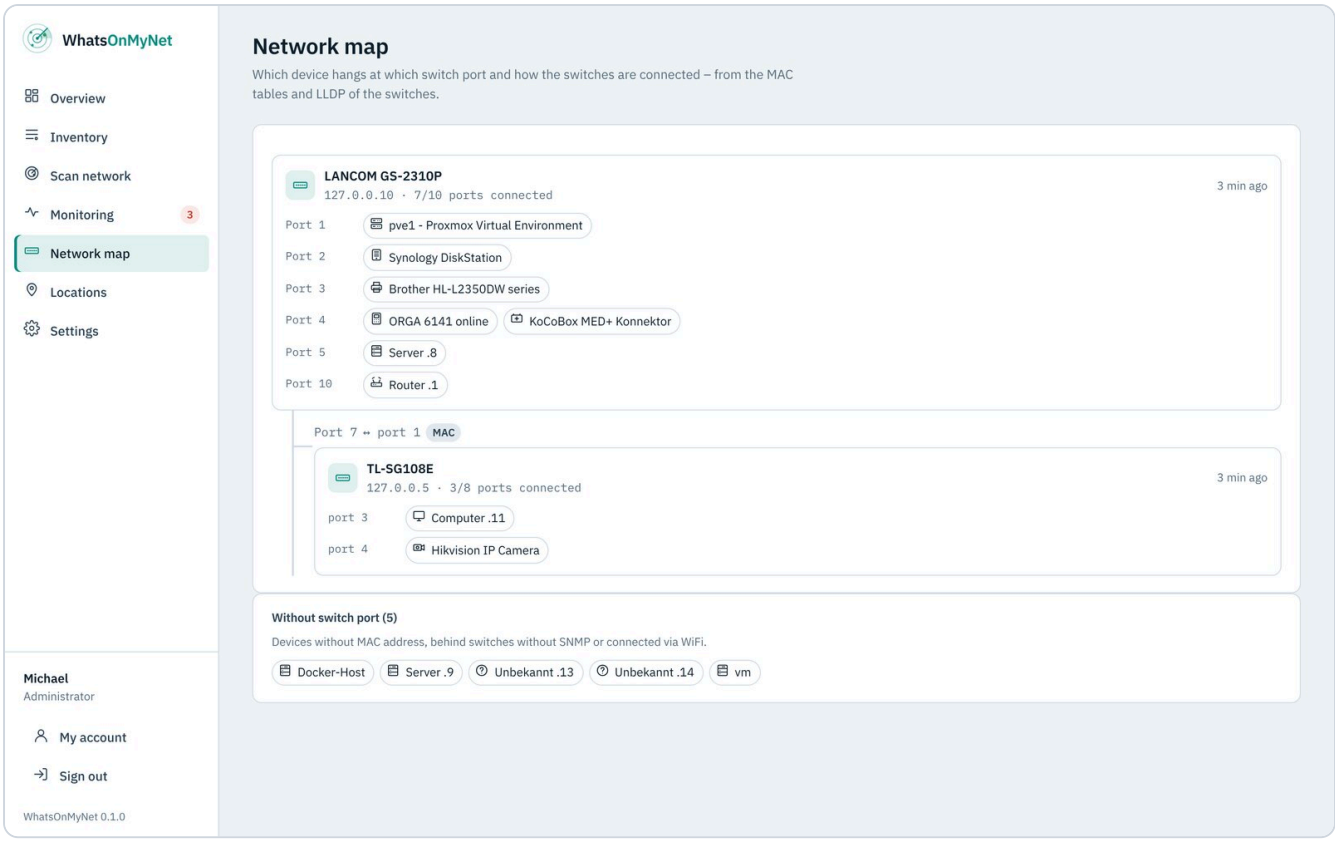

Network map


Sensors

Every value a device delivers can become a monitor of its own – with history, alarm and maintenance windows. On the device page "Add sensor", then choose value and condition, e.g.:

- "toner cyan less than or equal 10 %"
- "usage /volume1 greater than or equal 85 %"
- "temperature drive 2 greater than 50 °C"
- "port 10 (uplink) connected"

The kind **SNMP value (OID)** reads any SNMP value (e.g. runtime left of a UPS) and compares with less, greater, equal or "contains text".

Proxmox VE and Backup Server

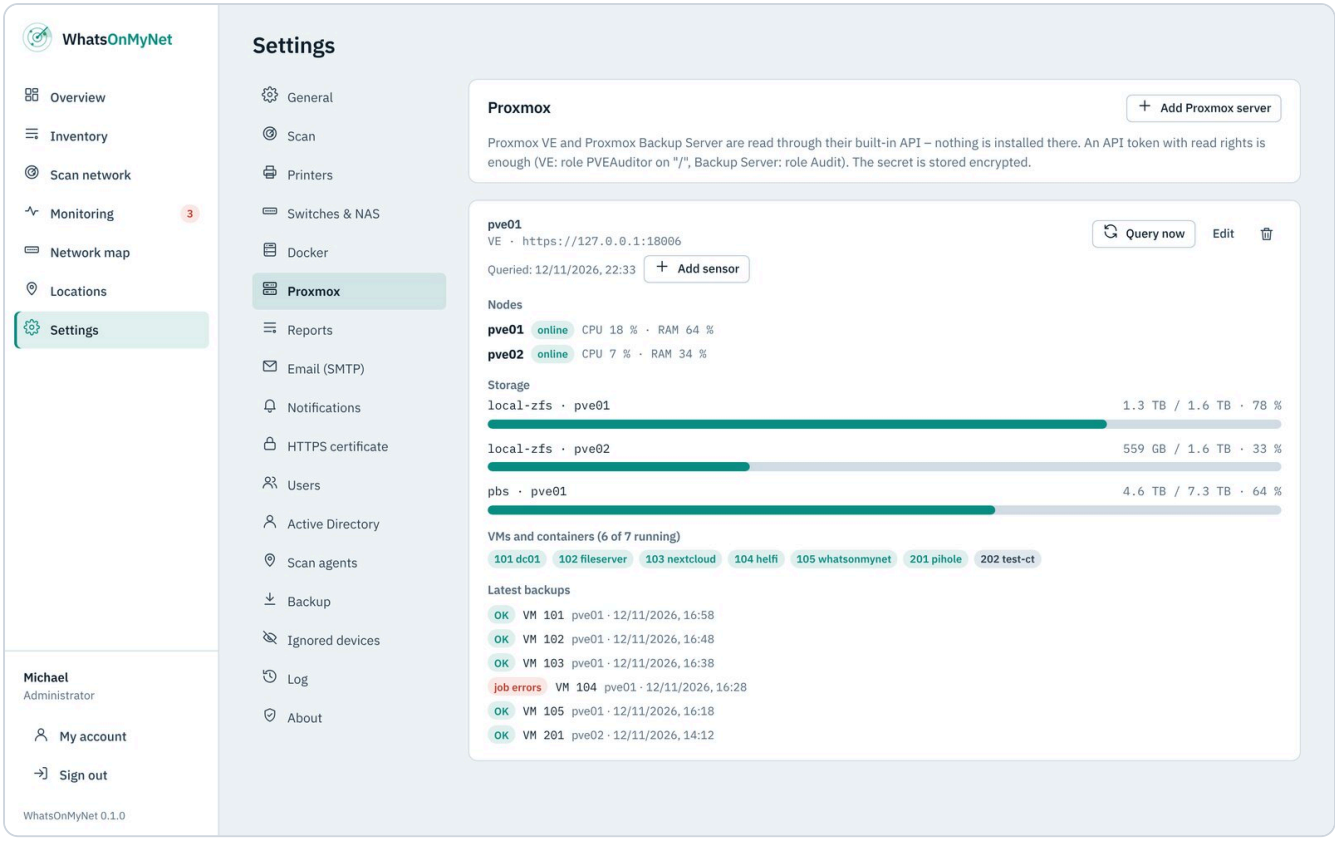


Proxmox

Under *Settings* → *Proxmox* WhatsOnMyNet reads Proxmox through its API – nothing is installed there.

1. In Proxmox VE: *Datacenter* → *Permissions* → *API Tokens*, "Privilege Separation" on, give the token the role **PVEAuditor** on `/`. On the Backup Server: *Configuration* → *Access Control* → *API Token*, role **Audit**.
2. In WhatsOnMyNet enter the address (`https://pve01:8006` or `:8007`), token ID (`monitor@pve!womn`) and secret.
3. For the self-signed certificate paste the content of `/etc/pve/pve-root-ca.pem` (VE) or `/etc/proxmox-backup/proxy.pem` (Backup Server).

Nodes, storage, VMs and containers, backups, datastores and failed tasks are shown. "Add sensor" watches e.g. "VM 101 running" or "last backup older than 26 hours".

Reports

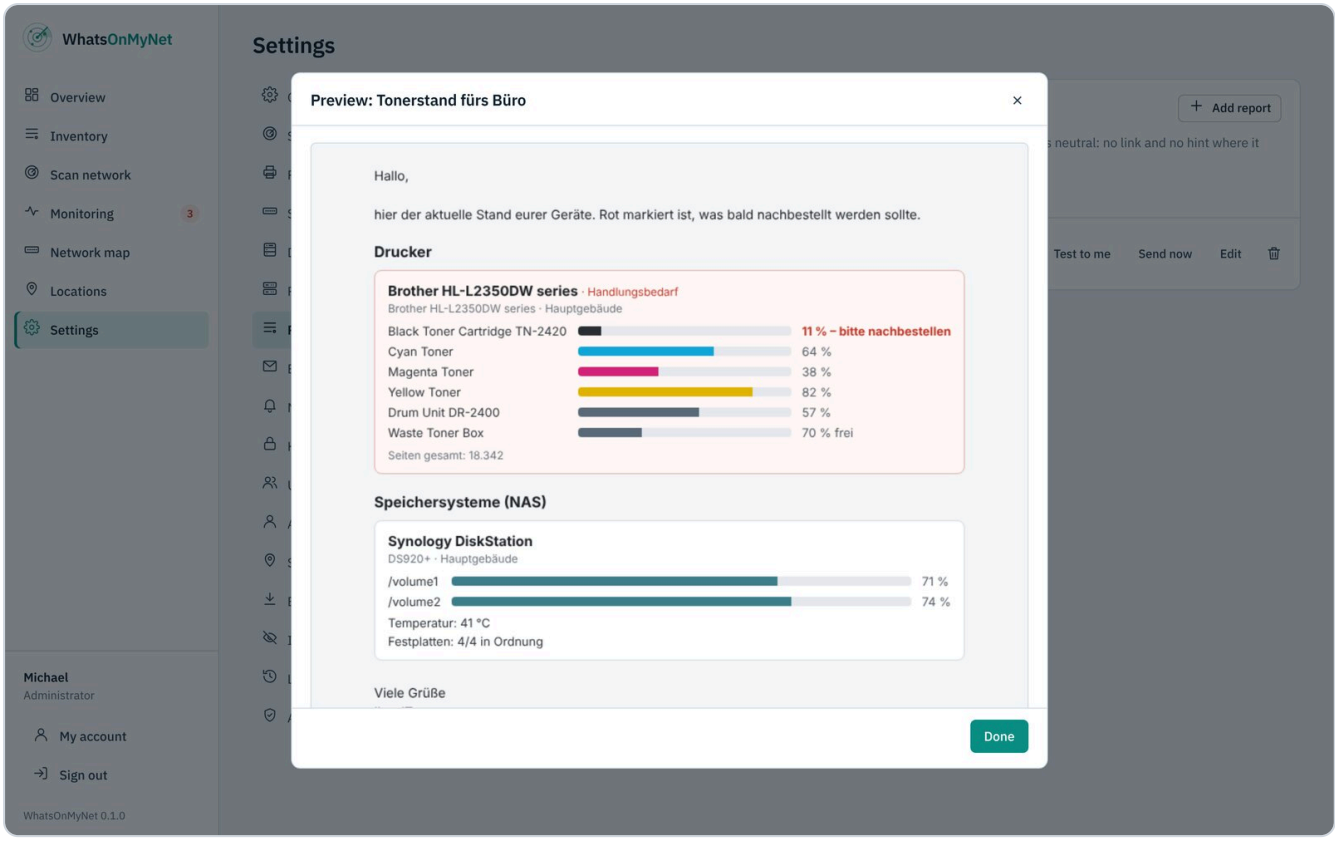

Report

Under *Settings → Reports* reports go out by e-mail at set times – e.g. the toner levels to the office every Monday at 8:00.

- Content: printers, NAS, switches; can be limited to locations; optionally only devices that need action.
- The mail is **neutral**: no link, no program name – only your sender name, subject (`{week}` , `{date}`), introduction, the devices and your closing.
- "Preview", "Test to me" and "Send now" right in the list.

Users and rights

- **Roles**: *Administrator* (everything), *Editor* (scan, adopt, maintain, monitors), *Read only*.
- **Locations**: editors and viewers can be limited to locations – they then only see and change devices, scans and monitors of these.
- **Active Directory** (*Settings → Active Directory*): sign-in with the Windows account over LDAPS or StartTLS. The role comes from AD groups; members of none cannot sign in. Local accounts win for the same name.
- **Two-factor sign-in** (*My account*): scan the QR code with an authenticator app, confirm a code, keep the recovery codes. It can be made mandatory for administrators under *Settings → General*.

Scan agent for branch offices

For a branch office a second container runs there as scan agent. Under *Settings* → *Scan agents* add an agent for the location; put the `.env` shown next to `docker-compose.agent.yml` from the release and start `docker compose -f docker-compose.agent.yml up -d`. The agent opens no port, fetches jobs over HTTPS and reports only addresses of its location.

Backup and updates

- Every night WhatsOnMyNet backs up the database to `data/backups/`; additionally before every database update.
- *Settings* → *Backup*: download a backup, back up now, restore a backup (the current state is backed up first, then the program restarts).
- **Keep `data/secret.key` (or `WOMN_SECRET`) as well** – without it stored passwords in a backup are unreadable.
- Updates: in Dockhand/Watchtower or `docker compose pull && docker compose up -d`. Once a month a security update with new packages is released.

Troubleshooting

- **Interface not reachable**: open the host firewall for the HTTPS port. With host networking Docker/Dockhand shows no port mapping – that is correct.
- **No printer/switch data**: switch on SNMP at the device, check the community under *Settings* → *Scan*, "Query now" on the device page.
- **Locked out**: `docker compose exec whatsonmynet womn-admin reset <user>` sets a new password, makes the account administrator again and switches two-factor sign-in off. `womn-admin create <user>` adds a new administrator.
- **Log**: *Settings* → *Log* shows who changed what; technical messages are in the container log.