GRAND JUNCTION Winwater COMPANY

Customer Name

Job Name Line 1

Job Name Line 2

Materials Submittal Index

Materials List

Bid Item	Manufacturer	# of Pages
	Manufacturer	# of Pages
	Manufacturer	# of Pages
	Manufacturer	# of Pages
	Manufacturer	# of Pages
	Manufacturer	# of Pages
	Manufacturer	# of Pages
	Manufacturer	# of Pages

GRAND JUNCTION Winwater COMPANY

Customer Name

Job Name Line 1

Job Name Line 2

Materials Submittal Index

Materials List

	Manufacturer	# of Pages
	Manufacturer	# of Pages
	Manufacturer	# of Pages
	Manufacturer	# of Pages
	Manufacturer	# of Pages
	Manufacturer	# of Pages
	Manufacturer	# of Pages
	Manufacturer	# of Pages

Customer Name

Job Name Line 1
Job Name Line 2

Materials Submittal Index

Materials List

Check Valve — 2" Silent Wafer	Watts	2

Check Valve — 2" Silent Wafer Watts LF2000B

D-701A – 19”x30” Elliptical Pipe Culvert

Taxiway B
P-701B – Elliptical Pipe Flared End Sections

Taxiway B
P-701C & P-701E – 18” & 24” RCP
Pipe Culvert

Taxiway B
P-701D – 18” RCP Pipe Flared End Sections

Taxiway B
D-701f 12” HDPE Pipe Culvert

Taxiway B
D-701g 12” HDPE Pipe End Section

Taxiway B
D-705A – 6” Pipe Underdrain

Taxiway B
D-705B – 6” Solid Drain Pipe

Taxiway B
D-751A - Inlet

Taxiway B
D-751B – Manhole

Taxiway G
P-701C – 18” RCP

Taxiway G
D-751A – Inlet

Taxiway G
D-705A & D-705B – 6” Perforated and Solid Pipe Underdrain

Taxiway G
D-705C – Infiltration Basin

#70 Steel Casing

#71 – 24” Pipe CWD

#72 – 24” MJ BFV

#73 – Hydrant Connection

Series 2000B

Double Check Valve Assemblies

Sizes: ½" – 2" (15 – 50mm)

2" 2000B HC
(50mm)

¾" 2000B
(20mm)

Features

- Ease of maintenance with only one cover
- Top entry
- Replaceable seats and seat discs
- Modular construction
- Compact design
- ½" – 2" (15 – 50mm) Cast bronze body construction
- Top mounted ball valve test cocks
- Low pressure drop
- No special tools required
- ½" – 1" (15 – 25 mm) have tee handles

Available Models

Suffix:

B - Quarter turn ball valves
LBV - less ball valves
SH - stainless steel ball valve handles
HC - 2½" inlet/outlet fire hydrant fitting (2" valve)

Pressure — Temperature

Temperature Range: 33°F – 140°F (0.5°C – 60°C)

Maximum Working Pressure: 175psi (12.1 bar)

Standards

AWWA Std. C510, IAPMO PS31

⚠ WARNING

It is illegal to use this product in any plumbing system providing water for human consumption, such as drinking or dishwashing, in the United States. Before installing standard material product, consult your local water authority, building and plumbing codes.

Series 2000B Double Check Valve Assemblies are designed to protect drinking water supplies for dangerous cross-connections in accordance with national plumbing codes and water authority requirements for non-health-hazard non-potable service applications such as irrigation, fire line, or industrial processing.

These valves meet the requirements of ASSE Std. 1015 and AWWA Std. C510 and are approved by the Foundation for Cross-Connection Control and Hydraulic Research at the University of Southern California.

Specifications

A Double Check Valve Assembly shall be installed at each noted location. The assembly shall consist of two positive seating check modules with captured springs and rubber seat discs. The check module seats and seat discs shall be replaceable. Service of all internal components shall be through a single access cover secured with stainless steel bolts. The assembly shall also include two resilient seated isolation valves and four top mounted, resilient seated test cocks. The assembly shall meet the requirements of ASSE Std. 1015 and AWWA Std. C510. Approved by the Foundation for Cross-Connection Control and Hydraulic Research at the University of Southern California. Assembly shall be an Ames Company Series 2000B.

Approvals

1015 B64.5 ¾" - 2" (LBV Models Only)

Approved by the Foundation for Cross-Connection Control and Hydraulic Research at the University of Southern California.

LBV models not listed.

Horizontal and vertical "flow up" approval on all sizes.

Job Name _____ Contractor _____

Job Location _____ Approval _____

Engineer _____ Contractor's P.O. No. _____

Approval _____ Representative _____

Ames product specifications in U.S. customary units and metric are approximate and are provided for reference only. For precise measurements, please contact Ames Technical Service. Ames reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Ames products previously or subsequently sold.

Dimensions – Weights

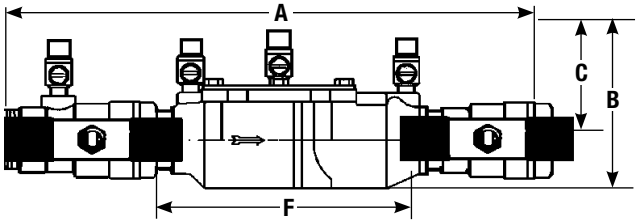



Suffix HC — Fire Hydrant Fittings dimension "A" = 23½" (594mm)

SIZE (DN)		DIMENSIONS														WEIGHT	
		A		B		C		F		G		H		I			
in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	lbs.	kgs.
½	15	10	254	4⅝	117	2 7/16	62	5	127	3⅜	85	2 5/16	59	2 1/16	52	4.5	2
¾	20	11⅛	282	4	102	3⅛	79	6 3/16	157	3 7/16	87	2⅛	54	1 5/16	33	5	2.3
1	25	13¼	337	5⅛	130	4	102	7½	191	3⅜	85	11 1/16	43	11 1/16	43	12	5.4
1¼	32	16⅜	416	5	127	3 5/16	84	9½	241	5	127	3	76	2	50	15	6.8
1½	40	16¾	425	4⅞	124	3½	89	9¾	248	5 13/16	148	3⅛	79	2 11/16	68	15.86	7.2
2	50	19½	495	6¼	159	4	102	13⅜	340	6⅛	156	3 7/16	87	2 11/16	68	25.75	11.7

Strainer sold separately

Capacities

As compiled from documented Foundation for Cross-Connection Control and Hydraulic Research at the University of Southern California lab tests.
ΔTypical maximum system flow rate (7.5 feet/sec., 2.3 meters/sec.)

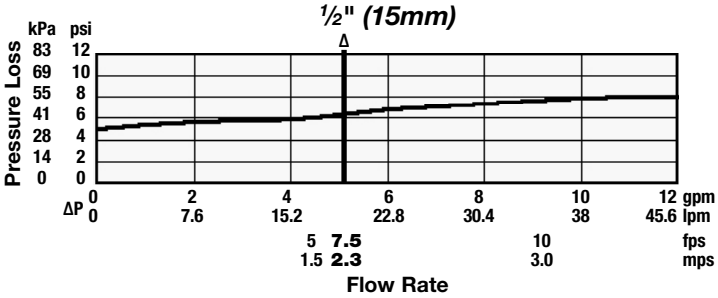

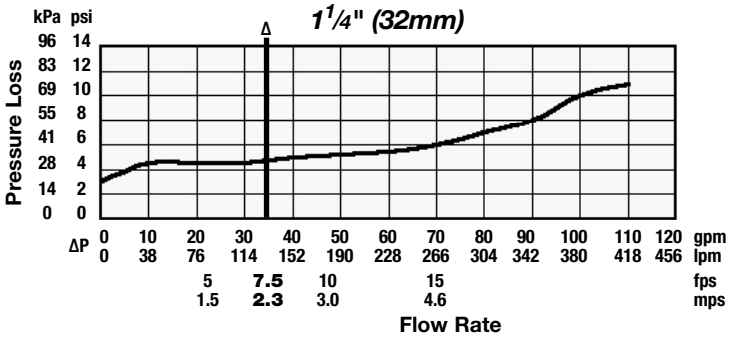

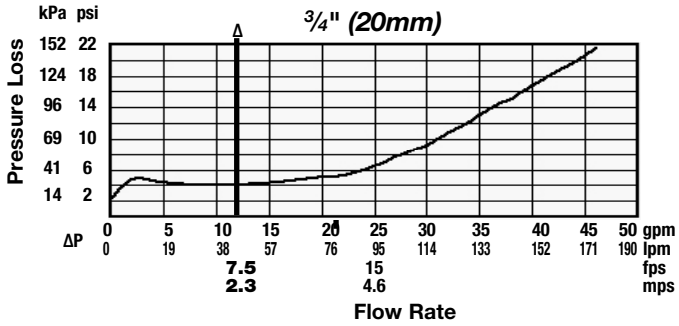

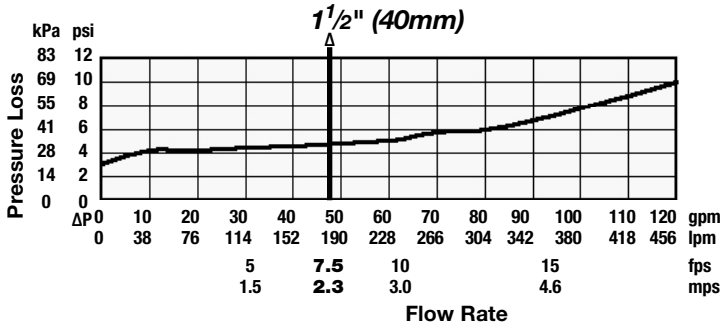

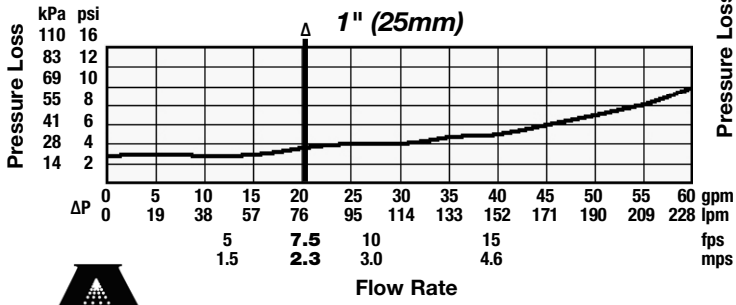

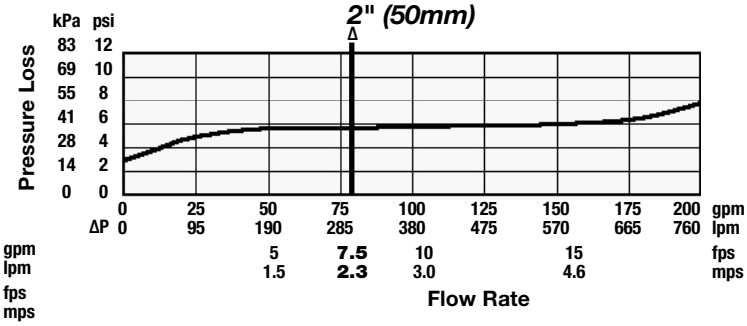

AMES
FIRE & WATERWORKS

A Watts Water Technologies Company

USA: Backflow Tel: (978) 689-6066 • Fax: (978) 975-8350 • AmesFireWater.com
USA: Control Valves Tel: (713) 943-0688 • Fax: (713) 944-9445 • AmesFireWater.com
Canada: Tel: (905) 332-4090 • Fax: (905) 332-7068 • AmesFireWater.ca
Latin America: Tel: (52) 81-1001-8600 • Fax: (52) 81-8000-7091 • AmesFireWater.com

© 2014 Ames Fire & Waterworks