Changelog

SGPA3

Automated Process Management System

Some applications mentioned in this report may not be available in the feature pack in your SGPA 3.0

Thank you for being a SGPA 3.0 user!

We update our system in order to fix bugs, improve performance and add new features to bring a better user experience and contribute to a management with greater quality and efficiency.

+55 (18) 3622-2270

Av. Brasília, 2.121 - Edif. New York Tower
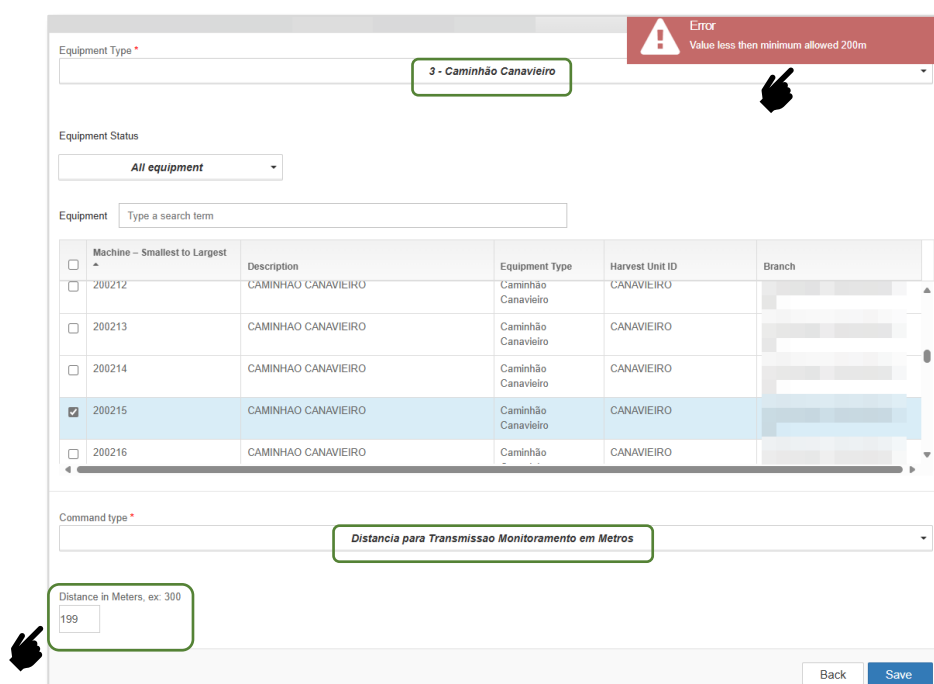Jardim Nova York - Araçatuba/SP

Table of Contents

1. SGPA3

1.1 Improvements

1.1.1 Online Command and Onboard Settings

Improvements made in the Online Command "Distance for Transmission Monitoring in Meters" and in the "Onboard Settings" screen, for the types of Equipment "3 – Sugarcane Truck" and "60 – Slave Truck (CCT)". As this version, the features have the following validations:

- The Online Command "Distance for Monitoring Transmission in Meters" has handling in the "Distance in meters" field to allow the command to be sent only when the value is equal to or greater than 200 meters and, if a value lower than this is entered, it will not be possible to send the command.

- "Onboard Settings": in the "Distance in Meters for Monitoring Sending" field there is validation for the minimum insertion of 200 meters and, if a value lower than this is entered, it will not be possible to apply the settings.

Image 01 – Online Command: failure message displayed when trying to save after entering a value less than 200 meters in the "Distance in meters" field
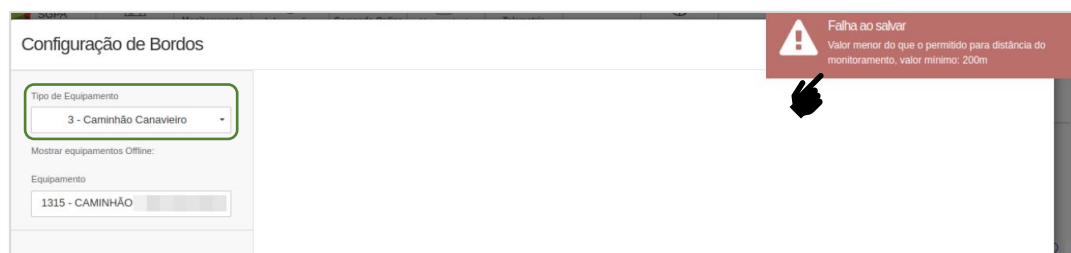
Image 02 – Onboard Settings: failure message displayed when applying a change with a value lower than 200 in the "Distance in Meters for Monitoring Send" field

💬 Go to Main menu > Modules > Online Command > Equipment Type > 3 – Sugarcane Truck and 60 – Slave Truck > Command Type > Distance for Transmission Monitoring in Meters > Distance in meters and in Main menu > Maintenance > Solinftec Maintenance > Onboard Settings > Equipment Type > 3 – Sugarcane Truck and 60 – Slave Truck > Distance in Meters for Sending Monitoring

1.1.2 PBI Reports – Supplies Optimization

Improvement implemented in the PBI Report "Supplies Optimization", from Cane Vertical, in order to include the option to select the current day in the Date Range Filter.
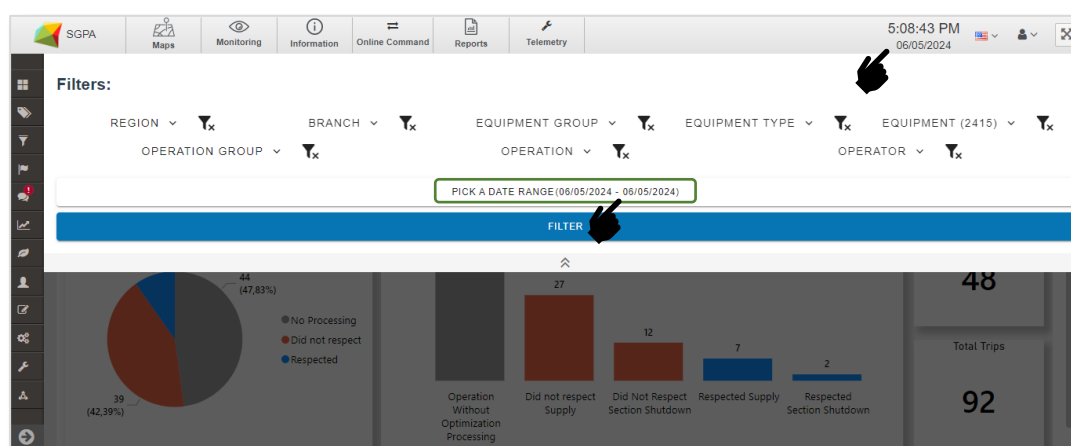

Image 03 – "Supplies Optimization" report filtering the current day

💬 Go to Main menu > Reports > PBI > Supplies Optimizer

ℹ️ Available for Environments in the Sugarcane vertical that have the extra report "Supplies Optimization". Applied on 05/29/2024.

+55 (18) 3622-2270
Av. Brasília, 2.121 – Edif. New York Tower
Jardim Nova York – Araçatuba/SP

1.1.3 Records – Benchmark (Cane)

Improvement implemented in the "Equipment Group Links" tab of the "Benchmark" Registry, of Cane Vertical, to include all Equipment Groups in the group "1 – OWN CLT FRONT".
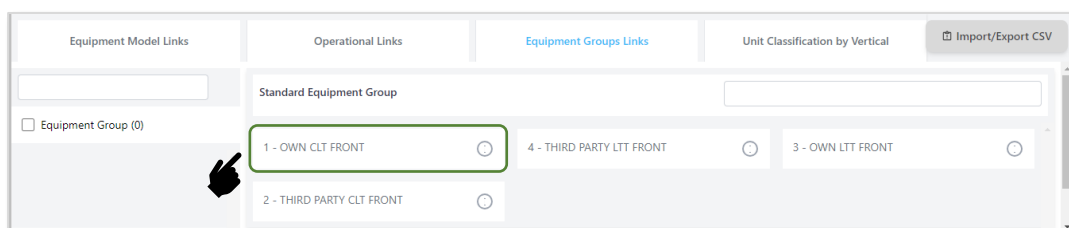

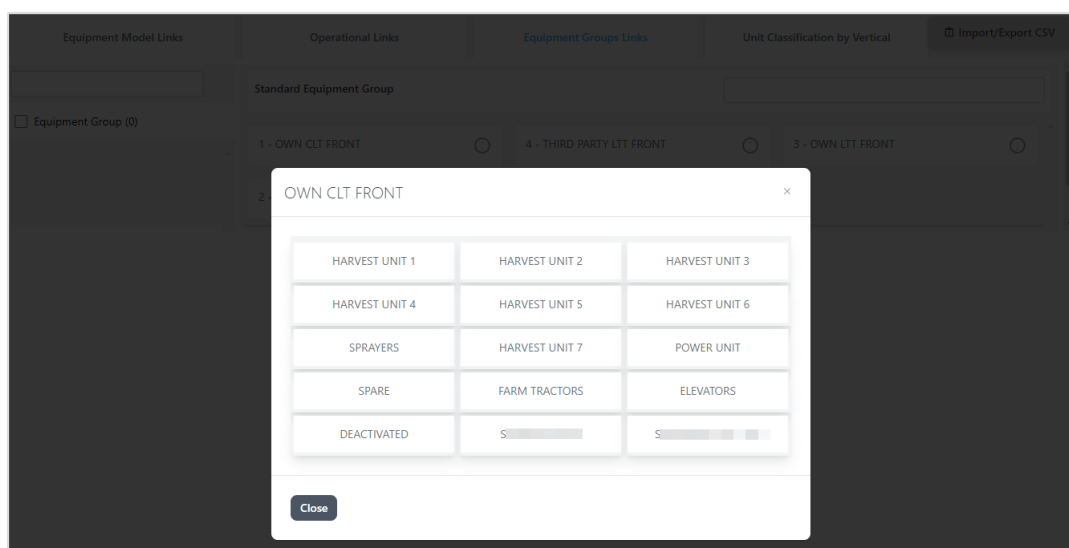Image 04 – "Equipment Group Links" tab in the "Benchmark" Register

Image 05 – Displaying the Equipment Groups in the group "1 – OWN CLT FRONT"

💬 Go to Main menu > Records > Benchmark > Equipment Group Links > 1 – OWN CLT FRONT

ℹ️ Available for Cane vertical environments. Access available only to the "Project Manager" and "IT Support" User Groups.

1.2 Bugs

1.2.1 Modules – Online Command

Adjustment made in the Online Command "Update Stop Registration" to allow the insertion of an alphanumeric character (letter and number) in the "Special Unproductive Operation Code" field.

💬 Go to Main Menu > Modules > Online Command > Update Stop Registration > Special Code for Unproductive Operation

1.2.2 PBI Reports – Filters

Adjustment applied to display data in PBI Reports when selecting data in Filters.

💬 Go Main Menu > Reports > PBI > Filters

ℹ️ Applied on 05/29/2024.

1.2.3 Records – Rules – Fence/Alert

Adjustment made to prevent the screen from freezing when creating Fences in the "Rules – Fence/Alert" register.

💬 Go to Main Menu > Registrations > Alerts > Rules – Fence/Alert

1.2.4 Maintenance – Onboard Settings

Adjustment made on the "Onboard Settings" screen, for the Equipment type "40 – Light Tire Tractor", in order to display the data in the correct format in the "Solinftec Serial Number" field, that is, to display alphanumeric characters (letters and numbers).

💬 Go to Main menu > Maintenance > Solinftec Maintenance > Onboard Settings > Equipment Type > 40 – Light Tire Tractor > Solinftec Serial Number

> *In case of doubt or further clarification, please contact us via email* [*suporte@solinftec.com.br*](mailto:suporte@solinftec.com.br) *or call +55 18 3622 2270*