


Changelog

SGPA3 Automated Process Management System

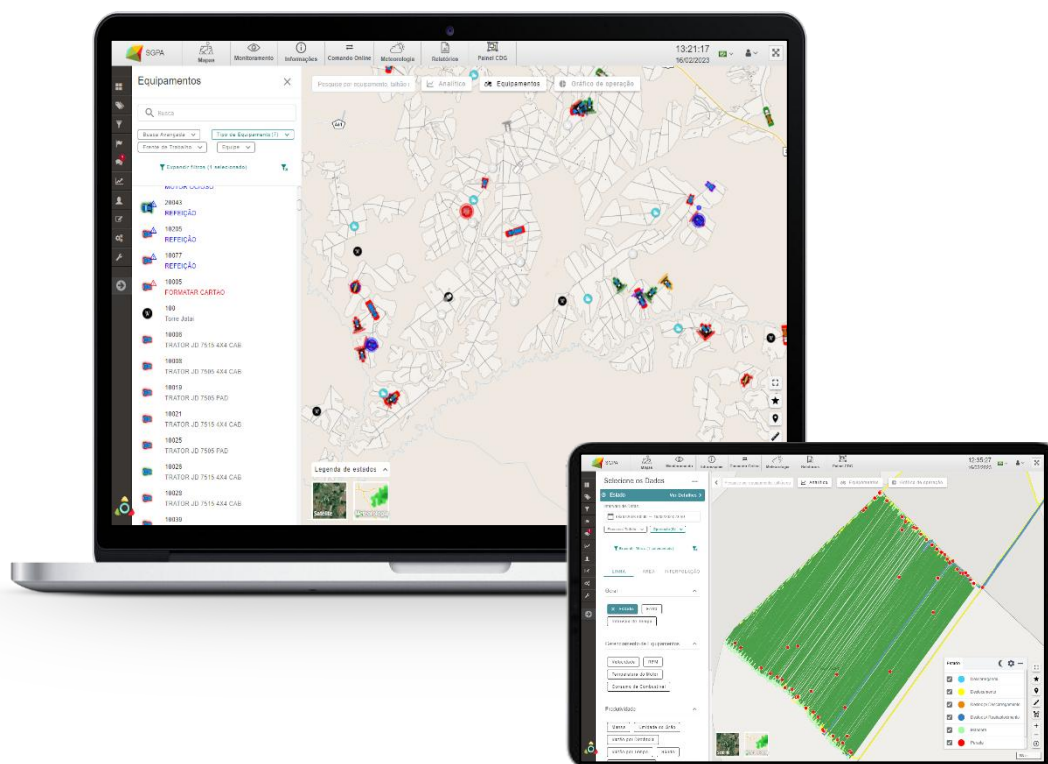

Changelog Version 2026/285

Period: 08/25/2026 to 08/31/2026

Revision 00

Date: 22/09/2026

Some applications mentioned in this report may not be available in the package of functionalities installed in your SGPA 3.0

+55 (18) 3622-2270

Av. Brasília, 2.121 - Edif. New York Tower
Jardim Nova York - Araçatuba/SP



Thank you for being a SGPA 3.0 user!

We update our system frequently to fix bugs, improve performance, and add new features to enable a better user experience and contribute to management with higher quality and efficiency.

Summary

1.	SGPA3.....	4
1.1	Improvements.....	4
1.1.1	Telemetry – Alarm Configuration.....	4
1.1.2	Maintenance – Totem On board Configuration.....	5
1.1.3	Irrigation – Dashboard and Configurations.....	6
1.1.4	PBI Report – Fertigation.....	7
1.1.5	PBI Report – Operational Achievement.....	8
2.1	Bugs.....	9
2.1.1	PBI Report – Climate Conditions Report.....	9
2.1.2	Telemetry – Recent Failures.....	10
2.1.3	Registrations – Alert Configuration.....	10
2.1.4	On-Board Configuration – Adjustments.....	11

1. SGPA3


1.1 Improvements

1.1.1 Telemetry – Alarm Configuration

Improvement applied to the Telemetry tool, on the Alarm Configuration screen, to standardize and make available the "Coolant Temperature" parameter for equipment types 1 (Harvester) and 2 (Overflow).

Soon, the field that was previously incorrectly displayed as "Engine Oil Temperature" was renamed and aligned with the standard of the other equipment, facilitating the creation of rules and the uniform parameterization of the fleet's temperature sensors.

To validate, go to the Alarm Configuration in Telemetry, select a type 1 or 2 equipment model and confirm that the "Coolant Temperature" parameter is correctly available for configuration.

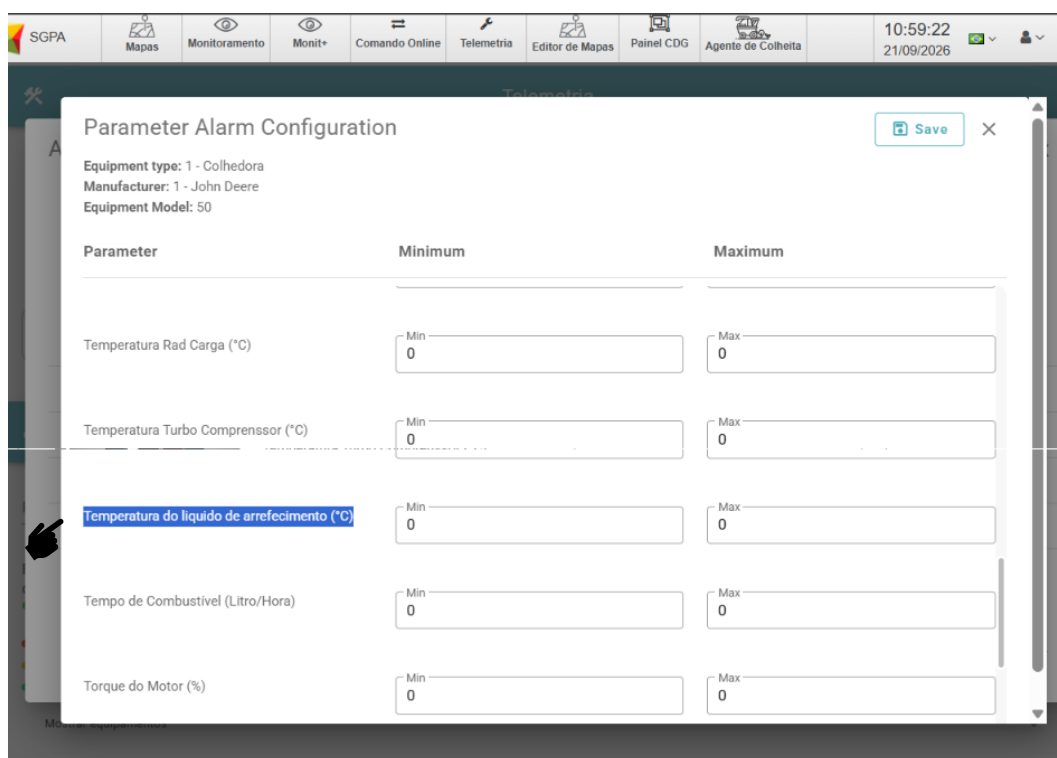

Parameter Alarm Configuration

Equipment type: 1 - Colhedora
Manufacturer: 1 - John Deere
Equipment Model: 50

Parameter	Minimum	Maximum
Temperatura Rad Carga (°C)	Min 0	Max 0
Temperatura Turbo Compressor (°C)	Min 0	Max 0
Temperatura do líquido de arrefecimento (°C)	Min 0	Max 0
Tempo de Combustível (Litro/Hora)	Min 0	Max 0
Torque do Motor (%)	Min 0	Max 0


Figure 1 – Alarm Configuration Parameters Screen

Access in: Upper Menu > Telemetry > Alarm Configuration > Icon Edit > Alarm Configuration Parameters > Coolant Temperature (°C)

1.1.2 Maintenance – Totem On board Configuration


Improvement made through the addition of option 66 – Totem in the on board Configuration screen, allowing to consult and manage the equipment configurations directly through the SGPA.

To consult or change the configurations, the equipment must be online. Otherwise, the fleet will not be made available for selection.

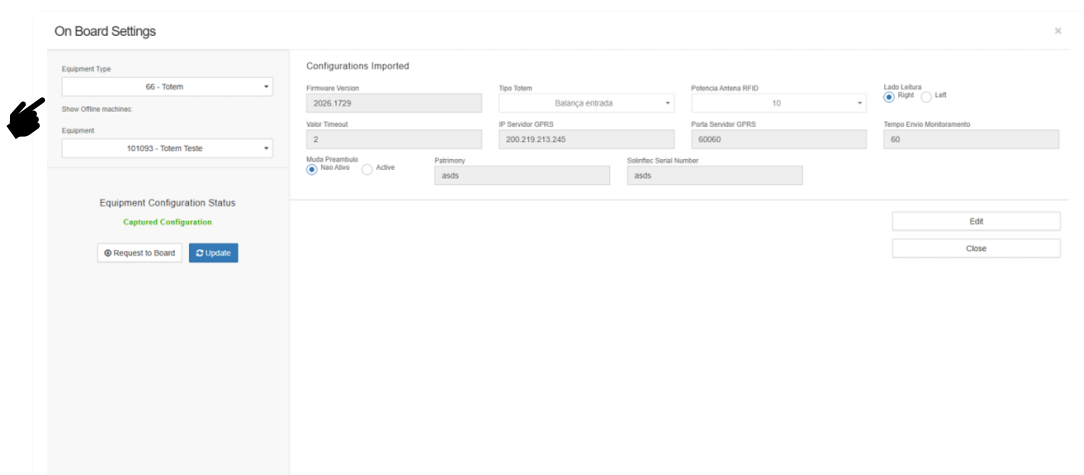

The screenshot shows the 'On Board Settings' window. On the left, under 'Equipment Type', a dropdown menu is set to '66 - Totem'. Below it, 'Show Offline machines:' is checked, and 'Equipment' is set to '101093 - Totem Teste'. The 'Equipment Configuration Status' section shows 'Captured Configuration' with 'Request to Board' and 'Update' buttons. The main area, 'Configurations Imported', contains various fields: 'Firmware Version' (2026.1729), 'Tipo Totem' (Balança entrada), 'Potencia Antena RFID' (10), 'Lado Letura' (Right), 'Valor Timeout' (2), 'IP Servidor GPRS' (200.219.213.245), 'Porta Servidor GPRS' (60060), 'Tempo Envio Monitoramento' (60), 'Modo Presetado' (Nao Ativo), 'Ativo' (radio button), 'Patrimony' (add), 'Solenflex Serial Number' (add), 'Edit', and 'Close' buttons.

Figure 2 – On board Configuration Screen – Equipment 66 Totem

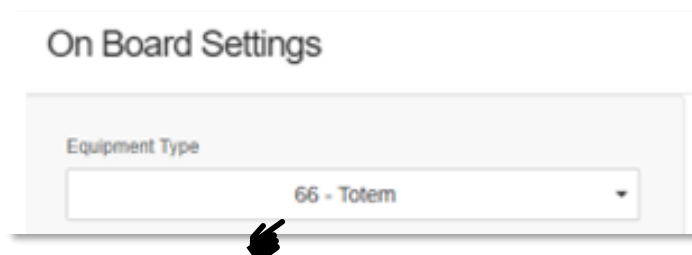

This is a close-up of the 'On Board Settings' window, specifically the 'Equipment Type' dropdown menu. The menu is open, showing '66 - Totem' as the selected option. A hand icon points to the dropdown arrow.

Figure 3 – On board Configuration Screen – Equipment 66 Totem – (zoom)



Access in: Side Menu > Solinftec Maintenance > Maintenance > On board Configuration

1.1.3 Irrigation – Dashboard and Configuration

Improvement made to the Water Resources Management (Irrigation) module, in the Dashboard and Configurations tabs, to improve the usability of the selectors, standardize the display of dates, and simplify the application of filters in the report.

Therefore, by clicking directly on the arrow icon in the Project and Operation fields, the drop-down list starts to expand and collapse intuitively; the dates of the Crop Coefficient (Kc) periods were converted to the Brazilian standard (DD/MM/YYYY), eliminating ambiguities on days less than 12; and the Dashboard calendar had its flow optimized, removing the intermediate buttons ("Select" and "Cancel") to apply the period directly with a single click on "FILTER".

To validate, access the Water Resources Configurations tab, test the opening of the Project and Operation selectors by the arrows, confirm the display of the Kc dates in DD/MM/YYYY format and, in the Dashboard tab, select an interval and press the FILTER button to check the immediate update of the data.

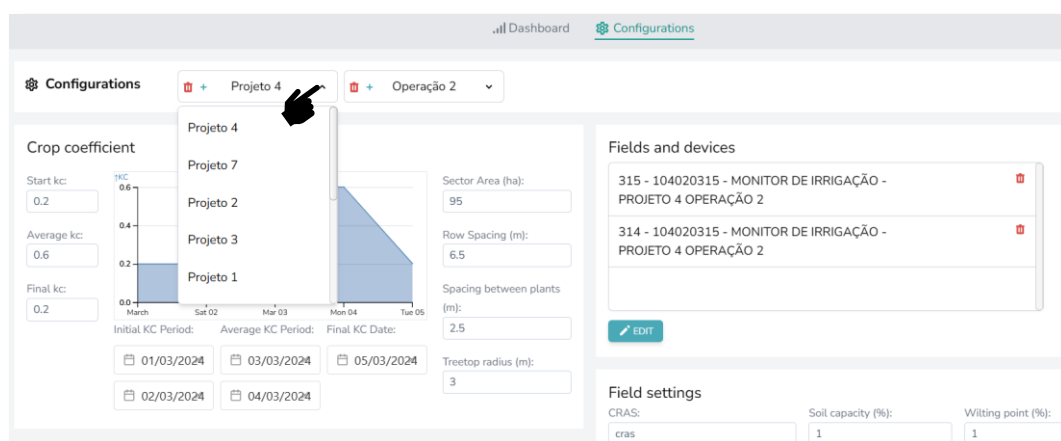


Figure 4 – Opening the drop-down list in the Configurations tab

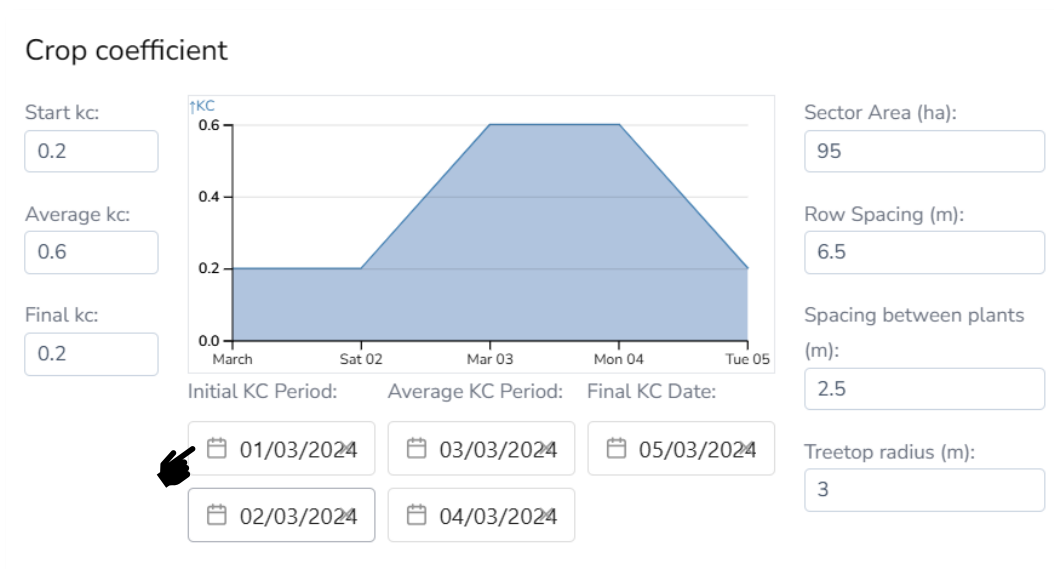


Figure 5 – Standardized dates for DD/MM/YYYY in the Crop Coefficient (KC) – Configurations tab.



Figure 6 – Dashboard tab calendar containing only the direct action of "FILTER" and the period selected at the top of the report.



Access in: Top Menu > Irrigation > Configurations > Dashboard and Configurations Tabs

1.1.4 PBI Report – Fertigation

Improvement made to the PBI Fertigation Notes Report, in the Analytics tab, to enable the permanent display of data labels in the chart where it displays the weighted average loading, unloading, empty offset and loaded offset values. To validate, access the Fertigation Notes report in the PBI, select the Analytics tab and confirm that the numerical labels are already presented statically in each column of the weighted average chart.



Figure 7 – Fertigation Notes - Analytical Tab - Weighted Average Graph...



Access in: Side Menu > PBI > Reports > Fertigation Notes> Analytical Tab.

1.1.5 PBI Report – Operational Achievement

Improvement made in the PBI Report of Operational Achievement, General Efficiency Tab with the inclusion of the metrics "Qty Days with Area" and "Qty of Equipment" in the selection field "Choose a metric for analysis" in the upper left table. Therefore, the report now provides the accounting of productive days and active machines with an operational area greater than zero directly in the table.

To validate, access the Operational Achievement report in the PBI, locate the selector filter "Choose a metric for analysis", select the options "Qty Days with Area"

and "Qty of Equipment" and confirm that the tables now reflect these indicators individually and combined.



Figure 8 – Operational Achievement Report



Access in: Side Menu > Reports > PBI > Operational Reports > Operational Realization

2.1 Bugs

2.1.1 PBI Report – Climate Conditions Report

Adjustments made to the display of historical evapotranspiration data in the Weather Report (Power BI), where there was an inconsistency.

The calculation and consolidation of radiation were also adjusted in the rainfall database, ensuring that the daily values are displayed continuously and aligned with the system's meteorological graphs, without gaps or divergences between the screens.



Access in: Side menu > PBI > Reports > Climate > Climate Conditions Report

2.1.2 Telemetry – Recent Failures

Adjustments made to the Telemetry module, in the Recent Failures side panel, to improve usability and visual confirmation when verifying a failure. Previously, when marking the failure as verified/justified, the list was not updated immediately, requiring manual reloading of the page for the item to stop being displayed. With this update, a confirmation window (modal) was implemented detailing the action, accompanied by the automatic update of the list soon after the user's confirmation.

To validate, access the Telemetry tool, open the Recent Failures panel and click on the check icon next to the desired failure. Confirm the action in the confirmation window that will be displayed and make sure that the list is updated instantly on the screen, removing the confirmed record without the need to refresh the page.



Access in: Top Menu > Telemetry > Side Panel (right side) > Recent Failures

2.1.3 Registrations – Alert Configuration

Adjustments made to the Alert Conditions Creation Screen, where The "Equipment Type" property has been hidden because it is redundant with the equipment type that is already selected in the rule itself in the upper right corner. It appears in the condition construction properties because the source is the equipment type field that is used both as the equipment type property on this screen and in the equipment information popup in monitoring. To test, just follow the creation of a rule and check if the "Equipment Type" property no longer appears.



Access in: Side Menu > Registrations > Fence/Alert Rule > Creation of Alert Conditions

2.1.4 Onboard Configuration – Adjustments

Adjustments made to the On-Board Configurations screen, to correct the communication failure and parameter request with the on-board computers of the online equipment. Previously, when trying to request device information or send commands online, there was a processing error on the console that prevented the return and unlocking of data on the screen. With this update, the request routine was corrected, reestablishing connectivity and real-time reading of the on-board configurations.

To validate, access the Onboard Configurations screen in the SGPA, select a unit and an active online equipment, request the reading of the data from the on-board computer and send a test command, confirming that the information is loaded on the screen without errors on the console and with the status duly updated.



Access in: Side Menu > Solinftec Maintenance > Maintenance > Onboard Configuration

If you have any questions or other clarifications, please contact us via email suporte@solinftec.com.br or call +55 18 3622 2270.