


1					2			3			4		
	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE		COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE		
△					.	△					.	.	
△						△					.	.	
△						△					.	.	

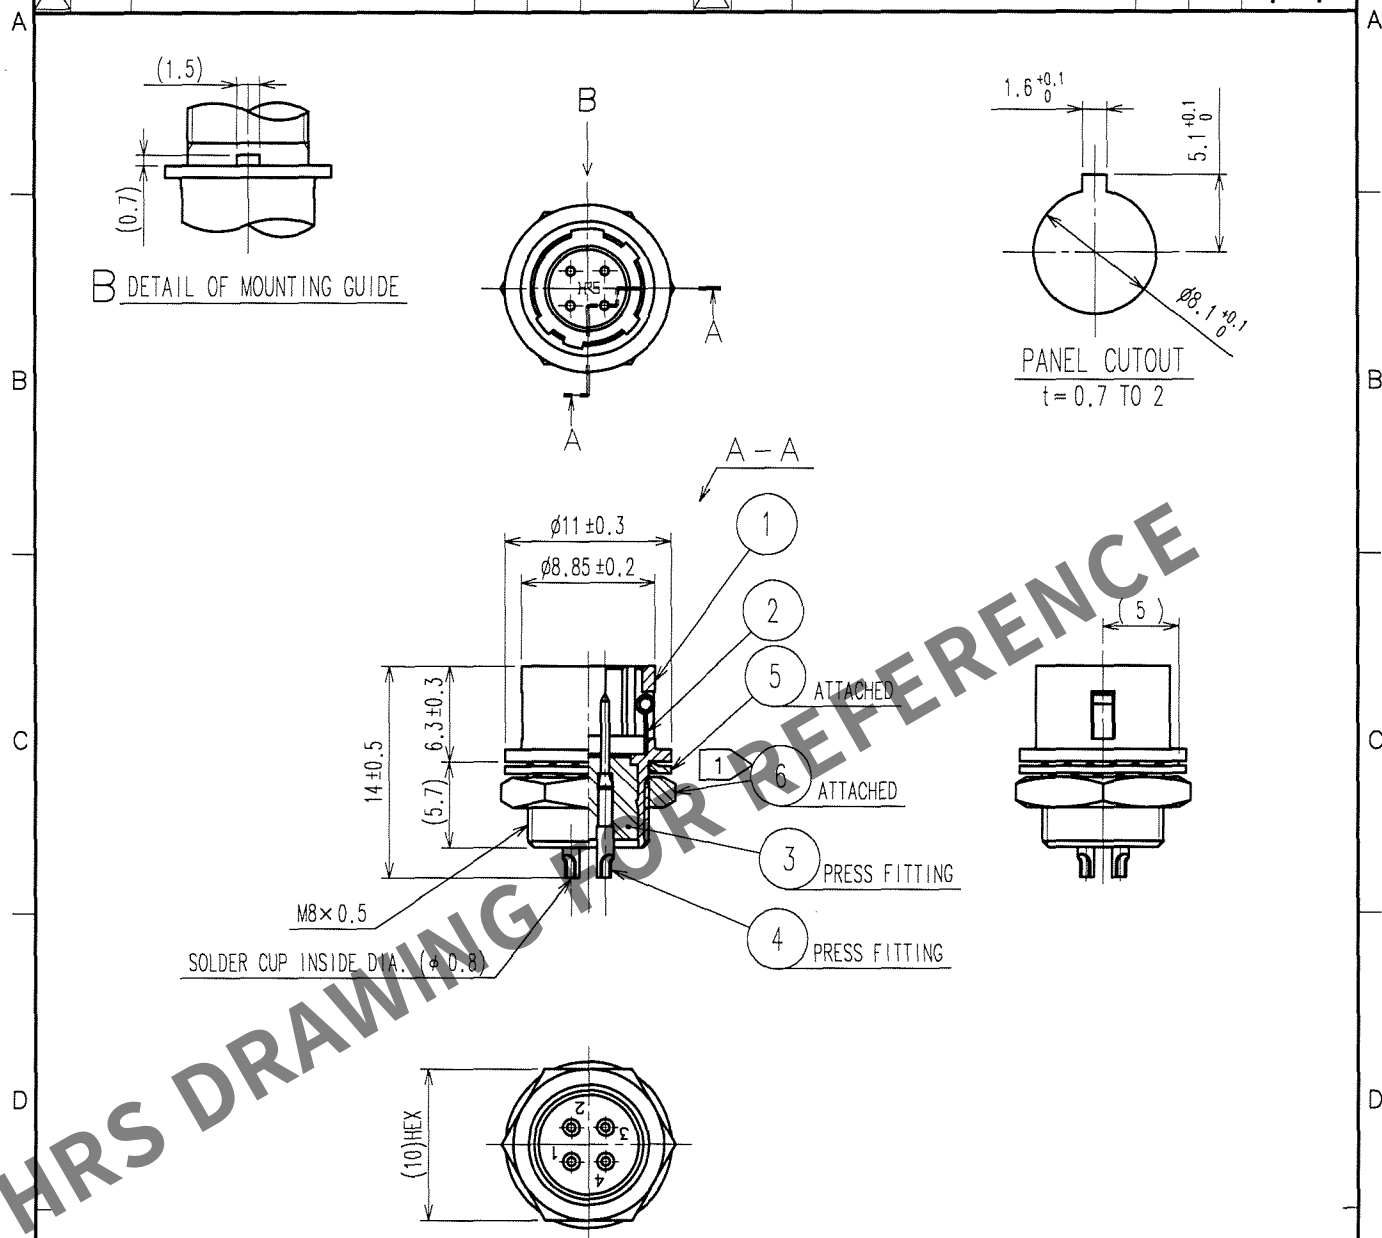

NOTE ① THE RECOMMENDED CLAMP TORQUE, REF. NO. ⑥ : 1.5N · m.
LOCTITE 242, HENKEL JAPAN OR EQUIVALENT IS RECOMMENDED TO
PREVENT REF. NO. ⑥ FOR LOOSENING.

3	POLYAMIDE	(BLACK) UL94V-0	6	BRASS	NICKLE PLATING
2	STAINLESS STEEL		5	PHOSPHOR BRONZE	NICKEL PLATING
1	ZINC ALLOY	MATTE FINISH NICKEL PLATED	4	BRASS	OVER PLATING: GOLD 0.2μ m min. UNDER PLATING: NICKEL 2μ m min.
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS

CODE NO. (OLD)		DRAWN	DESIGNED	CHECKED	APPROVED	RELEASED
CL		<i>M. Sato</i>	<i>T. Morita</i>	<i>E. Kunita</i>	<i>M. Sato</i>	
		07.04.11	07.04.11	07.04.11	07.04.11	

DRAWING NO.		PART NO.	
EDC4-020539-74		HR10A-7R-4P(74)	
SCALE		CODE NO.	
2 : 1		CL110-0306-6-74	
UNITS			
mm			

HRS

HIROSE ELECTRIC CO., LTD.