

MONO

POLY



60MBLK HOME PV

60-CELL MONOCRYSTALLINE MODULE



310 Wp
MAX POWER OUPUT

18.8%
MAX EFFICIENCY

10 YEAR
PRODUCT WARRANTY

25 YEAR
LINEAR PERFORMANCE GUARANTEE

HELIENE INC. IS A PREMIER SOLAR MODULE MANUFACTURER, SERVICING THE GROWING SOLAR ENERGY MARKETS OF NORTH AMERICA.

COMBINING PROVEN EUROPEAN TECHNOLOGY WITH NORTH AMERICAN INGENUITY ALLOWS HELIENE TO MAKE A REAL COMMITMENT IN PROVIDING SMARTER ENERGY CHOICES FOR THE FUTURE.

HELIENE
www.heliene.com



GUARANTEED POSITIVE POWER SORTING: [-0 : +4.99 WP]



AVAILABLE IN 1000V OR 1500V SYSTEM VOLTAGE RATING




MANUFACTURED FOLLOWING INTERNATIONAL QUALITY SYSTEM STANDARDS: ISO9001



H-BLACK INTEGRATION AVAILABLE (ALL-BLACK MODULE)

LINEAR PERFORMANCE GUARANTEE


10 YEAR WORKMANSHIP WARRANTY • 25 YEAR LINEAR PERFORMANCE GUARANTEE

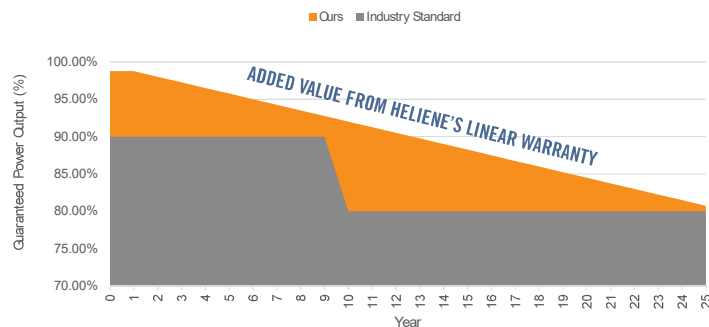



60MBLK HOME PV

60-CELL MONOCRYSTALLINE HOME PV

DIMENSIONS FOR 60M HOME PV SERIES

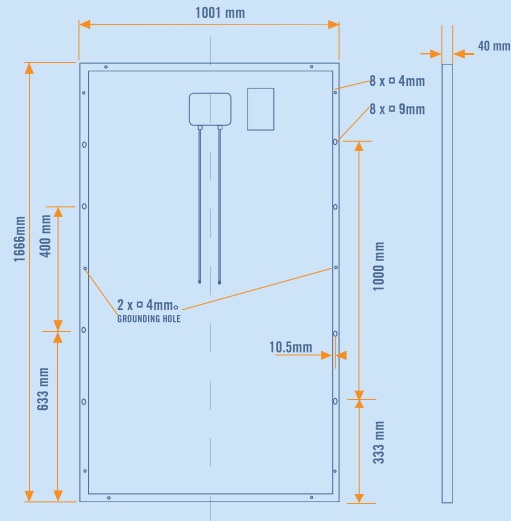

I-V CURVE FOR HELIENE 60M HOEM PVSERIES



CERTIFICATIONS



ELECTRICAL DATA (STC)

Peak Rated Power	P _{mpp} (W)	310	305	300	295
Maximum Power Voltage	V _{mpp} (V)	33.44	34.14	33.72	33.42
Maximum Power Current	I _{mpp} (A)	9.66	9.62	9.56	9.53
Open Circuit Voltage	V _{oc} (V)	40.13	40.08	39.63	39.22
Short Circuit Current	I _{sc} (A)	10.22	10.17	10.10	10.09
Module Efficiency *	Eff (%)	18.78	18.48	18.18	17.88
Maximum Series Fuse Rating	MF (A)	20	20	20	20
Power Output Tolerance	[- 0 , + 4.99] Wp				

STC - Standard Test Conditions: Irradiation 1000 W/m² - Air mass AM 1.5 - Cell temperature 25 °C

* Calculated using maximum power based on full positive output tolerance [-0 , +4.99] Wp

MECHANICAL DATA

Dimensions (L x W x D)	1666 x 1001 x 40 mm (65.5 x 39.4 x 1.6 inch)
Weight*	22 kg (48.5 lbs)
Output Cables	1.0 m (39.4 inch) symmetrical cables with MC4 type connectors
Junction Box	IP-67 rated with bypass diodes
Frame	Double webbed 15 micron anodized aluminum alloy
Front Glass	Low-iron content, high-transmission PV solar glass
Solar Cells	60 Monocrystalline cells (159 x 159 mm)

* Calculated using 3.2mm PV glass, if 4mm profile is requested weight load will vary

CERTIFICATIONS

UL Certification	ULC/ORD-C1703-1, UL1703
IEC Certification	Optional

All Heliene modules are certified under the California Energy Commision (CEC) Listing Report

TEMPERATURE RATINGS

Nominal Operating Cell Temperature (NOCT)	+45°C (±2°C)
Temperature Coefficient of P _{max}	-0.38%/°C
Temperature Coefficient of V _{oc}	-0.36%/°C
Temperature Coefficient of I _{sc}	0.07%/°C

MAXIMUM RATINGS

Operational Temperature	-40°C - +85°C
Max System Voltage	1000V (*1500V) *Optional

WARRANTY

10 Year Manufacturer's Workmanship Warranty
25 Year Linear Power Guarantee

(Refer to product warranty page for details)

CAUTION: READ SAFETY AND INSTALLATION INSTRUCTIONS BEFORE USING THE PRODUCT. Specifications included in this datasheet are subject to change without notice.

HELIENEG0MBLK_HOME PV-Rev.00