Solar Mounting Solutions

Curved & Flat Tile Roofs





QBlock® Tile Replacement Mounts




The Tile Replacement Mount provides a fast and easy way to install solar on tile roofs while protecting against water intrusion. Simply remove the tile and replace it with the Tile Replacement Mount. Works with all standard curved and flat tile roofs, and all standard rail-based racking systems. Flashed at both the deck and top levels, the Tile Replacement Mount is fully engineered to meet code requirements and industry best practices. The Tile Replacement Mount features our patented Elevated Water Seal Technology® for optimal waterproofing.

TECHNOLOGY BENEFITS

- Versatile: works with Flat, S-shaped and W-shaped tiles and all standard rail-based racking systems
- Simple and clean: no time-consuming, messy tile grinding or cutting
- Universal base mount works with all three tile profile flashings
- Double-flashed: flashed at both the deck and tile levels for code compliance
- Features patented QBlock® Elevated Water Seal Technology®
- All hardware and sub-flashing included
- Meets or exceeds all roofing industry best practices; 100% IBC compliant
- 25-year warranty



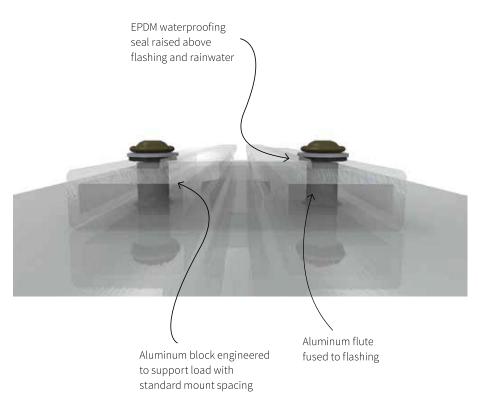

TILE REPLACEMENT MOUNT PRODUCTS



Tile Replacement Mount for S-shaped Curved Tile Profiles

Universal base mount with integrated sub-flashing, 3.25" post and preformed aluminum flashing replaces S-shaped tile.

Available finishes: aluminum mill (A), black (B)



Tile Replacement Mount for W-shaped Curved Tile Profiles

Universal base mount with integrated sub-flashing, 4" post and preformed aluminum flashing replaces W-shaped tile.

Available finishes: aluminum mill (A), black (B)



Tile Replacement Mount for Flat Tile Profiles

Universal base mount with integrated sub-flashing, 3.25" post and preformed aluminum flashing replaces flat tile.

Available finishes: aluminum mill (A), black (B)

Conduit Mount for Tile - For Curved & Flat Tile Roofs

The Conduit Mount for Tile is designed to lift electrical conduit off the roof to protect wiring from overheating. The Conduit Mount works with flat or curved tile and does not require tile cutting or grinding. All stainless steel hardware included.

TECHNOLOGY BENEFITS

- Raises array wiring off hot roof
- Works with flat and curved tile roofs
- No tile cutting or grinding
- No penetrations through the roof
- Meets or exceeds roofing industry best practices
- All stainless steel hardware included
- 100% IBC compliant
- 25-year warranty



Conduit clamp and pipe not included

Tile Replacement Conduit Penetration Flashing - For Curved & Flat Tile Roofs

The Tile Replacement Conduit Penetration Flashing provides a quick, easy way to install conduit through the roof while protecting the penetration against water intrusion. The Conduit Penetration Flashing is comprised of all-aluminum top and deck flashings and an innovative EPDM post collar that can be customized to fit a ½", ¾", or 1" diameter conduit. Fully engineered to meet code requirements and industry best practices.

TECHNOLOGY BENEFITS

- Works with all standard flat and curved tile roofs
- Versatile: Works with Flat, S-shaped and W-shaped tiles
- Simple and clean: No time-consuming, messy tile grinding or cutting
- Double flashed: Flashed at both the deck and tile levels for code compliance
- Creates replacement tiles on the job
- 100% IBC compliant
- 25-year warranty





2700 Mitchell Dr. Walnut Creek, CA 94598 www.quickmountpv.com • (925) 478-8269





Printed on 100% recycled paper using vegetable-based inks.

©2018 by Quick Mount PV. All rights reserved